



INTEC  
LIGHT




inTEC  
LIGHT



# INTEC

LIGHT

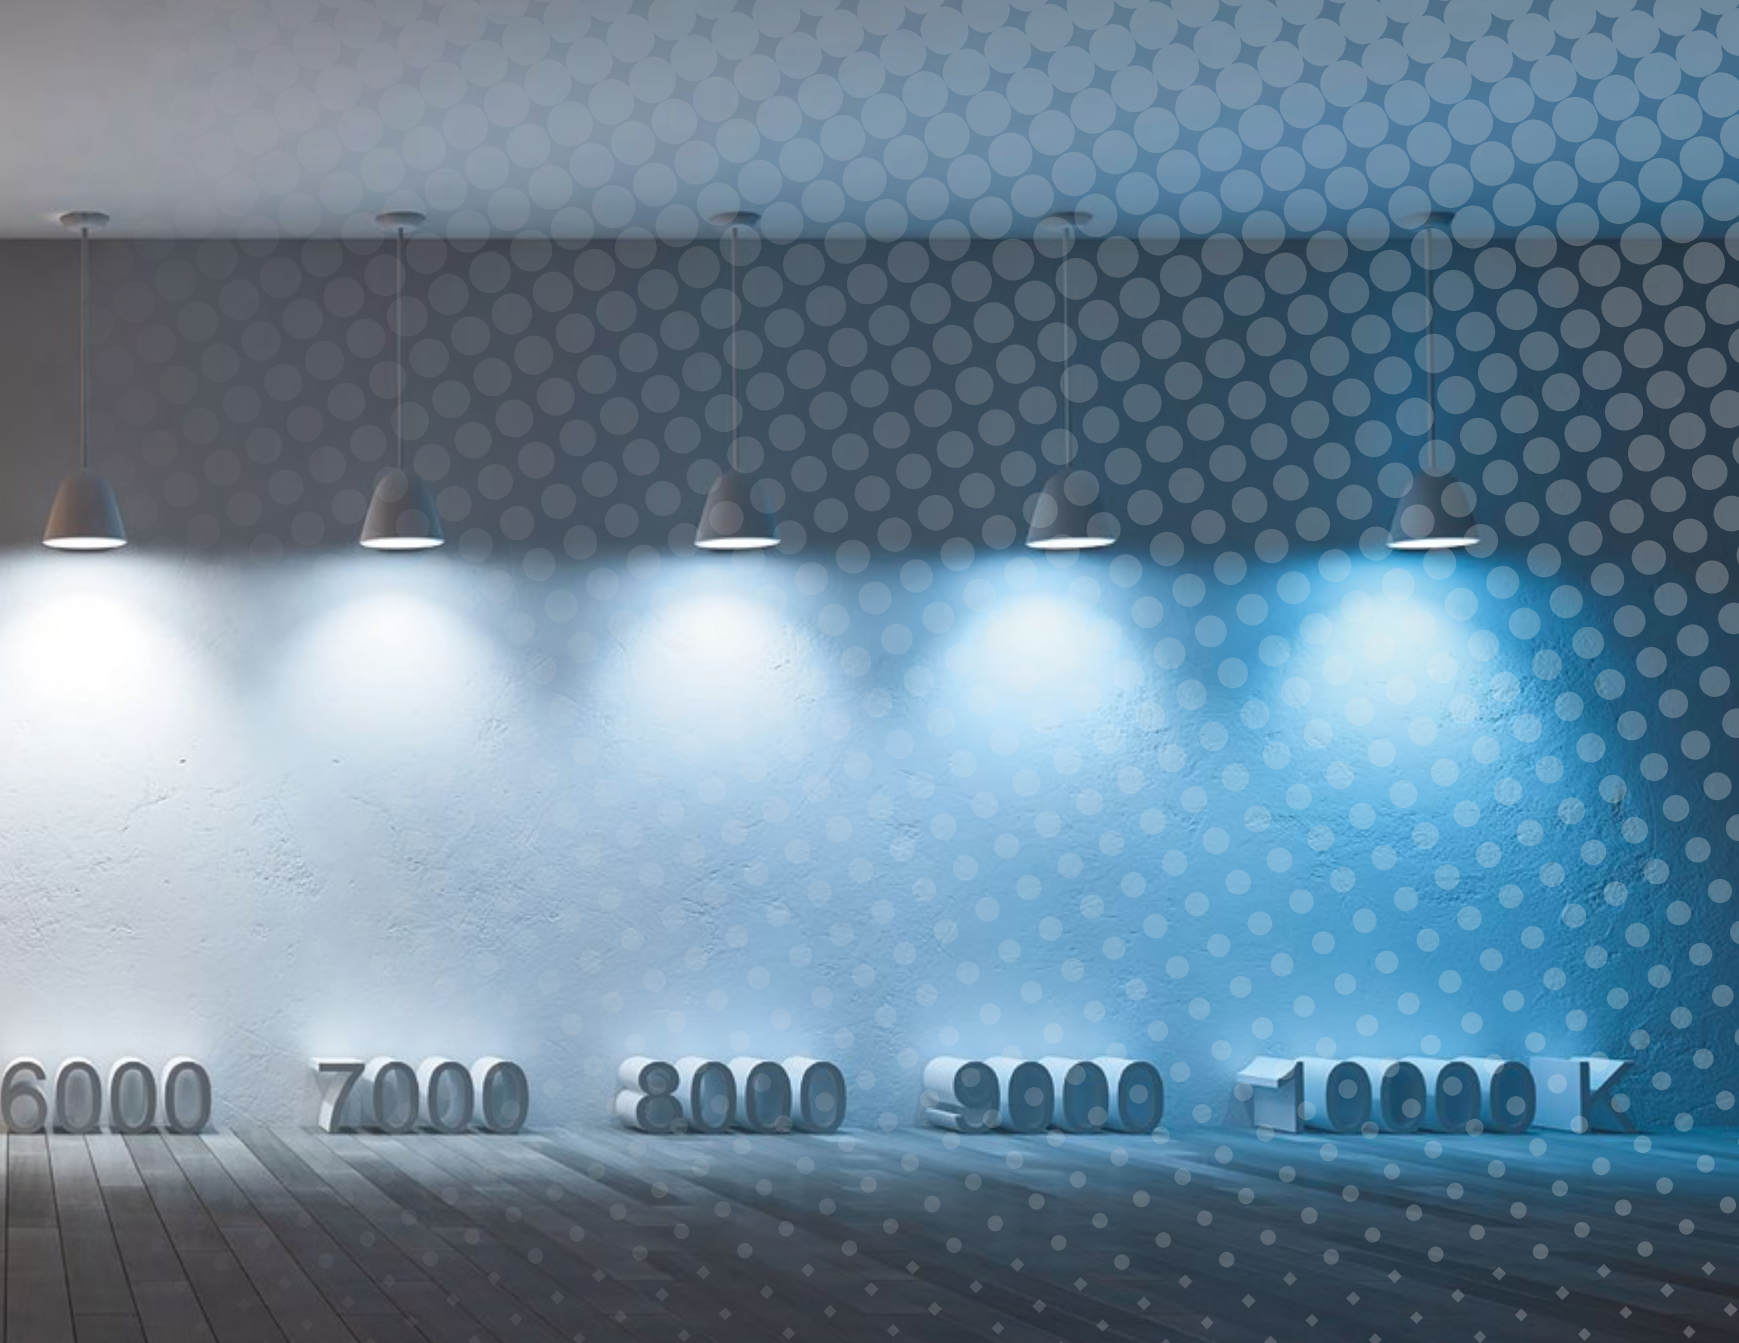













































**In.tec: Materiali, Tecniche, Innovazione.**

Le collezioni della serie IN.TEC offrono la più ampia libertà di scelta, tra un gran numero di soluzioni coordinate per tutte le esigenze di illuminazione ad alto contenuto tecnologico. Ideali in qualsiasi ambientazione di arredo e per la fornitura Contract di alta qualità. Frutto della progredita ricerca e del know-how specifico Fan Europe, questi prodotti sono destinati a durare nel tempo, con in più quel tocco di originalità inconfondibile che li rende sempre protagonisti dell'ambiente.

**In.tec: Materiali, Tecniche, Innovazione.**

*IN.TEC collection series offer a wide choice of lighting solutions for any lighting option from the basic to the highest and newest technologies. Our products' versatility allow the utilization in any furniture setting even in the most exigent qualified contracts. Result of continuous research and innovation of company Fan Europe, these products are projected for long lasting and for following day by day the new borders of efficiency. Showing always some feature of originality our products are recognized as protagonists of any scene.*



	ABEL	Pag. 117		ARIEL	Pag. 103		BLUMA	Pag. 390
	ACCESSORI	Pag. 394		ARROW	Pag. 21		BOLT	Pag. 293
	ADAM	Pag. 80		ASTRON	Pag. 116		BOSTON	Pag. 231
	ADATTATORI	Pag. 393		ATLANTA	Pag. 232		BOXTER	Pag. 202
	AGERA	Pag. 200		ATLANTIC ST	Pag. 318		CADILLAC	Pag. 168
	AKRON	Pag. 295		ATLAS	Pag. 134		CANDIDA	Pag. 112
	ALAN	Pag. 389		AUSTIN	Pag. 235		CARRERA	Pag. 172
	ALCOR	Pag. 133		BABILON	Pag. 256		CLAY	Pag. 384
	ALFA	Pag. 204		BANJIE	Pag. 111		CLOCK	Pag. 25
	ALYSON	Pag. 222		BARCELONA	Pag. 279		CLOE	Pag. 214
	ANDROMEDA	Pag. 127		BARRET	Pag. 281		CONNETTORI STRIP	Pag. 377
	ANIMA	Pag. 109		BATTEN	Pag. 178		CONTROL WIFI	Pag. 354
	ANTARES	Pag. 128		BETA	Pag. 188		CONTROLLER	Pag. 310
	ANTHEA	Pag. 390		BIOME	Pag. 196		CONTROLLER POOL	Pag. 314
	APOLLO	Pag. 36		BLIZ	Pag. 76		COOPER	Pag. 166



CORTINA

Pag. 112



COSMO

Pag. 297



CRUISE

Pag. 142



DADO

Pag. 149



DELTA

Pag. 205



DELTA

Pag. 49



DENVER

Pag. 232



DETROIT

Pag. 203



DEZIR

Pag. 200



DRIVE

Pag. 288



DRIVER

Pag. 378



DRIVER

Pag. 351



EAGLE

Pag. 18



EASY

Pag. 274



ELIOS

Pag. 298



ELITE

Pag. 42



ENDY

Pag. 151



ENERGY

Pag. 330



EOS

Pag. 299



EPSILON

Pag. 130



EROS

Pag. 186



ET

Pag. 154



ETERNA

Pag. 336



EUCLID

Pag. 30



EVER

Pag. 271



EXPRESS

Pag. 21




EXTRA

Pag. 278



F1/F2

Pag. 155



FIBRA OTTICA

Pag. 65



FIRENZE

Pag. 246



FLAP

Pag. 62



FLORENZA

Pag. 390



FOSTER

Pag. 115



FRAME

Pag. 315



FUSION

Pag. 75



FUTURA

Pag. 322



GABRIEL

Pag. 108



GAETA

Pag. 254



GAIA

Pag. 148



GAMMA

Pag. 194



GECO

Pag. 262



GEMINI

Pag. 69



GEMMA

Pag. 7389



GHIBLI

Pag. 206



GHOST

Pag. 96

	GOLF	Pag. 197
	GRADO	Pag. 140
	HELP	Pag. 332
	HORUS	Pag. 61
	HURACAN	Pag. 231
	HYDRA	Pag. 124
	IBIZA	Pag. 276
	IMPACT	Pag. 285
	IRIDE	Pag. 342
	JOY	Pag. 151
	JUMP	Pag. 229
	KIT STRIP	Pag. 364
	KITE	Pag. 139
	KLIO	Pag. 56
	KLIPPE	Pag. 73

	KRISS	Pag. 148
	KRONE	Pag. 71
	KRONOS	Pag. 304
	KRONOS SPK	Pag. 295
	LADY	Pag. 212
	LAMBDA	Pag. 135
	LANCER	Pag. 146
	LEIRON	Pag. 113
	LELE	Pag. 149
	LELLA	Pag. 120
	LIMOGES	Pag. 169
	LYBRA	Pag. 48
	LYKAN	Pag. 292
	LYRA	Pag. 50
	MASTER	Pag. 328

	MATRIX	Pag. 77
	MEGAN	Pag. 218
	MEMPHIS	Pag. 233
	MERCURY	Pag. 193
	METRO	Pag. 30
	MIAMI	Pag. 162
	MILANO	Pag. 242
	MITO	Pag. 170
	MIURA	Pag. 192
	MONDRIAN	Pag. 224
	MONTBLANC	Pag. 114
	MORGANA	Pag. 101
	MORITZ	Pag. 118
	MOSES	Pag. 113
	MOVIE	Pag. 182















	MUSTANG	Pag. 137
	MYKONOS	Pag. 119
	NADIR	Pag. 72
	NEON FLEX	Pag. 362
	NEPTUNE	Pag. 347
	NISMO	Pag. 187
	OBOE	Pag. 24
	OCEAN	Pag. 319
	ODIC	Pag. 183
	OMEGA	Pag. 134
	OMICRON	Pag. 131
	OMNIA	Pag. 136
	ONYX	Pag. 290
	ORBIT	Pag. 208
	ORIONE	Pag. 68

	ORLANDO	Pag. 233
	OSLO	Pag. 230
	OUTSIDER	Pag. 44
	PANEL	Pag. 82
	PANEL STRUTTURA + ACCESSORI	Pag. 90
	PAR 56	Pag. 349
	PAULA	Pag. 120
	PAVIA	Pag. 252
	PEGASO	Pag. 135
	PHANTOM	Pag. 94
	PHOENIX	Pag. 132
	PIC NIC	Pag. 258
	PISA	Pag. 244
	PLASMA	Pag. 60
	POLARIS	Pag. 67

	PORTALAMP-PADE	Pag. 394
	POUND	Pag. 70
	PROFILI	Pag. 376
	PROFY	Pag. 105
	Q1/Q2	Pag. 155
	RAIN	Pag. 145
	RAINBOW	Pag. 344
	RAYS	Pag. 340
	REFLEX	Pag. 386
	RIDER	Pag. 282
	RIGEL	Pag. 125
	RIVA	Pag. 143
	ROBY	Pag. 150
	ROCKET	Pag. 814
	ROMA	Pag. 238

	RUBIK	Pag. 110
	SANTIAGO	Pag. 248
	SANTORINI	Pag. 119
	SCARAB	Pag. 142
	SEATTLE	Pag. 234
	SENSITIVE	Pag. 269
	SENSO	Pag. 98
	SENSORI	Pag. 392
	SESTRIERE	Pag. 117
	SHEDAR	Pag. 300
	SHELBY	Pag. 291
	SHELLY	Pag. 270
	SHINE	Pag. 110
	SHON	Pag. 152
	SIGMA	Pag. 129

	SINKRO	Pag. 34
	SINTESI	Pag. 190
	SIRIO	Pag. 74
	SLIM	Pag. 58
	SMART	Pag. 275
	SNOW	Pag. 100
	SONAR	Pag. 183
	SOTTOPENSILE LEDBAR	Pag. 181
	SPACE	Pag. 106
	SPETTRO	Pag. 95
	SPIRIT	Pag. 99
	SPLITTER	Pag. 355
	STARLIGHT	Pag. 64
	STEFAN	Pag. 120
	STEFANY	Pag. 153

	STEP	Pag. 284
	STRIP	Pag. 364
	STRIP 12/24V	Pag. 370
	STRIP 220V	Pag. 382
	SUNLITE	Pag. 352
	SUNNY	Pag. 164
	SURROUND	Pag. 360
	T5	Pag. 179
	TAYLOR	Pag. 359
	TECHNO	Pag. 158
	TITAN	Pag. 302
	TOKIO	Pag. 236
	TRACK	Pag. 26
	TRAIN	Pag. 17
	TRIPOD	Pag. 314

	TUCSON	Pag. 226		XANTO	Pag. 52
	TWILIGHT	Pag. 138		YORK	Pag. 227
	UFO	Pag. 320		YOUNG	Pag. 180
	UNIX	Pag. 176		ZARAH	Pag. 391
	UP	Pag. 81		ZENIT	Pag. 66
	URANO	Pag. 309		ZEPHIR	Pag. 191
	VEGA	Pag. 126		ZONDA	Pag. 201
	VENEZIA	Pag. 250			
	VEYRON	Pag. 195			
	VIPER	Pag. 388			
	VISION	Pag. 324			
	VISTA	Pag. 184			
	WALK	Pag. 286			
	WALLWASHER	Pag. 341			
	WALLY	Pag. 143			



iNTEC  
LIGHT





### **SISTEMA A BINARI**

Sistema d'illuminazione flessibile per ambienti commerciali e privati ideali per creare un'esperienza che sappia risaltare e valorizzare in modo confortevole e semplice ogni singolo dettaglio. Con la tecnologia LED potrai salvaguardare l'ambiente e ottenere una notevole riduzione dei consumi di energia.

### **TRACK RAIL SYSTEM**

*Flexible lighting system for commercial and private environments are ideal to create an experience that knows how to stand out and enhance it so comfortable and easy every single detail. With the LED technology will be able to safeguard the environment and obtain a significant reduction of energy consumption.*


## ROCKET

Faro binario con adattatore trifase in alluminio rifiniture bianco,nero,oro,cromo e bronzo LED COB integrato  
Track light with three phase adaptor aluminum material finish white, black, gold, chrome and bronze built-in COB LED



informazioni tecniche - technical information


LED-ROCKET-7M CR 8031414864317	4000K	7W	☀️ 700 Lumen	38°	⏻ >15 000 on/off	🕒 h 25 000	🔌 driver incluso
LED-ROCKET-7C CR 8031414864294	3000K	7W	☀️ 700 Lumen	38°	⏻ >15 000 on/off	🕒 h 25 000	🔌 driver incluso
LED-ROCKET-7M ORO 8031414864737	4000K	7W	☀️ 700 Lumen	38°	⏻ >15 000 on/off	🕒 h 25 000	🔌 driver incluso
LED-ROCKET-7C ORO 8031414864164	3000K	7W	☀️ 700 Lumen	38°	⏻ >15 000 on/off	🕒 h 25 000	🔌 driver incluso
LED-ROCKET-7M BRO 8031414864744	4000K	7W	☀️ 700 Lumen	38°	⏻ >15 000 on/off	🕒 h 25 000	🔌 driver incluso
LED-ROCKET-7C BRO 8031414864188	3000K	7W	☀️ 700 Lumen	38°	⏻ >15 000 on/off	🕒 h 25 000	🔌 driver incluso





informazioni tecniche - *technical information*

LED-ROCKET-7M NERO 8031414864300	4000K	7W	☀️ 700 Lumen	📐 38°	🔌 >15 000 on/off	🕒 h 25 000	🔋 driver incluso
LED-ROCKET-7C NERO 8031414861965	3000K	7W	☀️ 700 Lumen	📐 38°	🔌 >15 000 on/off	🕒 h 25 000	🔋 driver incluso
LED-ROCKET-7M BCO 8031414864171	4000K	7W	☀️ 700 Lumen	📐 38°	🔌 >15 000 on/off	🕒 h 25 000	🔋 driver incluso
LED-ROCKET-7C BCO 8031414861972	3000K	7W	☀️ 700 Lumen	📐 38°	🔌 >15 000 on/off	🕒 h 25 000	🔋 driver incluso

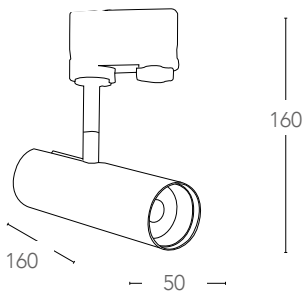



## ROCKET

Plafoniera in alluminio rifiniture bianco o nero LED COB integrato  
 Ceiling lamp aluminum material finish white or black built-in COB LED



### informazioni tecniche - technical information

LED-ROCKET-APC NERO 8031414861989	3000K	7W	700 Lumen	38°	>15 000 on/off	h 25 000	driver incluso
LED-ROCKET-APM NERO 8031414864980	4000K	7W	700 Lumen	38°	>15 000 on/off	h 25 000	driver incluso
LED-ROCKET-APC BCO 8031414861996	3000K	7W	700 Lumen	38°	>15 000 on/off	h 25 000	driver incluso
LED-ROCKET-APM BCO 8031414864966	4000K	7W	700 Lumen	38°	>15 000 on/off	h 25 000	driver incluso

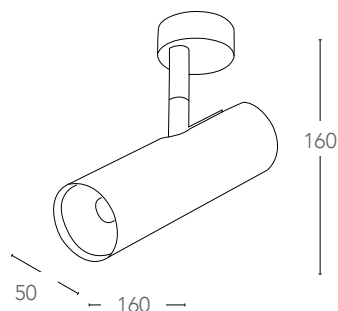

# TRAIN

Faro binario con adattatore trifase in alluminio pressofuso rifiniture in bianco o nero goffrato LED COB integrato  
 Track light with three phase adaptor aluminum material finish embossed white or black built-in COB LED



## informazioni tecniche - technical information




NERO



BIANCO

LED-TRAIN-B-40WM 8031440360289	4000K	40W	☀️ 4000 Lumen	40°	PF 0,90	⏻ >15 000 on/off	🕒 h 25 000	🔋 driver incluso
LED-TRAIN-B-40WC 8031440360456	3000K	40W	☀️ 4000 Lumen	40°	PF 0,90	⏻ >15 000 on/off	🕒 h 25 000	🔋 driver incluso
LED-TRAIN-W-40WM 8031440360296	4000K	40W	☀️ 4000 Lumen	40°	PF 0,90	⏻ >15 000 on/off	🕒 h 25 000	🔋 driver incluso
LED-TRAIN-W-40WC 8031440360449	3000K	40W	☀️ 4000 Lumen	40°	PF 0,90	⏻ >15 000 on/off	🕒 h 25 000	🔋 driver incluso

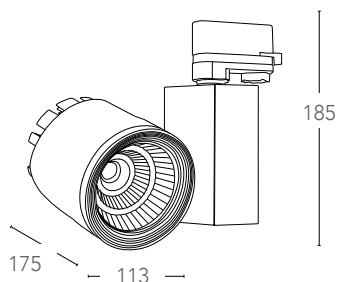

# EAGLE


Faro binario con adattatore trifase in alluminio pressofuso rifiniture in bianco o nero goffrato LED COB integrato  
 Track light with three phase adaptor aluminum material finish embossed white or black built-in COB LED



## informazioni tecniche - technical information




NERO



BIANCO

LED-EAGLE-B-10WM 8031440358774	4000K	10W	☀️ 1000 Lumen	40°	PF 0,90	⏻ >15 000 on/off	🕒 h 25 000	🔋 driver incluso
LED-EAGLE-B-10WC 8031440358712	3000K	10W	☀️ 1000 Lumen	40°	PF 0,90	⏻ >15 000 on/off	🕒 h 25 000	🔋 driver incluso
LED-EAGLE-W-10WM 8031440358750	4000K	10W	☀️ 1000 Lumen	40°	PF 0,90	⏻ >15 000 on/off	🕒 h 25 000	🔋 driver incluso
LED-EAGLE-W-10WC 8031440358743	3000K	10W	☀️ 1000 Lumen	40°	PF 0,90	⏻ >15 000 on/off	🕒 h 25 000	🔋 driver incluso

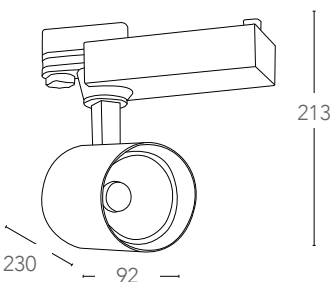

# EAGLE


Faro binario con adattatore trifase in alluminio pressofuso rifiniture in bianco o nero goffrato LED COB integrato  
 Track light with three phase adaptor aluminium material finish embossed white or black built-in COB LED



## informazioni tecniche - technical information




NERO



BIANCO

LED-EAGLE-B-20WM 8031440358767	4000K	20W	☀️ 2000 Lumen	40°	PF 0,90	⏻ >15 000 on/off	🕒 h 25 000	🔋 driver incluso
LED-EAGLE-B-20WC 8031440358798	3000K	20W	☀️ 2000 Lumen	40°	PF 0,90	⏻ >15 000 on/off	🕒 h 25 000	🔋 driver incluso
LED-EAGLE-W-20WM 8031440358736	4000K	20W	☀️ 2000 Lumen	40°	PF 0,90	⏻ >15 000 on/off	🕒 h 25 000	🔋 driver incluso
LED-EAGLE-W-20WC 8031440358729	3000K	20W	☀️ 2000 Lumen	40°	PF 0,90	⏻ >15 000 on/off	🕒 h 25 000	🔋 driver incluso

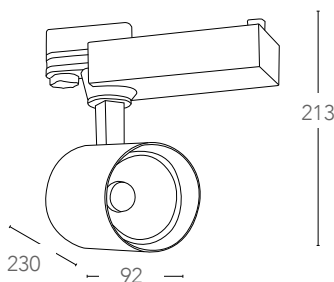



## EAGLE

Faro binario con adattatore trifase in alluminio pressofuso rifiniture in bianco o nero goffrato LED COB integrato  
 Track light with three phase adaptor aluminum material finish embossed white or black built-in COB LED





### informazioni tecniche - technical information

	LED-EAGLE-B-40WM 8031440358651	4000K	40W	☀️ 4000 Lumen	40°	PF 0,90	⏻ >15 000 on/off	🕒 h 25 000	🔌 driver incluso
	LED-EAGLE-B-40WC 8031440358644	3000K	40W	☀️ 4000 Lumen	40°	PF 0,90	⏻ >15 000 on/off	🕒 h 25 000	🔌 driver incluso
	LED-EAGLE-W-40WM 8031440358637	4000K	40W	☀️ 4000 Lumen	40°	PF 0,90	⏻ >15 000 on/off	🕒 h 25 000	🔌 driver incluso
	LED-EAGLE-W-40WC 8031440358620	3000K	40W	☀️ 4000 Lumen	40°	PF 0,90	⏻ >15 000 on/off	🕒 h 25 000	🔌 driver incluso


NERO

BIANCO

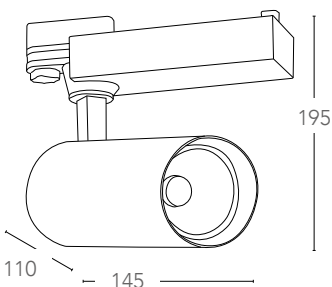

## ARROW

Faro binario con adattatore trifase in alluminio pressofuso rifiniture in bianco LED COB integrato  
Track light with three phase adaptor aluminum material finish embossed white built-in COB LED



LED-ARROW-40W  
8031439211264



40W



2800 Lumen



24°

PF  
0,90




>15 000 on/off




h 25 000

driver incluso



## EXPRESS

Faro binario con adattatore trifase attacco E27 rifiniture in bianco o nero satinato  
Track light with three phase adaptor with E27 lamp holder finish satin white or black



BIANCO LED-EXPRESS  
8031440360470

1xE27 max 42w  
non include - not included



NERO LED-EXPRESS-B  
8031414864676

1xE27 max 42w  
non include - not included








## OBOE


Sospensione con adattatore trifase in alluminio rifiniture in bianco, nero, oro, cromo e bronzo LED COB integrato

*Pendant lamp with three phase adaptor aluminum material finish white, black, gold, chrome and bronze built-in COB LED*

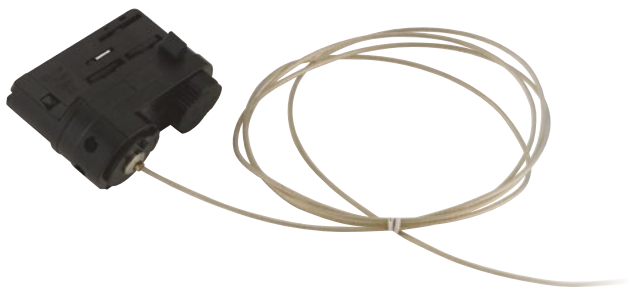

informazioni tecniche - technical information

LED-OBOE-SM BCO 8031414862047	4000K	3,5W	280 Lumen	40°	>15 000 on/off	h 25 000	driver incluso
LED-OBOE-SC BCO 8031414865109	3000K	3,5W	280 Lumen	40°	>15 000 on/off	h 25 000	driver incluso
LED-OBOE-SM NERO 8031414862030	4000K	3,5W	280 Lumen	40°	>15 000 on/off	h 25 000	driver incluso
LED-OBOE-SC NERO 8031414865147	3000K	3,5W	280 Lumen	40°	>15 000 on/off	h 25 000	driver incluso
LED-OBOE-SM ORO 8031414862054	4000K	3,5W	280 Lumen	40°	>15 000 on/off	h 25 000	driver incluso
LED-OBOE-SC ORO 8031414865123	3000K	3,5W	280 Lumen	40°	>15 000 on/off	h 25 000	driver incluso
LED-OBOE-SM CR 8031414862061	4000K	3,5W	280 Lumen	40°	>15 000 on/off	h 25 000	driver incluso
LED-OBOE-SC CR 8031414865130	3000K	3,5W	280 Lumen	40°	>15 000 on/off	h 25 000	driver incluso
LED-OBOE-SM BRO 8031414864287	4000K	3,5W	280 Lumen	40°	>15 000 on/off	h 25 000	driver incluso
LED-OBOE-SC BRO 8031414865116	3000K	3,5W	280 Lumen	40°	>15 000 on/off	h 25 000	driver incluso

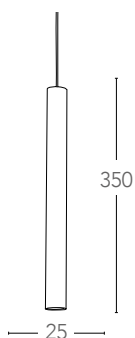


## CLOCK

Sospensione con adattatore trifase in alluminio rifiniture in cromo o nero  
Pendant lamp with three phase adaptor aluminum material finish chrome and black




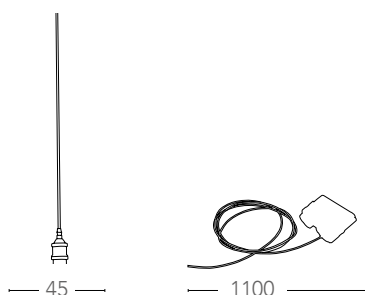
informazioni tecniche - *technical information*

I-TRACK-CLOCK-CR  
8031414864072

 1xE27 max 60w  
non include - *not included*

I-TRACK-CLOCK-NERO  
8031414864096

 1xE27 max 60w  
non include - *not included*



CE

RoHS  
WEEE COMPLIANT

## TRACK

Binari ed accessori  
Track and components



informazioni tecniche - *technical information*

bianco - *white*



**LED-TRACK-1M**  
8031439221263

nero - *black*



**LED-TRACK-1M-NERO**  
8031440360425

Binari elettrificati trifase in alluminio 1 mt (tappi inclusi)  
*Track rail in aluminium with threephase adaptor (endcap)*

**LED-TRACK-2M**  
8031440360340

**LED-TRACK-2M-NERO**  
8031440360364

Binari elettrificati trifase in alluminio 2 mt (tappi inclusi)  
*Track rail in aluminium with threephase adaptor (endcap)*

**LED-TRACK-3M**  
8031440360357

**LED-TRACK-3M-NERO**  
8031440360371

Binari elettrificati trifase in alluminio 3 mt (tappi inclusi)  
*Track rail in aluminium with threephase adaptor (endcap)*




informazioni tecniche - *technical information*

**LED-TRACK-1M-INC**  
8031440361804

Binario guida ad incasso trifase 1mt bianco per proiettore led mis. 1000x42x33,5 mm  
*Recessed track rail in aluminium with threephase adaptor 1m mis. 1000x42x33,5 mm*

**LED-TRACK-2M-INC**  
8031440361811

Binario guida ad incasso trifase 2mt bianco per proiettore led mis. 2000x42x33,5 mm  
*Recessed track rail in aluminium with threephase adaptor 2m mis. 2000x42x33,5 mm*

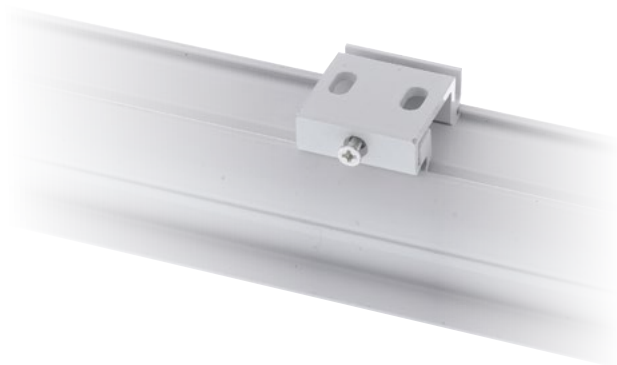

informazioni tecniche - *technical information*

bianco - *white*

**LED-TRACK-PL**  
8031440358668

nero - *black*

**LED-TRACK-PL-NERO**  
8031440358699

Kit 2pz. basette per binario guida trifase  
*Kit 2p. sourceface mount base for track rail three phase*



informazioni tecniche - *technical information*

bianco - *white*

**LED-TRACK-BASE**  
8031440361668

nero - *black*

**LED-TRACK-BASE NERO**  
8031440361675

Base tonda per innesto binario trifase  $\varnothing$  120 mm H 25 mm  
*Round base for track rail three phase  $\varnothing$  120 mm H 25 mm*



informazioni tecniche - *technical information*



bianco - *white*

nero - *black*

**LED-TRACK-S-1,5**  
8031440359061

**LED-TRACK-S-1,5-NERO**  
8031440359078

Kit sospensione 1,5 mt per binari  
*Suspension kit 1,5 mt for rail track*

**LED-TRACK-S-3**  
8031440359047

**LED-TRACK-S-3-NERO**  
8031440359054

Kit sospensione 3 mt per binari  
*Suspension kit 3 mt for rail track*

## TRACK

Binari ed accessori  
Track and components



informazioni tecniche - *technical information*

bianco - *white*

nero - *black*

LED-TRACK-I-MINI  
8031440358705

LED-TRACK-I-MINI-NERO  
8031440357845

Connettore lineare mini a scomparsa per binari guida per circuito trifase  
*Mini invisible connector for threephase track rail system*

informazioni tecniche - *technical information*

bianco - *white*

nero - *black*

LED-TRACK-NEST  
8031440311564

LED-TRACK-NEST-NERO  
8031440360418

Innesto **sinistro** per binari guida entrata L N + cavo di terra per circuito a trifase  
*Power connector left side for three phase track rail*

LED-TRACK-NEST-R  
8031440359009

LED-TRACK-NEST-R NERO  
8031440359016

Innesto **destro** per binari guida entrata L N + cavo di terra per circuito a trifase  
*Power connector right side for three phase track rail*



informazioni tecniche - *technical information*

bianco - *white*

nero - *black*

LED-TRACK-I  
8031440311526

LED-TRACK-I-NERO  
8031440360432

Connettore lineare per binari guida a trifase  
*Straight extension for three phase track rail*



informazioni tecniche - *technical information*

bianco - *white*

nero - *black*

LED-TRACK-FLEX  
8031440359085

LED-TRACK-FLEX-NERO  
8031440359030

Connettore track flessibile per binari guida trifase  
*Flexible power connector for three phase track rail*



informazioni tecniche - *technical information*

bianco - *white*

nero - *black*

LED-TRACK-X  
8031439231262

LED-TRACK-X -NERO  
8031440360395

Connettore a croce per binari guida per circuito trifase  
*Extension X shape for three phase track rail*

informazioni tecniche - *technical information*

bianco - *white*

nero - *black*

LED-TRACK-L-R  
8031440358972

LED-TRACK-L-R-NERO  
8031440359023

Connettore track **destro** a L per binari guida trifase  
*L connector right side for three phase track rail*


LED-TRACK-L  
8031439241261

LED-TRACK-L NERO  
8031440360401

Connettore track **sinistro** a elle per binari guida trifase  
*L connector left side for three phase track rail*

## TRACK

Binari ed accessori  
Track and components

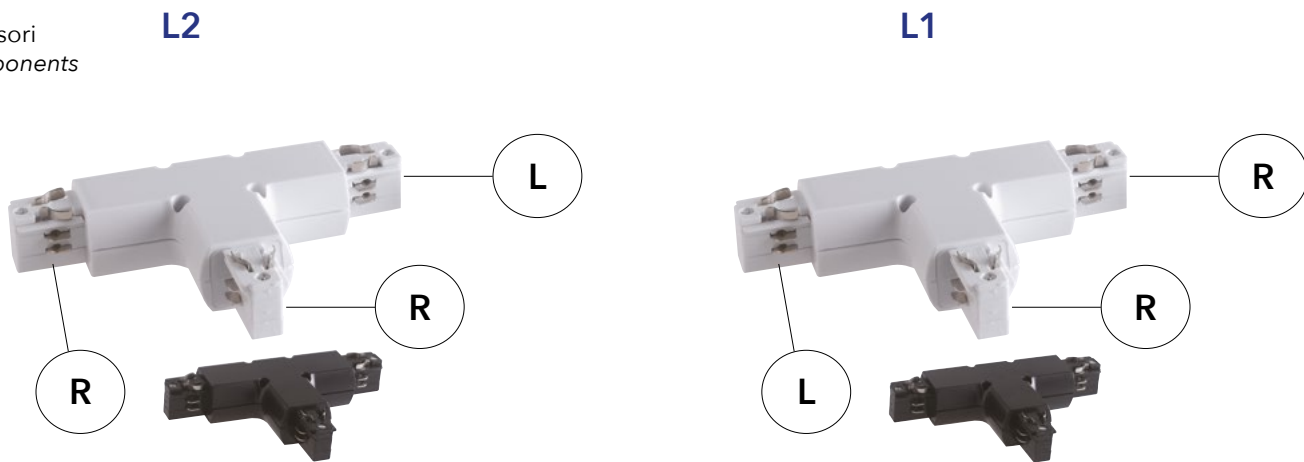


informazioni tecniche - technical information

bianco - white

nero - black

<b>L2</b>	LED-TRACK-T 8031440311571	LED-TRACK-T NERO 8031440360388	Connettore <b>destro</b> a T per binari guida entrata L N + cavo di terra per circuito a trifase <i>T connector right side for three phase track rail</i>
<b>L1</b>	LED-TRACK-T-L1 8031440358989	LED-TRACK-T-L1 NERO 8031440358996	Connettore <b>sinistro</b> a T per binari guida entrata L N + cavo di terra per circuito a trifase <i>T connector left side for three phase track rail</i>

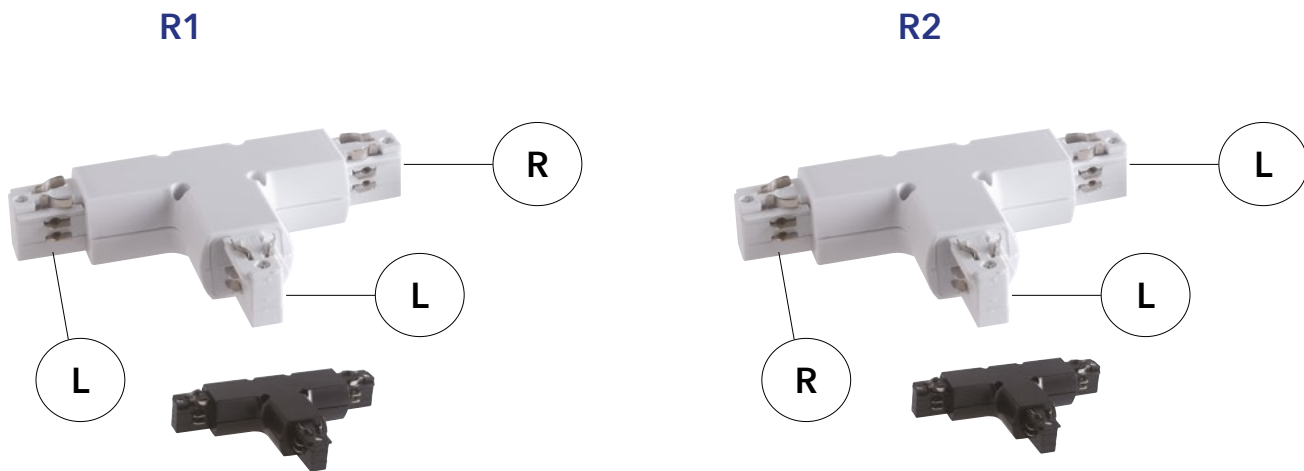

informazioni tecniche - technical information

bianco - white

nero - black

<b>R1</b>	LED-TRACK-T-R1 8031440357449	LED-TRACK-T-R1 NERO 8031440357456	Connettore <b>destro</b> a T per binari guida entrata L N + cavo di terra per circuito a trifase <i>T connector right side for three phase track rail</i>
<b>R2</b>	LED-TRACK-T-R2 8031440357487	LED-TRACK-T-R2 NERO 8031440357661	Connettore <b>sinistro</b> a T per binari guida entrata L N + cavo di terra per circuito a trifase <i>T connector left side for three phase track rail</i>

R: RIGHT (DESTRO)

L: LEFT (SINISTRO)

## METRO

Sistema cavi tesi.  
Wire system.




informazioni tecniche - *technical information*

**LED-METRO-5**  
8031414862139

5xMR16 max 9w  
non include - *not included*

driver 50W incluso



10 mt  
sp. 2,5 mm

## EUCLID

Sistema cavi tesi.  
Wire system.




informazioni tecniche - *technical information*

**LED-EUCLID-5**  
8031414862146

5xMR16 max 9w  
non include - *not included*

driver 50W incluso



10 mt  
sp. 2,5 mm









## **INCASSI**

Incassi a LED per tutti gli ambienti commerciali e privati che necessitano di un preciso progetto di illuminazione diffusa o direzionale valorizzando in modo confortevole ed efficace ogni dettaglio richiesto.

## **RECESSED**

*Recessed LED fixtures for all commercial and private environments that need a precise project of diffuse or directional lighting enhancing comfortably and effectively every detail required.*

## SINKRO

Incasso con modulo LED COB. Bordo bianco con interno nero lucido  
Down light built-in COB LED. Satin white frame with glossy black inside




### informazioni tecniche - technical information

INC-SINKRO-2M  
8031440360876



2W




>10 000 on/off



h 25 000

driver incluso

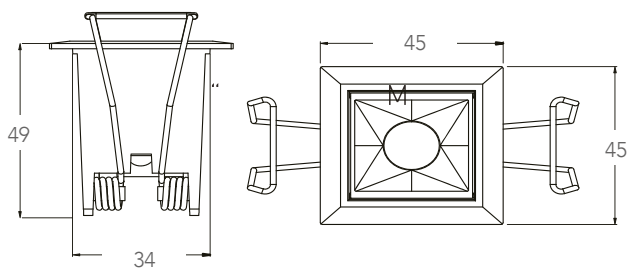

foro  
34X34 mm

CLASSE  
**A+**



COB



Ra  
>80

CE





informazioni tecniche - technical information

**INC-SINKRO-10M**  
8031440360890

4000K

5X2W

800 Lumen

45°

>10 000 on/off

h 25 000

driver incluso

**INC-SINKRO-20M**  
8031440360906

4000K

10X2W


1600 Lumen

45°


>10 000 on/off

h 25 000

driver incluso

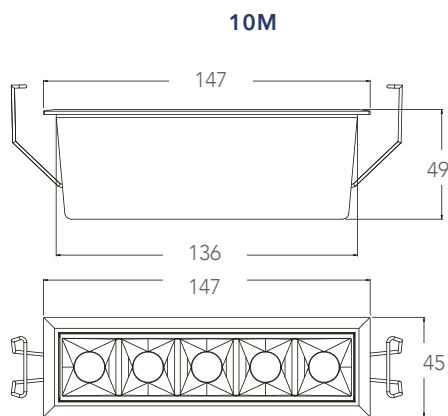

foro  
136X34 mm

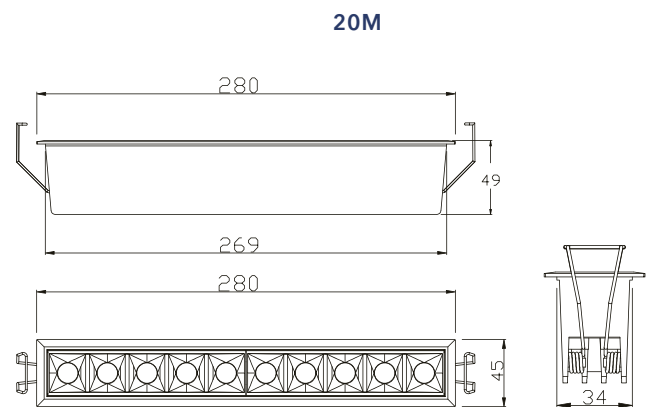

foro  
269X34 mm

CLASSE <b>A+</b>		<b>COB</b> 		<b>Ra</b> <b>&gt;80</b>	<b>CE</b>		<b>RoHS</b> WEEE COMPLIANT
---------------------	--	----------------	--	----------------------------	-----------	--	-------------------------------




# APOLLO

Incasso orientabile in 4 direzioni con modulo LED COB. Bordo bianco con interno nero satinato  
 Down light adjustable 4 directions built-in COB LED. Satin white frame with satin black inside



## informazioni tecniche - technical information




INC-APOLLO-1X10C 8031440360623	3000K	10W	☀️ 800 Lumen	40°	45°	⏻ >20 000 on/off	🕒 h 40 000	🔌 driver incluso
INC-APOLLO-1X10M 8031440360630	4000K	10W	☀️ 800 Lumen	40°	45°	⏻ >20 000 on/off	🕒 h 40 000	🔌 driver incluso
INC-APOLLO-1X20C 8031440360692	3000K	20W	☀️ 1600 Lumen	40°	45°	⏻ >20 000 on/off	🕒 h 40 000	🔌 driver incluso
INC-APOLLO-1X20M 8031440360708	4000K	20W	☀️ 1600 Lumen	40°	45°	⏻ >20 000 on/off	🕒 h 40 000	🔌 driver incluso

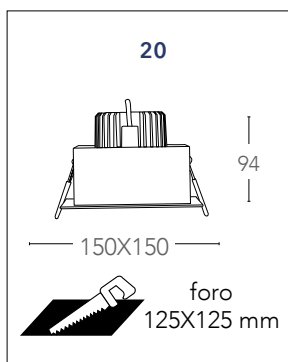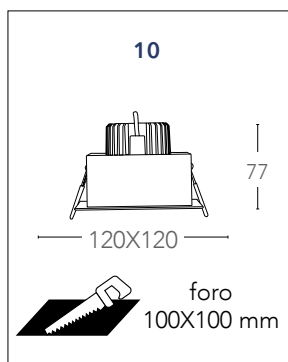



informazioni tecniche - technical information

INC-APOLLO-1X30C 8031440360753	3000K	30W	☀️ 2400 Lumen	40°	45°	PF 0,90	⏻ >20 000 on/off	🕒 h 40 000	🔋 driver incluso
INC-APOLLO-1X30M 8031440360760	4000K	30W	☀️ 2400 Lumen	40°	45°	PF 0,90	⏻ >20 000 on/off	🕒 h 40 000	🔋 driver incluso
INC-APOLLO-1X45C 8031440360777	3000K	45W	☀️ 3600 Lumen	40°	45°	PF 0,90	⏻ >20 000 on/off	🕒 h 40 000	🔋 driver incluso
INC-APOLLO-1X45M 8031440360784	4000K	45W	☀️ 3600 Lumen	40°	45°	PF 0,90	⏻ >20 000 on/off	🕒 h 40 000	🔋 driver incluso

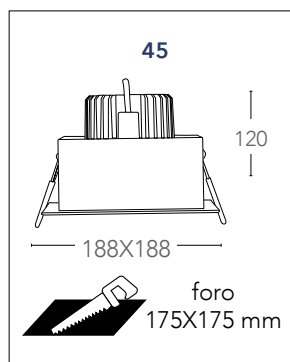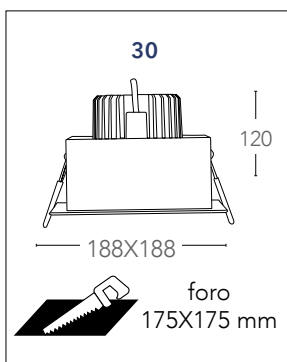




## APOLLO

Incasso orientabile in 4 direzioni con modulo LED COB. Bordo bianco con interno nero satinato  
 Down light adjustable 4 directions built-in COB LED. Satin white frame with satin black inside



### informazioni tecniche - technical information



INC-APOLLO-2X10C 8031440360647	3000K	2X10W	1600 Lumen	40°	45°	>20 000 on/off	h 40 000	driver incluso
INC-APOLLO-2X10M 8031440360654	4000K	2X10W	1600 Lumen	40°	45°	>20 000 on/off	h 40 000	driver incluso
INC-APOLLO-2X20C 8031440360715	3000K	2X20W	3200 Lumen	40°	45°	>20 000 on/off	h 40 000	driver incluso
INC-APOLLO-2X20M 8031440360722	4000K	2X20W	3200 Lumen	40°	45°	>20 000 on/off	h 40 000	driver incluso

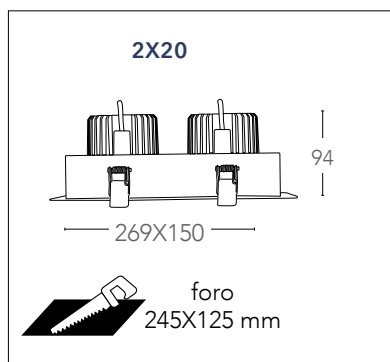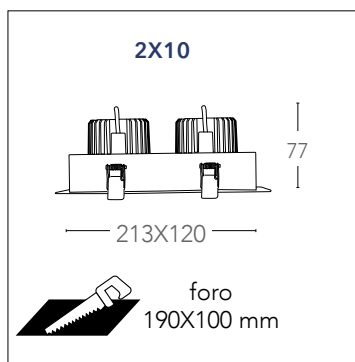



informazioni tecniche - *technical information*

INC-APOLLO-2X30C 8031440360791	3000K	2X30W	☀️ 4800 Lumen	40°	45°	PF 0,90	⏻ >20 000 on/off	🕒 h 40 000	🔌 driver incluso
INC-APOLLO-2X30M 8031440360807	4000K	2X30W	☀️ 4800 Lumen	40°	45°	PF 0,90	⏻ >20 000 on/off	🕒 h 40 000	🔌 driver incluso
INC-APOLLO-2X45C 8031440360814	3000K	2X45W	☀️ 7200 Lumen	40°	45°	PF 0,90	⏻ >20 000 on/off	🕒 h 40 000	🔌 driver incluso
INC-APOLLO-2X45M 8031440360821	4000K	2X45W	☀️ 7200 Lumen	40°	45°	PF 0,90	⏻ >20 000 on/off	🕒 h 40 000	🔌 driver incluso

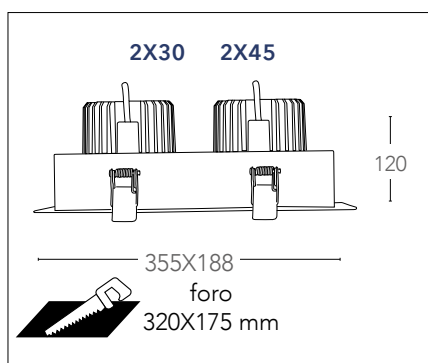

## APOLLO

Incasso orientabile in 4 direzioni con modulo LED COB.

Bordo bianco con interno nero satinato

Down light adjustable 4 directions built-in COB LED.

Satin white frame with satin black inside



### informazioni tecniche - technical information

**INC-APOLLO-3X10C**  
8031440360661



**3X10W** ☀️ 2400 Lumen



🔌 >20 000 on/off

🕒 h 40 000

🔋 driver incluso

**INC-APOLLO-3X10M**  
8031440360678



**3X10W** ☀️ 2400 Lumen



🔌 >20 000 on/off

🕒 h 40 000

🔋 driver incluso

**INC-APOLLO-3X20C**  
8031440360746



**3X20W** ☀️ 4800 Lumen



🔌 >20 000 on/off

🕒 h 40 000

🔋 driver incluso

**INC-APOLLO-3X20M**  
8031440360739



**3X20W** ☀️ 4800 Lumen




🔌 >20 000 on/off


🕒 h 40 000

🔋 driver incluso

**3X10**

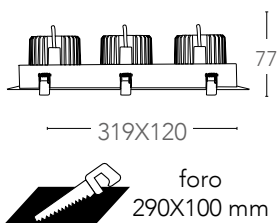

**3X20**

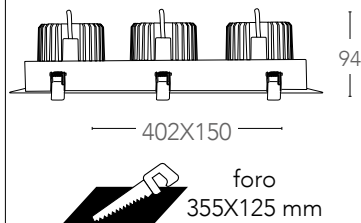

CLASSE  
**A+**



**COB**



**Ra**  
>80



**CE**






informazioni tecniche - technical information

INC-APOLLO-3X30C 8031440360845	3000K	<b>3X30W</b>	7200 Lumen	40°	45°	<b>PF 0,90</b>	>20 000 on/off	h 40 000	driver incluso
INC-APOLLO-3X30M 8031440360838	4000K	<b>3X30W</b>	7200 Lumen	40°	45°	<b>PF 0,90</b>	>20 000 on/off	h 40 000	driver incluso
INC-APOLLO-3X45C 8031440360852	3000K	<b>3X45W</b>	10800 Lumen	40°	45°	<b>PF 0,90</b>	>20 000 on/off	h 40 000	driver incluso
INC-APOLLO-3X45M 8031440360869	4000K	<b>3X45W</b>	10800 Lumen	40°	45°	<b>PF 0,90</b>	>20 000 on/off	h 40 000	driver incluso

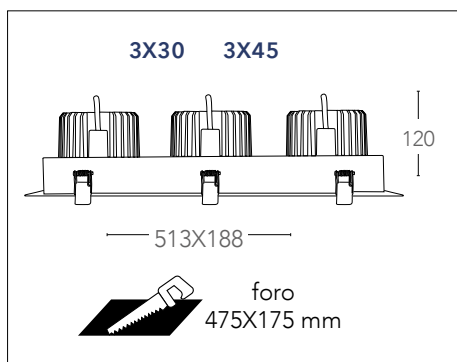



# ELITE

Incasso in alluminio bianco orientabile con modulo LED COB  
 White aluminium down light adjustable built-in COB LED

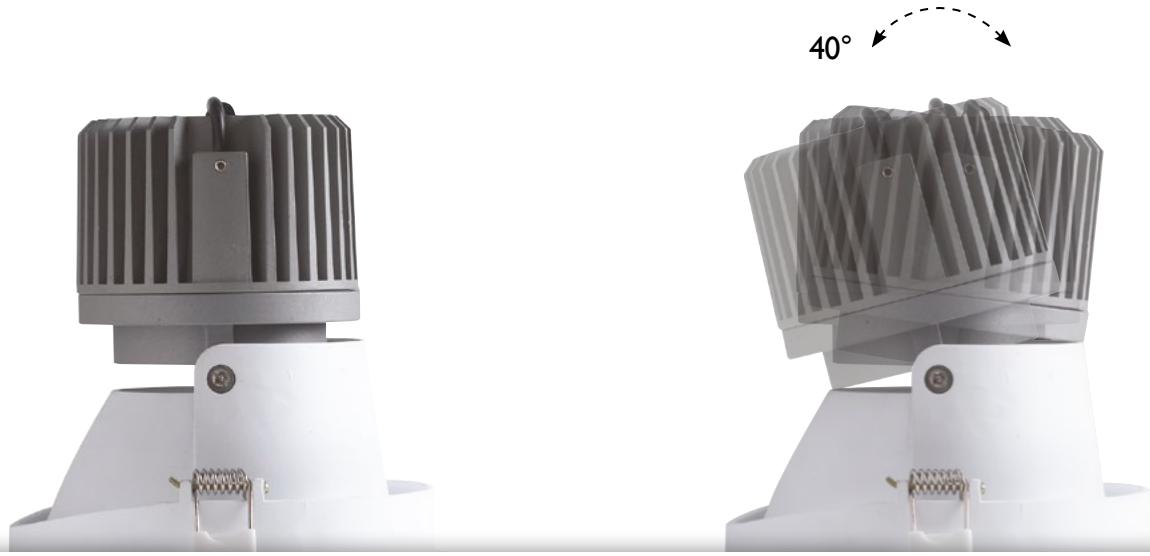

## informazioni tecniche - technical information



<b>INC-ELITE-1X10C</b> 8031440363396	3000K	10W	800 Lumen	40°	40°	>20 000 on/off	h 40 000	driver incluso
<b>INC-ELITE-1X10M</b> 8031440363365	4000K	10W	800 Lumen	40°	40°	>20 000 on/off	h 40 000	driver incluso
<b>INC-ELITE-1X20C</b> 8031440363372	3000K	20W	1600 Lumen	40°	40°	>20 000 on/off	h 40 000	driver incluso
<b>INC-ELITE-1X20M</b> 8031440363341	4000K	20W	1600 Lumen	40°	40°	>20 000 on/off	h 40 000	driver incluso

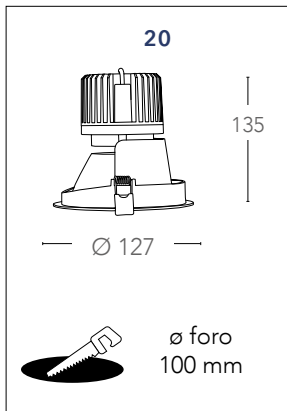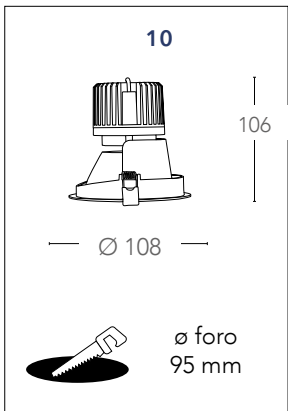



informazioni tecniche - technical information

<b>INC-ELITE-1X30C</b> 8031440363358	<b>3000K</b>	<b>30W</b>	<b>2400 Lumen</b>	<b>40°</b>	<b>40°</b>	<b>PF 0,90</b>	<b>&gt;20 000 on/off</b>	<b>h 40 000</b>	<b>driver incluso</b>
<b>INC-ELITE-1X30M</b> 8031440363327	<b>4000K</b>	<b>30W</b>	<b>2400 Lumen</b>	<b>40°</b>	<b>40°</b>	<b>PF 0,90</b>	<b>&gt;20 000 on/off</b>	<b>h 40 000</b>	<b>driver incluso</b>
<b>INC-ELITE-1X45C</b> 8031440363334	<b>3000K</b>	<b>45W</b>	<b>3600 Lumen</b>	<b>40°</b>	<b>40°</b>	<b>PF 0,90</b>	<b>&gt;20 000 on/off</b>	<b>h 40 000</b>	<b>driver incluso</b>
<b>INC-ELITE-1X45M</b> 8031440363303	<b>4000K</b>	<b>45W</b>	<b>3600 Lumen</b>	<b>40°</b>	<b>40°</b>	<b>PF 0,90</b>	<b>&gt;20 000 on/off</b>	<b>h 40 000</b>	<b>driver incluso</b>

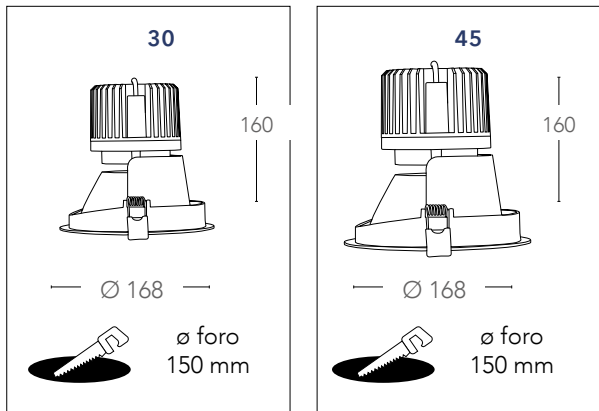



# OUTSIDER

Incasso orientabile Snooker bianco matto con bordatura interna nera LED COB integrato  
Adjustable down light in matt white color and black internal ring built-in COB LED



## informazioni tecniche - technical information



INC-OUTSIDER-1X15C 8031414864225	3000K	15W	1200 Lumen	24°	>20 000 on/off	h 40 000	driver incluso
INC-OUTSIDER-1X15M 8031414864119	4000K	15W	1200 Lumen	24°	>20 000 on/off	h 40 000	driver incluso
INC-OUTSIDER-1X30C 8031414864256	3000K	30W	2400 Lumen	24°	>20 000 on/off	h 40 000	driver incluso
INC-OUTSIDER-1X30M 8031414864133	4000K	30W	2400 Lumen	24°	>20 000 on/off	h 40 000	driver incluso

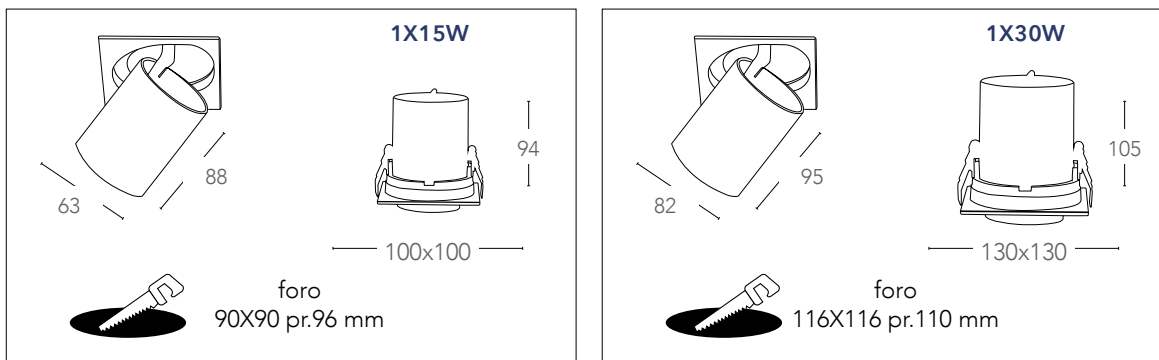



informazioni tecniche - technical information

INC-OUTSIDER-2X15C 8031414864232	3000K	2X15W	☀️ 2400 Lumen	🌀 24°	🔌 >20 000 on/off	🕒 h 40 000	🔌 driver incluso
INC-OUTSIDER-2X15M 8031414864126	4000K	2X15W	☀️ 2400 Lumen	🌀 24°	🔌 >20 000 on/off	🕒 h 40 000	🔌 driver incluso
INC-OUTSIDER-2X30C 8031414864263	3000K	2X30W	☀️ 4800 Lumen	🌀 24°	🔌 >20 000 on/off	🕒 h 40 000	🔌 driver incluso
INC-OUTSIDER-2X30M 8031414864140	4000K	2X30W	☀️ 4800 Lumen	🌀 24°	🔌 >20 000 on/off	🕒 h 40 000	🔌 driver incluso

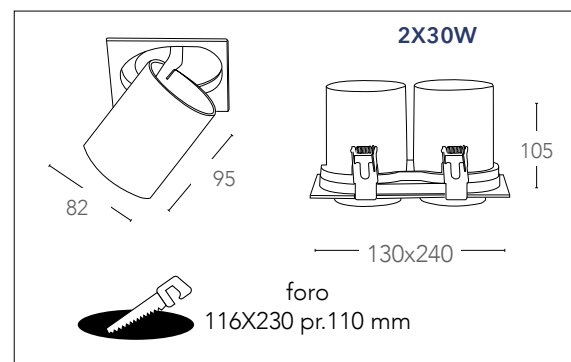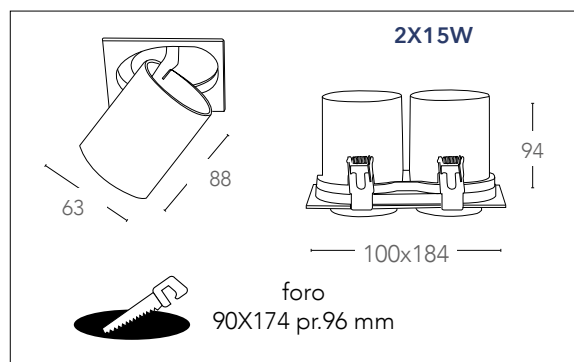




# OUTSIDER

Incasso orientabile Snooker bianco matto con bordatura interna nera LED COB integrato  
Adjustable down light in matt white color and black internal ring built-in COB LED



## informazioni tecniche - technical information

INC-OUTSIDER-3X15C 8031414864249	3000K	3X15W	3600 Lumen	24°	>20 000 on/off	h 40 000	driver incluso
INC-OUTSIDER-3X15M 8031414864102	4000K	3X15W	3600 Lumen	24°	>20 000 on/off	h 40 000	driver incluso
INC-OUTSIDER-3X30C 8031414864270	3000K	3X30W	7200 Lumen	24°	>20 000 on/off	h 40 000	driver incluso
INC-OUTSIDER-3X30M 8031414864157	4000K	3X30W	7200 Lumen	24°	>20 000 on/off	h 40 000	driver incluso

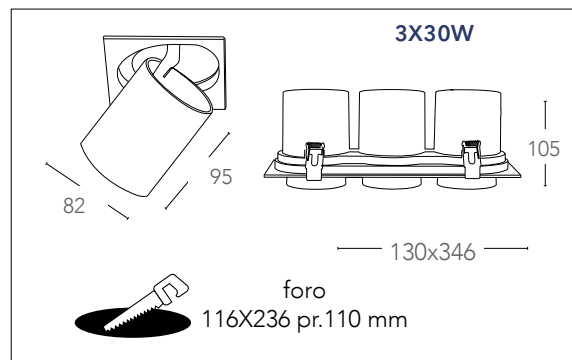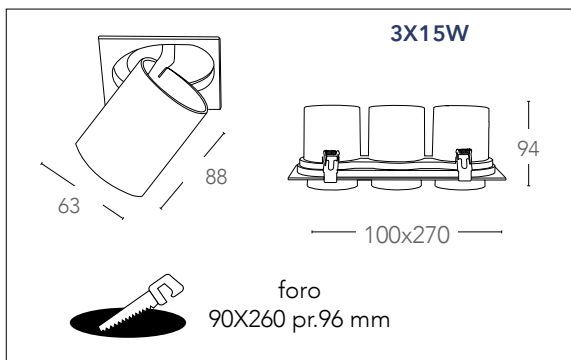




ESTÉE LAUDER



ESTÉE LAUDER  
Meglio oggi supera se stessa

## LYBRA

Incasso orientabile Snooker bianco satinato riflettore silver LED COB integrato  
Adjustable down light in satin white color built-in COB LED



informazioni tecniche - technical information

INC-LYBRA-30  
8031434951226



30W



1600 Lumen



PF  
0,90





>15 000 on/off



h 25 000

driver incluso

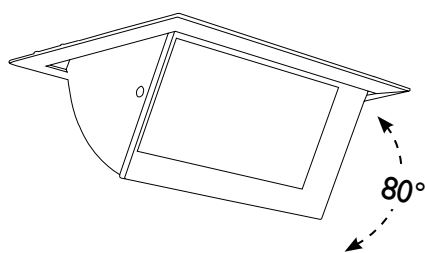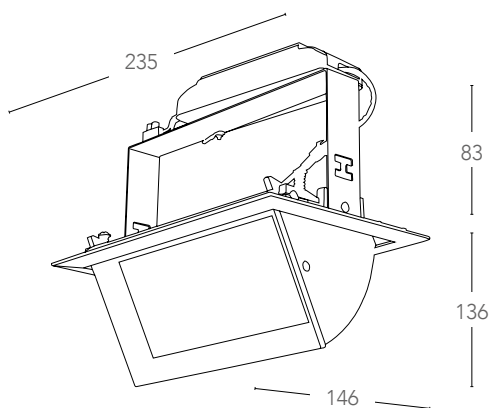

foro  
220x132 mm

CLASSE  
**A+**



COB



Ra  
>80


CE



RoHS  
WEEE COMPLIANT




## DELTA

Incasso orientabile Snooker bianco satinato riflettore silver LED COB integrato  
Adjustable down light in satin white color built-in COB LED

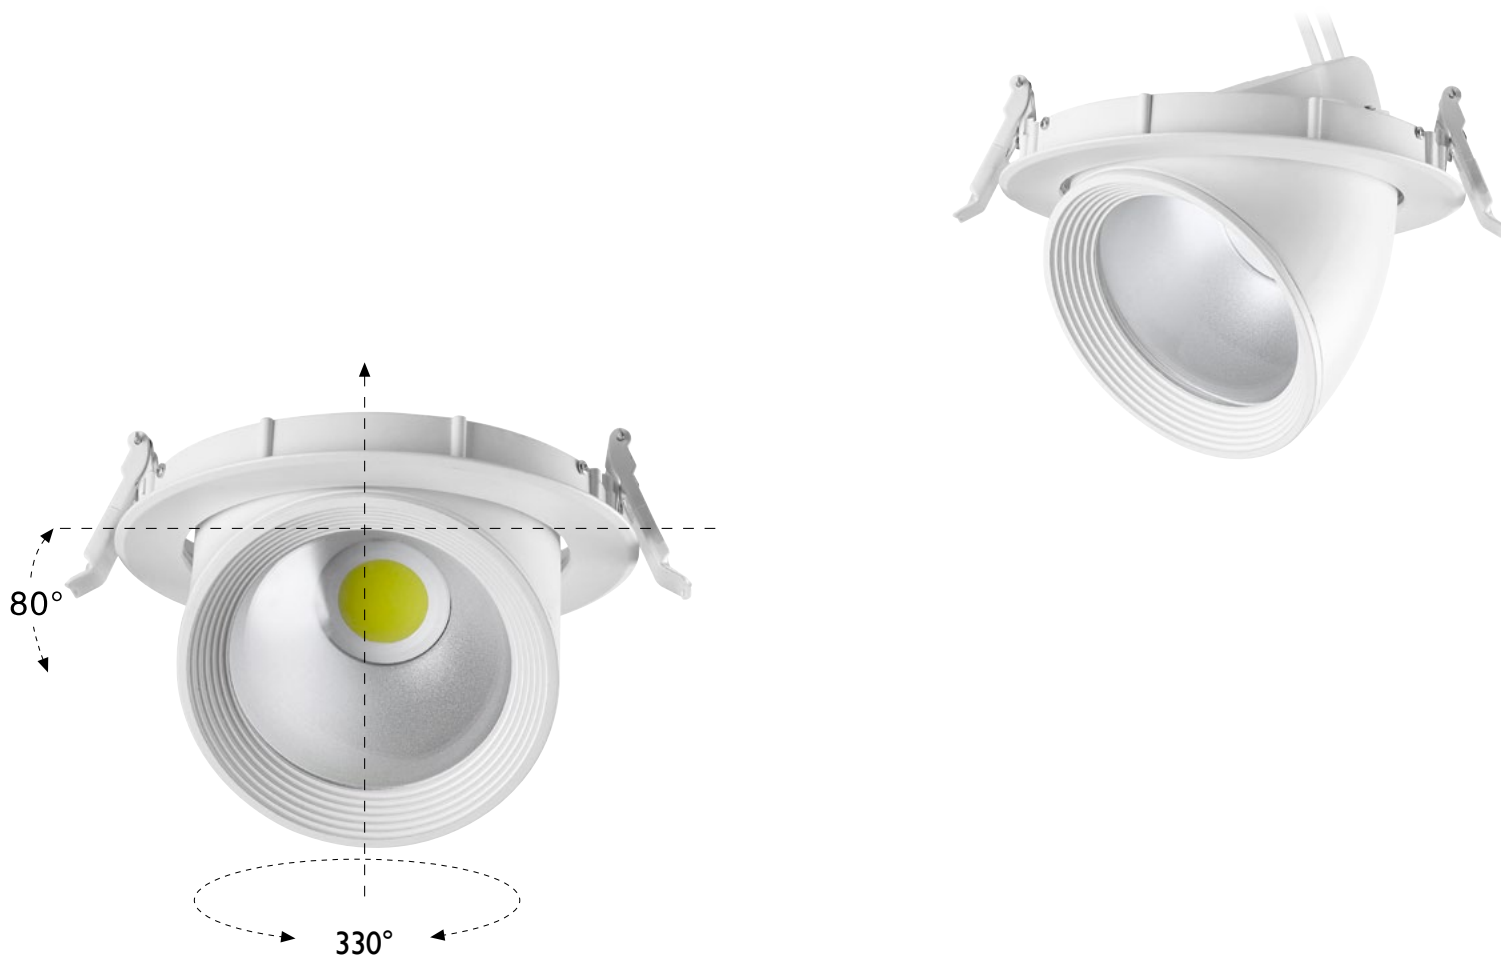

### informazioni tecniche - technical information

<b>INC-DELTA-8</b> 8031434921229	3200K	<b>8W</b>	☀️ 500 Lumen	68°	>15 000 on/off	h 25 000	driver incluso
<b>INC-DELTA-20</b> 8031434931228	3200K	<b>20W</b>	☀️ 1100 Lumen	68°	>15 000 on/off	h 25 000	driver incluso
<b>INC-DELTA-30</b> 8031434941227	3200K	<b>30W</b>	☀️ 1550 Lumen	68°	>15 000 on/off	h 25 000	driver incluso

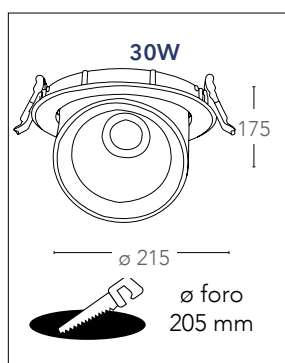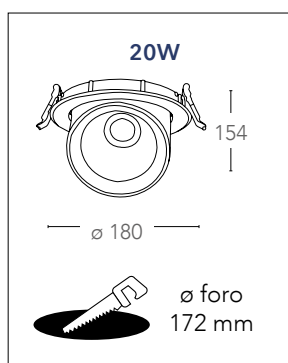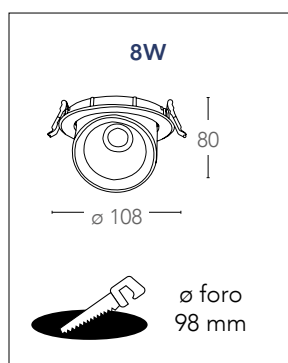




# LYRA

Incasso in alluminio pressofuso colore bianco satinato LED COB integrato  
 Diecast aluminium in satin white color built-in COB LED



## informazioni tecniche - technical information

INC-LYRA-10C 8031434851212	3200K	10W	800 Lumen	99°	>15 000 on/off	h 25 000	driver incluso
INC-LYRA-10F 8031434861211	5500K	10W	800 Lumen	99°	>15 000 on/off	h 25 000	driver incluso
INC-LYRA-20C 8031434871210	3200K	20W	1600 Lumen	99°	>15 000 on/off	h 25 000	driver incluso
INC-LYRA-20F 8031434891225	5500K	20W	1600 Lumen	99°	>15 000 on/off	h 25 000	driver incluso
INC-LYRA-30C 8031434901221	3200K	30W	2400 Lumen	99°	>15 000 on/off	h 25 000	driver incluso
INC-LYRA-30F 8031434911220	5500K	30W	2400 Lumen	99°	>15 000 on/off	h 25 000	driver incluso

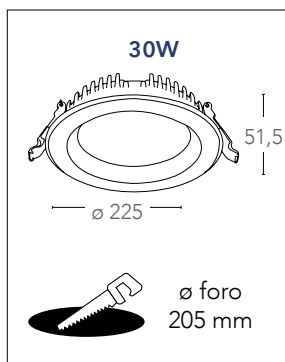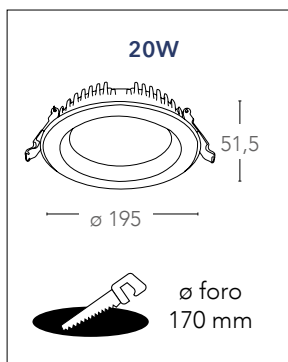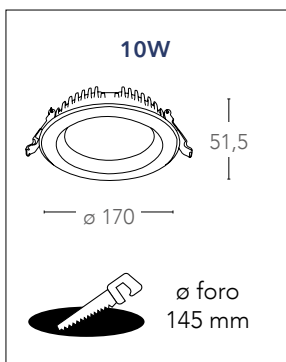

CLASSE  
**A**



**COB**



Ra  
**>80**

**CE**





informazioni tecniche - technical information

**INC-LYRA-60C**  
8031440357166



**60W**

5100 Lumen



>10 000 on/off



h 25 000

driver incluso

**INC-LYRA-60F**  
8031440357173



**60W**

5100 Lumen




>10 000 on/off



h 25 000

driver incluso

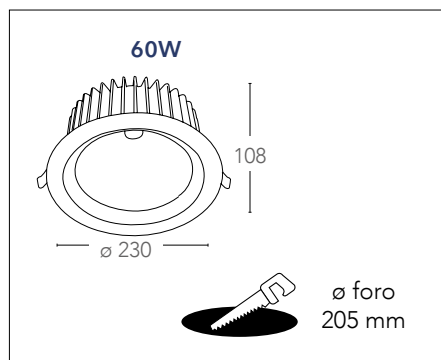


# XANTO

Incasso in alluminio pressofuso LED integrato  
Diecast aluminium down light built-in LED



## informazioni tecniche - technical information


<b>INC-XANTO-M-R220</b> 8031414861248	4000K	30W	☀️ 2800 Lumen	98°	>15 000 on/off	h 25 000	driver incluso
<b>INC-XANTO-F-R220</b> 8031414861187	5000K	30W	☀️ 2900 Lumen	98°	>15 000 on/off	h 25 000	driver incluso
<b>INC-XANTO-C-R220</b> 8031414861125	3000K	30W	☀️ 2700 Lumen	98°	>15 000 on/off	h 25 000	driver incluso

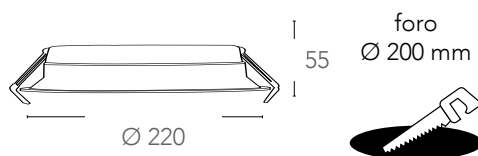




informazioni tecniche - *technical information*

<b>INC-XANTO-M-R154</b> 8031414861231	4000K	<b>18W</b>	1550 Lumen	98°	>15 000 on/off	h 25 000	driver incluso
<b>INC-XANTO-F-R154</b> 8031414861170	5000K	<b>18W</b>	1600 Lumen	98°	>15 000 on/off	h 25 000	driver incluso
<b>INC-XANTO-C-R154</b> 8031414861118	3000K	<b>18W</b>	1500 Lumen	98°	>15 000 on/off	h 25 000	driver incluso

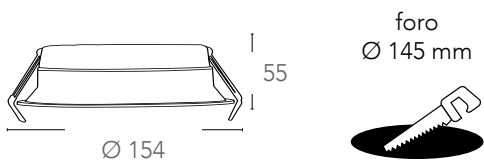

informazioni tecniche - *technical information*

<b>INC-XANTO-M-R120</b> 8031414861224	4000K	<b>12W</b>	980 Lumen	98°	>15 000 on/off	h 25 000	driver incluso
<b>INC-XANTO-F-R120</b> 8031414861163	5000K	<b>12W</b>	1000 Lumen	98°	>15 000 on/off	h 25 000	driver incluso
<b>INC-XANTO-C-R120</b> 8031414861101	3000K	<b>12W</b>	960 Lumen	98°	>15 000 on/off	h 25 000	driver incluso

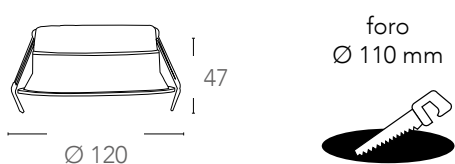



# XANTO

Incasso in alluminio pressofuso LED integrato  
Diecast aluminium down light built-in LED



## informazioni tecniche - technical information


<b>INC-XANTO-M-Q220</b> 8031414861217	4000K	30W	☀️ 2800 Lumen	98°	>15 000 on/off	h 25 000	driver incluso
<b>INC-XANTO-F-Q220</b> 8031414861156	5000K	30W	☀️ 2900 Lumen	98°	>15 000 on/off	h 25 000	driver incluso
<b>INC-XANTO-C-Q220</b> 8031414861095	3000K	30W	☀️ 2700 Lumen	98°	>15 000 on/off	h 25 000	driver incluso

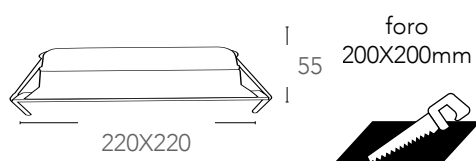




informazioni tecniche - *technical information*

<b>INC-XANTO-M-Q145</b> 8031414861200	4000K	<b>18W</b>	1550 Lumen	98°	>15 000 on/off	h 25 000	driver incluso
<b>INC-XANTO-F-Q145</b> 8031414861149	5000K	<b>18W</b>	1600 Lumen	98°	>15 000 on/off	h 25 000	driver incluso
<b>INC-XANTO-C-Q145</b> 8031414861088	3000K	<b>18W</b>	1500 Lumen	98°	>15 000 on/off	h 25 000	driver incluso

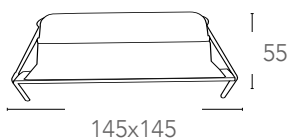

informazioni tecniche - *technical information*

<b>INC-XANTO-M-Q110</b> 8031414861194	4000K	<b>12W</b>	980 Lumen	98°	>15 000 on/off	h 25 000	driver incluso
<b>INC-XANTO-F-Q110</b> 8031414861132	5000K	<b>12W</b>	1000 Lumen	98°	>15 000 on/off	h 25 000	driver incluso
<b>INC-XANTO-C-Q110</b> 8031414861071	3000K	<b>12W</b>	960 Lumen	98°	>15 000 on/off	h 25 000	driver incluso



<b>CLASSE A+</b>		<b>SMD</b>		<b>Ra &gt;80</b>	<b>CE</b>		
------------------	--	------------	--	------------------	-----------	--	--



# KLIO

Plafoniera in alluminio pressofuso finitura bianco goffrato LED integrato  
*Aluminium surface mount ceiling lamp embossed white built-in LED*



## informazioni tecniche - technical information

LED-KLIO-Q11 8031440363563	4000K	16W	☀️ 1300Lumen	🌀 120°	🔌 >10 000 on/off	🕒 h 25 000	🔌 driver incluso
LED-KLIO-Q17 8031440363570	4000K	22W	☀️ 2000 Lumen	🌀 120°	🔌 >10 000 on/off	🕒 h 25 000	🔌 driver incluso
LED-KLIO-Q21 8031440363549	4000K	36W	☀️ 2900 Lumen	🌀 120°	🔌 >10 000 on/off	🕒 h 25 000	🔌 driver incluso

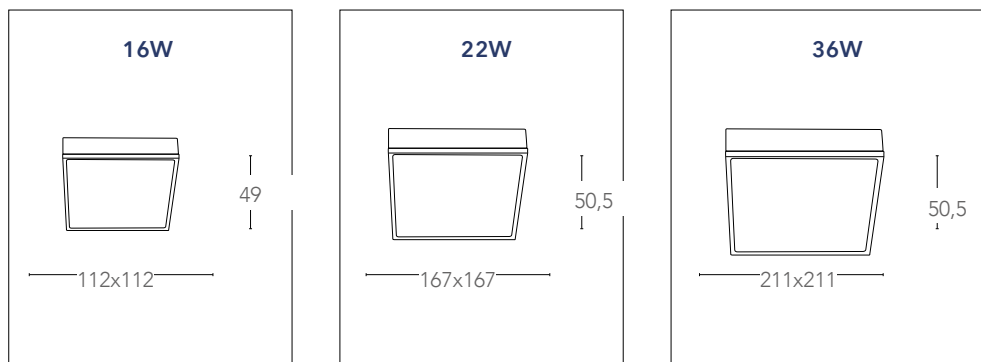


## KLIO

Plafoniera in alluminio pressofuso finitura bianco goffrato LED integrato  
Aluminium surface mount ceiling lamp embossed white built-in LED



### informazioni tecniche - technical information

<b>LED-KLIO-R11</b> 8031440358675	4000K	<b>16W</b>	☀️ 1300Lumen	🌀 120°	🔌 >10 000 on/off	🕒 h 25 000	🔌 driver incluso
<b>LED-KLIO-R17</b> 8031440363587	4000K	<b>22W</b>	☀️ 2000 Lumen	🌀 120°	🔌 >10 000 on/off	🕒 h 25 000	🔌 driver incluso
<b>LED-KLIO-R21</b> 8031440363594	4000K	<b>36W</b>	☀️ 2900 Lumen	🌀 120°	🔌 >10 000 on/off	🕒 h 25 000	🔌 driver incluso

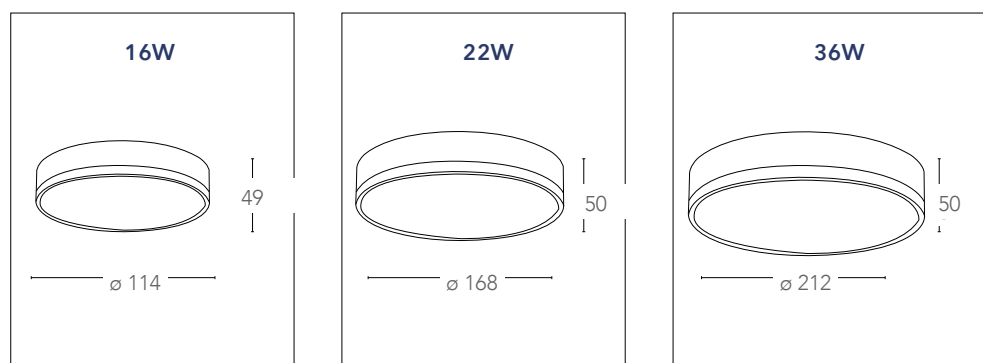


## SLIM

Incasso in alluminio pressofuso LED integrato  
Diecast aluminium down light built-in LED



### informazioni tecniche - technical information

INC-SLIM/8W BCO 8031440357203	4000K	8W	480 Lumen	120°	>15 000 on/off	h 15 000	driver incluso
INC-SLIM/8WF BCO 8031440357197	5500K	8W	480 Lumen	120°	>15 000 on/off	h 15 000	driver incluso
INC-SLIM/8WC BCO 8031440357180	3000K	8W	450 Lumen	120°	>15 000 on/off	h 15 000	driver incluso



### informazioni tecniche - technical information


INC-SLIM/12W BCO 8031431491183	4000K	12W	800 Lumen	120°	>15 000 on/off	h 15 000	driver incluso
INC-SLIM/12WF BCO 8031440357234	5500K	12W	800 Lumen	120°	>15 000 on/off	h 15 000	driver incluso
INC-SLIM/12WC BCO 8031440357258	3000K	12W	750 Lumen	120°	>15 000 on/off	h 15 000	driver incluso
INC-SLIM/12W NIK 8031431501189	4000K	12W	800 Lumen	120°	>15 000 on/off	h 15 000	driver incluso
























BCO




NIK







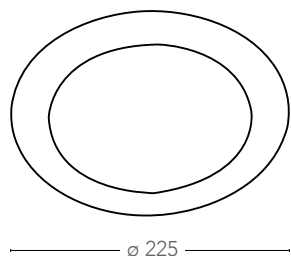
















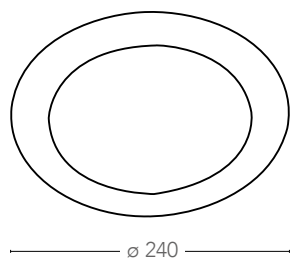
informazioni tecniche - *technical information*

 <p>BCO</p> <p>NIK</p>	<b>INC-SLIM/18W BCO</b> 8031431511188	4000K	<b>18W</b>	 1400 Lumen	 120°	 >15 000 on/off	 h 15 000	 driver incluso
	<b>INC-SLIM/18WF BCO</b> 8031440357210	5500K	<b>18W</b>	 1400 Lumen	 120°	 >15 000 on/off	 h 15 000	 driver incluso
	<b>INC-SLIM/18WC BCO</b> 8031440357227	3000K	<b>18W</b>	 1300 Lumen	 120°	 >15 000 on/off	 h 15 000	 driver incluso
	<b>INC-SLIM/18W NIK</b> 8031431521187	4000K	<b>18W</b>	 1400 Lumen	 120°	 >15 000 on/off	 h 15 000	 driver incluso



informazioni tecniche - *technical information*

 <p>BCO</p> <p>NIK</p>	<b>INC-SLIM/24W BCO</b> 8031440364720	4000K	<b>24W</b>	 1800 Lumen	 120°	 >15 000 on/off	 h 15 000	 driver incluso
	<b>INC-SLIM/24WF BCO</b> 8031440364713	5500K	<b>24W</b>	 1800 Lumen	 120°	 >15 000 on/off	 h 15 000	 driver incluso
	<b>INC-SLIM/24WC BCO</b> 8031440364706	3000K	<b>24W</b>	 1700 Lumen	 120°	 >15 000 on/off	 h 15 000	 driver incluso
	<b>INC-SLIM/24W NIK</b> 8031440364775	4000K	<b>24W</b>	 1800 Lumen	 120°	 >15 000 on/off	 h 15 000	 driver incluso





## PLASMA

Incasso in alluminio pressofuso con bordo in vetro trasparente temperato con anello cromato LED integrato  
 Diecast aluminium down light with clear tempered glass edge whit chrome metal ring built-in LED



### informazioni tecniche - technical information

<b>INC-PLASMA-18W</b> 8031440091275	4000K	<b>18W</b>	1400 Lumen	120°	>15 000 on/off	h 15 000	driver incluso
<b>INC-PLASMA-12W</b> 8031440081276	4000K	<b>12W</b>	900 Lumen	120°	>15 000 on/off	h 15 000	driver incluso

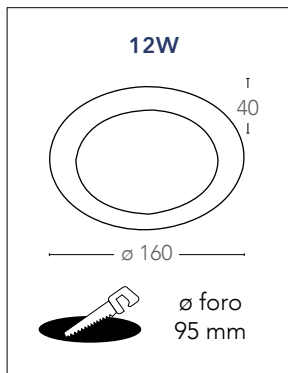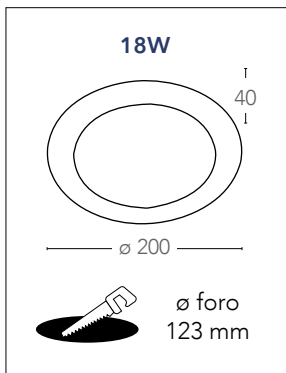

CLASSE <b>A</b>		<b>SMD</b> 		<b>Ra</b> <b>&gt;80</b>	<b>CE</b>		<b>RoHS</b> WEEE COMPLIANT
--------------------	--	----------------	--	----------------------------	-----------	--	-------------------------------






# HORUS

Incasso in termoplastica bianco LED integrato  
Thermo plastic down light built-in LED



## informazioni tecniche - technical information

INC-HORUS-10W 8031440363501	4000K	10W		750 Lumen	100°		>15 000 on/off	h 25 000	driver integrato
INC-HORUS-15W 8031440363518	4000K	15W		1100 Lumen	100°		>15 000 on/off	h 25 000	driver integrato
INC-HORUS-20W 8031440363464	4000K	20W		1800 Lumen	100°		>15 000 on/off	h 25 000	driver integrato
INC-HORUS-25W 8031440363495	4000K	25W	PF 0,90	2200 Lumen	100°		>15 000 on/off	h 25 000	driver integrato

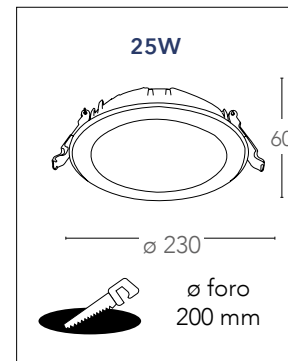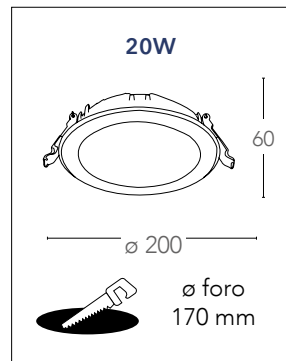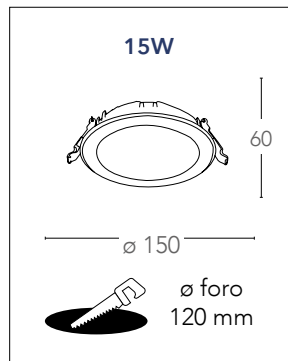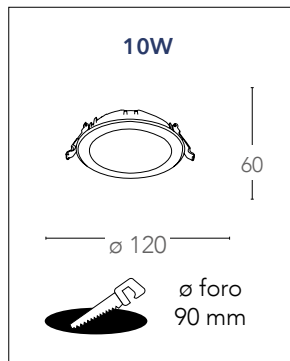


## FLAP

Incasso in alluminio pressofuso LED integrato colore bianco opaco  
Diecast aluminium down light built-in LED satin white color



### informazioni tecniche - technical information

<b>INC-FLAP/8WM</b> 8031440363402	4000K	<b>8W</b>	480 Lumen	120°	>15 000 on/off	h 15 000	driver incluso
<b>INC-FLAP/8WF</b> 8031440363389	5500K	<b>8W</b>	480 Lumen	120°	>15 000 on/off	h 15 000	driver incluso
<b>INC-FLAP/8WC</b> 8031440363419	3000K	<b>8W</b>	450 Lumen	120°	>15 000 on/off	h 15 000	driver incluso

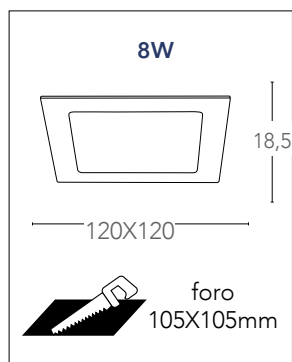



## FLAP

Incasso in alluminio pressofuso LED integrato colore bianco opaco  
Diecast aluminium down light built-in LED satin white color



### informazioni tecniche - technical information

<b>INC-FLAP/12W</b> 8031431441188	4000K	<b>12W</b>	☀️ 800 Lumen	🌀 120°	🔌 >15 000 on/off	🕒 h 15 000	🔋 driver incluso
<b>INC-FLAP/12WF</b> 8031440357265	5500K	<b>12W</b>	☀️ 800 Lumen	🌀 120°	🔌 >15 000 on/off	🕒 h 15 000	🔋 driver incluso
<b>INC-FLAP/12WC</b> 8031440354615	3000K	<b>12W</b>	☀️ 750 Lumen	🌀 120°	🔌 >15 000 on/off	🕒 h 15 000	🔋 driver incluso
<b>INC-FLAP/18W</b> 8031431451187	4000K	<b>18W</b>	☀️ 1400 Lumen	🌀 120°	🔌 >15 000 on/off	🕒 h 15 000	🔋 driver incluso
<b>INC-FLAP/18WF</b> 8031440357241	5500K	<b>18W</b>	☀️ 1400 Lumen	🌀 120°	🔌 >15 000 on/off	🕒 h 15 000	🔋 driver incluso
<b>INC-FLAP/18WC</b> 8031440357272	3000K	<b>18W</b>	☀️ 1300 Lumen	🌀 120°	🔌 >15 000 on/off	🕒 h 15 000	🔋 driver incluso

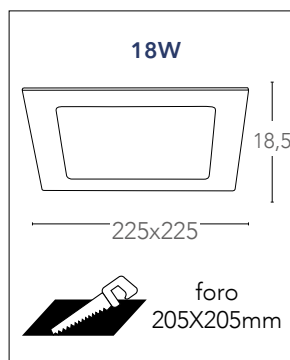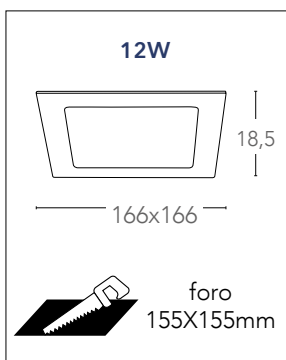


# STARLIGHT

Mini faretto a incasso con ghiera intercambiabile bianca o silver per luci decorative  
*White downlight for decorative light with metal frame*



## informazioni tecniche - technical information

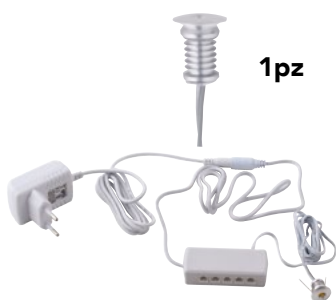

1pz

### Kit 30pz

cavo 1 mt. per faretto  
*1mt. cable for downlight*

LED-STARLIGHT-W 8031440361682	4000K	11 Lumen	0,2W 12V DC 1A	>15 000 on/off	h 20 000	incl. cavo 1 mt. <i>with 1mt. cable</i>
LED-STARLIGHT-BLU 8031440361699	Blu		0,2W 12V DC 1A	>15 000 on/off	h 20 000	incl. cavo 1 mt. <i>with 1mt. cable</i>
LED-STARLIGHT-30-W 8031440357692	4000K	330 Lumen	30X0,2W 12V DC 1A	>15 000 on/off	h 20 000	driver incluso



LED-STARLIGHT-NEX  
8031440364430

Scatola connessione per 10 teste 12V DC 1A incl. cavo 1 mt.  
*Box connection for 10 pcs 12V DC 1A with 1mt. cable*




LED-STARLIGHT-DR  
8031440364447

Driver 12V DC 100mA 6W incl. cavo 1 mt.



LED-STARLIGHT-CONN  
8031440364843

Connettore con singola entrata 3 uscite per kit cielo stellato 12V DC 1A incl. cavo 1 mt.  
*Connector one input three output for starlight 12V DC 1A with 1m cable*




Connessione in parallelo  
*Parallel connection system*



# FIBRA OTTICA

Kit fibra ottica

LED optical fiber kit

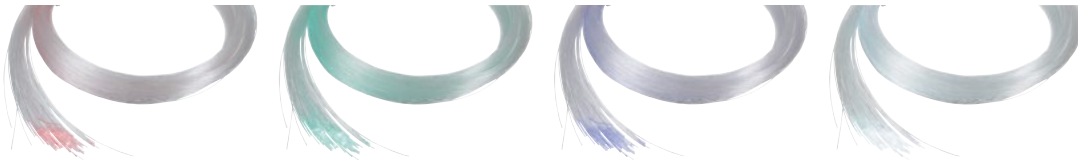

informazioni tecniche - technical information

FIBRAOTTICA-LED-RGB  
8031436691236



9W



On / Off





>10 000 on/off



h 25 000



driver incluso

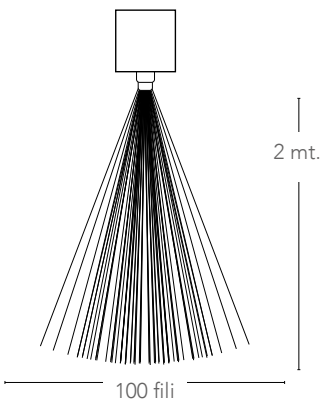

CLASSE <b>A+</b>		<b>SMD</b> 		<b>Ra</b> <b>&gt;80</b>	<b>CE</b>			<b>RoHS</b> WEEE COMPLIANT
---------------------	--	----------------	--	----------------------------	-----------	--	--	-------------------------------

# ZENIT


Incasso struttura in policarbonato LED integrato  
PC frame down light built-in LED



## informazioni tecniche - technical information



INC-ZENIT-5W NIK 8031439901271	3000K	5W	☀️ 400 Lumen	120°	↻ 25°	IP44	⏻ >10 000 on/off	🕒 h 25 000	230V DRIVER FREE
INC-ZENIT-5W BCO 8031439881276	3000K	5W	☀️ 400 Lumen	120°	↻ 25°	IP44	⏻ >10 000 on/off	🕒 h 25 000	230V DRIVER FREE
INC-ZENIT-5W CR 8031439891275	3000K	5W	☀️ 400 Lumen	120°	↻ 25°	IP44	⏻ >10 000 on/off	🕒 h 25 000	230V DRIVER FREE
INC-ZENIT-5W ORO 8031439911270	3000K	5W	☀️ 400 Lumen	120°	↻ 25°	IP44	⏻ >10 000 on/off	🕒 h 25 000	230V DRIVER FREE

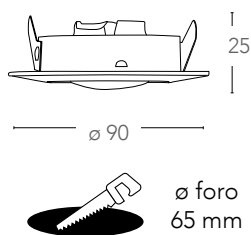





























# POLARIS

Incasso orientabile in alluminio pressofuso LED COB integrato  
Die cast adjustable down light built-in COB LED





## informazioni tecniche - technical information

	silver <b>INC-POLARIS-R3</b> 8031432041196	4000K	3W	 190 Lumen	 24°	 25°	 >10 000 on/off	 h 25 000	 driver incluso
	bianco white <b>INC-POLARIS-R3 BCO</b> 8031429681169	4000K	3W	 190 Lumen	 24°	 25°	 >10 000 on/off	 h 25 000	 driver incluso
	silver <b>INC-POLARIS-Q3</b> 8031432051195	4000K	3W	 190 Lumen	 24°	 25°	 >10 000 on/off	 h 25 000	 driver incluso
	bianco white <b>INC-POLARIS-Q3 BCO</b> 8031429761168	4000K	3W	 190 Lumen	 24°	 25°	 >10 000 on/off	 h 25 000	 driver incluso



finitura silver goffrato  
embossed silver finish



finitura bianco goffrato  
embossed white finish































# ORIONE

Incasso orientabile in alluminio pressofuso LED COB integrato  
Die cast adjustable down light built-in COB LED





## informazioni tecniche - technical information

	silver	<b>INC-ORIONE-R6</b> 8031432021198	4000K	<b>6W</b>	 380 Lumen	 87°	 25°	 >10 000 on/off	 h 25 000	 driver incluso
	bianco white	<b>INC-ORIONE-R6 BCO</b> 8031429771167	4000K	<b>6W</b>	 380 Lumen	 87°	 25°	 >10 000 on/off	 h 25 000	 driver incluso
	silver	<b>INC-ORIONE-Q6</b> 8031432031197	4000K	<b>6W</b>	 380 Lumen	 87°	 25°	 >10 000 on/off	 h 25 000	 driver incluso
	bianco white	<b>INC-ORIONE-Q6 BCO</b> 8031434361216	4000K	<b>6W</b>	 380 Lumen	 87°	 25°	 >10 000 on/off	 h 25 000	 driver incluso



finitura silver gofrato  
embossed silver finish



finitura bianco gofrato  
embossed white finish



# GEMINI

Incasso orientabile in alluminio pressofuso LED COB integrato  
*Die cast adjustable down light built-in COB LED*



## informazioni tecniche - technical information



**INC-GEMINI-PL6**  
8031432011199

4000K

2x5W

630 Lumen

87°

25°

>10 000 on/off

h 25 000

driver incluso



**INC-GEMINI-PL6 BCO**  
8031439191269

4000K

2x5W

630 Lumen

87°

25°


>10 000 on/off

h 25 000

driver incluso



finitura silver gofrato  
embossed silver finish

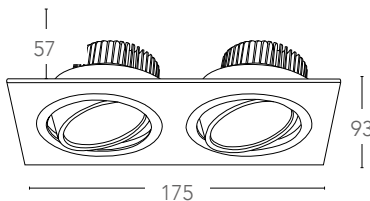

foro  
155x80 mm



finitura bianco gofrato  
embossed white finish



# POUND

Incasso orientabile in alluminio pressofuso LED COB integrato  
*Die cast adjustable down light built-in COB LED*



## informazioni tecniche - technical information




BCO




NIK

INC-POUND-5C BCO 8031435001227	3200K	5W	☀️ 320 Lumen	🌀 87°	🌀 15°	🔌 >10 000 on/off	🕒 h 25 000	🔌 driver incluso
INC-POUND-5F BCO 8031435011226	5500K	5W	☀️ 380 Lumen	🌀 87°	🌀 15°	🔌 >10 000 on/off	🕒 h 25 000	🔌 driver incluso
INC-POUND-5C NIK 8031435021225	3200K	5W	☀️ 320 Lumen	🌀 87°	🌀 15°	🔌 >10 000 on/off	🕒 h 25 000	🔌 driver incluso
INC-POUND-5F NIK 8031435031224	5500K	5W	☀️ 380 Lumen	🌀 87°	🌀 15°	🔌 >10 000 on/off	🕒 h 25 000	🔌 driver incluso

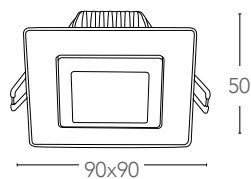

ø foro  
80 mm



# KRONE

Incasso orientabile in alluminio pressofuso LED COB integrato  
Die cast adjustable down light built-in COB LED



## informazioni tecniche - technical information




BCO



NIK

INC-KRONE-5C BCO 8031434961225	3200K	5W	320 Lumen	87°	15°	>10 000 on/off	h 25 000	driver incluso
INC-KRONE-5F BCO 8031434971224	5500K	5W	380 Lumen	87°	15°	>10 000 on/off	h 25 000	driver incluso
INC-KRONE-5C NIK 8031434981223	3200K	5W	320 Lumen	87°	15°	>10 000 on/off	h 25 000	driver incluso
INC-KRONE-5F NIK 8031434991222	5500K	5W	380 Lumen	87°	15°	>10 000 on/off	h 25 000	driver incluso



ø foro  
80 mm







# NADIR

Incasso in alluminio pressofuso finitura bianco goffrato LED COB integrato  
*Aluminium die cast embossed white built-in COB LED*



## informazioni tecniche - technical information

	INC-NADIR-R6C 8031439671266	3200K	6W	☀️ 390 Lumen	🌀 21°	💧 IP44	🔌 >10 000 on/off	🕒 h 25 000	🔋 driver incluso
	INC-NADIR-R6F 8031439641269	5500K	6W	☀️ 420 Lumen	🌀 21°	💧 IP44	🔌 >10 000 on/off	🕒 h 25 000	🔋 driver incluso
	INC-NADIR-Q6C 8031439691264	3200K	6W	☀️ 390 Lumen	🌀 21°	💧 IP44	🔌 >10 000 on/off	🕒 h 25 000	🔋 driver incluso
	INC-NADIR-Q6F 8031439661267	5500K	6W	☀️ 420 Lumen	🌀 21°	💧 IP44	🔌 >10 000 on/off	🕒 h 25 000	🔋 driver incluso



CLASSE <b>A+</b>		<b>COB</b>		<b>Ra &gt;80</b>	<b>CE</b>		
---------------------	---	------------	---	------------------	-----------	---	---

## KLIPPE

Incasso orientabile in 4 direzioni in alluminio pressofuso finitura bianco gofrato LED COB integrato  
*Aluminium die cast down light adjustable in 4 direction embossed white finish built-in COB LED*



### informazioni tecniche - technical information

**INC-KLIPPE-8C**  
8031435041223



**8W**



480 Lumen



24°



15°



>10 000 on/off



h 25 000



driver incluso

**INC-KLIPPE-8F**  
8031435051222



**8W**



550 Lumen



24°



15°




>10 000 on/off



h 25 000



driver incluso

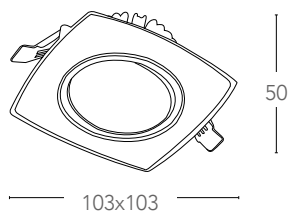


ø foro  
95 mm



# SIRIO

Incasso in alluminio pressofuso finitura nickel spazzolato LED integrato  
 Diecast aluminium down light brush nickel color built-in LED

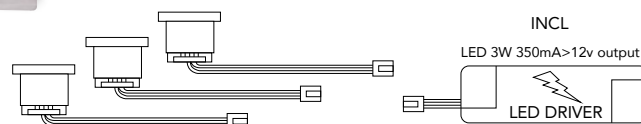

## informazioni tecniche - technical information



**INC-SIRIO-R3**  
8031432071193

4000K

3x1W

☀️ 3X50 Lumen

30°

>15 000 on/off

h 25 000

🔌 driver incluso



**INC-SIRIO-Q3**  
8031432061194

4000K

3x1W

☀️ 3X50 Lumen

30°

>15 000 on/off

h 25 000

🔌 driver incluso



## informazioni tecniche - technical information

**Connessione in serie**  
**Serie connection system**

Driver page 379  
I-DRIVER/4W  
I-DRIVER/18W



**INC-SIRIO-R1**  
8031433991216

4000K

1W


☀️ 50 Lumen

30°

>15 000 on/off

h 25 000

350mA >12V



**INC-SIRIO-Q1**  
8031433961219

4000K

1W



☀️ 50 Lumen

30°

>15 000 on/off

h 25 000

350mA >12V



foro  
27 mm


CLASSE <b>A+</b>		<b>COB</b>		<b>Ra &gt;80</b>	<b>CE</b>		
---------------------	--	------------	--	------------------	-----------	--	--

# FUSION

Incasso in alluminio nelle finiture nickel, bianco satinato o oro satinato LED integrato  
*Aluminium down light nickel, satin white or satin gold finish built-in LED*



## informazioni tecniche - technical information

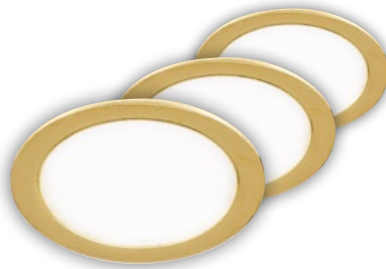

INC-FUSION-3X5W NIK  
8031440353342

4000K

3x5W

3x230 Lumen

120°

>10 000 on/off

h 25 000

**230V**  
DRIVER FREE

INC-FUSION-3X5W BCO  
8031440353335

4000K

3x5W

3x230 Lumen

120°

>10 000 on/off

h 25 000

**230V**  
DRIVER FREE

INC-FUSION-3X5W ORO  
8031440353359

4000K

3x5W

3x230 Lumen

120°

>10 000 on/off

h 25 000

**230V**  
DRIVER FREE

NIK

BCO

ORO



INC-FUSION-5W NIK  
8031440361705

4000K

5W

230 Lumen

120°

>10 000 on/off

h 25 000

**230V**  
DRIVER FREE

INC-FUSION-5W BCO  
8031440361736

4000K

5W

230 Lumen

120°

>10 000 on/off

h 25 000

**230V**  
DRIVER FREE

INC-FUSION-5W ORO  
8031440361712

4000K

5W


230 Lumen

120°

>10 000 on/off

h 25 000

**230V**  
DRIVER FREE

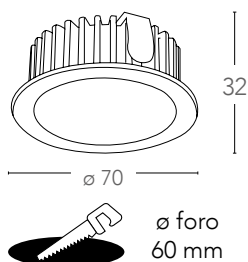

CLASSE  
**A+**



SMD



Ra  
>80

CE



RoHS  
WEEE COMPLIANT

## BLIZ

Kit faretto 3 pz. in alluminio bianco opaco con struttura esterna  
Kit 3 p. surface mount aluminium matt white down light









### informazioni tecniche - technical information

LED-BLITZ-R3  
8031440353274



3X5W

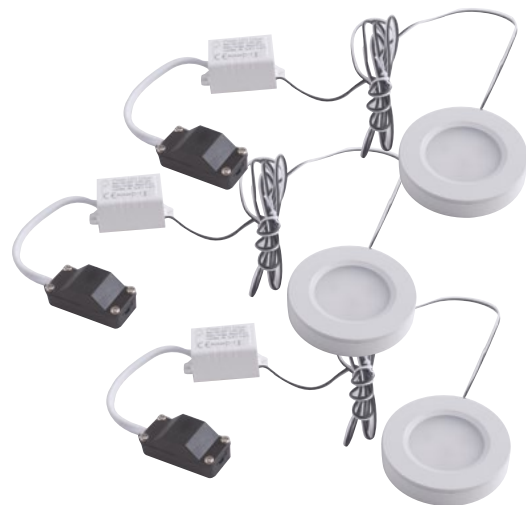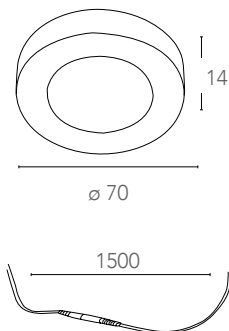

CLASSE  
**A**<sup>+</sup>



SMD



Ra  
>80

CE



## MATRIX

Kit 3 pz. incasso in metallo nelle finiture bianco o nikel lampade LED incluse  
 Kit 3 pcs metal down lights white or nikel finish with LED bulbs included




### informazioni tecniche - technical information



NIK

BCO

INC-MATRIX-LEDF3 NIK 8031440359337	3000K	3X6W	3X400Lumen	100°	>10 000 on/off	h 15 000
INC-MATRIX-LEDF3 BCO 8031440359320	3000K	3X6W	3X400 Lumen	100°	>10 000 on/off	h 15 000

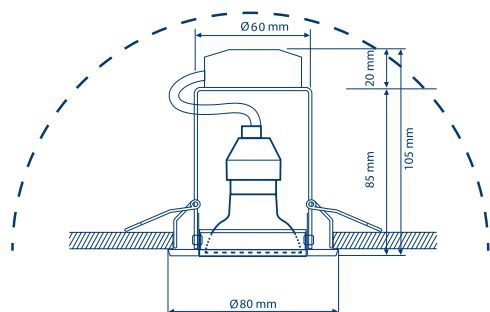

	3X
3xGU10 - 6W LED 230V~ 50Hz INCL	
	INCL



# MATRIX


Incasso in metallo nelle finiture nikel, cromo, oro lucido o bianco orientabili lampade LED incluse  
*Metal down lights adjustable nikel, chrome, gold or white finish with LED bulbs included*



## informazioni tecniche - technical information



<b>INC-MATRIX-LEDM1 NIK</b> 8031440313049	3000K	6W	400 Lumen	100°	15°	>10 000 on/off	h 15 000
<b>INC-MATRIX-LEDM1 BCO</b> 8031440313063	3000K	6W	400 Lumen	100°	15°	>10 000 on/off	h 15 000
<b>INC-MATRIX-LEDM1 CR</b> 8031440313056	3000K	6W	400 Lumen	100°	15°	>10 000 on/off	h 15 000
<b>INC-MATRIX-LEDM1 ORO</b> 8031440313070	3000K	6W	400 Lumen	100°	15°	>10 000 on/off	h 15 000

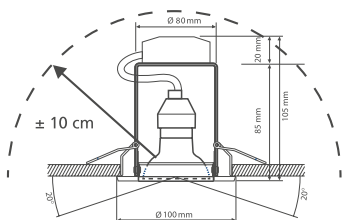

ø foro  
 80 mm

IxGU10 - 6W  
 LED  
 230V~ 50Hz  
 INCL

IX  
  
 INCL

CLASSE <b>A</b>		SMD 		Ra <b>&gt;80</b>	CE		
--------------------	--	---------	--	---------------------	----	--	--


# MATRIX

Kit 3 pz. incasso in metallo nelle finiture nikel, cromo, oro lucido o bianco orientabili lampade LED incluse  
 Kit 3 pcs metal down lights nikel, chrome, gold or white finish adjustable with LED bulbs included



## informazioni tecniche - technical information

	INC-MATRIX-LEDM3 NIK 8031431571182	3000K	3X6W	3X400 Lumen	100°	15°	>10 000 on/off	h 15 000
	INC-MATRIX-LEDM3 BCO 8031429651162	3000K	3X6W	3X400 Lumen	100°	15°	>10 000 on/off	h 15 000
	INC-MATRIX-LEDM3 CR 8031440313032	3000K	3X6W	3X400 Lumen	100°	15°	>10 000 on/off	h 15 000
	INC-MATRIX-LEDM3 ORO 8031440313025	3000K	3X6W	3X400 Lumen	100°	15°	>10 000 on/off	h 15 000

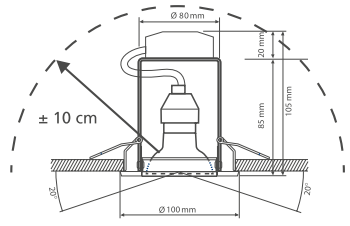


ø foro 80 mm

	3X
3xGU10 - 6W LED 230V~ 50Hz INCL	
	INCL

CLASSE <b>A+</b>		SMD		Ra >80	CE		
------------------	--	-----	--	--------	----	--	--


# ADAM

Incasso in metallo diffusore in vetro trasparente  
*Metal down light with transparent glass diffusor*

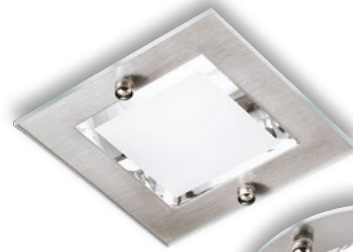


## informazioni tecniche - technical information


**INCASSO-ADAM-Q2**  
 8031433971218

 2xE27 max 60w  
 non include - not included


**INCASSO-ADAM-R2**  
 8031433921213





 2xE27 max 60w  
 non include - not included

**INCASSO-ADAM-Q1**  
 8031433941211

 1xE27 max 60w  
 non include - not included

**INCASSO-ADAM-R1**  
 8031433951210

 1xE27 max 60w  
 non include - not included

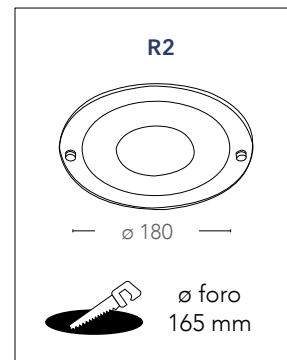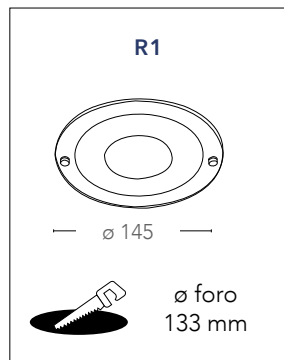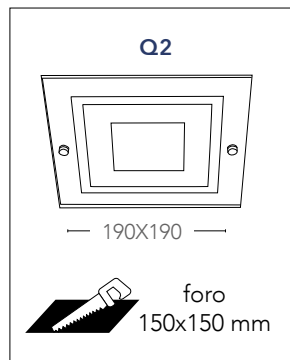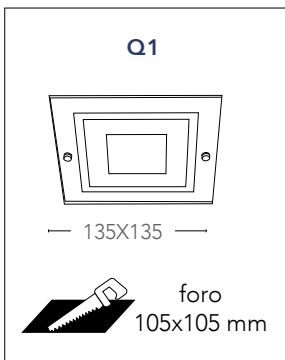

## UP


Incasso in metallo con diffusore in vetro trasparente  
Metal down light with clear glass diffusor



informazioni tecniche - technical information

**INCASSO-UP-L-BCO**  
8031440351737

max 15,5 cm



2xE27 max 60w

non incluse - not included


**INCASSO-UP-L-NIK**  
8031440351744

max 15,5 cm



2xE27 max 60w

non incluse - not included

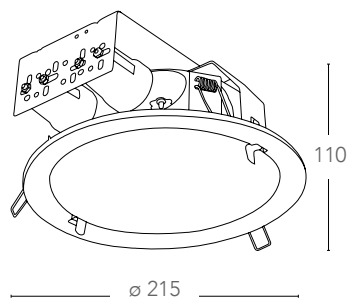


ø foro  
207 mm







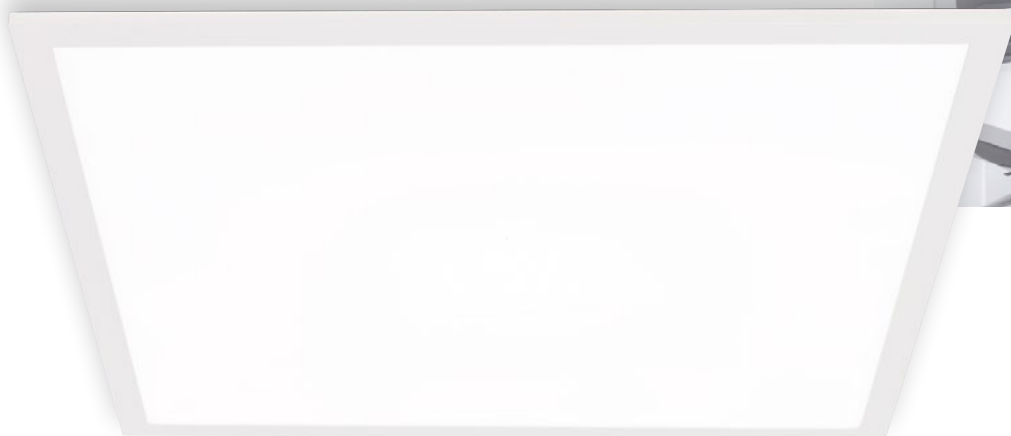















## PANEL

Pannello in alluminio rifiniture bianco LED integrato  
*Aluminium panel light white color built-in LED*



### informazioni tecniche - technical information

<b>LED-PANEL-60X60</b> 8031440352444	 <b>40W</b>  3600 Lumen	 120°	 >7500 on/off	 h 20 000	 driver incluso
<b>LED-PANEL-C-60X60</b> 8031440354868	 <b>40W</b>  3200 Lumen	 120°	 >7500 on/off	 h 20 000	 driver incluso
<b>LED-PANEL-F-60X60</b> 8031440354929	 <b>40W</b>  3600 Lumen	 120°	 >7500 on/off	 h 20 000	 driver incluso

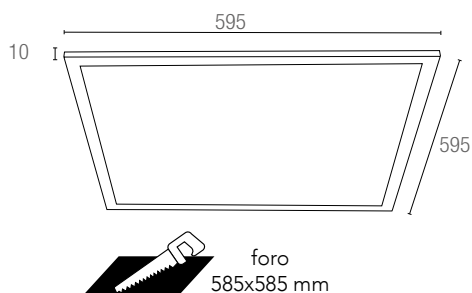

## PANEL

Pannello in alluminio rifiniture bianco LED integrato  
Aluminium panel light white color built-in LED



### informazioni tecniche - technical information

LED-PANEL-30X120  
8031440352468



40W

3600 Lumen



>7500 on/off



h 20 000



driver incluso

LED-PANEL-F-30X120  
8031440354912



40W

3600 Lumen





>7500 on/off



h 20 000



driver incluso

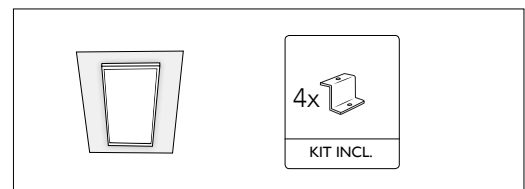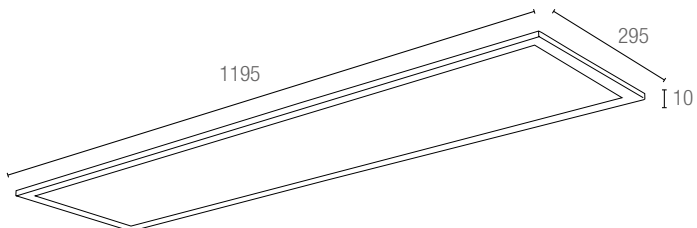

## PANEL

Pannello in alluminio rifiniture bianco LED integrato  
Aluminium panel light white color built-in LED



### informazioni tecniche - technical information

LED-PANEL-60X120  
8031440361897

4000K

60W

4800 Lumen

120°

>7500 on/off

h 20 000

driver incluso

LED-PANEL-F-60X120  
8031440361873

5000K

60W




4800 Lumen

120°

>7500 on/off

h 20 000

driver incluso

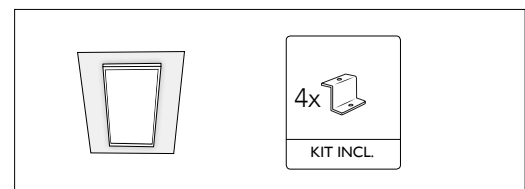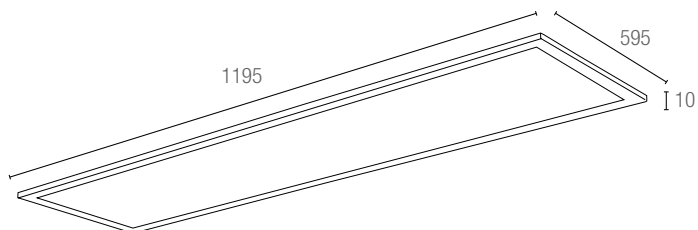


## PANEL

Pannello in alluminio con sistema di variazione intensità luminosa intelligente tramite sensore LUX

*Panel light for dropped ceiling in aluminium white color built-in LED with adjustable light intensity through Harvest lux sensor*

### sistema di illuminazione dinamica

i sistemi di illuminazione dinamica permettono di regolare in luminosità e colorazione i pannelli LED per adattarsi ad ogni esigenza di ambiente.

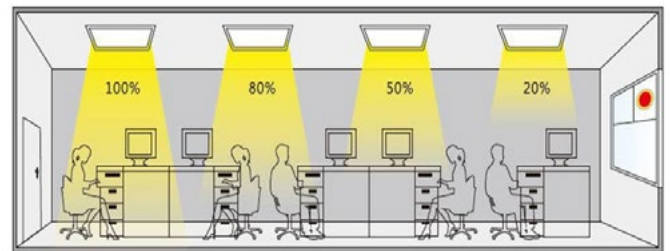

informazioni tecniche - *technical information*

**LED-PANEL-30X120-SENS**  
8031414861880



**40W**



>7500 on/off



h 15 000



**LED-PANEL-60X60-SENS**  
8031414861897




**40W**




>7500 on/off





h 15 000

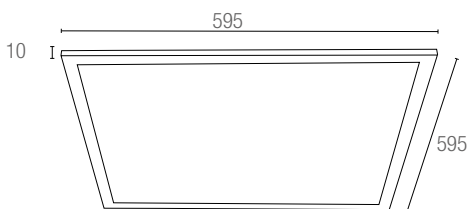

foro  
585x585 mm

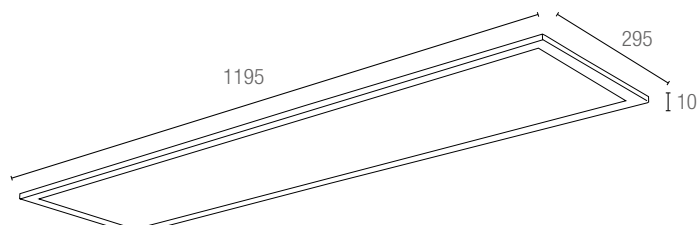

foro  
285x1185 mm




## PANEL UGR

Pannello in alluminio rifiniture bianco, LED integrato  
*Aluminium panel light white color built-in LED*

### sistema di illuminazione UGR - unified glare rating

UGR è un indice unificato in campo internazionale, sviluppato dalla CIE (commission international de l'Enclairage), per la valutazione dell'abbagliamento diretto derivante dall'impianto di illuminazione. La norma europea per l'illuminazione dei posti di lavoro in interni **UNI-EN 12464-1** richiede un valore UGR specifico per ogni applicazione, compreso tra **10 e 30: più basso è il valore, minore è l'abbagliamento**

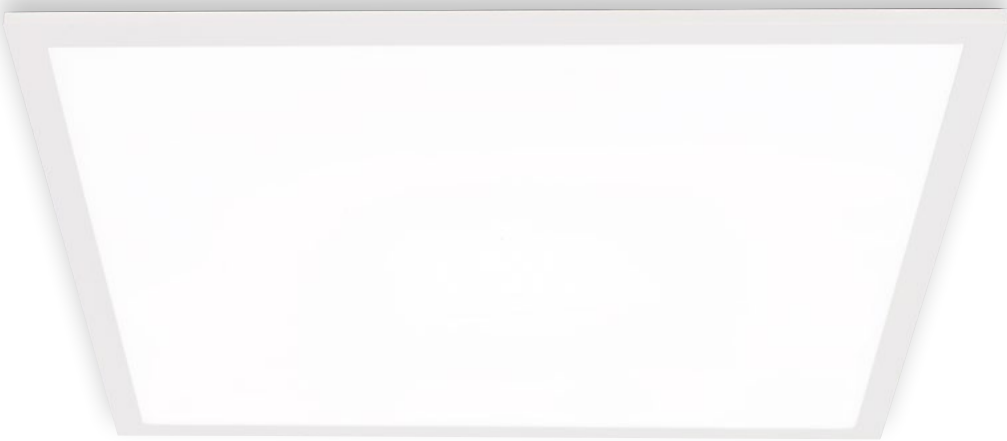


#### informazioni tecniche - technical information

LED-PANEL-60X60-M-UGR  
 8031440361835



40W



UGR<19  
 multiposition



>7000 on/off



h 20 000



driver incluso


multiposition



LED-PANEL-60X60-UGR  
 8031440357524



40W



UGR<19  
 single position



>7000 on/off





h 20 000



driver incluso

single position

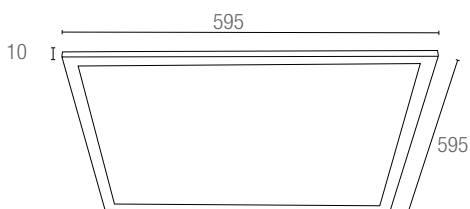


## PANEL


Pannello in alluminio con sistema di variazione di intensità di luce in 3 step tramite interruttore.  
*Panel light for dropped ceiling in aluminium white color built-in LED with three step switch dimmer*

### sistema di illuminazione dinamica

i sistemi di illuminazione dinamica permettono di regolare in luminosità e colorazione i pannelli LED per adattarsi ad ogni esigenza di ambiente.

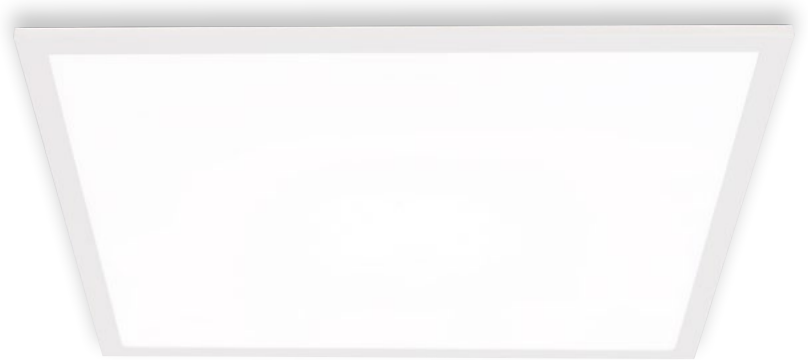

### 3 step - Dimming



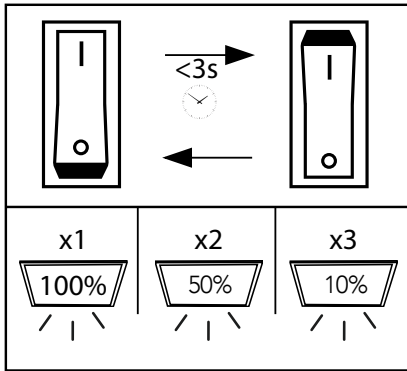


### informazioni tecniche - technical information

LED-PANEL-60x60-DIM  
8031414861026










40W



LED-PANEL-30x120-DIM  
8031414861033



40W

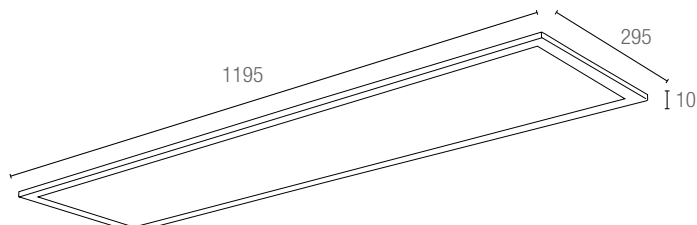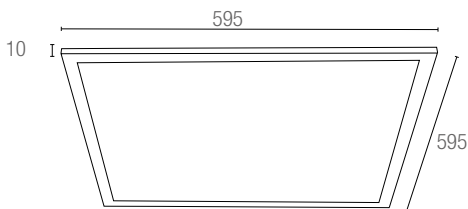


## PANEL

Pannello in alluminio con sistema di variazione gradi Kelvin e di intensità di luce, con telecomando (incluso)  
*Panel light for dropped ceiling in aluminium white color built-in LED. remote adjustable color temperature*

### sistema di illuminazione dinamica




i sistemi di illuminazione dinamica permettono di regolare in luminosità e colorazione i pannelli LED per adattarsi ad ogni esigenza di ambiente.

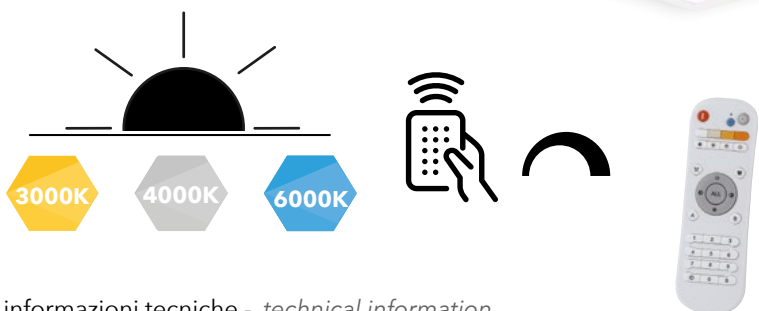

informazioni tecniche - *technical information*

LED-PANEL-60x60-CCT 40W 3600 Lumen 120° >7500 on/off h 15 000 driver incluso  
8031414861040

LED-PANEL-30x120-CCT 40W 3600 Lumen 120° >7500 on/off h 15 000 driver incluso  
8031414861057

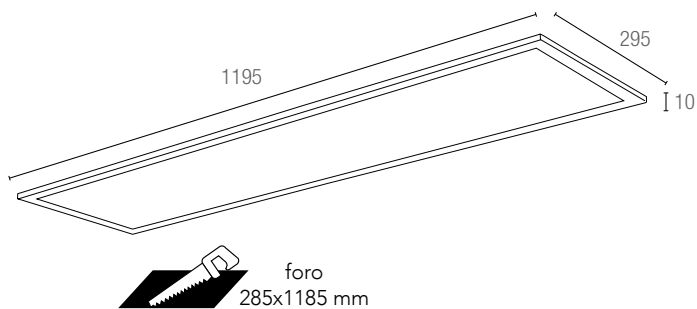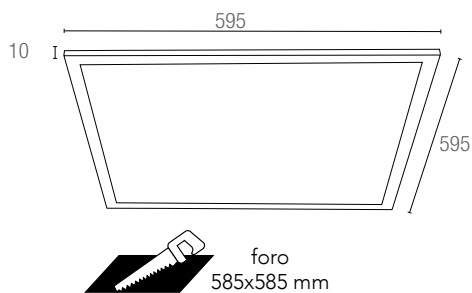


## PANEL

Pannello in alluminio con sistema di variazione colorazione luce RGB e luce bianca, con telecomando (incluso)  
*Panel light for dropped ceiling in aluminium white color built-in LED, remote adjustable RGB and white color*

### sistema di illuminazione dinamica

i sistemi di illuminazione dinamica permettono di regolare in luminosità e colorazione i pannelli LED per adattarsi ad ogni esigenza di ambiente.

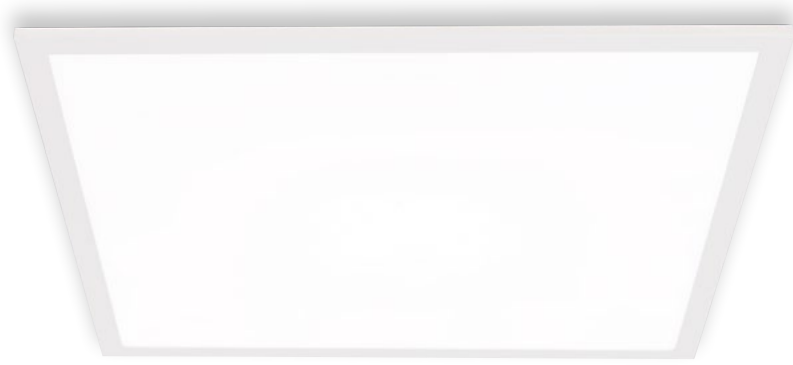




**R G B W**  
RED GREEN BLUE WHITE



informazioni tecniche - *technical information*


LED-PANEL-60x60-RGBW  
8031414861064

40W  3000 Lumen  4000K  120°  >7500 on/off  h 15 000  driver incluso

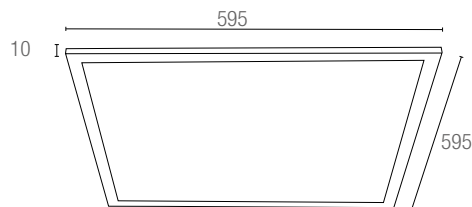




## PANEL STRUTTURA

Struttura in metallo per montaggio a plafoniera per panel  
*Metal structure for panel light surface mount*

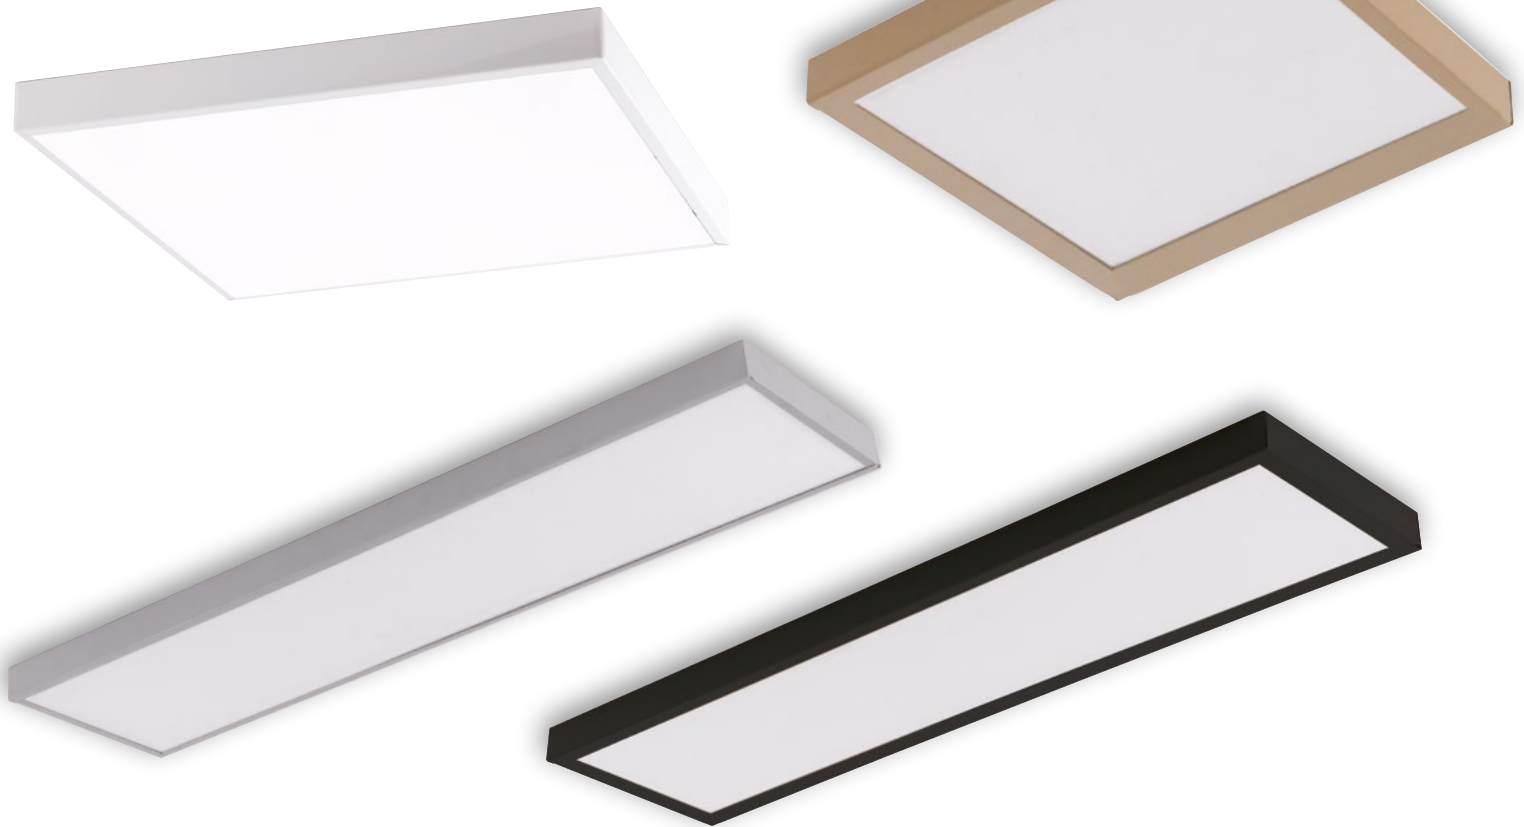


### informazioni tecniche - technical information

<b>LED-PANEL-30X120-PL</b> 8031440361828	Struttura in metallo bianco per pannello led 30X120 cm <i>White metal frame for LED panel 30x120 cm</i>	<b>LED-PANEL-60X60-FIX</b> 8031414861293	Struttura montata in metallo bianco per pannello led 60x60 cm <i>Assembler white metal frame for LED panel 60x60 cm</i>
<b>LED-PANEL-60X120-PL</b> 8031440363723	Struttura in metallo per pannello led a 60X120 cm <i>Metal frame for LED panel 60x120 cm</i>	<b>LED-PANEL-30X120-FIX</b> 8031414861286	Struttura montata in metallo bianco per pannello led 30X120 cm <i>Assembler white metal frame for LED panel 30x120 cm</i>
<b>LED-PANEL-60X60-PL</b> 8031440361859	Struttura in metallo bianco per pannello led 60x60 cm <i>White metal frame for LED panel 60x60 cm</i>	<b>LED-PANEL-30X120-FIX BRO</b> 8031414864782	<b>LED-PANEL-60X60-FIX BRO</b> 8031414864799
<b>LED-PANEL-30X120-FIX GR</b> 8031414864775	<b>LED-PANEL-60X60-FIX GR</b> 8031414864805	Struttura in metallo tortora per pannello led <i>Dove gray metal frame for LED panel</i>	
<b>LED-PANEL-30X120-FIX NER</b> 8031414864768	<b>LED-PANEL-60X60-FIX NER</b> 8031414864812	Struttura in metallo grigio per pannello led <i>Gray metal frame for LED panel</i>	
		Struttura in metallo nero per pannello led <i>Black metal frame for LED panel</i>	

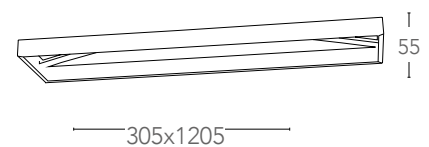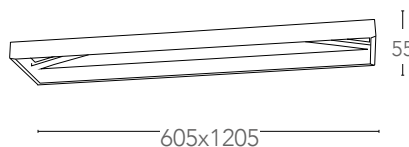


## PANEL ACCESSORI

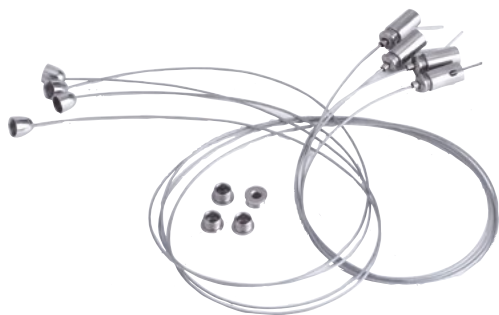

**LED-PANEL-KIT**  
8031440352451

Kit cavi in acciaio per sospensione  
*Steel cable kit for suspension*



**LED-PANEL-GANCI**  
8031440361903

Kit molle 4pz.  
*Metal spring kit 4pcs.*



**LED-PANEL-SOSP**  
8031440361781

Kit sospensione pannello cavo 1,5 mt. + scatola di connessione elettrica a soffitto 120x120x60 mm  
*kit for suspension with 1,5 mt. cable + metal canopi with electric connection 120x120x60 mm*





## Verniciabile



### GESSO

Le collezioni in gesso offrono la più ampia libertà di scelta, ideate per creare e valorizzare ogni tipo di ambiente , offrono la migliore soluzione di esigenza estetica, creando effetti di luce puri e funzionali

### GYPSUM

*The Gypsum collections offer the widest freedom of choice, designed to create and enhance for every type of environment, offer the best solution appearance requirements, creating pure lighting effects and functional*

# PHANTOM

Incassi in gesso verniciabili esterni  
Gypsun down light paintable



informazioni tecniche - technical information




**INC-PHANTOM-R1**  
8031431551184

1xGU10 max 35w  
non include - not included



**INC-PHANTOM-Q1**  
8031431561183

1xGU10 max 35w  
non include - not included

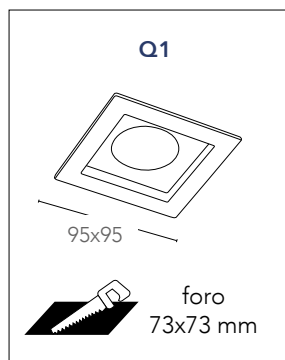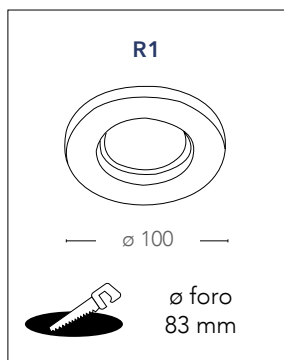





## SPETTRO

Incassi in gesso verniciabili esterni con scalini  
*Gypsun down light paintable*



informazioni tecniche - *technical information*

<b>INC-SPETTRO-R1</b> 8031431531186	1xGU10 max 35w non include - <i>not included</i>	 45°
<b>INC-SPETTRO-Q1</b> 8031431541185	1xGU10 max 35w non include - <i>not included</i>	 45°

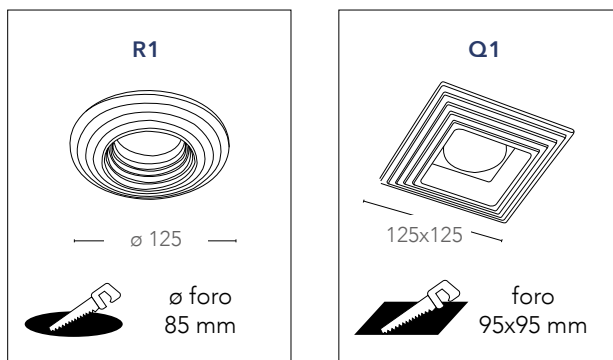

# GHOST

Incassi in gesso verniciabili a scomparsa  
*Recess gypsun down light paintable*



informazioni tecniche - *technical information*

**INC-GHOST-Q1**  
 8031434261219

1xGU10 max 35w  
 non include - *not included*






**INC-GHOST-Q1D**  
 8031434241211

1xGU10 max 35w  
 non include - *not included*



emissione luce laterale  
*side light diffusion*

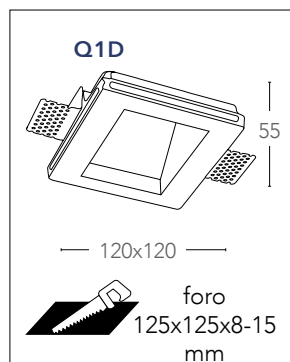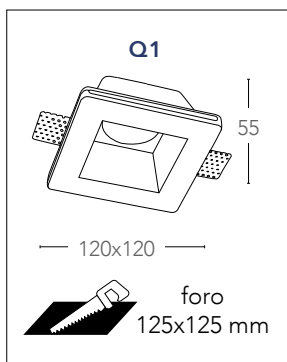

# GHOST

Doppio incasso in gesso verniciabili a scomparsa  
Double recess gypsun down light paintable




informazioni tecniche - technical information

INC-GHOST-Q2  
8031434301212

2xGU10 max 35w  
non include - not included



45°

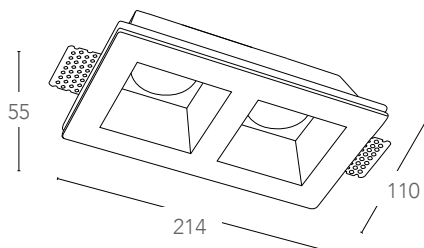

foro  
220x115x8-15  
mm



# SENSO



Incassi in gesso verniciabili a scomparsa  
Recess gypsun down light paintable



informazioni tecniche - technical information

INC-SENSO-1  
8031434221213

1xGU10 max 35w  
non include - not included

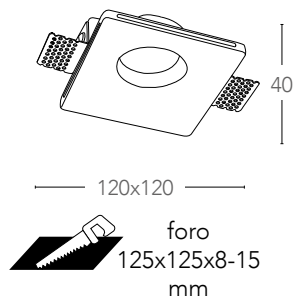



## SPIRIT

Incassi in gesso verniciabili a scomparsa  
*Recess gypsun down light paintable*



informazioni tecniche - *technical information*

<b>INC-SPIRIT-Q1</b> 8031440362160	1xGU10 max 35w non include - <i>not included</i>	 45°
<b>INC-SPIRIT-R1</b> 8031440362177	1xGU10 max 35w non include - <i>not included</i>	 45°

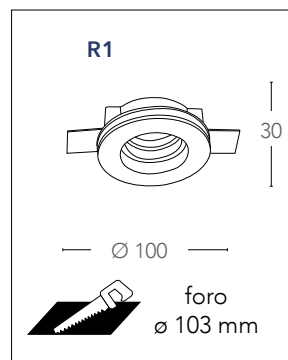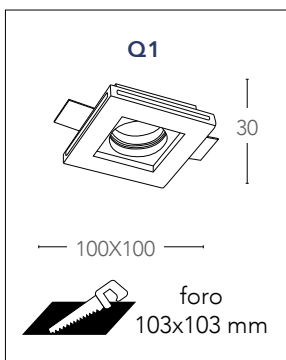

# SNOW

Incassi in gesso verniciabili a scomparsa con vetro  
*Recess gypsun down light paintable with glass*



## informazioni tecniche - technical information




**INC-SNOW-R**  
8031440351607

1xGU10 max 35w  
non include - not included



**INC-SNOW-Q**  
8031440351577

1xGU10 max 35w  
non include - not included

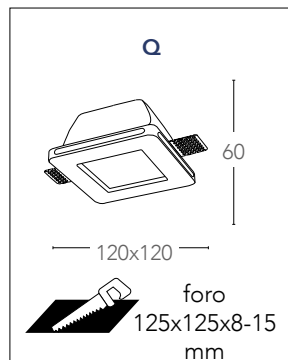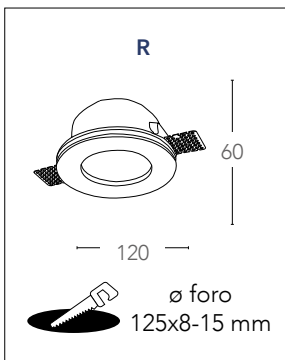

# MORGANA

Incassi in gesso verniciabili a scomparsa orientabile  
*Recess gypsun down light paintable adjustable*



## informazioni tecniche - technical information




**INC-MORGANA-Q1**  
 8031434231212

1xGU10 max 35w  
 non include - not included



**INC-MORGANA-R1**  
 8031434211214

1xGU10 max 35w  
 non include - not included

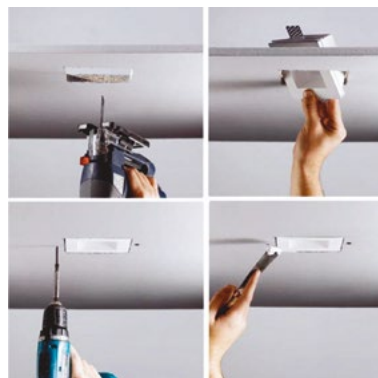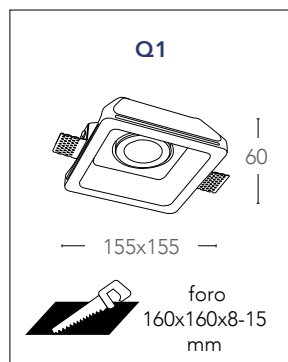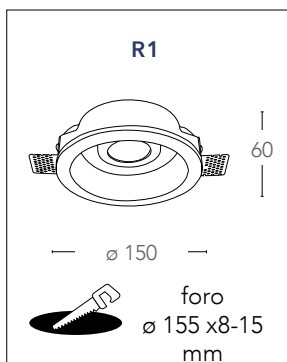

## MORGANA


Doppio incasso orientabile in gesso verniciabili a scomparsa  
Double recess gypsun down light paintable adjustable



informazioni tecniche - technical information

INC-MORGANA-Q2  
8031434201215

2xGU10 max 35w  
non include - not included

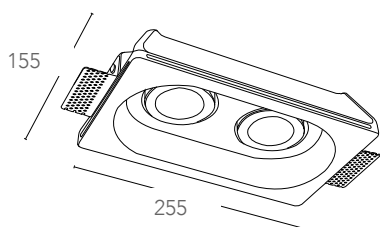

foro  
260x160x8-15  
mm




## ARIEL

Incasso a parete in gesso verniciabile a scomparsa  
*Recess gypsun wall lamp paintable*




informazioni tecniche - *technical information*

I-ARIEL-QL1  
8031434151213



1xGU10 MINI max 35W  
non include - *not included*

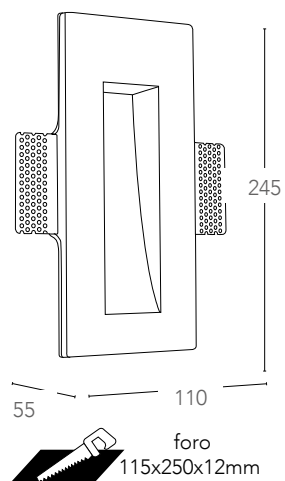


## ARIEL

Segnapassi in gesso verniciabili a scomparsa  
Recess gypsun wall lamp paintable



informazioni tecniche - technical information


**I-ARIEL-RS1**  
8031434131215





1xGU10 MINI max 35W  
non include - not included



**I-ARIEL-RM1**  
8031434121216



1xGU10 MINI max 35W  
non include - not included

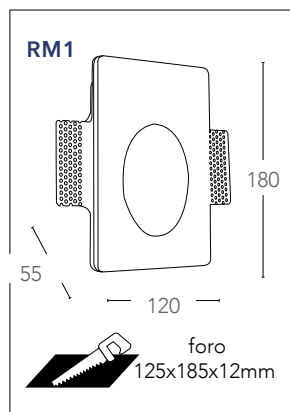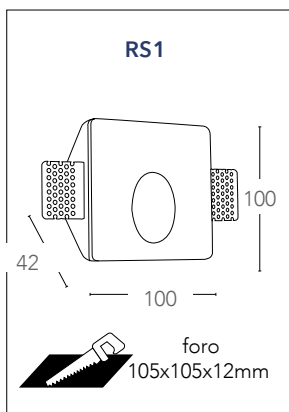



## PROFY

Profilo in gesso verniciabile a scomparsa  
Recess gypsum profile paintable



informazioni tecniche - technical information

I-PROFY-100  
8031434081213

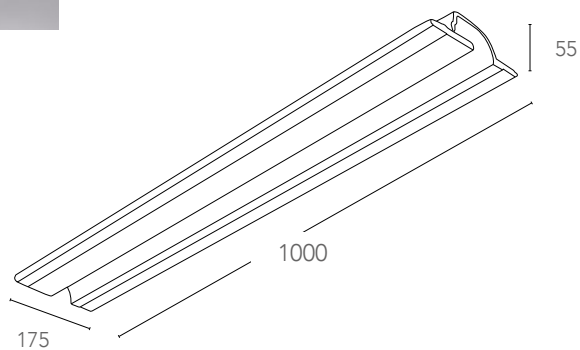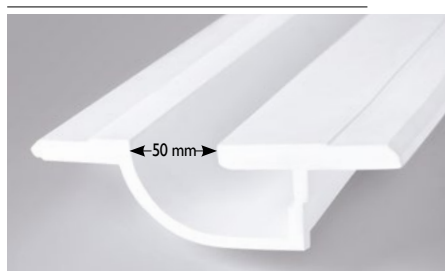


## SPACE

Faro struttura esterna in gesso verniciabile  
Surface mount gypsun lamp paintable




informazioni tecniche - *technical information*



**I-SPACE-S-Q1**  
8031439521264

 1xGU10 max 35w  
non incluse - *not included*



**I-SPACE-S-R1**  
8031439531263

 1xGU10 max 35w  
non incluse - *not included*

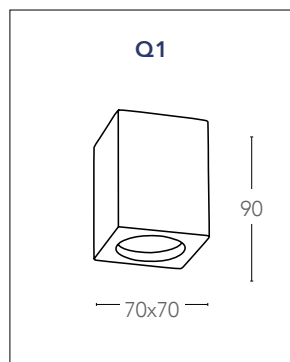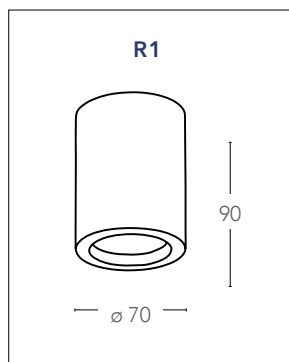

CE



## SPACE

Faro struttura esterna in gesso verniciabile orientabile  
Surface mount gypsun lamp paintable adjustable



informazioni tecniche - *technical information*



**I-SPACE-Q1**  
8031434171211

1xGU10 max 35w  
non incluse - *not included*



**I-SPACE-R1**  
8031434141214

1xGU10 max 35w  
non incluse - *not included*

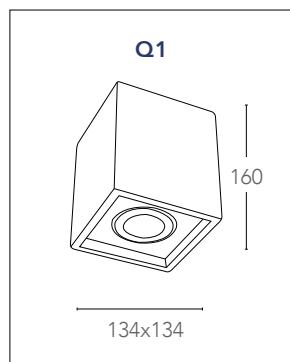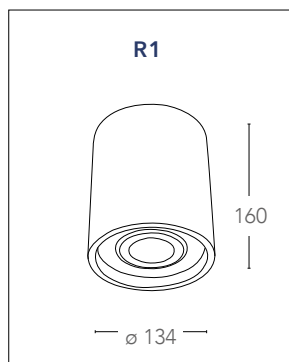


## GABRIEL

Plafoniera in gesso verniciabile con diffusore in vetro  
*Gypsun ceiling paintable with glass diffuser*




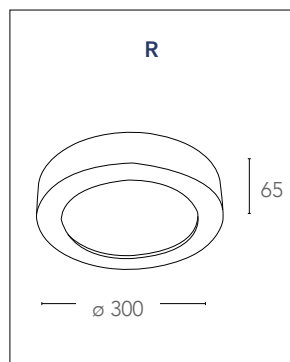
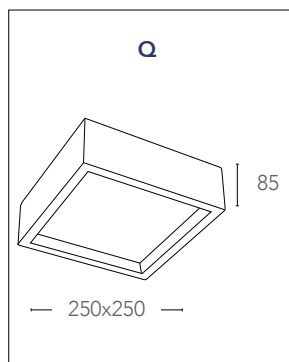
informazioni tecniche - *technical information*

I-GABRIEL/PL25Q  
8031434101218

 2xE27 max 42w  
non include - *not included*

I-GABRIEL/PL30R  
8031434111217

 2xE27 max 42w  
non include - *not included*




## ANIMA


Incasso a parete in gesso verniciabile a scomparsa  
*Recess gypsun wall lamp paintable*



informazioni tecniche - *technical information*


I-ANIMA-AP2  
8031414861323

 2xE14 max 13w  
non incluse - *not included*

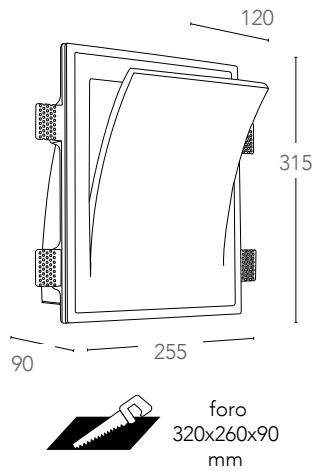

## SHINE

Appliche a parete in gesso verniciabile  
Gypsun wall lamp paintable



informazioni tecniche - technical information


I-SHINE-AP  
8031434191219

1xG9 max 28W  
non include - not included



## RUBIK

Appliche a parete in gesso verniciabile  
Gypsun wall lamp paintable



informazioni tecniche - technical information

I-RUBIK-AP  
8031440362146

1xG9 max 28W  
non include - not included



## BANJIE


Applique a parete in gesso verniciabile  
*Gypsun wall lamp paintable*



informazioni tecniche - *technical information*

I-BANJIE-S-AP  
8031440365475


2xGU10 max 35w  
non include - *not included*

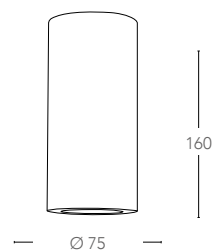

informazioni tecniche - *technical information*

I-BANJIE-L-AP  
8031440365499

2xGU10 max 35w  
non include - *not included*

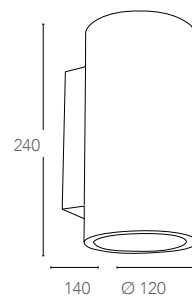


## CANDIDA

Applique a parete in gesso verniciabile  
Gypsun wall lamp paintable




informazioni tecniche - technical information

I-CANDIDA-AP  
8031436751237

 2xE14 max 13W  
non include - not included

 100°  
 100°

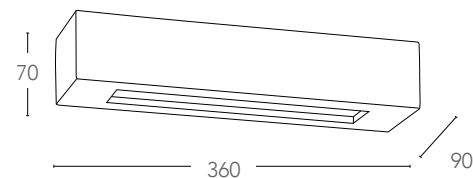


## CORTINA

Applique a parete in gesso verniciabile  
Gypsun wall lamp paintable




informazioni tecniche - technical information

I-CORTINA-AP  
8031414861347

 2xE14 max 13w  
non include - not included

 100°  
 100°

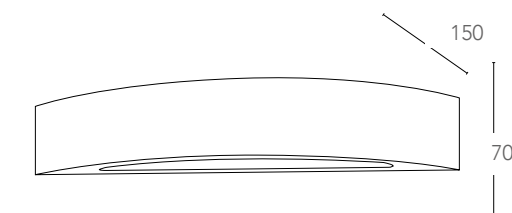

420




## MOSES


Applique a parete in gesso verniciabile  
Gypsun wall lamp paintable



informazioni tecniche - technical information

I-MOSES-AP  
8031434181210

 1xG9 max 28W  
non incluse - not included

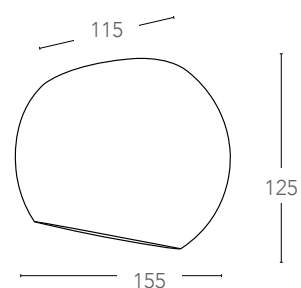


## LEIRON


Applique a parete in gesso verniciabile  
Gypsun wall lamp paintable



informazioni tecniche - technical information

I-LEIRON-AP  
8031436741238

 1xG9 max 28W  
non incluse - not included



CE

RoHS  
WEEE COMPLIANT


## MONTBLANC


Applique a parete in gesso verniciabile  
Gypsun wall lamp paintable



informazioni tecniche - *technical information*

I-MONTBLANC-AP  
8031414861354

 1xG9 max 28W  
non include - not included

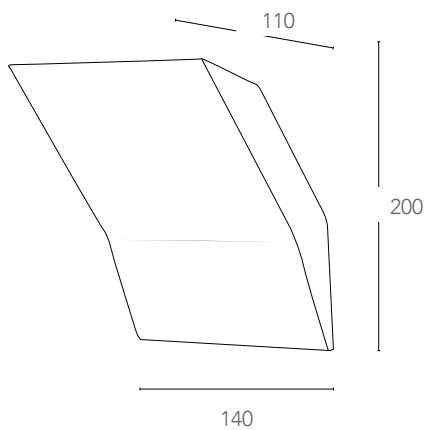

## FOSTER


Applique a parete in gesso verniciabile  
Gypsun wall lamp paintable



informazioni tecniche - technical information

I-FOSTER-AP  
8031414861385

2xGU10 max 35w  
non include - not included

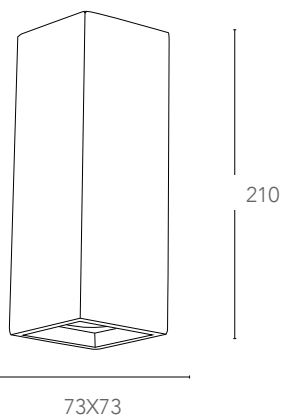


# ASTRON


Applique a parete in gesso verniciabile  
Gypsun wall lamp paintable



## informazioni tecniche - technical information

I-ASTRON-AP  
8031414862412

 2xG9 max 28W  
non include - not included

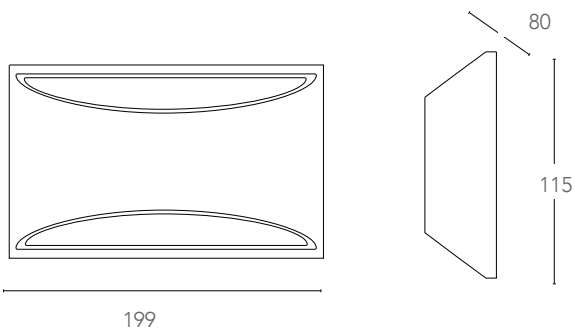


## ABEL


Applique a parete in gesso verniciabile  
Gypsun wall lamp paintable



informazioni tecniche - technical information

I-ABEL-AP  
8031440362153

 2xE14 max 13W  
non include - not included

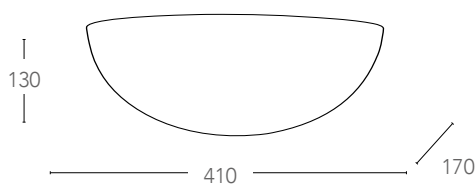


## SESTRIERE


Applique a parete in gesso verniciabile  
Gypsun wall lamp paintable



informazioni tecniche - technical information

I-SESTRIERE-AP  
8031414861330

 1xE27 max 40W  
non include - not included

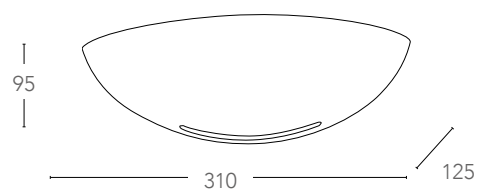

CE




## MORITZ

Appliche a parete in gesso verniciabile  
Gypsun wall lamp paintable




informazioni tecniche - technical information

I-MORITZ-L-AP  
8031414861361


 1xE27 max 42W  
non incluse - not included

 100°

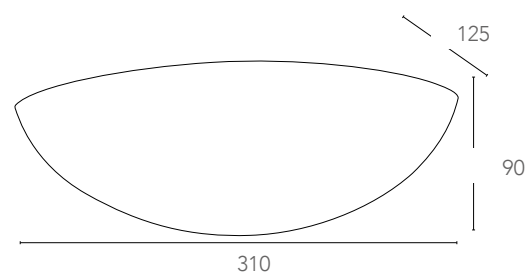


informazioni tecniche - technical information

I-MORITZ-S-AP  
8031414861378

 1xE27 max 42W  
non incluse - not included

 100°

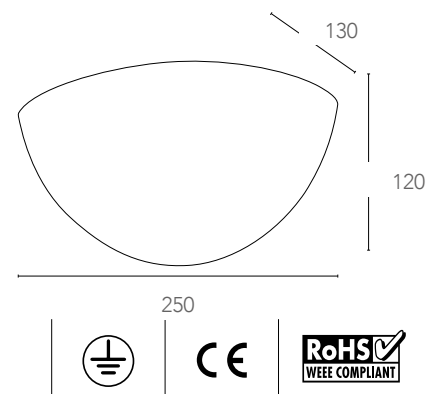


## SANTORINI


Applique in gesso a parete angolare verniciabile con diffusione luminosa verso l'alto  
*Angular gypsun wall lamp paintable with light diffusion upward*



informazioni tecniche - *technical information*

I-SANTORINI-AP  
8031440351553

 1xE14 max 13W  
non incluse - *not included*

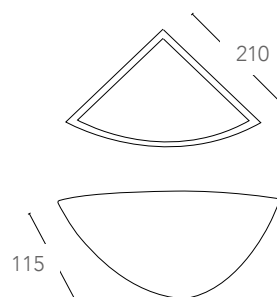


## MYKONOS

Applique in gesso a parete angolare verniciabile con doppia emissione di luce  
*Angular gypsun wall lamp paintable with light diffusion upward*




informazioni tecniche - *technical information*

I-MYKONOS-AP  
8031440351584

 1xE14 max 13W  
non incluse - *not included*

 100°  
 100°

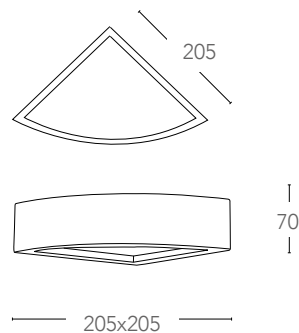


## LELLA


Applique a parete in ceramica verniciabile con diffusione luminosa verso l'alto  
*Ceramic wall lamp paintable with light diffusion upward*



informazioni tecniche - *technical information*

164/00200  
8031414052516

max 78 mm  
 1xR7s max 120w  
non include - *not included*

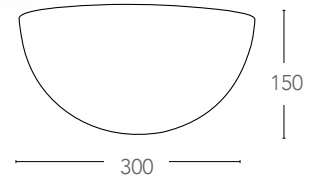


## PAULA


Applique a parete in ceramica verniciabile diffusione luminosa superiore e inferiore  
*Ceramic wall lamp paintable with light diffusion up and down*



informazioni tecniche - *technical information*

166/01200  
8031414056583

max 78 mm  
 1xR7s max 120w  
non include - *not included*




## STEFAN


Applique a parete in ceramica verniciabile diffusore in vetro emissione luce superiore e inferiore  
*Ceramic wall lamp paintable with glass diffuser up and down emission lighting*



informazioni tecniche - *technical information*

166/00100  
8031414034260

 1xE27 max 42W  
non include - *not included*

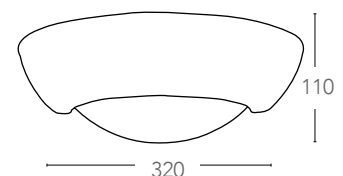







## APPLIQUE DA PARETE

Le nostre collezioni hanno un design moderno e ricercato, per ambienti indoor e outdoor , utilizzano il know-how innovativo LED adatto ad illuminare pareti in modo efficiente e suggestivo .

## WALL LAMP

*Our collections have a modern and sophisticated design, for indoor and outdoor environments, using the know-how Innovative LED suitable for illuminating walls efficiently and suggestive.*

## HYDRA

Appliche a LED in alluminio cromato con diffusore in acrilico  
Aluminium LED wall lamp with acrylic diffuser



informazioni tecniche - technical information

LED-W-HYDRA/3W  
8031432951204



3W

240 Lumen




>10 000 on/off



h 25 000



driver incluso



CLASSE  
**A**



SMD



Ra  
>80

CE



RoHS  
WEEE COMPLIANT

## RIGEL

Applique a LED in alluminio cromato con diffusore in acrilico  
Aluminium LED wall lamp with acrylic diffuser



### informazioni tecniche - technical information

**LED-W-RIGEL/6W**  
8031433041201

3500K

6W

400Lumen

120°

>10 000 on/off

h 25 000

driver incluso

**LED-W-RIGEL/3W**  
8031433021203

3500K

3W



200 Lumen

120°

>10 000 on/off

h 25 000

driver incluso

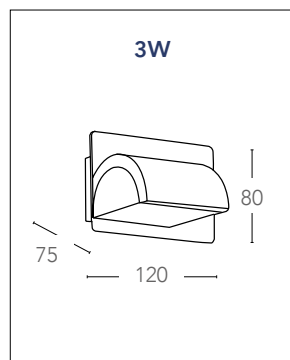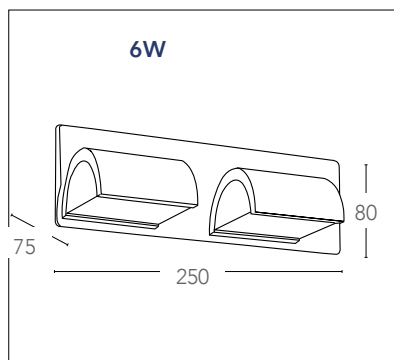

CLASSE  
**A**



SMD



Ra  
>80

CE



RoHS  
WEEE COMPLIANT

# VEGA

Applique a LED in alluminio cromato con diffusore in acrilico  
*Aluminium LED wall lamp with acrylic diffuser*



## informazioni tecniche - technical information

**LED-W-VEGA/6W**  
 8031432991200



**6W**

400Lumen



>10 000 on/off

h 25 000

driver incluso

**LED-W-VEGA/3W**  
 8031432961203



**3W**



200 Lumen



>10 000 on/off

h 25 000

driver incluso

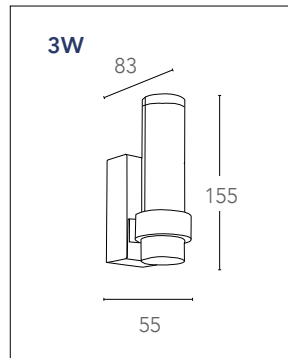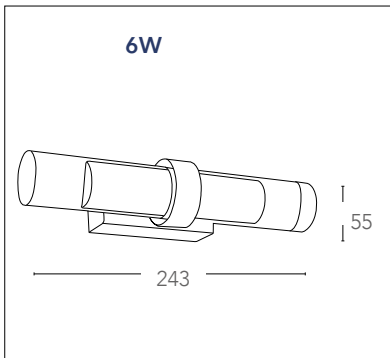

CLASSE  
**A**



**SMD**



**Ra**  
**>80**

**CE**



# ANDROMEDA

Applique a LED in metallo cromato  
Metal LED wall lamp



## informazioni tecniche - technical information

LED-W-ANDROMEDA/4W  
8031432941205

3500K

4W


☀️ 280 Lumen

120°

⏻ >10 000 on/off

🕒 h 25 000

🔌 driver incluso

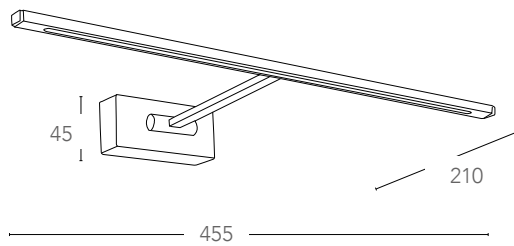

CLASSE  
**A**



SMD



Ra  
>80

CE



RoHS  
WEEE COMPLIANT

# ANTARES

Applique a LED in alluminio con diffusore in acrilic cromato o bianco  
*Aluminium LED wall lamp with acrylic diffuser*



## informazioni tecniche - technical information



**LED-W-ANTARES/8W CR**  
8031433081207

3500K

8W

620Lumen

120°

>10 000 on/off

h 25 000

driver incluso

CR



**LED-W-ANTARES/8W BCO**  
8031433091206

3500K

8W

620 Lumen



120°

>10 000 on/off

h 25 000

driver incluso

BCO

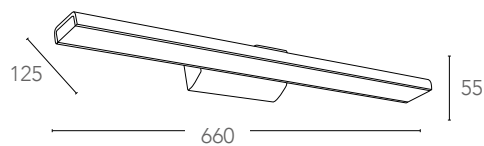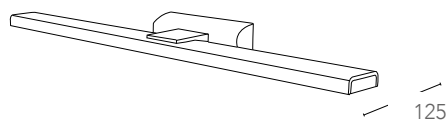

CLASSE  
**A**



SMD



Ra  
>80

CE



RoHS  
WEEE COMPLIANT

# SIGMA

Applique a LED in metallo cromo o oro satinato con diffusore in acrilico  
Metal LED wall lamp



## informazioni tecniche - technical information



**LED-W-SIGMA/4W**  
8031432971202



**4W**

320Lumen



>10 000 on/off



h 25 000

driver incluso

CR



**LED-W-SIGMA/4W ORO**  
8031440362306



**4W**

320 Lumen




>10 000 on/off



h 25 000

driver incluso

ORO

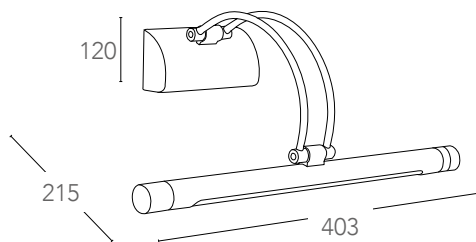

CLASSE  
**A**



**SMD**



**Ra**  
**>80**

**CE**



**RoHS**  
WEEE COMPLIANT

## EPSILON

Applique a LED in metallo cromato con diffusore in acrilico  
Metal LED wall lamp



informazioni tecniche - *technical information*

LED-W-EPSILON/4W  
8031433061209



4W


320 Lumen



>10 000 on/off

h 25 000

driver incluso

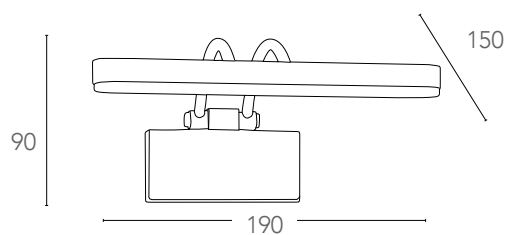

CLASSE  
**A**



SMD



Ra  
>80

CE



RoHS  
WEEE COMPLIANT

## OMICRON

Applique a LED in alluminio cromato con diffusore in acrilico  
Aluminium LED wall lamp with acrylic diffuser




informazioni tecniche - technical information

LED-W-OMICRON/6W  
8031433031202



6W

 400 Lumen




>10 000 on/off



h 25 000

 driver incluso

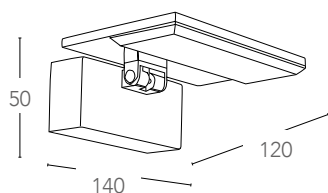

CLASSE  
**A**



SMD  




Ra  
>80

CE



RoHS  
WEEE COMPLIANT

## PHOENIX

Applique a LED in alluminio con diffusore in acrilico  
Aluminium LED wall lamp with acrylic diffuser




informazioni tecniche - *technical information*

LED-W-PHOENIX/6W  
8031433051200



6W

 400 Lumen




>10 000 on/off



h 25 000



driver incluso

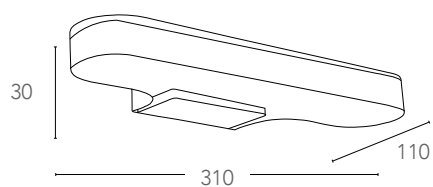

CLASSE  
**A**



SMD  




Ra  
>80

CE



RoHS  
WEEE COMPLIANT

# ALCOR

Appliche a LED in alluminio bianco gofrato o silver gofrato  
Aluminium LED wall lamp




## informazioni tecniche - technical information



**LED-W-ALCOR/5W BCO**  
8031440355186



**5W**



>10 000 on/off



h 25 000




driver incluso

**LED-W-ALCOR/5W SIL**  
8031440355148



**5W**




>10 000 on/off



h 25 000




driver incluso

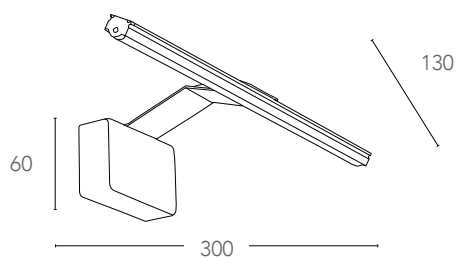

CLASSE <b>A</b>		<b>SMD</b> 		<b>Ra</b> >80	<b>CE</b>		<b>RoHS</b> WEEE COMPLIANT
--------------------	--	----------------	--	------------------	-----------	--	-------------------------------

## ATLAS

Applique a LED in alluminio bianco goffrato  
Aluminium LED wall lamp

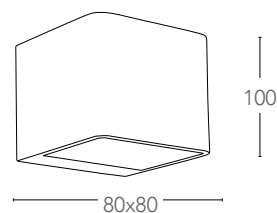

informazioni tecniche - *technical information*

LED-W-ATLAS/6W  
8031433071208



6W

400 Lumen




>10 000 on/off

h 25 000

driver incluso

## OMEGA

Applique a LED in alluminio bianco goffrato  
Aluminium LED wall lamp

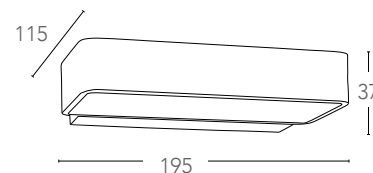

informazioni tecniche - *technical information*

LED-W-OMEGA/4W  
8031433011204



4W

320 Lumen




>10 000 on/off

h 25 000

driver incluso

## LAMBDA

Applique a LED in alluminio bianco goffrato  
Aluminium LED wall lamp

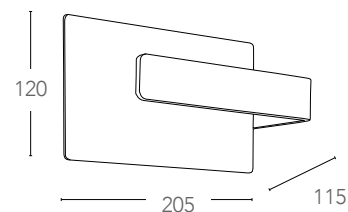

informazioni tecniche - technical information

LED-W-LAMBDA/4W  
8031433001205



4W

320 Lumen




>10 000 on/off

h 25 000

driver incluso

## PEGASO

Applique a LED in alluminio bianco goffrato  
Aluminium LED wall lamp

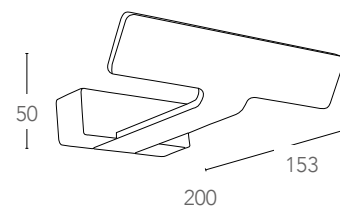

informazioni tecniche - technical information

LED-W-PEGASO/4W  
8031432981201



4W

320 Lumen



>10 000 on/off

h 25 000

driver incluso

CLASSE  
**A**



SMD



Ra  
>80


CE



RoHS  
WEEE COMPLIANT

# OMNIA

Faro a LED dimmerabile in alluminio, orientabile  
Dimmable aluminium LED lamp adjustable

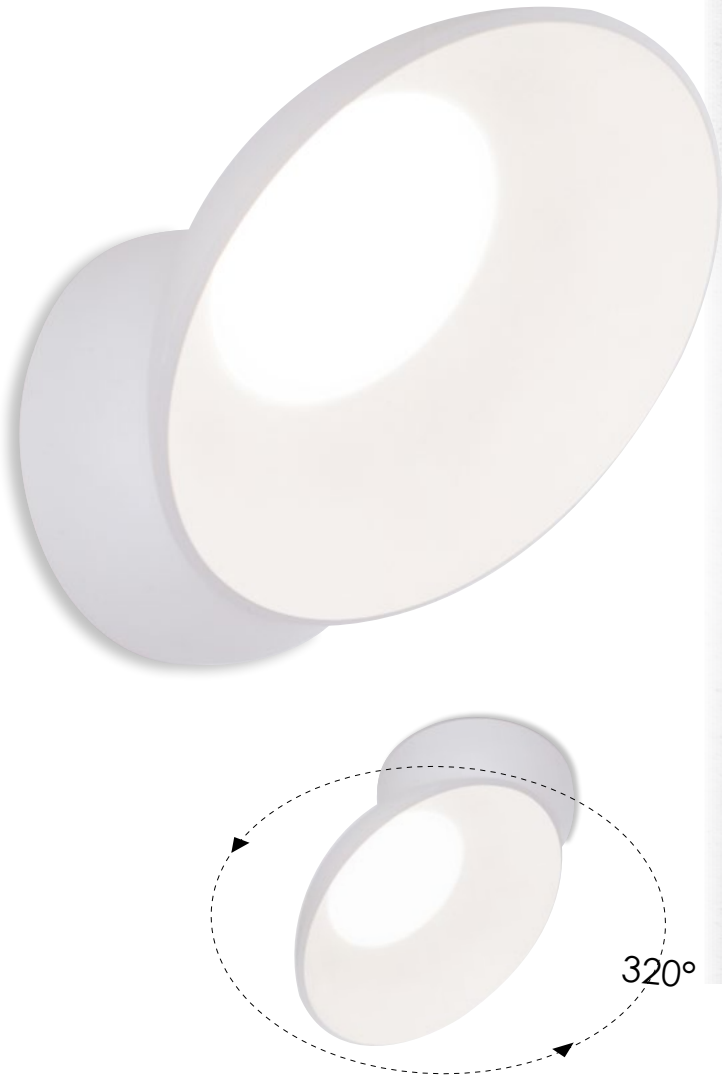


## informazioni tecniche - technical information

LED-W-OMNIA/15W  
8031440351423



15W




>10 000 on/off



h 25 000

driver incluso

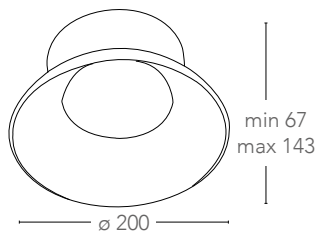

CLASSE  
**A**



SMD



Ra  
>80

CE



# MUSTANG

Applique a LED in alluminio  
Aluminium LED wall lamp



## informazioni tecniche - technical information

LED-W-MUSTANG-200  
8031440361156

4000K

8W

640 Lumen

120°

>15 000 on/off

h 25 000

driver incluso

LED-W-MUSTANG-600  
8031440361149

4000K

15W



1200 Lumen

120°

>15 000 on/off

h 25 000

driver incluso

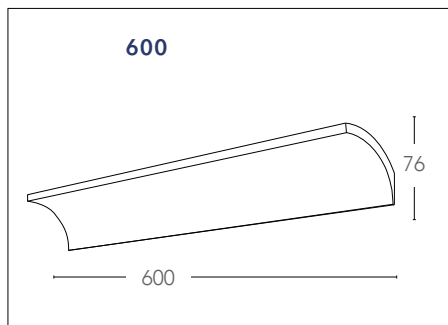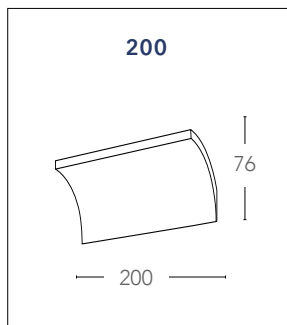

CLASSE  
**A**



SMD



Ra  
>80

CE



RoHS  
WEEE COMPLIANT

## TWILIGHT

Applique LED in alluminio bianco matto con diffusore mobile  
Matt white aluminium wall lamp with adjustable diffuser



informazioni tecniche - technical information

LED-W-TWILIGHT  
8031440361088

4000K

4W


☀️ 288 Lumen

🔺 107°

🔌 >15 000 on/off

🕒 h 25 000

🔋 driver incluso

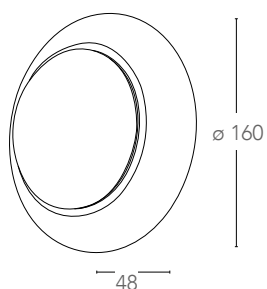

CLASSE  
**A**



SMD  
SMD



Ra  
>80


CE



RoHS  
WEEE COMPLIANT

# KITE

Applique a LED in alluminio bianco o nero  
*Black or white aluminium LED wall lamp*

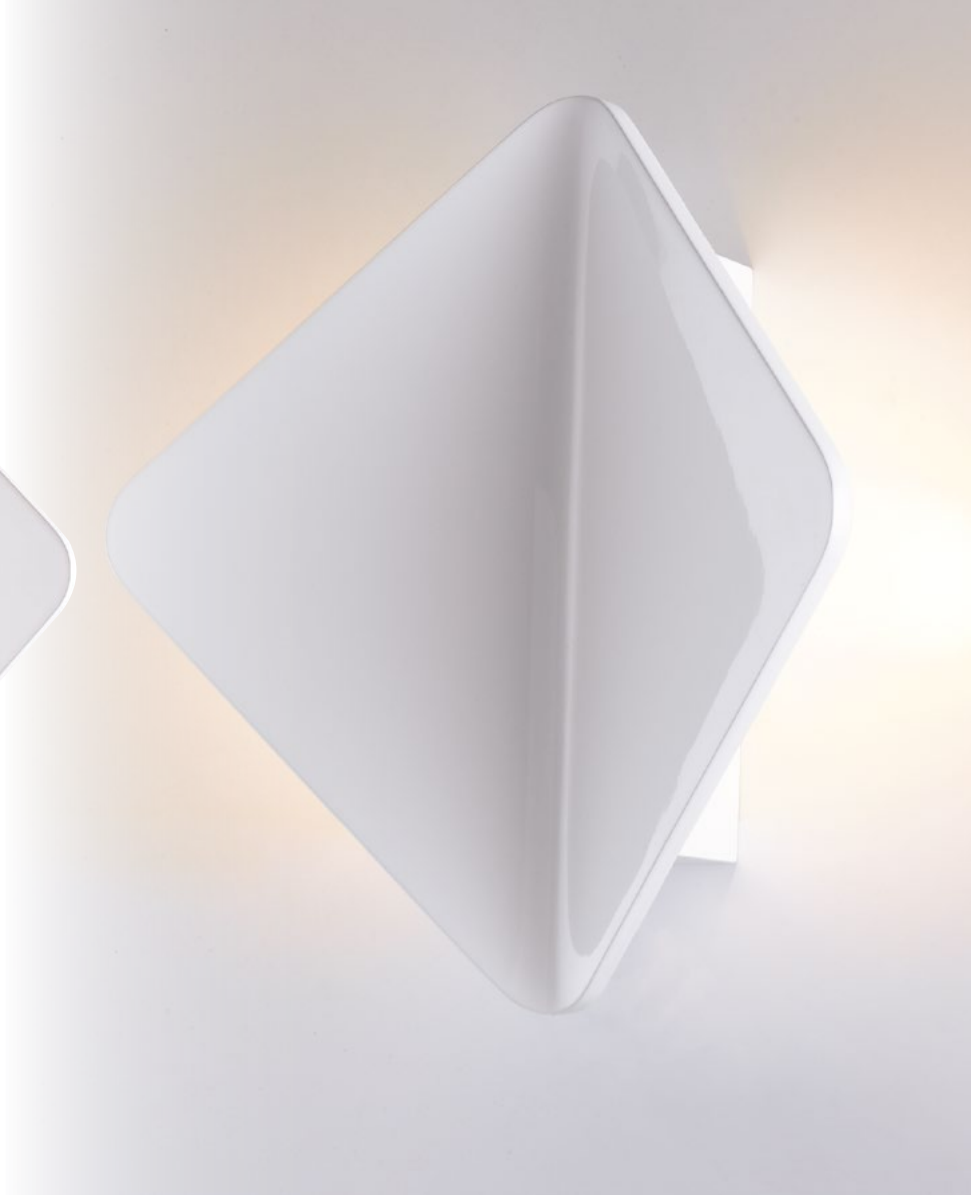

## informazioni tecniche - technical information



LED-W-KITE NERO  
 8031440361187

4000K

2X3W

☀️ 540 Lumen

120°  
 ■  
 120°

⏻ >15 000 on/off

🕒 h 25 000

🔌 driver incluso

LED-W-KITE BCO  
 8031440361170

4000K

2X3W


☀️ 540 Lumen

120°  
 ■  
 120°

⏻ >15 000 on/off

🕒 h 25 000

🔌 driver incluso

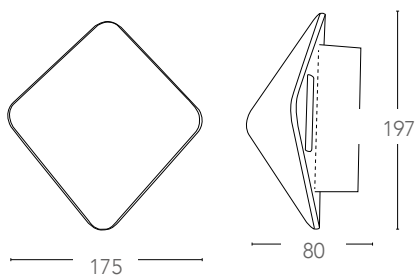

CLASSE <b>A</b>		SMD 		Ra <b>&gt;80</b>	CE		
--------------------	--	---------	--	---------------------	----	--	--

# GRADO

Appliche a LED in alluminio  
Aluminium LED wall lamp



informazioni tecniche - *technical information*

LED-W-GRADO  
8031440361194

4000K

10W



800 Lumen

120°

>15 000 on/off

h 25 000

driver incluso

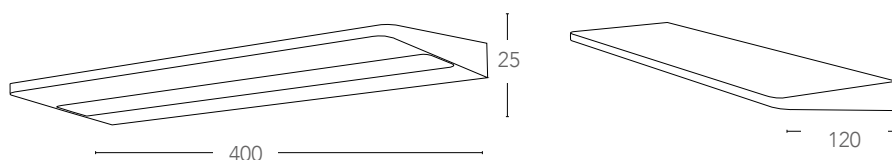



### **APPLIQUE DA BAGNO**

La nostra gamma è stata creata con un design elegante, moderno, semplice e funzionale, per applicazioni sia a parete che a specchio.

offre un'illuminazione direzionale o omogenea, per le molteplici esigenze per l'ambiente più personale della casa

### **BATHROOM WALL LAMP**

*Our range has been created with a design, modern, simple and functional, for application on the wall or mirror.*

*They offer a directional or even lighting for the many needs, for the most personal room in the house.*

## CRUISE

Applique a LED in termoplastica finitura cromo  
*Cabinet LED thermoplastic finish chrome*




Doppio sistema di fissaggio *Double mounting system*

informazioni tecniche - *technical information*

su specchio  
*On mirror*



su cornice  
*On frame*

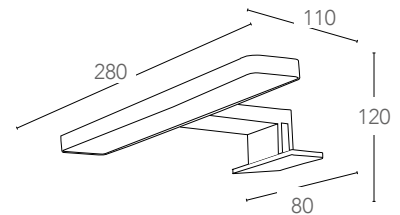

SPOT-B-CRUISE  
 8031440363426



5,2W



430 Lumen



>15 000 on/off



h 25 000

230V  
 DRIVER FREE

## SCARAB

Applique a LED in alluminio finitura cromo  
*Cabinet LED aluminium finish chrome*




Doppio sistema di fissaggio *Double mounting system*

informazioni tecniche - *technical information*

su specchio  
*On mirror*



su cornice  
*On frame*

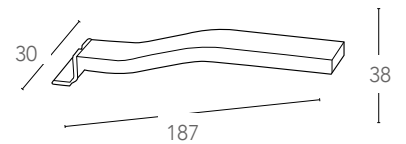

SPOT-B-SCARAB  
 8031440363440



3W



280 Lumen



>15 000 on/off



h 25 000

driver incluso

CLASSE  
**A**



SMD



Ra  
 >80

CE



RoHS  
 WEEE COMPLIANT

## RIVA


Applique a LED in alluminio finitura cromo  
Cabinet LED aluminium finish chrome



Doppio sistema di fissaggio *Double mounting system*

informazioni tecniche - *technical information*

su specchio  
*On mirror*

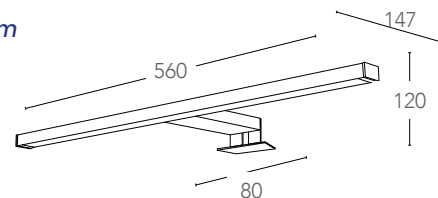

SPOT-B-RIVA  
8031440363457



8W

740 Lumen



>15 000 on/off

h 25 000

230V  
DRIVER FREE

## WALLY


Applique a LED in alluminio finitura cromo  
Cabinet LED aluminium finish chrome



Doppio sistema di fissaggio *Double mounting system*

informazioni tecniche - *technical information*

su specchio  
*On mirror*

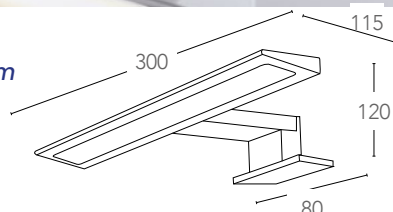

SPOT-B-WALLY  
8031440363471



8W

650 Lumen



>15 000 on/off

h 25 000

230V  
DRIVER FREE

CLASSE  
**A**



SMD



Ra  
>80

CE



RoHS  
WEEE COMPLIANT



## RAIN

Plafoniera a LED con diffusore in acrilico cornice silver bordo trasparente  
LED ceiling lamp with acrylic diffuser silver frame and transparent edge



informazioni tecniche - *technical information*

I-RAIN-PL33  
8031440361866



12W


1160 Lumen



> 15 000 on/off

h 25 000

230V  
DRIVER FREE

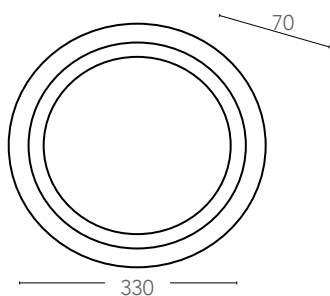

CLASSE  
**A**



SMD



Ra  
>80

CE



RoHS  
WEEE COMPLIANT

# LANCER

Appliche a LED in alluminio  
Aluminium LED wall lamp



## informazioni tecniche - technical information



**LED-W-LANCER NERO**  
8031440361217



17W



1360Lumen



>10 000 on/off



h 25 000



driver incluso

NERO



**LED-W-LANCER BCO**  
8031440361200



17W



1360 Lumen



>10 000 on/off




h 25 000



driver incluso

BCO

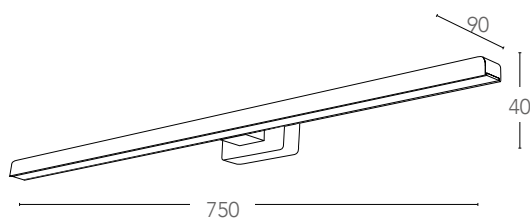

CLASSE  
**A**



**SMD**  
SMD



**Ra**  
>80

**CE**



**RoHS**  
WEEE COMPLIANT



## GAIA

Applique da specchio in metallo finitura nickel  
Mirror lamp in metal nickel finish




IP23

informazioni tecniche - technical information

SPOT-B-GAIA  
8031431951199

1xGU10 max 42W  
non include - not included



## KRISS

Applique da specchio in metallo con diffusore in vetro finitura nikel  
Mirror lamp in metal with glass shade nikel finish




IP23

informazioni tecniche - technical information

SPOT-B-KRISS  
8031431971197

2xG4 max 7w  
non include - not included

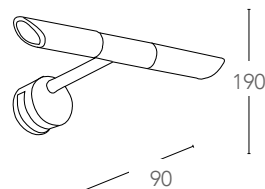

## DADO


Applique da specchio in metallo con diffusore in vetro finitura cromo  
*Mirror lamp in metal with glass shade chrome finish*



informazioni tecniche - *technical information*

SPOT-B-DADO  
8031431931191

1xG9 max 28w  
non incluse - *not included*



## LELE


Applique da specchio in metallo con diffusore in vetro finitura cromo  
*Mirror lamp in metal with glass shade chrome finish*



informazioni tecniche - *technical information*

SPOT-B-LELE  
8031431981196

2xG9 max 28w  
non incluse - *not included*



## ROBY

Applique da specchio in metallo con diffusore in vetro finitura cromo  
Mirror lamp in metal with glass shade chrome finish


IP23



informazioni tecniche - technical information

SPOT-B-ROBY-CP  
8031440312349

2xG9 max 28w  
non include - not included

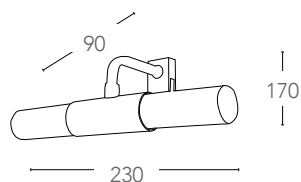

## ROBY

Applique da parete in metallo con diffusore in vetro finitura cromo  
Wall lamp in metal with glass shade chrome finish


IP23



informazioni tecniche - technical information

SPOT-B-ROBY  
8031440312356

2xG9 max 28w  
non include - not included

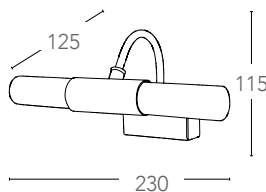


## ENDY


Applique in metallo con diffusore in vetro finitura nikel  
Wall lamp in metal with glass shade nikel finish



informazioni tecniche - *technical information*



SPOT-B-ENDY  
8031431941190

 1xE14 max 40W  
non incluse - *not included*

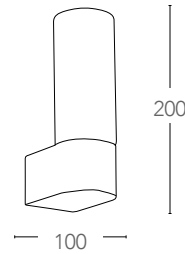


## JOY


Applique in metallo con diffusore in vetro finitura nikel  
Wall lamp in metal with glass shade nikel finish

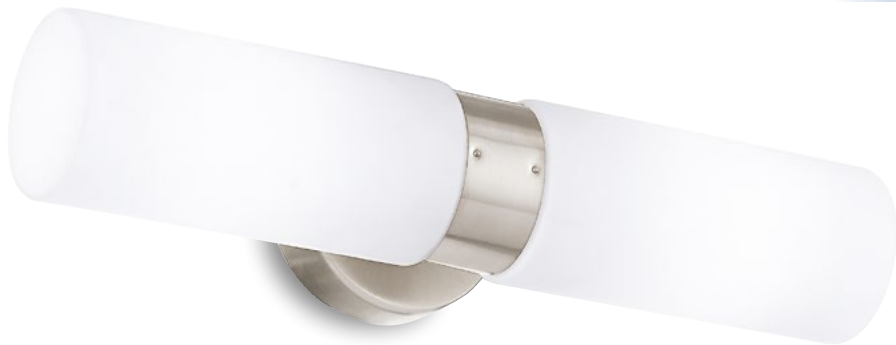

informazioni tecniche - *technical information*

SPOT-B-JOY  
8031431961198

 2xE14 max 40W  
non incluse - *not included*

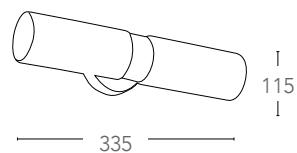


## SHON

Applique in vetro con rifiniture in metallo cromo  
Glass wall lamp and metal with metal chrome finish




### informazioni tecniche - technical information

**SPOT-B-SHON/M**  
8031432001190



 2xE14 max 40W  
non include - not included

**IP20**

**SPOT-B-SHON/L**  
8031431991195


 2xE14 max 40W  
non include - not included

**IP20**

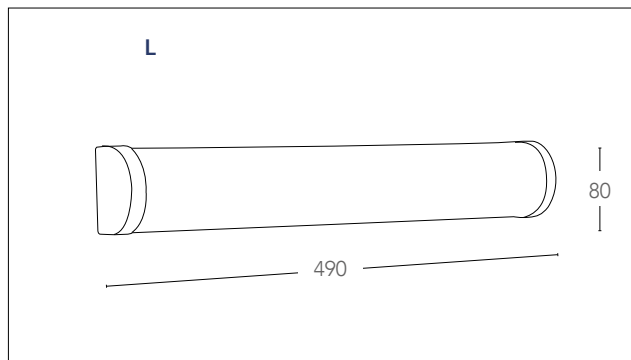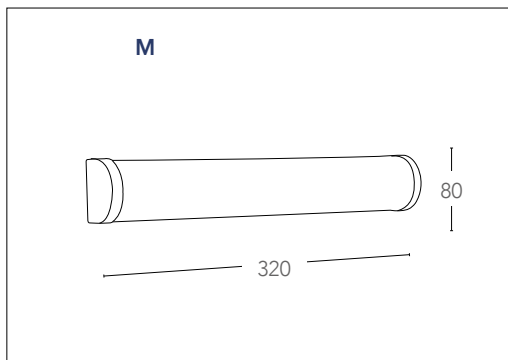


## STEFANY

Appliche in vetro con rifiniture in metallo cromo  
Glass wall lamp and metal with metal chrome finish

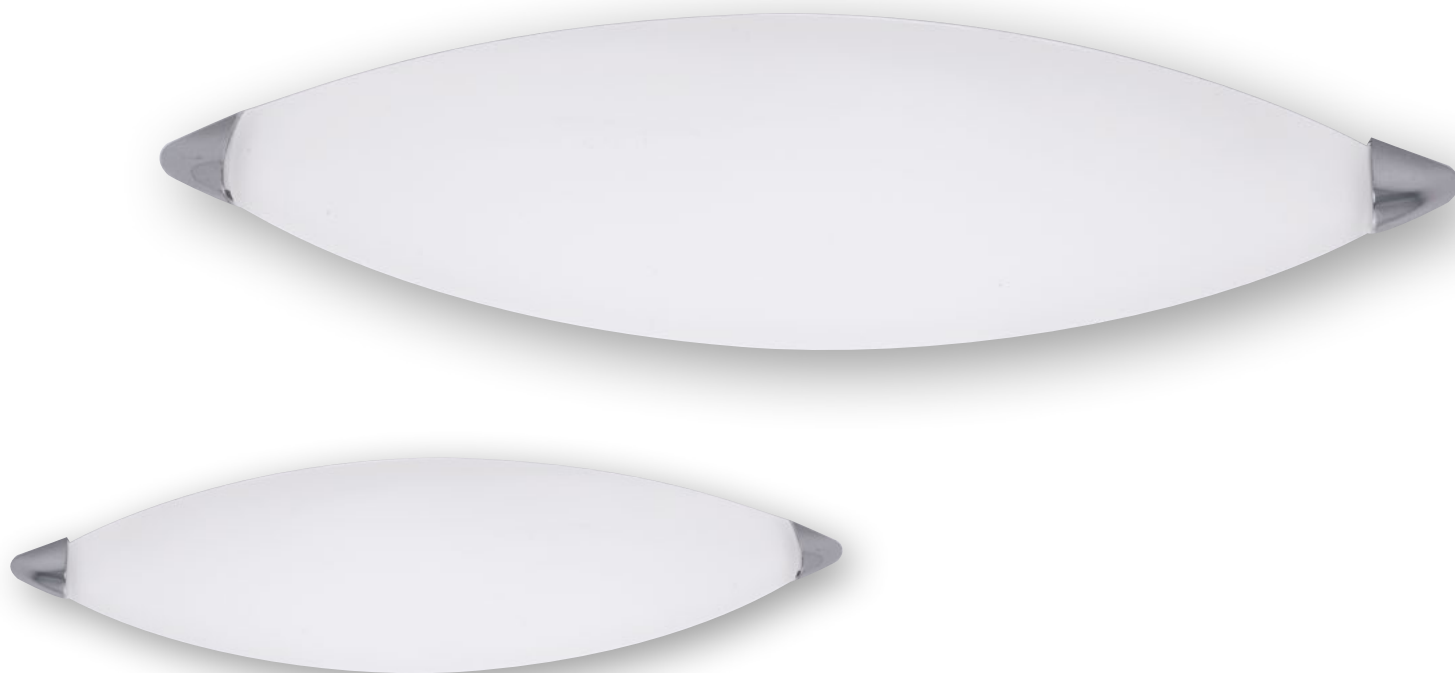


### informazioni tecniche - technical information

**15/02400**  
8031425791121

 2xE14 max 40W  
non include - not included


**IP20**

**15/02300**  
8031422751098


 1xE14 max 40W  
non include - not included

**IP20**

**15/02300**

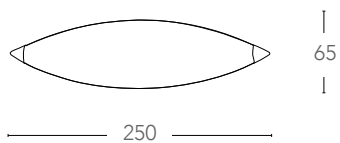

**15/02400**

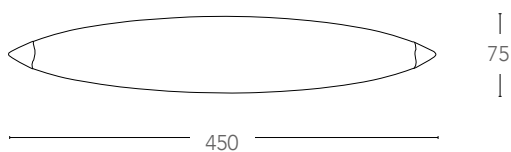

CE



## ET

Appliche orientabile in metallo con diffusore in vetro finitura cromo  
*Metal wall lamp adjustable with glass shape chrome finish*



informazioni tecniche - *technical information*


I-YHS7014/WB  
8031414043590

max 78 mm



1xR7s max 120w

non include - *not included*

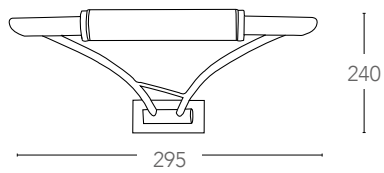

CE

RoHS  
WEEE COMPLIANT

## F1/F2

Appliche metallo flessibile con diffusore in vetro  
*Metal wall lamp with glass shade*



informazioni tecniche - *technical information*



CROMO

**SPOT-F1**  
8031414076956


1xG9 max 28w  
 non include - *not included*



BRUNITO


**SPOT-F2**  
8031414076963

1xG9 max 28w  
 non include - *not included*

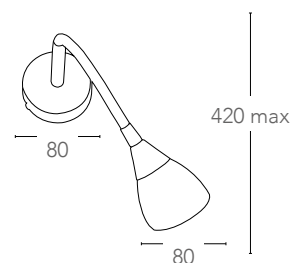

## Q1/Q2

Appliche in metallo orientabile con diffusore in vetro  
*Metal wall lamp adjustable with glass shade*



informazioni tecniche - *technical information*



NIKEL

**SPOT-Q1**  
8031414076932


2xG9 max 28w  
 non include - *not included*



ORO

**SPOT-Q2**  
8031414076949

2xG9 max 28w  
 non include - *not included*

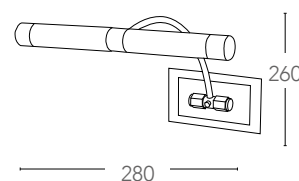





## FARETTI

Le nostre collezioni offrono le principali forme moderno-decorativo, dalla singola alla multipla luce , con la possibilità di orientare il fascio di luce nella direzione ideale per creare la soluzione per ogni tipologia di ambiente .

## SPOT LIGHT

*Our collections offer the main modern-decorative forms, from single to multiple light, with the ability to direct the beam of light in the ideal direction to create the solution for any type of environment.*

## TECHNO

Spot in metallo finitura nero satinato  
Metal spot light satin black finish




### informazioni tecniche - technical information

<b>SPOT-TECHNO-1 NER</b> 8031414864652	1xGU10 6W LED include - included	4000K	<b>1X6W</b>	400 Lumen	100°	>10 000 on/off	h 25 000
<b>SPOT-TECHNO-2 NER</b> 8031414864669	2xGU10 6W LED include - included	4000K	<b>2X6W</b>	800 Lumen	100°	>10 000 on/off	h 25 000
<b>SPOT-TECHNO-3 NER</b> 8031414864539	3xGU10 6W LED include - included	4000K	<b>3X6W</b>	1200 Lumen	100°	>10 000 on/off	h 25 000
<b>SPOT-TECHNO-PL4 NER</b> 8031414864546	4xGU10 6W LED include - included	4000K	<b>4X6W</b>	2400 Lumen	100°	>10 000 on/off	h 25 000

## TECHNO

Spot in metallo finitura bianco  
Metal spot light white finish

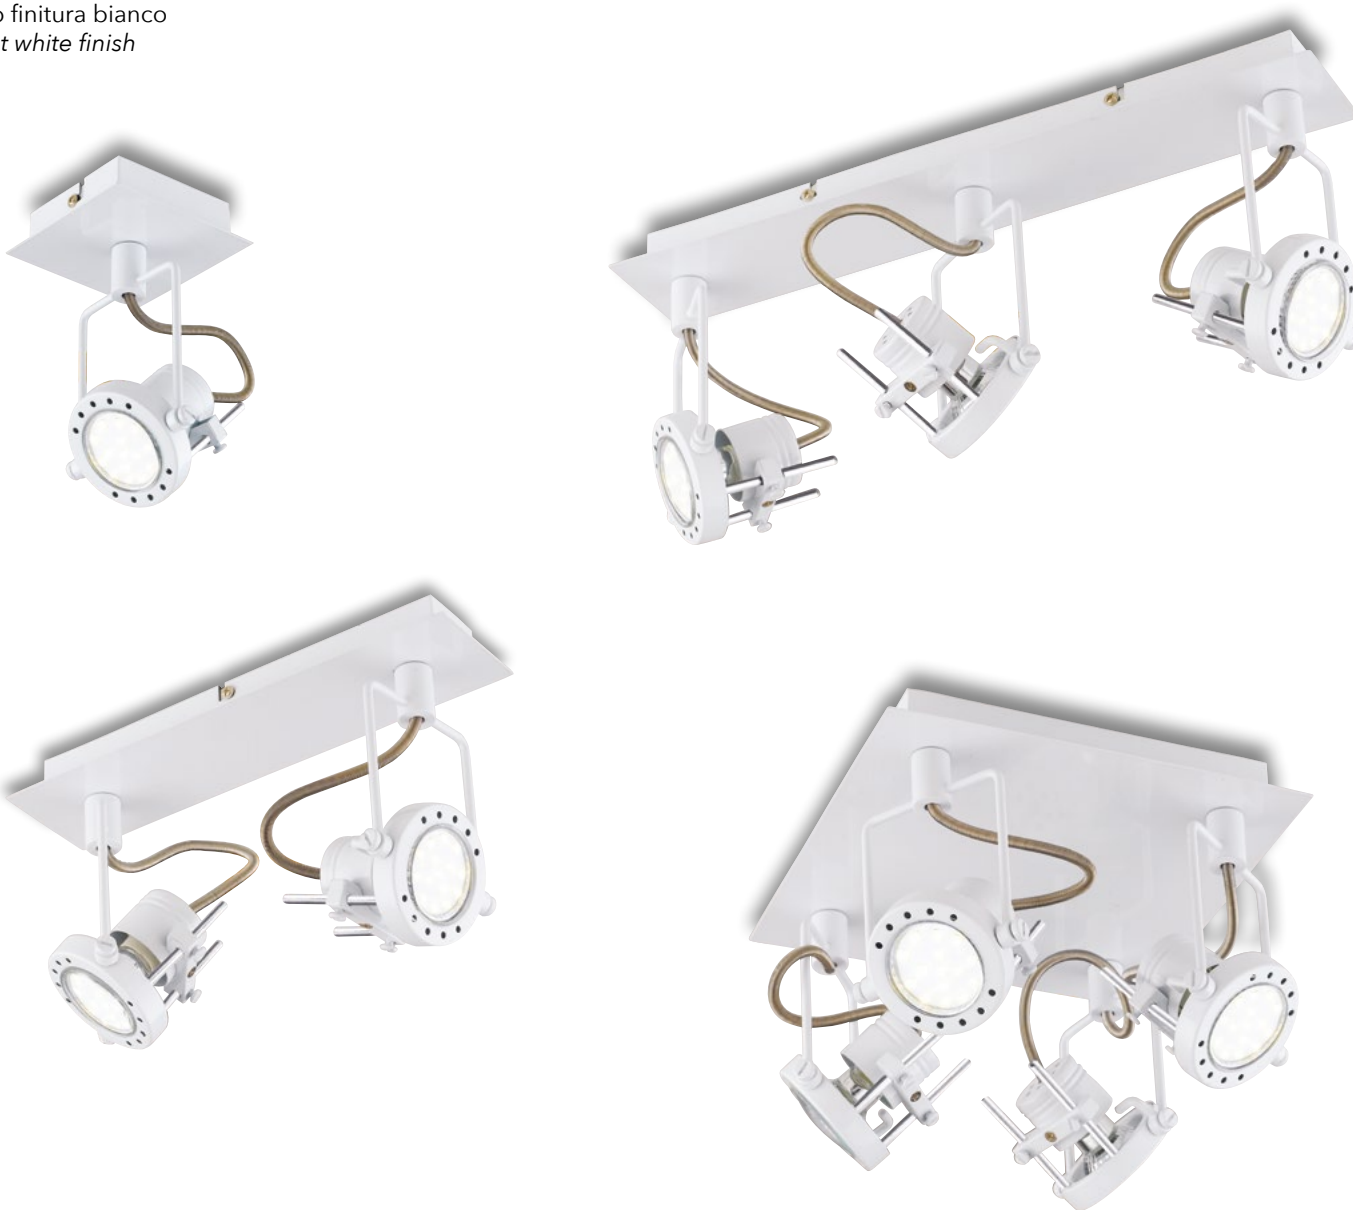

### informazioni tecniche - technical information

<b>SPOT-TECHNO-1 BCO</b> 8031414864638	1xGU10 6W LED include - included	4000K	<b>1X6W</b>	400 Lumen	100°	>10 000 on/off	h 25 000
<b>SPOT-TECHNO-2 BCO</b> 8031414864645	2xGU10 6W LED include - included	4000K	<b>2X6W</b>	800 Lumen	100°	>10 000 on/off	h 25 000
<b>SPOT-TECHNO-3 BCO</b> 8031414864515	3xGU10 6W LED include - included	4000K	<b>3X6W</b>	1200 Lumen	100°	>10 000 on/off	h 25 000
<b>SPOT-TECHNO-PL4 BCO</b> 8031414864522	4xGU10 6W LED include - included	4000K	<b>4X6W</b>	2400 Lumen	100°	>10 000 on/off	h 25 000

## TECHNO

Spot in metallo finitura cromo satinato  
Metal spot light satin chrome finish



### informazioni tecniche - technical information

SPOT-TECHNO-1 8031422881108	1xGU10 3W LED include - included	3000K	1X3W	250 Lumen	100°	>10 000 on/off	h 25 000
SPOT-TECHNO-2 8031422891107	2xGU10 3W LED include - included	3000K	2X3W	500 Lumen	100°	>10 000 on/off	h 25 000
SPOT-TECHNO-3 8031423041105	3xGU10 3W LED include - included	3000K	3X3W	750 Lumen	100°	>10 000 on/off	h 25 000
SPOT-TECHNO-PL4 8031423051104	4xGU10 3W LED include - included	3000K	4X3W	1000 Lumen	100°	>10 000 on/off	h 25 000

CLASSE  
**A**



SMD







Ra  
>80

CE



RoHS  
WEEE COMPLIANT

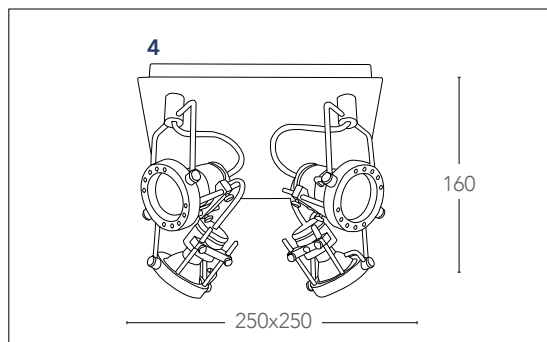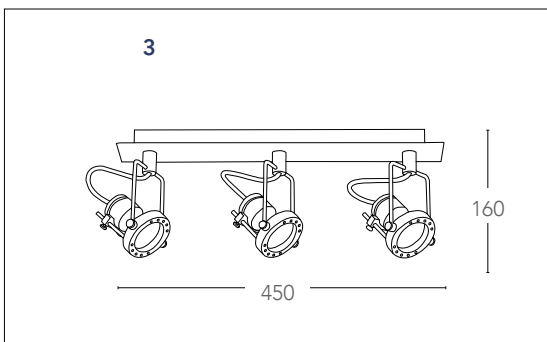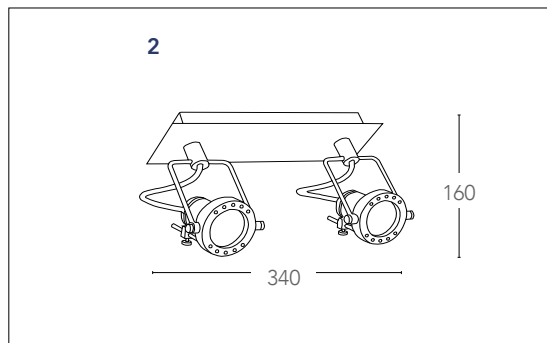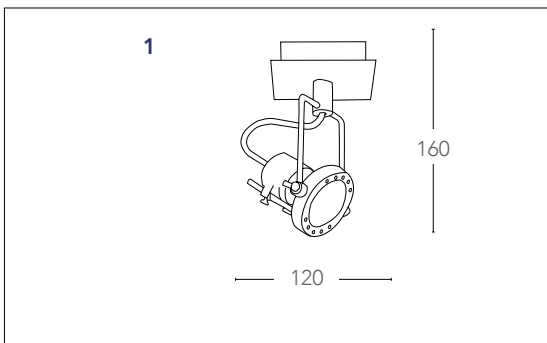


## MIAMI





Spot in metallo finitura nikel spazzolato con vetro  
 Metal spot light satin nickel finish with glass



### informazioni tecniche - technical information

<b>SPOT-MIAMI 01</b> 8031414076772	1xGU10 3W LED include - included	3000K	<b>1X3W</b>	250 Lumen	100°	>10 000 on/off	h 25 000
<b>SPOT-MIAMI 02</b> 8031414076796	2xGU10 3W LED include - included	3000K	<b>2X3W</b>	500 Lumen	100°	>10 000 on/off	h 25 000
<b>SPOT-MIAMI 03</b> 8031414076802	3xGU10 3W LED include - included	3000K	<b>3X3W</b>	750 Lumen	100°	>10 000 on/off	h 25 000
<b>SPOT-MIAMI PL4</b> 8031414076819	4xGU10 3W LED include - included	3000K	<b>4X3W</b>	1000 Lumen	100°	>10 000 on/off	h 25 000



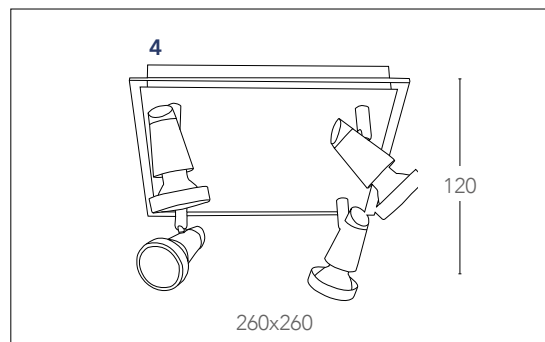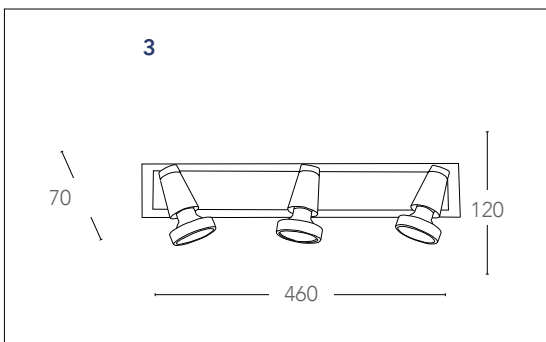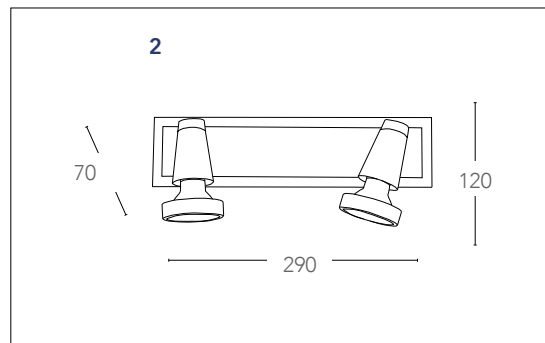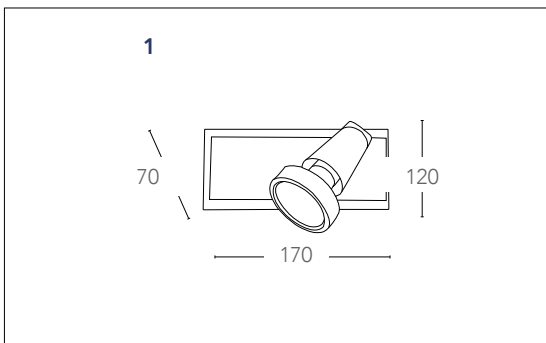

## SUNNY





Spot in metallo finitura nikel  
Metal spot light nikel finish



### informazioni tecniche - technical information

<b>SPOT-SUNNY-1</b> 8031431831187	1xGU10 3W LED include - included	3000K	<b>1X3W</b>	250 Lumen	100°	>10 000 on/off	h 25 000
<b>SPOT-SUNNY-2</b> 8031431841186	2xGU10 3W LED include - included	3000K	<b>2X3W</b>	500 Lumen	100°	>10 000 on/off	h 25 000
<b>SPOT-SUNNY-S3</b> 8031431861184	3xGU10 3W LED include - included	3000K	<b>3X3W</b>	750 Lumen	100°	>10 000 on/off	h 25 000
<b>SPOT-SUNNY-4</b> 8031431851185	4xGU10 3W LED include - included	3000K	<b>4X3W</b>	1000 Lumen	100°	>10 000 on/off	h 25 000



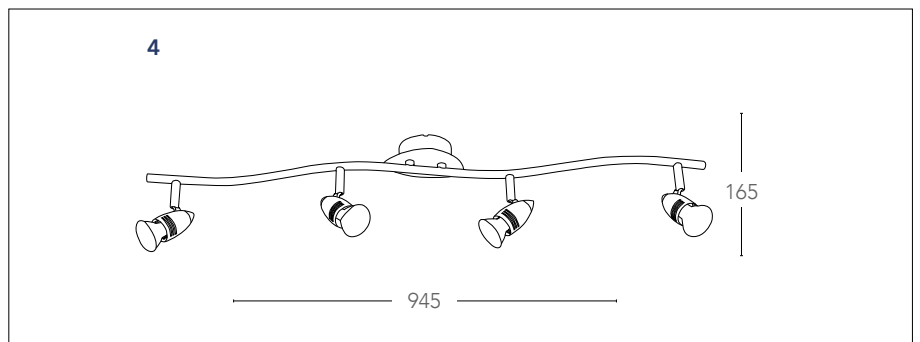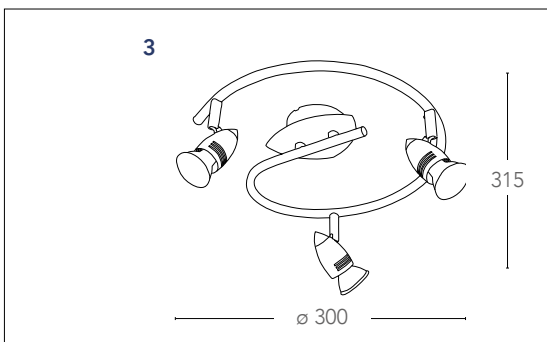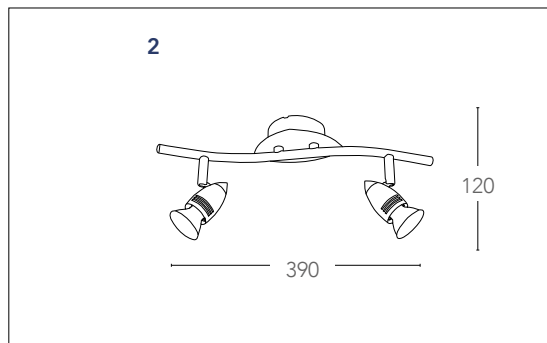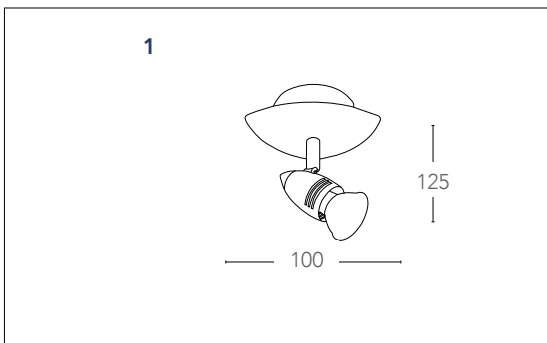

## COOPER





Spot in metallo finitura silver  
Metal spot light silver finish



### informazioni tecniche - technical information

<b>SPOT-COOPER-1</b> 8031440360913	1xGU10 3W LED include - included	3000K	<b>1X3W</b>	250 Lumen	100°	>10 000 on/off	h 25 000
<b>SPOT-COOPER-2</b> 8031440360920	2xGU10 3W LED include - included	3000K	<b>2X3W</b>	500 Lumen	100°	>10 000 on/off	h 25 000
<b>SPOT-COOPER-3</b> 8031440360937	3xGU10 3W LED include - included	3000K	<b>3X3W</b>	750 Lumen	100°	>10 000 on/off	h 25 000
<b>SPOT-COOPER-4</b> 8031440360944	4xGU10 3W LED include - included	3000K	<b>4X3W</b>	1000 Lumen	100°	>10 000 on/off	h 25 000



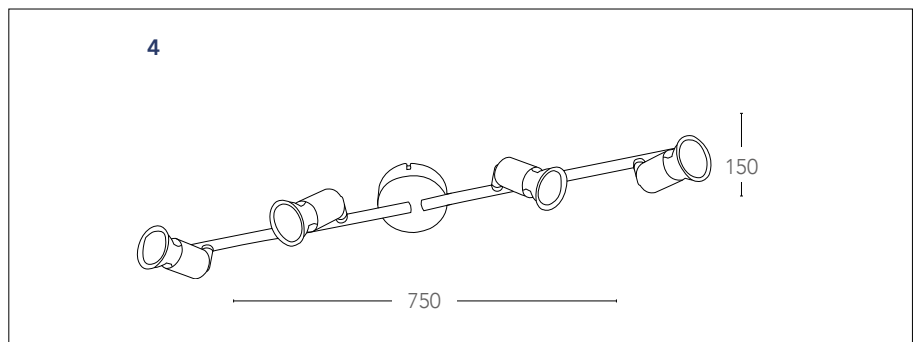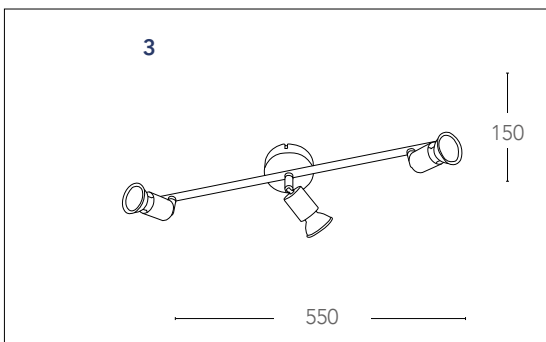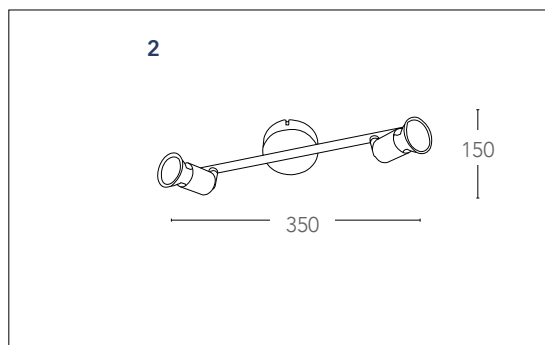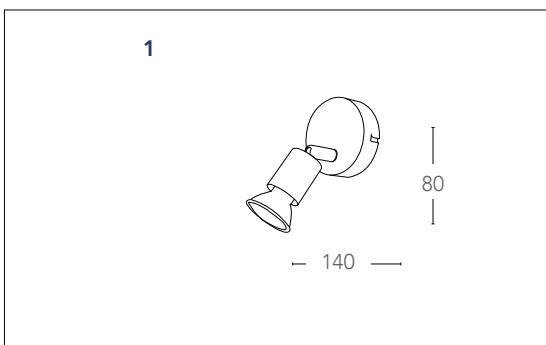


## CADILLAC

Spot in metallo finitura cromo  
Metal chrome spot light




### informazioni tecniche - technical information


**SPOT-CADILLAC-1**  
8031438541256

 1xE14 max 40w  
non include - not included


**SPOT-CADILLAC-2**  
8031438551255





 2xE14 max 40w  
non include - not included

**SPOT-CADILLAC-3**  
8031414076918

 3xE14 max 40w  
non include - not included

**SPOT-CADILLAC-PL4**  
8031438521258

 4xE14 max 40w  
non include - not included

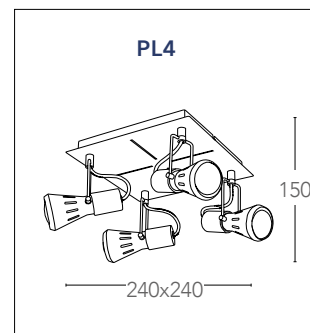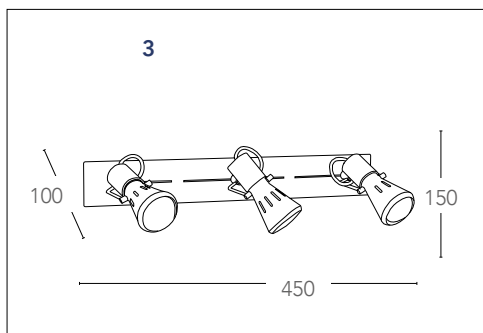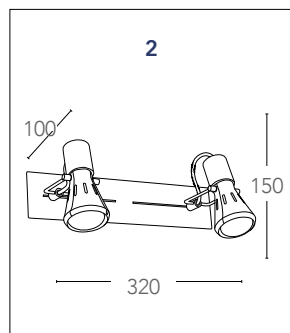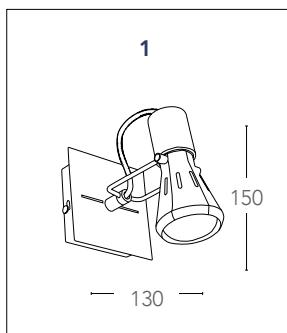


## LIMOGES

Spot in ceramica  
Ceramic spot light




informazioni tecniche - technical information


**SPOT-LIMOGES-1**  
8031438531257




 1xG9 max 33w  
non include - not included

**SPOT-LIMOGES-2**  
8031438501250

 2xG9 max 33w  
non include - not included

**SPOT-LIMOGES-PL3**  
8031438511259

 3xG9 max 33w  
non include - not included

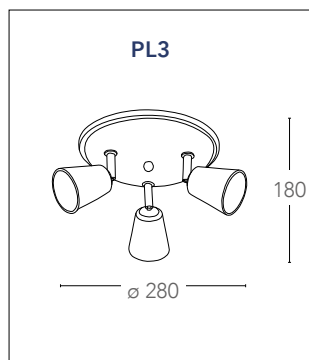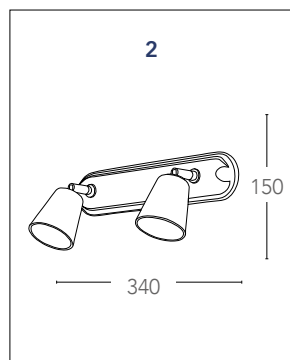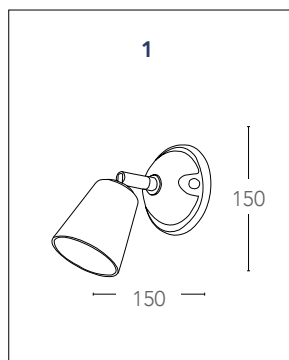





## MITO





Spot in metallo finitura cromo satinato con diffusore in vetro  
Metal spot light satin chrome finish with glass shade



### informazioni tecniche - technical information

SPOT-MITO-1 8031431791184	 1xE14 max 40W non include - not included
SPOT-MITO-PL3 8031431801180	 3xE14 max 40W non include - not included
SPOT-MITO-S3 8031431811189	 3xE14 max 40W non include - not included
SPOT-MITO-S4 8031431821188	 4xE14 max 40W non include - not included



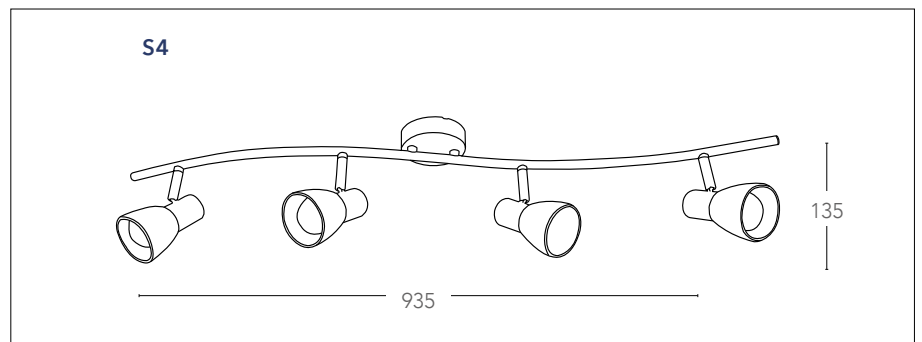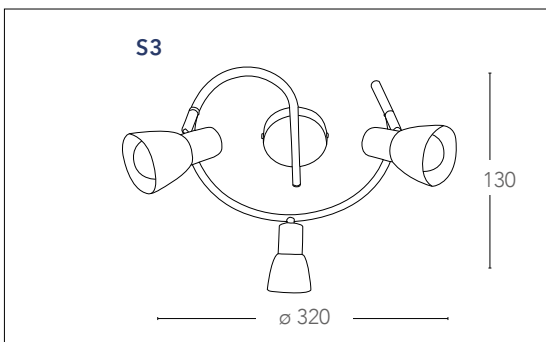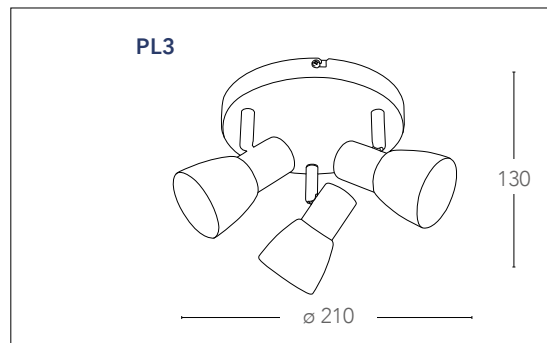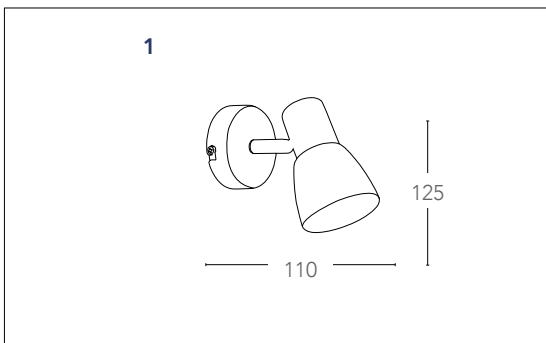












## CARRERA

Spot in metallo finitura bianca  
Metal spot light white finish








informazioni tecniche - *technical information*

SPOT-CARRERA-1 8031431701183	 1xE27 max 42w non incluse - <i>not included</i>	
SPOT-CARRERA-C 8031431731180	 1xE27 max 42w non incluse - <i>not included</i>	  On / Off
SPOT-CARRERA-2 8031431711182	 2xE27 max 42w non incluse - <i>not included</i>	
SPOT-CARRERA-3 8031431721181	 3xE27 max 42w non incluse - <i>not included</i>	
SPOT-CARRERA-PL3 8031431741189	 3xE27 max 42w non incluse - <i>not included</i>	

CE



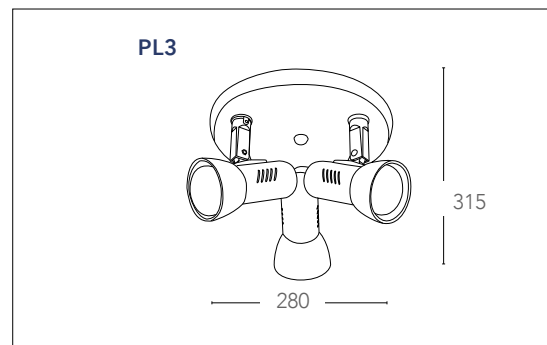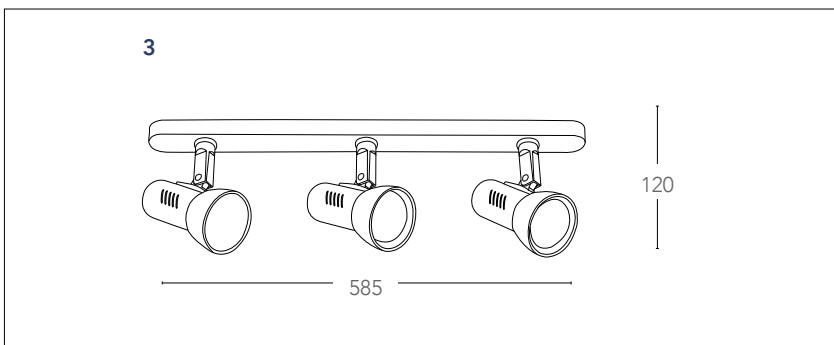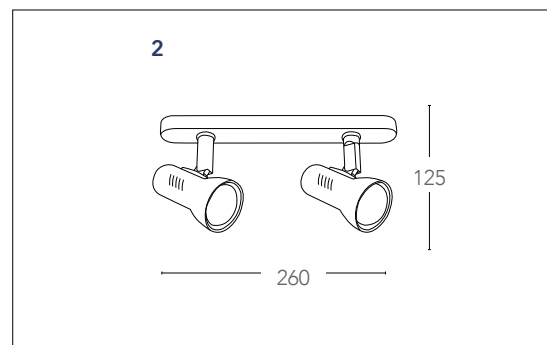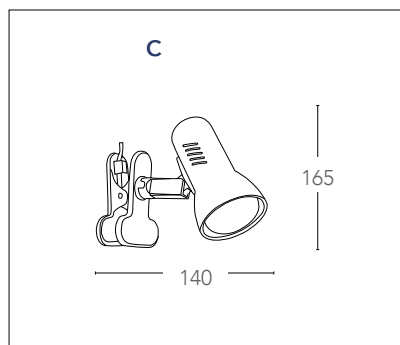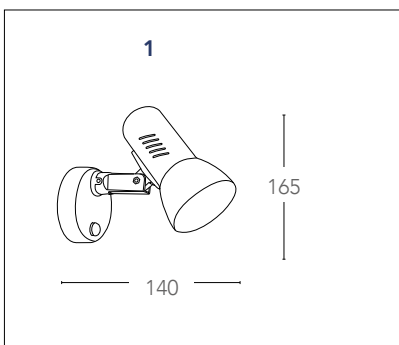





### **SOTTOPENSILI**


Collezione di barre sottopensili , armadi e illuminazione di cortesia a LED, sia con alimentazione a normale corrente o batteria adattabili per ogni esigenza di illuminazione decorativa

### **LED CABINETS**

*Collection of LED cabinets and courtesy lighting , power supply at normal current or battery adaptable for every need for decorative lighting*


# UNIX

Barra sotto pensile a LED in alluminio con diffusore in policarbonato riflettente  
 Cabinet ledbar in aluminium with PC reflective diffuser

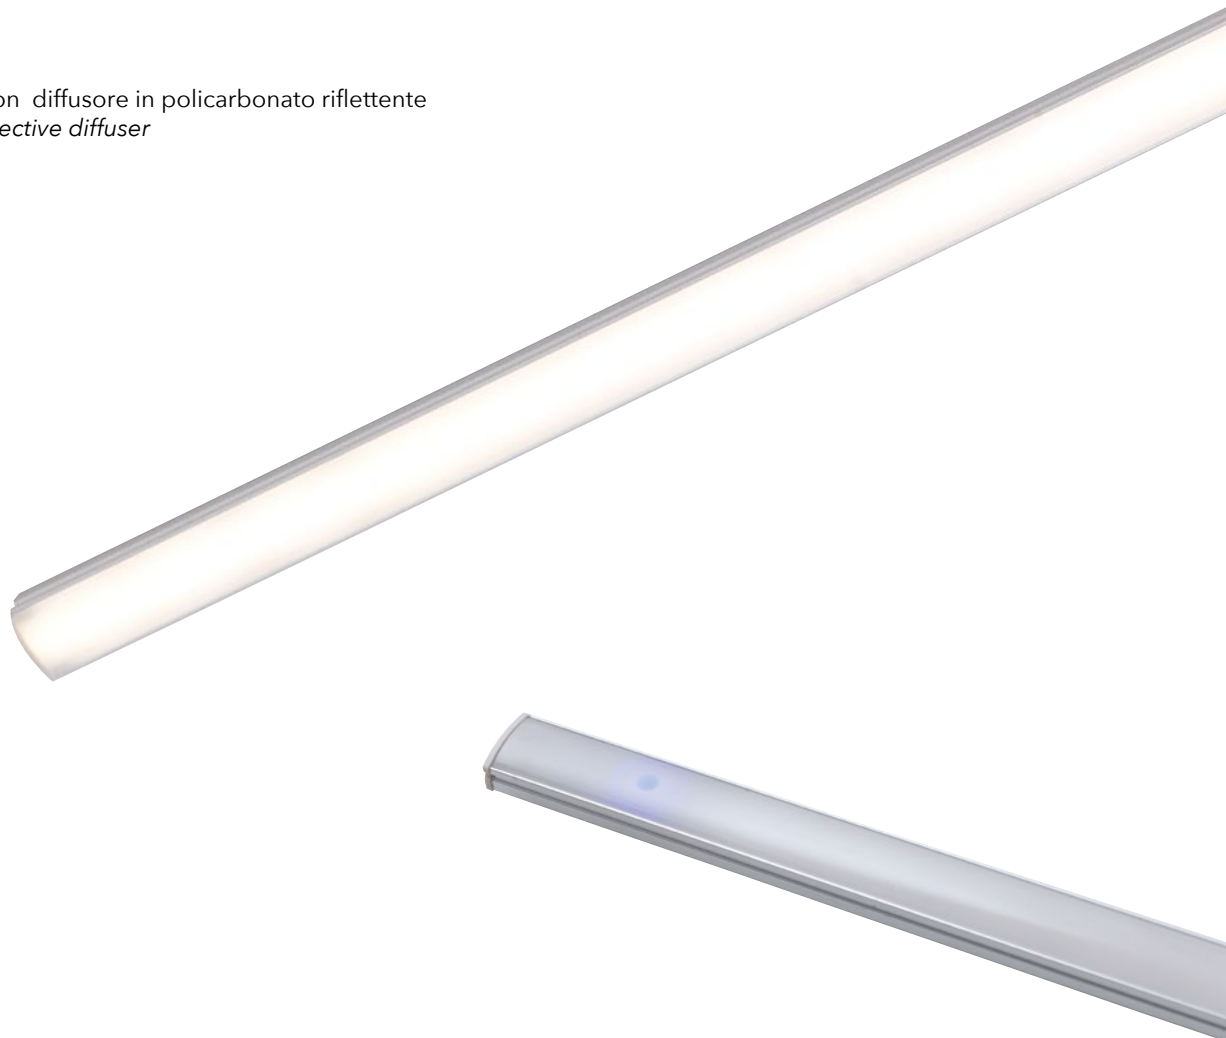


## informazioni tecniche - technical information

LEDBAR-UNIX-45 8031414864614	4000K	<b>8,64W</b>	405 Lumen	135°	>10 000 on/off	h 25 000	driver incluso
LEDBAR-UNIX-60 8031414864621	4000K	<b>11,52W</b>	540 Lumen	135°	>10 000 on/off	h 25 000	driver incluso
LEDBAR-UNIX-90 8031414864492	4000K	<b>17,28W</b>	810 Lumen	135°	>10 000 on/off	h 25 000	driver incluso
LEDBAR-UNIX-120 8031414864508	4000K	<b>23,04W</b>	1080 Lumen	135°	>10 000 on/off	h 25 000	driver incluso




# UNIX

Barra sotto pensile angolare a LED in alluminio con diffusore in policarbonato riflettente  
*Cabinet ledbar in aluminium with PC reflective diffuser*

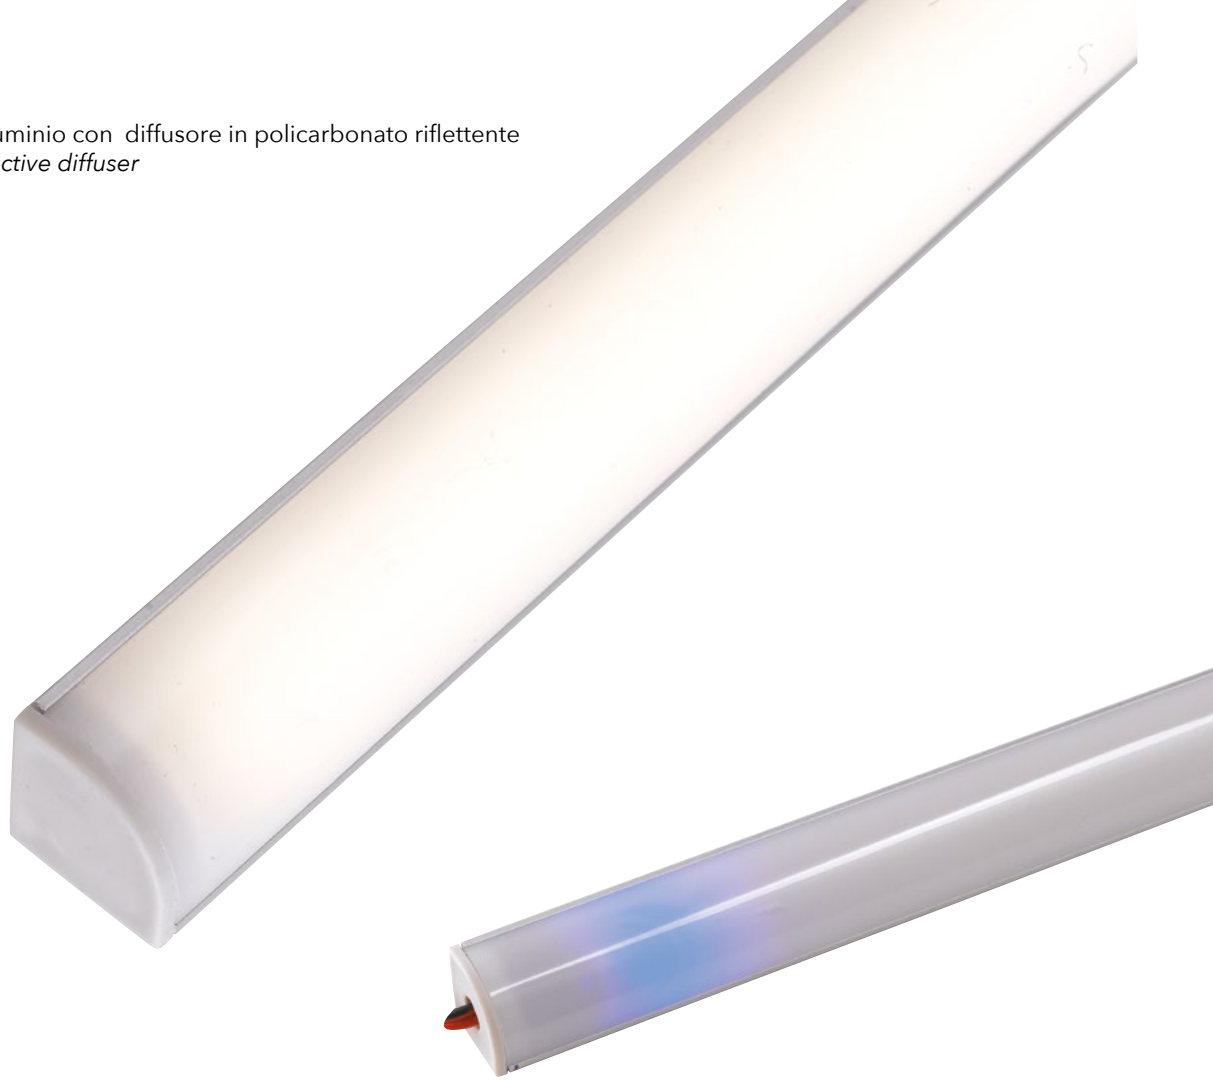

## informazioni tecniche - technical information

LEDBAR-UNIX-45 ANG 8031414864607	4000K	<b>8,64W</b>	☀️ 405 Lumen	🔺 135°	🔌 >10 000 on/off	🕒 h 25 000	🔌 driver incluso
LEDBAR-UNIX-60 ANG 8031414864478	4000K	<b>11,52W</b>	☀️ 540 Lumen	🔺 135°	🔌 >10 000 on/off	🕒 h 25 000	🔌 driver incluso
LEDBAR-UNIX-90 ANG 8031414864485	4000K	<b>17,28W</b>	☀️ 810 Lumen	🔺 135°	🔌 >10 000 on/off	🕒 h 25 000	🔌 driver incluso
LEDBAR-UNIX-120 ANG 8031414864577	4000K	<b>23,04W</b>	☀️ 1080 Lumen	🔺 135°	🔌 >10 000 on/off	🕒 h 25 000	🔌 driver incluso

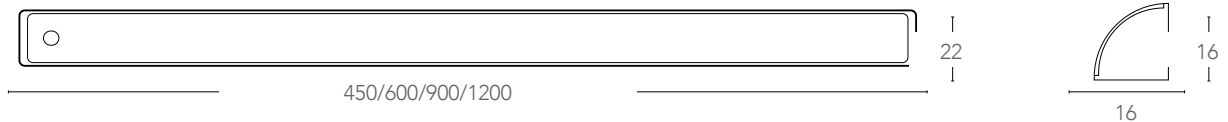



## BATTEN

Barra LED struttura in PC finitura bianca diffusore opale  
 Cabinet PC LED bar white color opal diffuser



### informazioni tecniche - technical information

LED-BATTEN-30 8031440357722	4000K	9W	765 Lm	120°	IP20	>15 000 on/off	h 25 000	230V DRIVER FREE
LED-BATTEN-60 8031440357739	4000K	18W	1530 Lm	120°	IP20	>15 000 on/off	h 25 000	230V DRIVER FREE
LED-BATTEN-120 8031440357746	4000K	36W	3060 Lumen	120°	IP20	>15 000 on/off	h 25 000	230V DRIVER FREE
LED-BATTEN-150 8031440357753	4000K	45W	3820 Lumen	120°	IP20	>15 000 on/off	h 25 000	230V DRIVER FREE

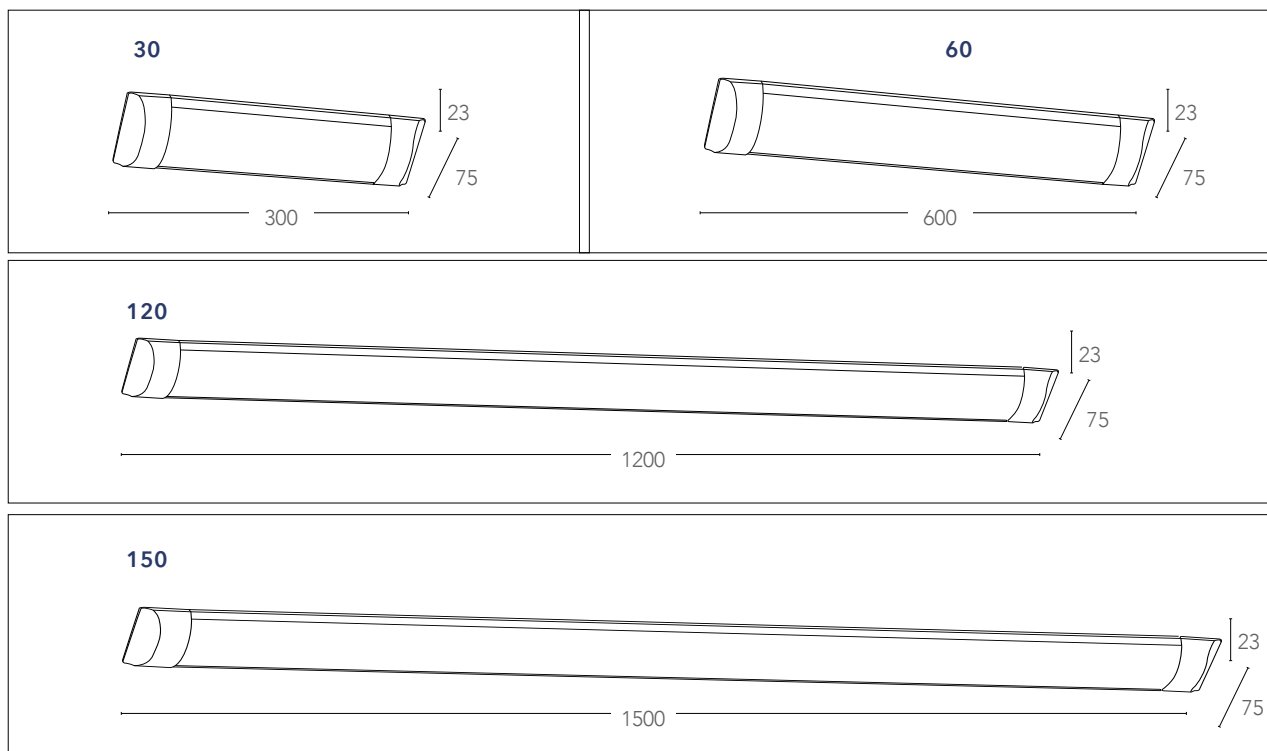


# T5

Barre sottopensile a LED in policarbonato  
 Cabinet LED bar in PC




## informazioni tecniche - technical information

LEDBAR-T5-30 8031440354691	4000K	4W	370 Lumen	135°	>10 000 on/off	h 25 000	230V DRIVER FREE
LEDBAR-T5-60 8031440354707	4000K	8W	700 Lumen	135°	>10 000 on/off	h 25 000	230V DRIVER FREE
LEDBAR-T5-90 8031440354677	4000K	10W	900 Lumen	135°	>10 000 on/off	h 25 000	230V DRIVER FREE
LEDBAR-T5-120 8031440354684	4000K	14W	1300 Lumen	135°	>10 000 on/off	h 25 000	230V DRIVER FREE

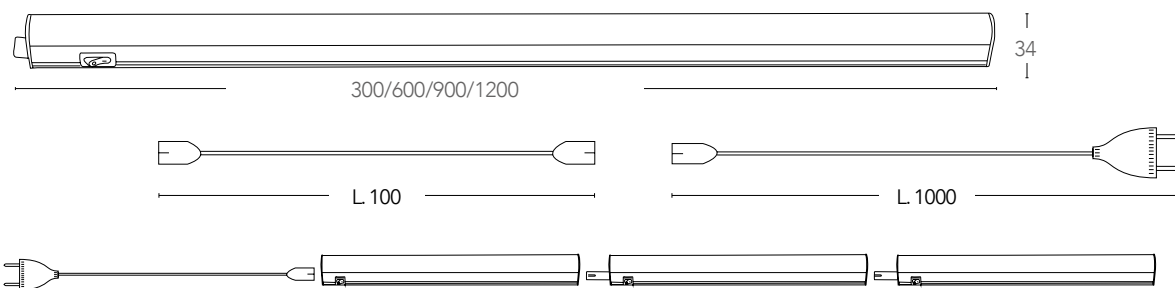


AC230V ⚡  
 MULTI-CONNECT



## YOUNG

Barra sotto pensile a LED in alluminio con interruttore ottico  
Cabinet ledbar in aluminium with optical switch

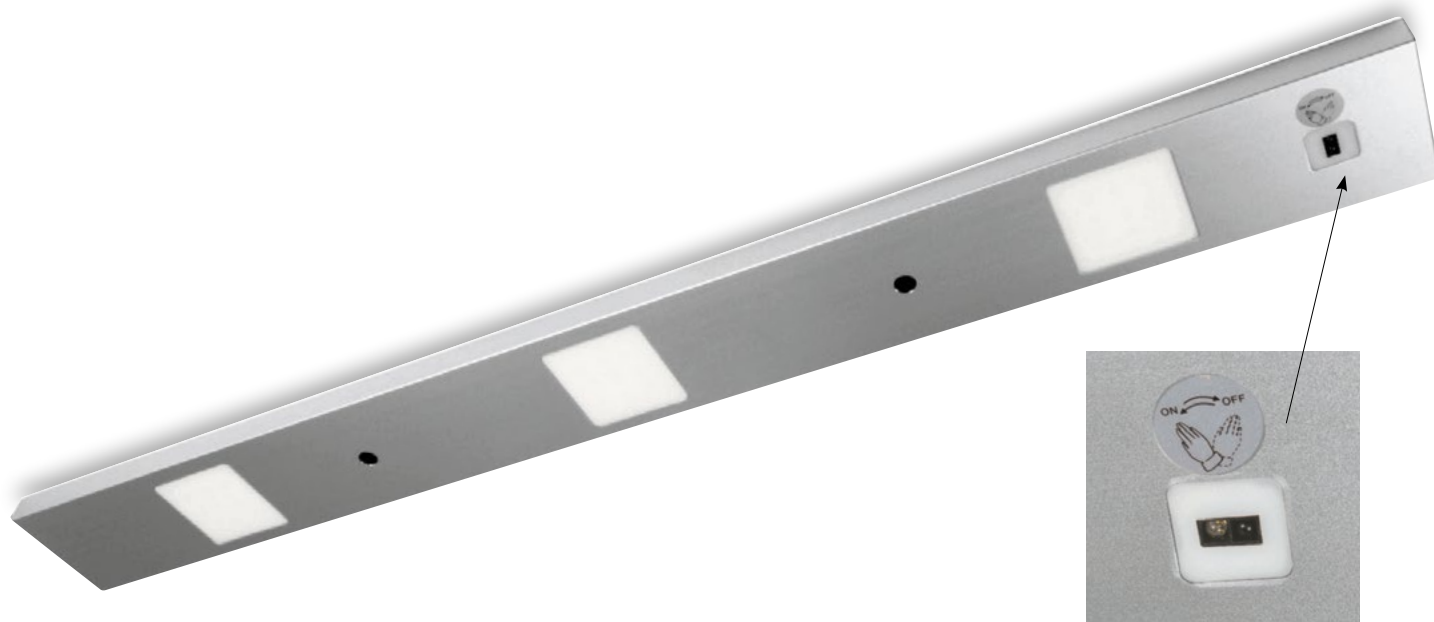


informazioni tecniche - *technical information*

LED-YOUNG-5W  
8031440071277



4,9W

 330 Lumen




>10 000 on/off



h 25 000



driver incluso

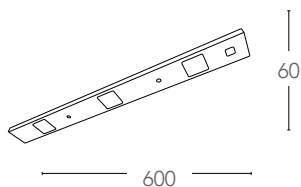

CLASSE  
**A**



SMD  




Ra  
>80

CE






## SOTTOPENSILE

Barra sottopensile a LED in alluminio con diffusore in policarbonato riflettente  
 Cabinet ledbar in aluminium with PC reflective diffuser



### informazioni tecniche - technical information

<b>LEDBAR-60CM</b> 8031433131209	4000K	10W 12V	750 Lumen	120°	>10 000 on/off	h 25 000	AC/DC 10W INPUT: 230V ~ 50Hz OUTPUT: 12V --- 0,8A non include - not included	touch
<b>LEDBAR-100CM</b> 8031433121200	4000K	15W 12V	1200Lumen	120°	>10 000 on/off	h 25 000	AC/DC 15W INPUT: 230V ~ 50Hz OUTPUT: 12V --- 1,2A non include - not included	touch
<b>LEDBAR-60CM-C</b> 8031440359290	3000K	10W 12V	750 Lumen	120°	>10 000 on/off	h 25 000	AC/DC 10W INPUT: 230V ~ 50Hz OUTPUT: 12V --- 0,8A non include - not included	touch
<b>LEDBAR-100CM-C</b> 8031440359313	3000K	15W 12V	1200Lumen	120°	>10 000 on/off	h 25 000	AC/DC 15W INPUT: 230V ~ 50Hz OUTPUT: 12V --- 1,2A non include - not included	touch

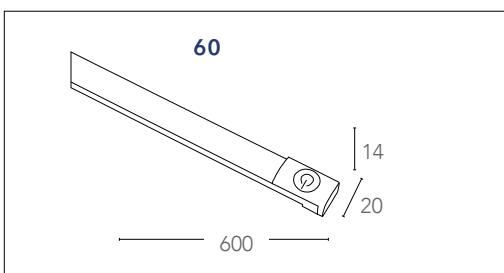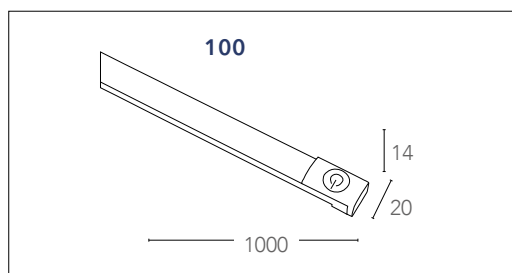

## MOVIE

Barra LED orientabile in PC con diffusore opale  
Adjustable cabinet PC LED bar white color opal diffuser



cavo 1,5 mt. incluso 1mt.  
1,5 mt cable included

informazioni tecniche - *technical information*

**LEDBAR-MOVIE**  
8031440355100

4000K

10W


680 Lumen

135°


>10 000 on/off

h 25 000

230V  
DRIVER FREE

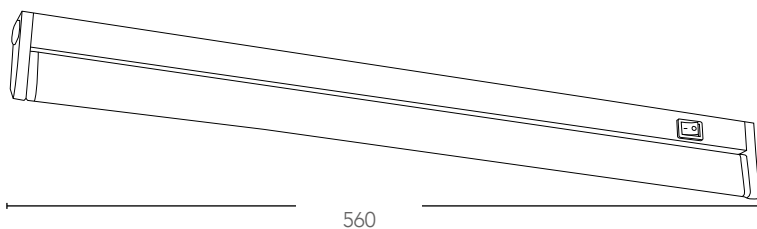

### MULTI-CONNECT



CLASSE  
**A**



SMD



Ra  
>80



CE



RoHS  
WEEE COMPLIANT

## SONAR

Barra sotto pensile orientabile a LED in alluminio con sensore alimentata a batterie  
*Cabinet ledbar adjustable in aluminium with sensor battery powered*

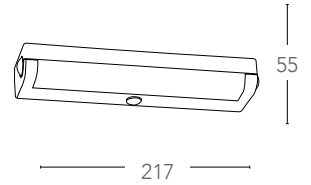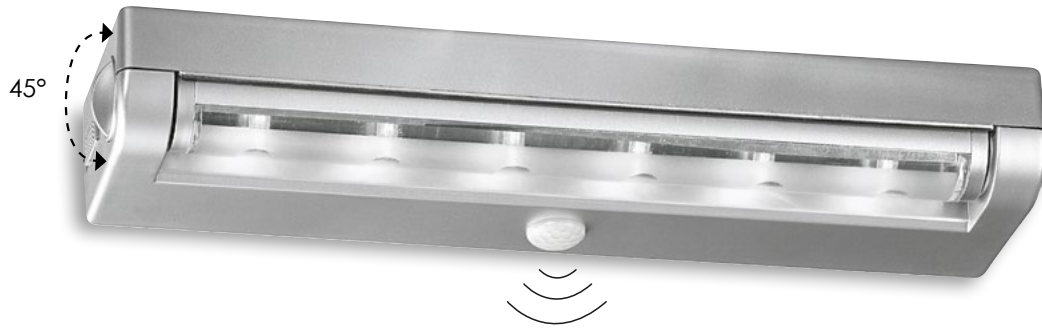

informazioni tecniche - *technical information*

LED-SONAR-AP  
8031440021272

4500K

6X0,075W

35 Lumen

45°



90°

>10 000 on/off

h 25 000

3x1,5V  
AAA


10LUX

15sec.- 45sec.

3m

## ODIC

Barra sotto pensile a LED in alluminio con sensore alimentata a batterie  
*Cabinet ledbar in aluminium with sensor battery powered*

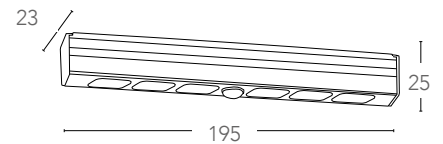

informazioni tecniche - *technical information*

LED-ODIC-3W  
8031440041270

4500K

6X0,16W

60 Lumen

120°



90°

>10 000 on/off

h 25 000

3x1,5V  
AAA

10LUX

15sec.- 45sec.

3m

CLASSE  
A



SMD



Ra  
>80

CE























# VISTA

Lampada a LED con sensore alimentata a batterie  
*LED lamp with sensor battery powered*



## informazioni tecniche - technical information

	<b>LED-VISTA-M-AP</b> 8031440031271		3X0,075W	 18 Lumen	 68° 88°	 >10 000 on/off	 h 25 000	 3x1,5V AAA	non include - not included	
	<b>LED-VISTA-AP</b> 8031439991272		3X0,075W	 20 Lumen	 68°	 >10 000 on/off	 h 25 000	 3x1,5V AAA	non include - not included	 90°  10LUX  15sec.- 45sec.  3m

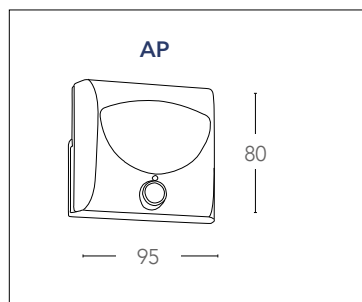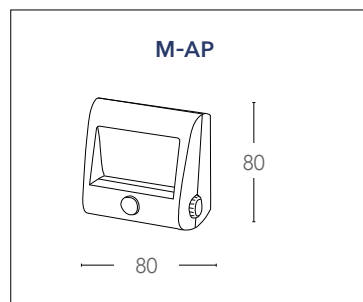

 CLASSE A		 SMD		 Ra >80	 CE	 EMC	 RoHS WEEE COMPLIANT
--	---	--	---	--	--	---	--



## ESTERNI

Le nostre collezioni offrono una vasta gamma di prodotti dal design moderno o decorativo , resistenti agli agenti atmosferici per illuminare e creare il migliore ambiente per pareti , balconi , giardini . Costruiti in alluminio o in composito plastico , a tecnologia a Led o tradizionale.

## OUTDOOR

*Our collections offer a wide range of products with modern or decorative design , weather-resistant to illuminate and create the best environment for walls, balconies, gardens.  
built in aluminum or plastic composite, with LED or traditional technology.*

# EROS

Collezione in alluminio a LED integrato finitura silver  
 Aluminium collection LED lamp silver finish



## informazioni tecniche - technical information

LED-EROS-AP  
 8031434061215



7W

630Lumen

120°



>10 000 on/off

h 25 000

driver incluso

LED-EROS-P1  
 8031434071214



7W

630Lumen



120°



>10 000 on/off

h 25 000

driver incluso

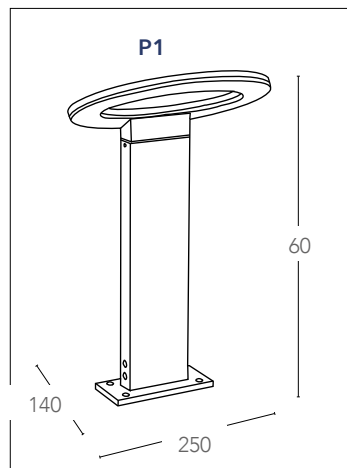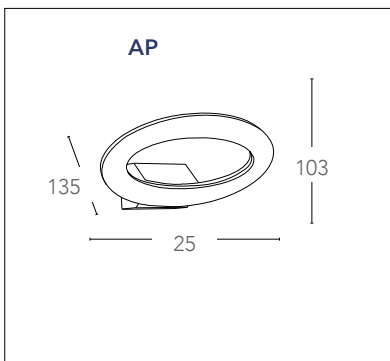

CLASSE  
**A**



SMD



Ra  
 >80

CE



# NISMO

Collezione in alluminio a LED integrato finitura bianco gofrato  
*Aluminium collection LED lamp white embossed finish*



## informazioni tecniche - technical information

**LED-NISMO-AP**  
8031440361224



**12W**

1100 Lumen

120°



>10 000 on/off

h 25 000

**230V**  
DRIVER FREE

**LED-NISMO-P60**  
8031440361231



**12W**

1100 Lumen



120°



>10 000 on/off

h 25 000


**230V**  
DRIVER FREE

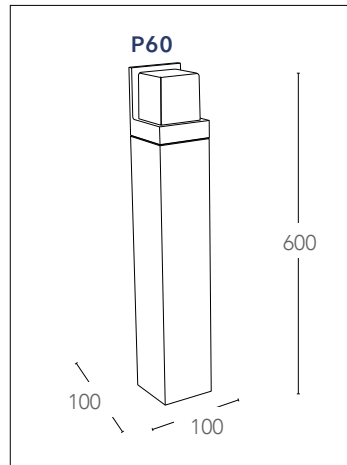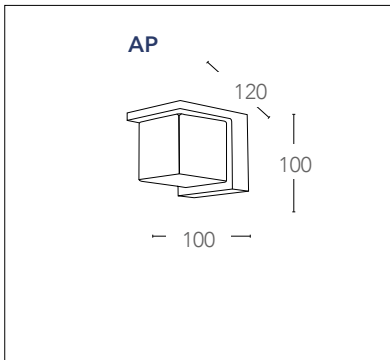

CLASSE <b>A+</b>		<b>SMD</b> 		<b>Ra &gt;80</b>	<b>CE</b>		<b>RoHS</b> WEEE COMPLIANT
------------------	--	----------------	--	------------------	-----------	--	-------------------------------

## BETA

Collezione in alluminio a LED integrato finitura silver  
Built-in LED aluminium collection silver finish



### informazioni tecniche - technical information

LED-BETA-AP2  
8031434021219



4X3W



1000 Lumen



120°




>10 000 on/off



h 25 000



driver incluso

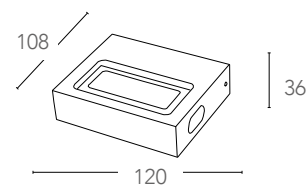

### informazioni tecniche - technical information

LED-BETA-AP1  
8031434051216



3W



250 Lumen



120°



>10 000 on/off



h 25 000



driver incluso

# BETA

Collezione in alluminio a LED integrato finitura silver  
Built-in LED aluminium collection silver finish







informazioni tecniche - technical information

LED-BETA-P1  
8031434031218



2X3W

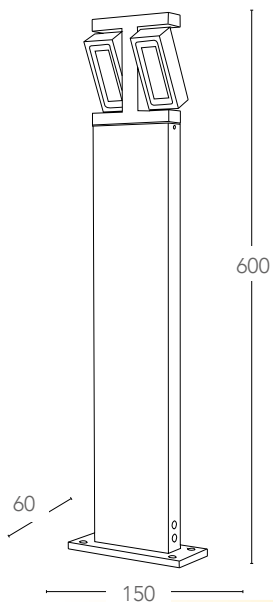

## SINTESI

Lampada in alluminio a LED integrato finitura bianco goffrato  
 Built in aluminium LED lamp white embossed finish



### informazioni tecniche - technical information

LED-SINTESI-AP BCO  
 8031414862207



6W

390 Lumen



>10 000 on/off

h 25 000

driver incluso

LED-SINTESI-AP NERO  
 8031414862221



6W

390 Lumen



>10 000 on/off

h 25 000

driver incluso

LED-SINTESI-P BCO  
 8031414862245



6W

390 Lumen



>10 000 on/off

h 25 000

driver incluso

LED-SINTESI-P NERO  
 8031414862252



6W




390 Lumen



>10 000 on/off

h 25 000

driver incluso

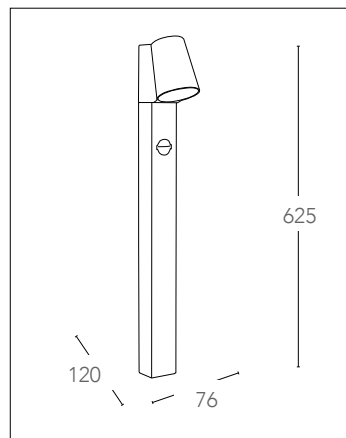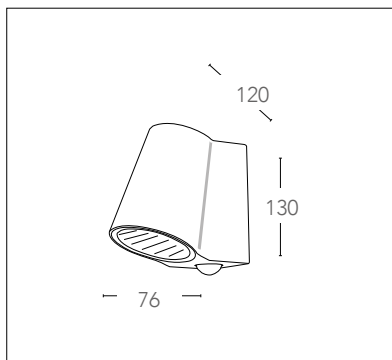

# ZEPHYR

Appliche a LED in metallo e diffusore in acrilico  
Aluminium LED wall lamp and acrylic diffuser



## informazioni tecniche - technical information

LED-W-ZEPHYR-1  
8031414864973

4000K

4W

350Lumen

120°

IP44

>10 000 on/off

h 25 000

230V  
DRIVER FREE

LED-W-ZEPHYR-2  
8031414864942

4000K

2X4W

700 Lumen



120°

IP44

>10 000 on/off

h 25 000

230V  
DRIVER FREE

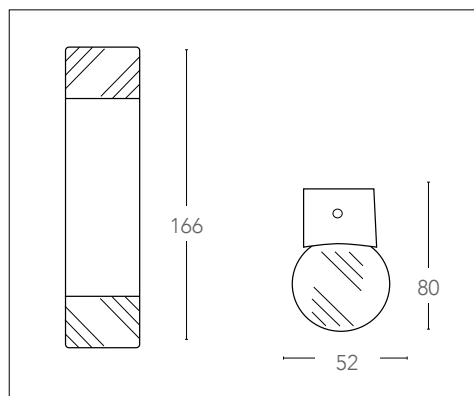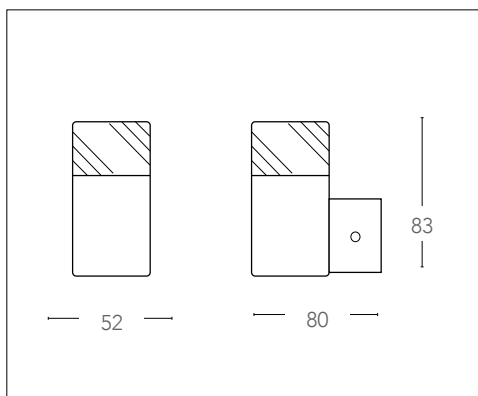

## MIURA

Applique a LED dimmerabile in alluminio bianco gofrato con diffusore di luce superiore ed inferiore  
Dimmable aluminium LED wall lamp with up and down diffuser



### informazioni tecniche - technical information

LED-W-MIURA/6W  
8031440351447



2X3W

520 Lumen

110°  
110°




>10 000 on/off



h 25 000



driver incluso

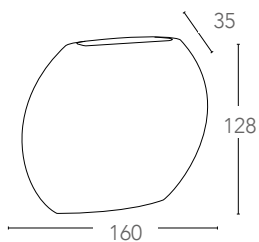

CLASSE  
**A**



SMD



Ra  
>80

CE



RoHS  
WEEE COMPLIANT

## MERCURY

Appliche a LED in alluminio bianco goffrato  
Aluminium LED wall lamp



### informazioni tecniche - technical information

LED-W-MERCURY/5W  
8031434091212



6W



630 Lumen




>10 000 on/off



h 25 000



driver incluso

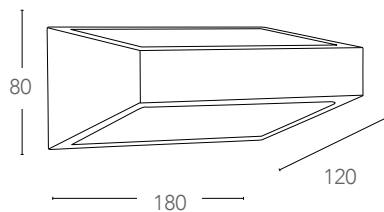

CLASSE  
**A**



SMD  
SMD



Ra  
>80

CE



RoHS  
WEEE COMPLIANT

# GAMMA

Applique a LED in alluminio con diffusore di luce superiore e inferiore  
Aluminium LED wall lamp with up and down light diffuser



## informazioni tecniche - technical information

LED-W-GAMMA/10W  
8031434041217



2X5W

1080 Lumen

120°  
120°





>10 000 on/off



h 25 000





driver incluso

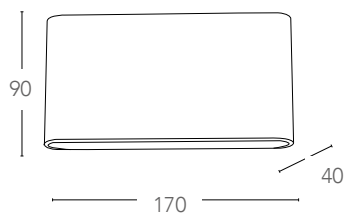

# VEYRON

Applicazione LED in alluminio  
Aluminium LED wall lamp

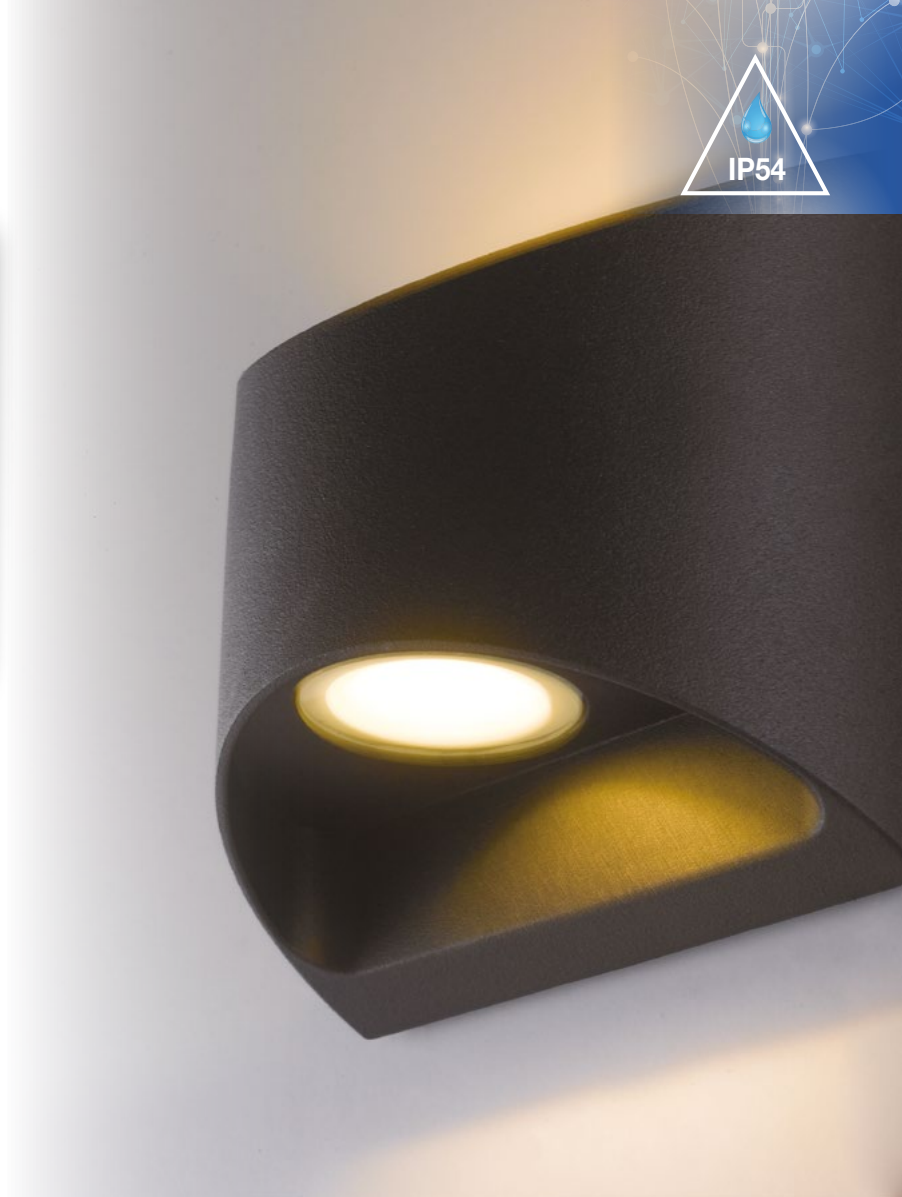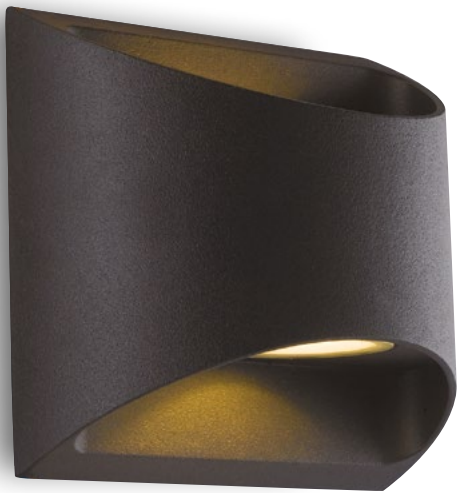

## informazioni tecniche - technical information



NERO

**LED-W-VEYRON NERO**  
8031440361095

4000K

2X7W

680 Lumen

120°

120°



>15 000 on/off

h 25 000

driver incluso



BCO

**LED-W-VEYRON BCO**  
8031440361163

4000K

2X7W

680 Lumen

120°


120°



>15 000 on/off

h 25 000

driver incluso




CLASSE <b>A</b>		<b>COB</b>		<b>Ra</b> >80	<b>CE</b>		<b>RoHS</b> WEEE COMPLIANT
--------------------	--	------------	--	------------------	-----------	--	-------------------------------

# BIOME

Applicare a LED in alluminio  
Aluminium LED wall lamp



## informazioni tecniche - technical information



**LED-W-BIOME NERO**  
8031440361132

4000K

2X7W

☀️ 630 Lumen

120°  
120°



⏻ >15 000 on/off

🕒 h 25 000

🔌 driver incluso



**LED-W-BIOME BCO**  
8031440361125

4000K

2X7W

☀️ 630 Lumen


120°  
120°



⏻ >15 000 on/off

🕒 h 25 000

🔌 driver incluso



CLASSE  
**A**



**COB**



**Ra**  
>80

**CE**



# GOLF

Applique a LED in alluminio  
Aluminium LED wall lamp



## informazioni tecniche - technical information



NERO



BCO

**LED-W-GOLF NERO**  
80314403610118

4000K

2X7W

☀️ 630 Lumen

120°  
120°



⏻ >15 000 on/off

🕒 h 25 000

🔌 driver incluso

**LED-W-GOLF BCO**  
8031440361101

4000K

2X7W

☀️ 630 Lumen


120°  
120°



⏻ >15 000 on/off

🕒 h 25 000

🔌 driver incluso



110X110

CLASSE  
**A**



**COB**




**Ra**  
>80

**CE**



# AGERA

Applique a LED in alluminio  
Aluminium LED wall lamp

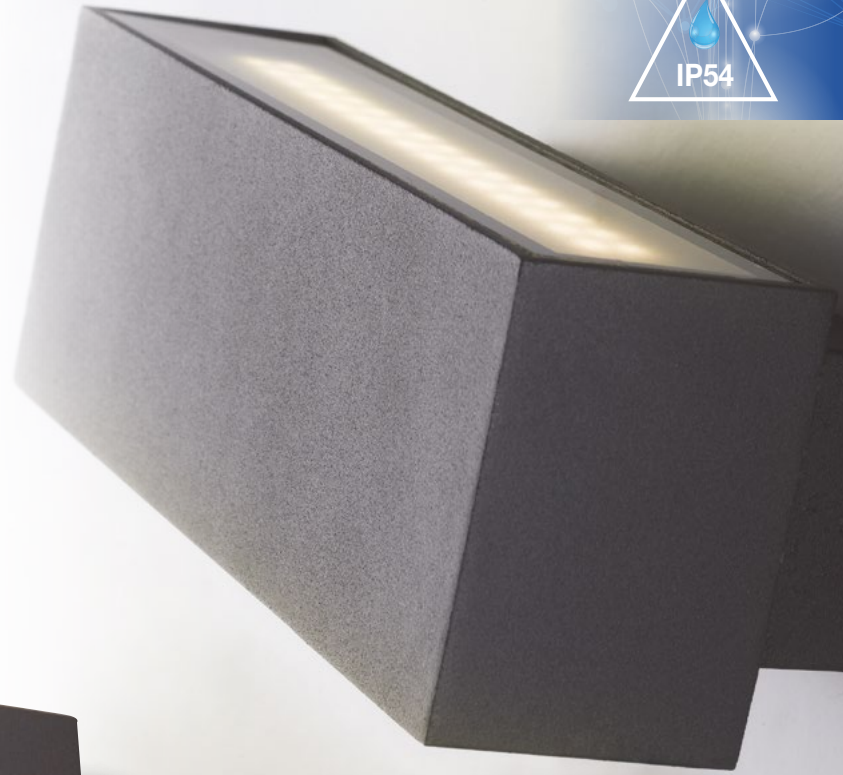

## informazioni tecniche - technical information

LED-W-AGERA-90  
8031440360951

4000K

2X3W

☀️ 340 Lumen

120°  
120°



>10 000 on/off



h 25 000



driver incluso

LED-W-AGERA-180  
8031440360975

4000K

2X8W

☀️ 550 Lumen

120°  
120°





>10 000 on/off



h 25 000



driver incluso

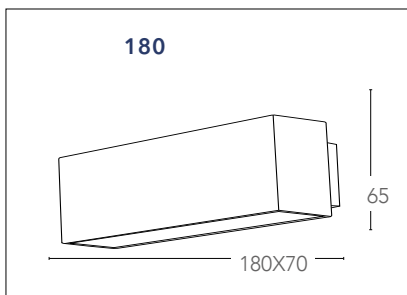

CLASSE  
**A**



SMD



Ra  
>80

CE



RoHS  
WEEE COMPLIANT



# DEZIR

Applique a LED in alluminio  
Aluminium LED wall lamp



## informazioni tecniche - technical information

LED-W-DEZIR  
8031440360999



2X6W


630 Lumen



>15 000 on/off

h 25 000

driver incluso



CLASSE  
**A**



**COB**




Ra  
>80

**CE**



# ZONDA

Applique a LED in alluminio  
Aluminium LED wall lamp

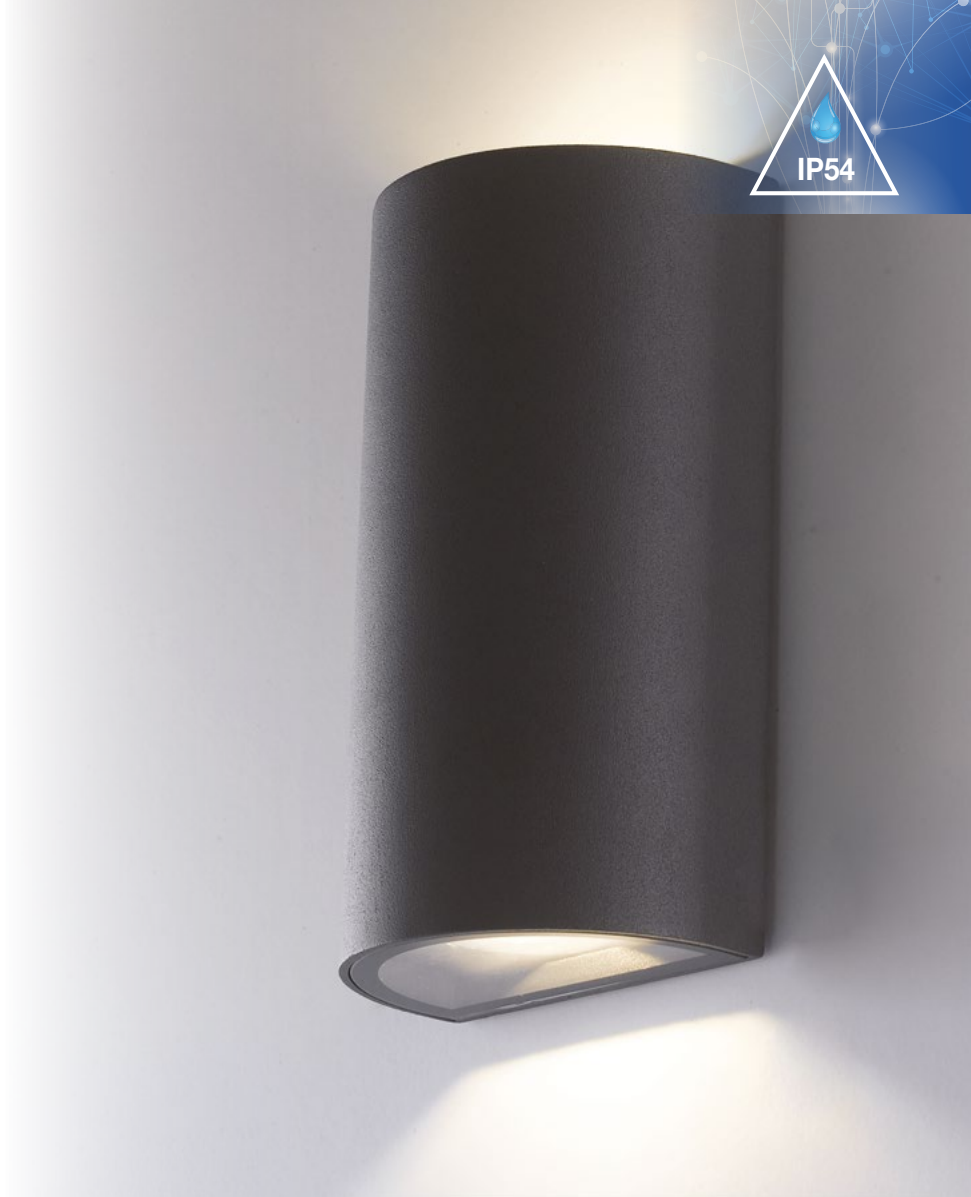


## informazioni tecniche - technical information


LED-W-ZONDA  
8031440360982




2X6W


 630 Lumen



 >15 000 on/off

 h 25 000

 driver incluso

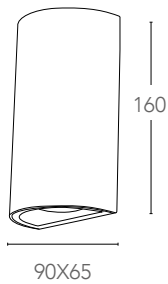

CLASSE  
**A**



COB




Ra  
>80

CE



# BOXTER

Applique a LED in alluminio  
Aluminium LED wall lamp

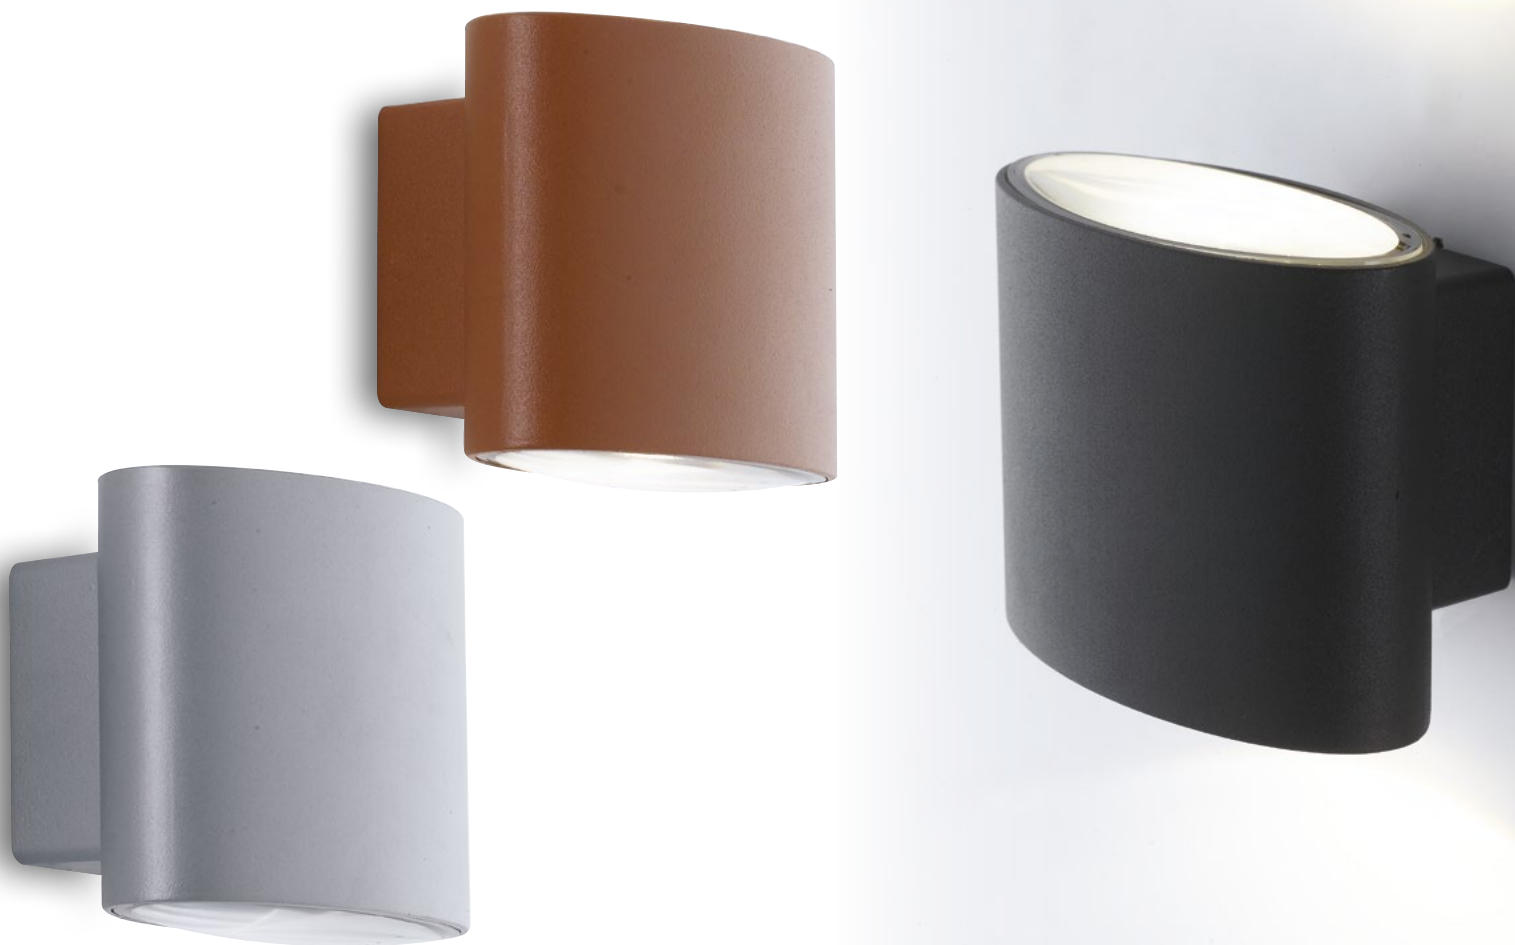

## informazioni tecniche - technical information

LED-W-BOXTER BRO  
8031414862405

LED-W-BOXTER NER  
8031414862382



2X4W



700 Lumen



>15 000 on/off





h 25 000



driver incluso

LED-W-BOXTER SIL  
8031414862399

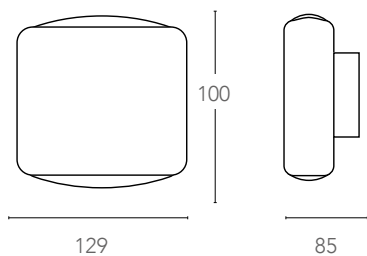

## DETROIT

Appliche a LED in alluminio diffusore in policarbonato  
Aluminium LED wall lamp shade in PC








### informazioni tecniche - technical information

LED-W-DETROIT-AP  
8031414862290



10W

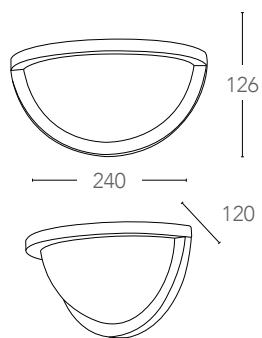

# ALFA

Appliche a LED in alluminio con diffusori di fascio di luce regolabili  
 Aluminium LED wall lamp with adjustable light flood diffusers



## informazioni tecniche - technical information






SILVER



BIANCO

<b>LED-W-ALFA/2W</b> 8031433981217	3000K	2X2W	360Lumen	10'/120 10'/120	IP54	>10 000 on/off	h 25 000	driver incl.
<b>LED-W-ALFA/6W</b> 8031439551261	3000K	2X3W	500 Lumen	10'/120 10'/120	IP54	>10 000 on/off	h 25 000	driver incl.
<b>LED-W-ALFA/2W BCO</b> 8031439541262	3000K	2X2W	360Lumen	10'/120 10'/120	IP54	>10 000 on/off	h 25 000	driver incl.
<b>LED-W-ALFA/6W BCO</b> 8031439651268	3000K	2X3W	500 Lumen	10'/120 10'/120	IP54	>10 000 on/off	h 25 000	driver incl.

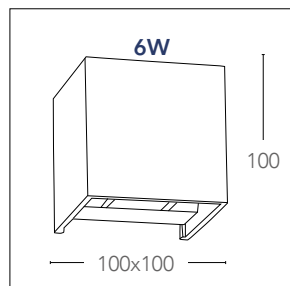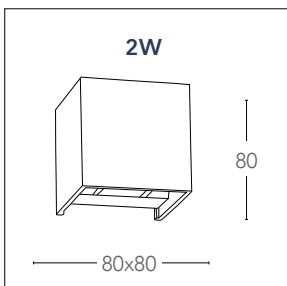

## DELTA

Appliche a LED in alluminio con diffusori di fascio di luce regolabili  
Aluminium LED wall lamp with adjustable light flood diffusers



### informazioni tecniche - technical information



SILVER



BIANCO

**LED-W-DELTA/6W**  
8031440341271



**2X3W**

500Lumen



>10 000 on/off

h 25 000

driver incl.

**LED-W-DELTA/6W BCO**  
8031440351270



**2X3W**



500 Lumen



>10 000 on/off

h 25 000

driver incl.

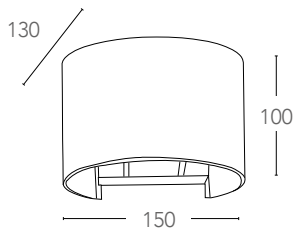

# GHIBLI

Applique a LED in alluminio con 4 fasci luminosi  
Aluminium LED lamp with 4 light flood



## informazioni tecniche - technical information



SILVER

BIANCO

**LED-W-GHIBLI/8W**  
8031440351430

3000K

4X2W

520 Lumen



>10 000 on/off

h 25 000

driver incluso

**LED-W-GHIBLI/8W BCO**  
8031440360593

3000K

4X2W


520 Lumen



>10 000 on/off

h 25 000

driver incluso

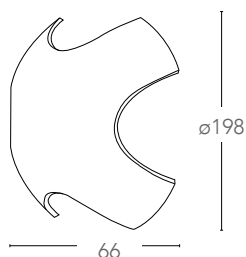

CLASSE <b>A</b>		<b>SMD</b> 		<b>Ra</b> <b>&gt;80</b>	<b>CE</b>		<b>RoHS</b> WEEE COMPLIANT
--------------------	--	----------------	--	----------------------------	-----------	--	-------------------------------







## ORBIT

Lantern in alluminio pressofuso colore nero diffusore in acrilico LED integrato  
Die cast aluminium lantern black finish with acrylic diffuser built-in LED



### informazioni tecniche - technical information

LANT-ORBIT/AP 8031414862658	4000K	12W	800 Lumen	IP44	>10 000 on/off	h 15 000	230V DRIVER FREE
LANT-ORBIT/S1 8031414862665	4000K	12W	800 Lumen	IP44	>10 000 on/off	h 15 000	230V DRIVER FREE
LANT-ORBIT/P1 8031414862689	4000K	12W	800 Lumen	IP44	>10 000 on/off	h 15 000	230V DRIVER FREE
LANT-ORBIT/P3 8031414862702	4000K	3X12W	2400 Lumen	IP44	>10 000 on/off	h 15 000	230V DRIVER FREE

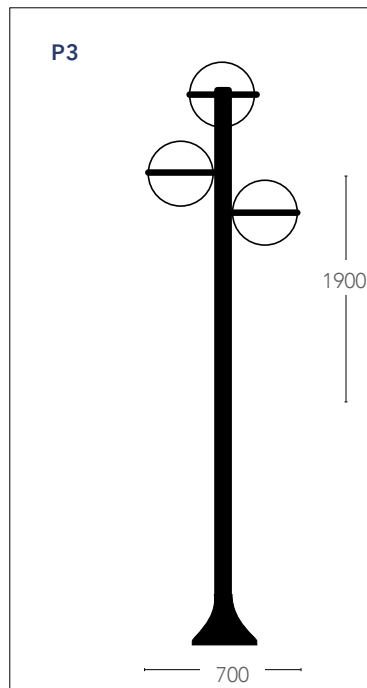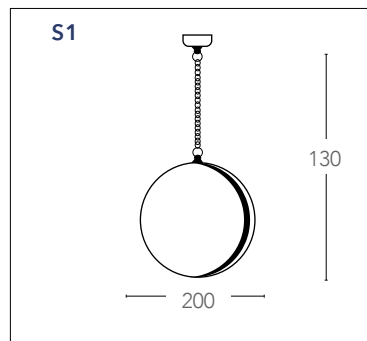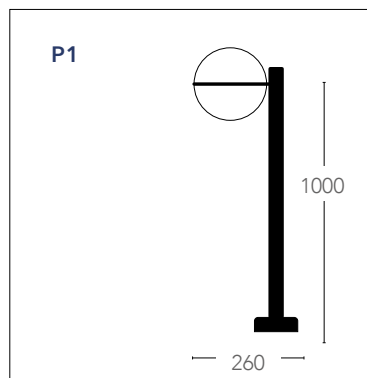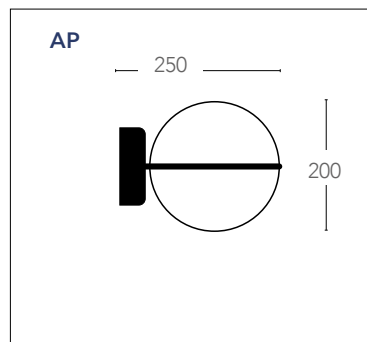

## LADY

Lantern in alluminio pressofuso colore nero gofrato diffusore in policarbonato LED integrato  
 Die cast aluminium lantern black embossed finish with PC diffuser built-in LED



### informazioni tecniche - technical information

LANT-LADY/AP1A  
8031440361316

4000K

12W 800 Lumen



>10 000 on/off

h 15 000

230V  
DRIVER FREE

LANT-LADY/AP1A-S  
8031440351323

4000K


12W 800 Lumen



>10 000 on/off

h 15 000

230V  
DRIVER FREE



LANT-LADY/AP1B  
8031440352130

4000K

12W 800 Lumen






>10 000 on/off

h 15 000

230V  
DRIVER FREE



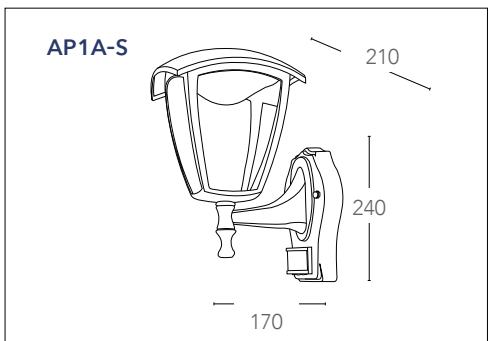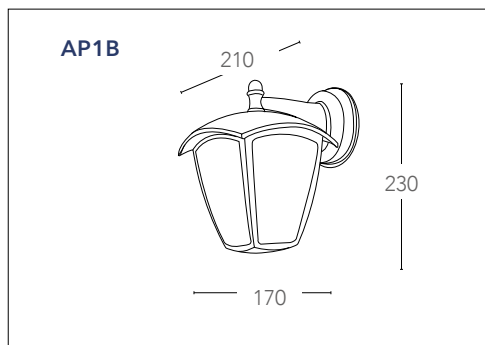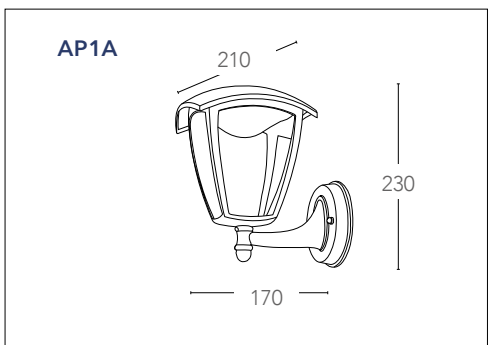

## LADY





Lantern in alluminio pressofuso colore nero gofrato diffusore in policarbonato LED integrato  
*Die cast aluminium lantern black embossed finish with PC diffuser built-in LED*





informazioni tecniche - technical information

LANT-LADY/L1 8031440361330	4000K	12W	800 Lumen	IP44	>10 000 on/off	h 15 000	230V DRIVER FREE
LANT-LADY/P1 8031440361347	4000K	12W	800 Lumen	IP44	>10 000 on/off	h 15 000	230V DRIVER FREE
LANT-LADY/S1 8031440352147	4000K	12W	800 Lumen	IP44	>10 000 on/off	h 15 000	230V DRIVER FREE
LANT-LADY/P3 8031440352116	4000K	3xGX53 9W include - included	3x680 Lumen	IP44	>10 000 on/off	h 25 000	

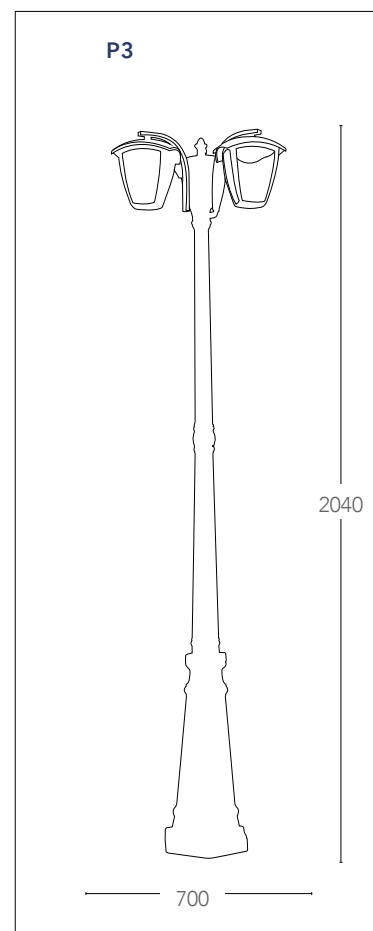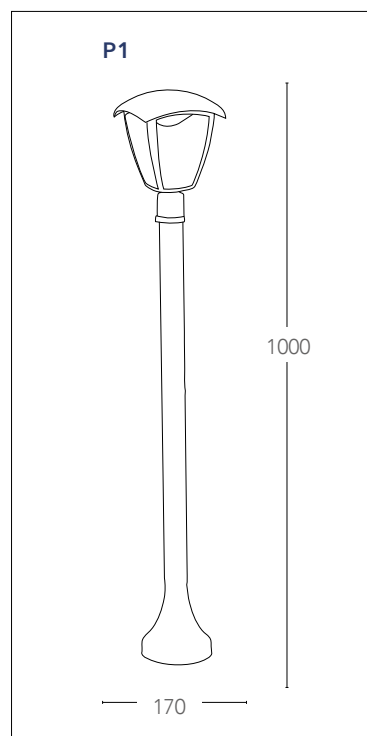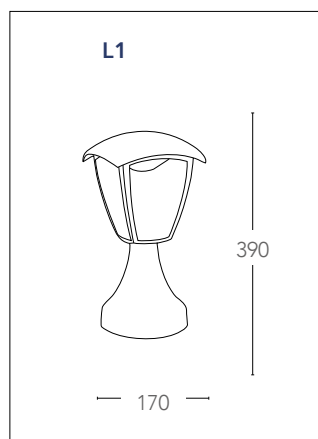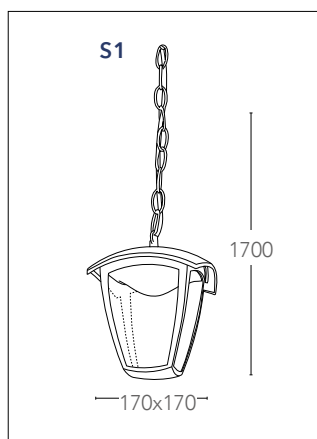






## CLOE

Lantern in alluminio pressofuso colore nero gofrato diffusore in policarbonato LED integrato  
Die cast aluminium lantern black embossed finish with PC diffuser built-in LED



### informazioni tecniche - technical information

LANT-CLOE/AP1A 8031440361385	4000K	12W	800 Lumen	IP44	>10 000 on/off	h 15 000	230V DRIVER FREE	
LANT-CLOE/AP1A-S 8031440361408	4000K	12W	800 Lumen	IP44	>10 000 on/off	h 15 000	230V DRIVER FREE	90° 10LUX 5sec.- 5 min. 1-8 m
LANT-CLOE/AP1B 8031440361392	4000K	12W	800 Lumen	IP44	>10 000 on/off	h 15 000	230V DRIVER FREE	
LANT-CLOE/S1 8031440361422	4000K	12W	800 Lumen	IP44	>10 000 on/off	h 15 000	230V DRIVER FREE	

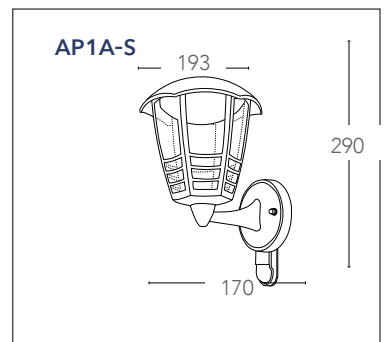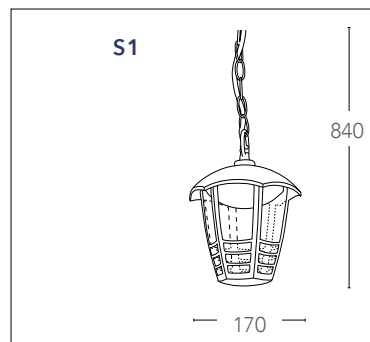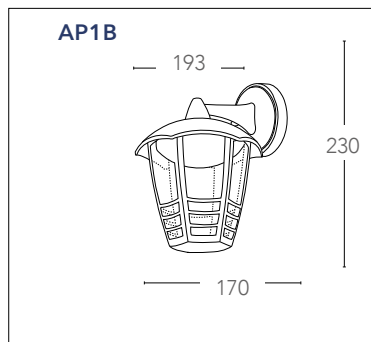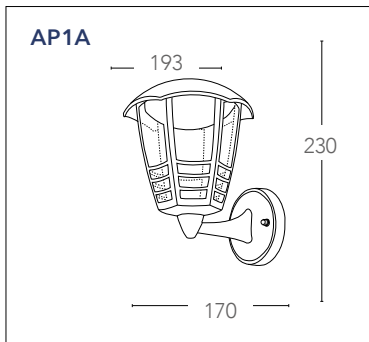

## CLOE




Lantern in alluminio pressofuso colore nero gofrato diffusore in policarbonato LED integrato  
*Die cast aluminium lantern black embossed finish with PC diffuser built-in LED*





informazioni tecniche - *technical information*

LANT-CLOE/L1 8031440361415	4000K	12W	800 Lumen	IP44	>10 000 on/off	h 15 000	230V DRIVER FREE
LANT-CLOE/P1 8031440361439	4000K	12W	800 Lumen	IP44	>10 000 on/off	h 15 000	230V DRIVER FREE
LANT-CLOE/P3 8031440361446	4000K	3X12W	2400 Lumen	IP44	>10 000 on/off	h 15 000	230V DRIVER FREE

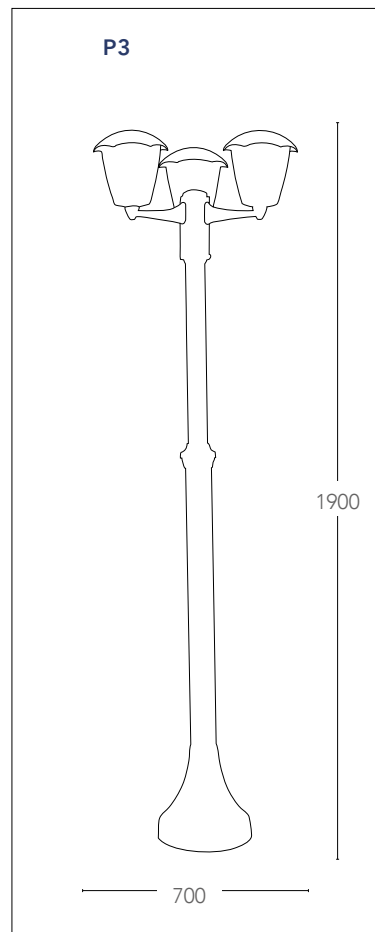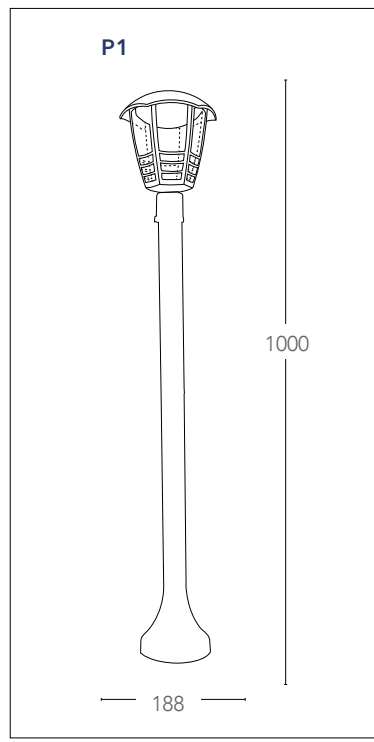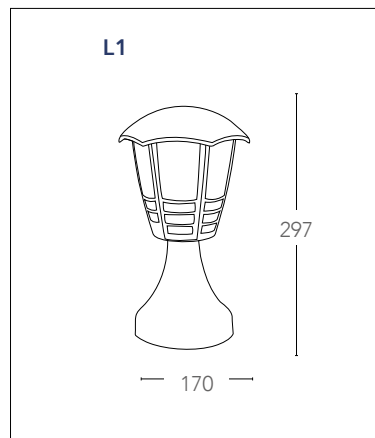

## MEGAN





Lantern in alluminio pressofuso colore nero gofrato diffusore in policarbonato LED integrato  
Die cast aluminium lantern black embossed finish with PC diffuser built-in LED

IP44



### informazioni tecniche - technical information

LANT-MEGAN/AP1A 8031440361453	4000K	12W	800 Lumen	IP44	>10 000 on/off	h 15 000	230V DRIVER FREE
LANT-MEGAN/AP1A-S 8031440361460	4000K	12W	800 Lumen	IP44	>10 000 on/off	h 15 000	230V DRIVER FREE 90° 10LUX 5sec.- 5 min. 1-8 m
LANT-MEGAN/AP1B 8031440361477	4000K	12W	800 Lumen	IP44	>10 000 on/off	h 15 000	230V DRIVER FREE
LANT-MEGAN/S1 8031440361507	4000K	12W	800 Lumen	IP44	>10 000 on/off	h 15 000	230V DRIVER FREE

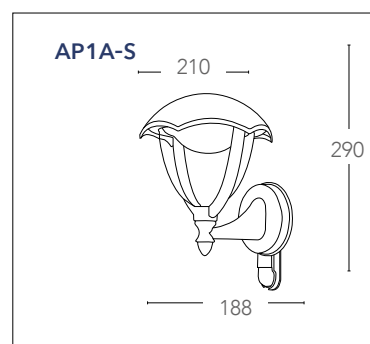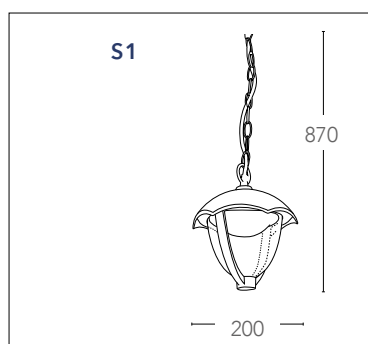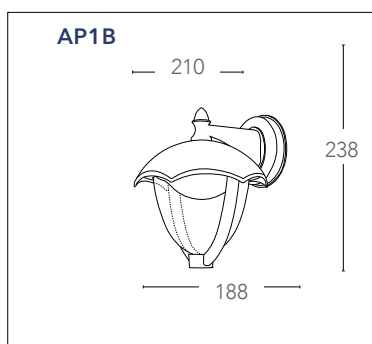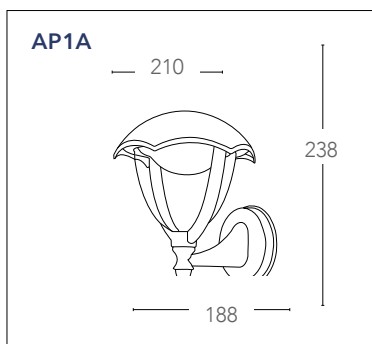

## MEGAN




Lantern in alluminio pressofuso colore nero gofrato diffusore in policarbonato LED integrato  
*Die cast aluminium lantern black embossed finish with PC diffuser built-in LED*





informazioni tecniche - technical information

LANT-MEGAN/L1 8031440361484	4000K	12W	800 Lumen	IP44	>10 000 on/off	h 15 000	230V DRIVER FREE
LANT-MEGAN/P1 8031440361491	4000K	12W	800 Lumen	IP44	>10 000 on/off	h 15 000	230V DRIVER FREE
LANT-MEGAN/P3 8031440361606	4000K	3X12W	2400 Lumen	IP44	>10 000 on/off	h 15 000	230V DRIVER FREE

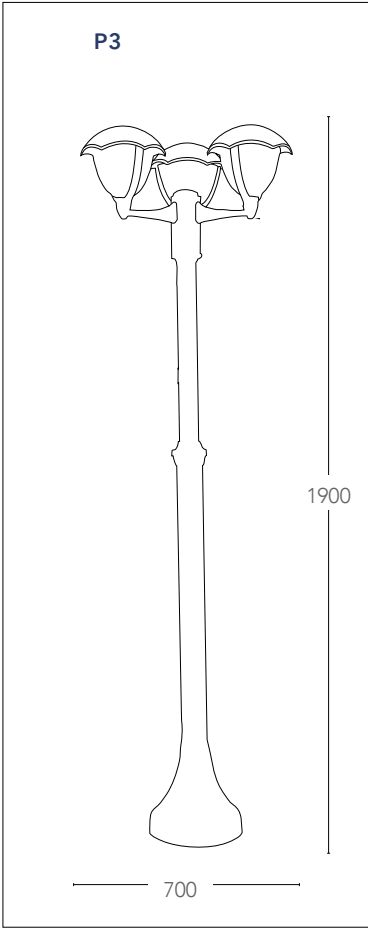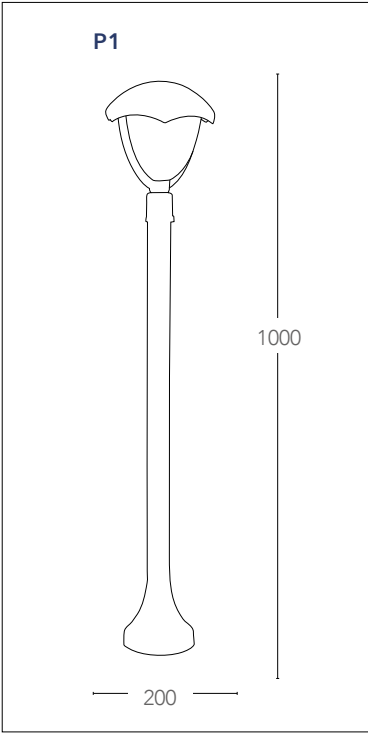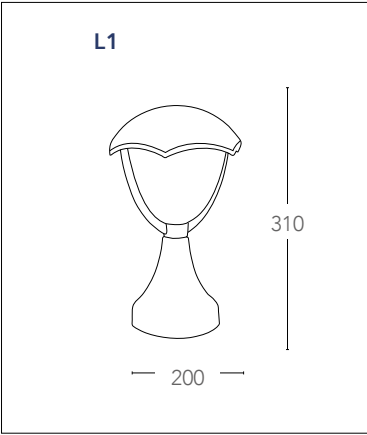

## ALYSON

Lantern in alluminio pressofuso colore nero o bianco goffrato diffusore in policarbonato LED integrato  
Die cast aluminium lantern black or white embossed finish with PC diffuser built-inLED



### informazioni tecniche - technical information

LANT-ALYSON/AP  
8031440361552

4000K

12W

800 Lumen

120°

>10 000 on/off

h 25 000

driver incluso

LANT-ALYSON/AP BCO  
8031440361514

LANT-ALYSON/P1  
8031440361569

4000K

12W

800 Lumen

120°

>10 000 on/off

h 25 000

driver incluso

LANT-ALYSON/P1 BCO  
8031440361538

CLASSE  
**A**



SMD





Ra  
>80

CE



RoHS  
WEEE COMPLIANT

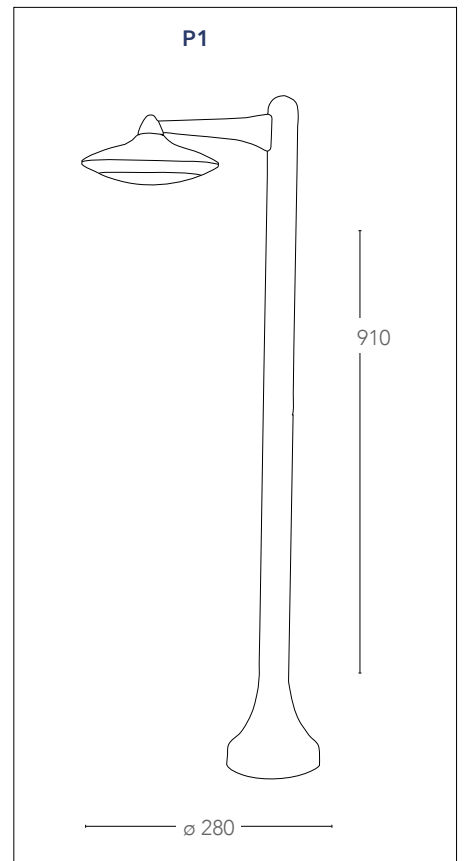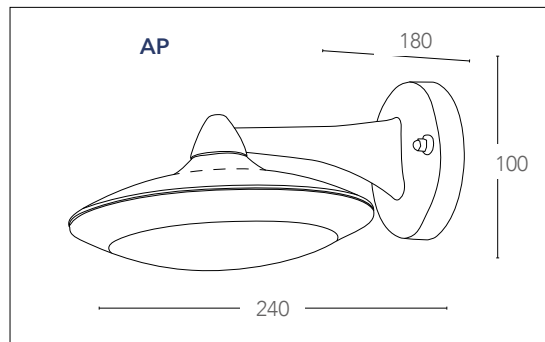

## MONDRIAN

Applique in metallo bronzo o silver con diffusore in vetro  
Metal wall lamp bronze or silver glass diffuser



informazioni tecniche - *technical information*


I-MONDRIAN-AP BRO  
8031414862313

1xE27 max 60w  
non include - *not included*



I-MONDRIAN-AP SIL  
8031414862306

1xE27 max 60w  
non include - *not included*

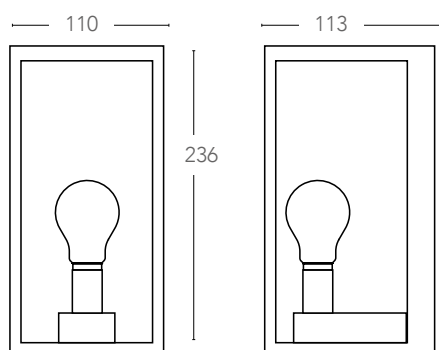

CE

RoHS  
WEEE COMPLIANT



## TUCSON

Applique in alluminio bronzo, bianco, nero o silver con diffusore in policarbonato  
Aluminium wall lamp bronze, white, black or silver PC diffuser



### informazioni tecniche - technical information

I-TUCSON-AP BCO  
8031414862160

2xE14 max 40W  
non include - not included




I-TUCSON-AP BRO  
8031414862191

2xE14 max 40W  
non include - not included



I-TUCSON-AP SIL  
8031414862184

2xE14 max 40W  
non include - not included

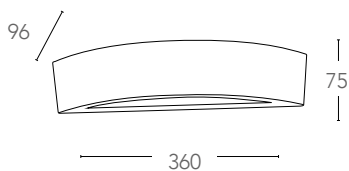

CE

RoHS  
WEEE COMPLIANT

# YORK

Applique in alluminio nero con diffusore in policarbonato  
Aluminium wall lamp black PC diffuser



## informazioni tecniche - technical information



LANT-YORK/AP  
8031414862757

1xE27 max 60w  
non include - not included



LANT-YORK/S1  
8031414862764

1xE27 max 60w  
non include - not included

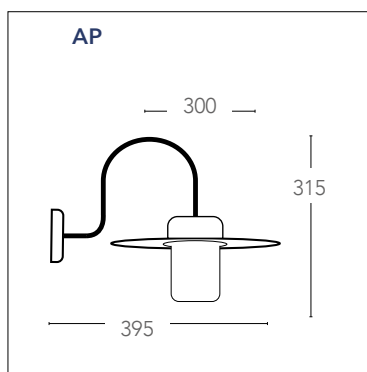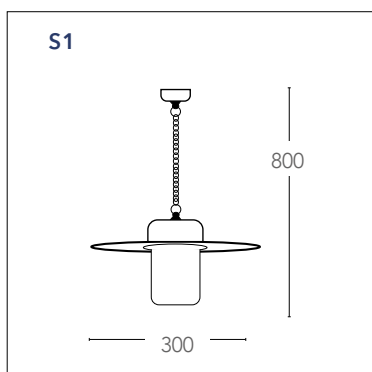



## JUMP

Applique in metallo bianco o acciaio  
Metal wall lamp white or steel finish




informazioni tecniche - *technical information*

I-JUMP-AP2 BCO  
8031414862351

I-JUMP-AP2 INOX  
8031414862368

2xGU10 max 35W  
non include - *not included*

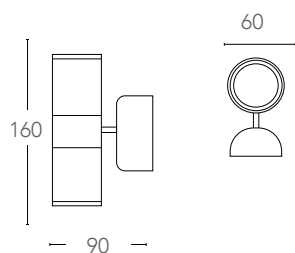

CE

RoHS  
WEEE COMPLIANT


# OSLO

Collezione in alluminio pressofuso finitura nero  
*Aluminium collection lamp black finish*




## informazioni tecniche - technical information



**I-OSLO-AP**  
8031440151276

 1xGX53  
non include - not included



**I-OSLO-P1**  
8031440131278

 1xGX53  
non include - not included

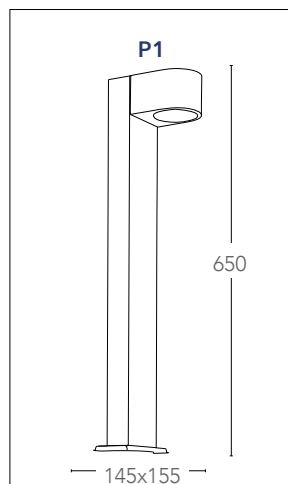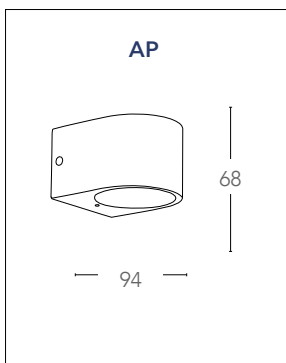


## BOSTON


Applique in alluminio con diffusore opale in policarbonato finitura antracite  
Aluminium wall lamp with PC opal diffuser anthracite finish



informazioni tecniche - technical information

I-BOSTON-AP  
8031440312240

 1xE27 max 42w  
non include - not included

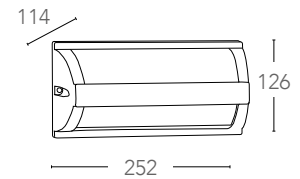


## HURACAN


Applique in alluminio pressofuso antracite goffrato  
Aluminium die-cast wall lamp embossed anthracite finish



informazioni tecniche - technical information

I-HURACAN-AP  
8031440361026

 1xGU10 max 42W  
non include - not included

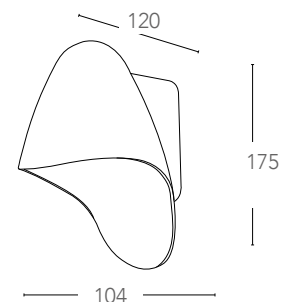

## ATLANTA

Applique in alluminio con diffusore opale in policarbonato finitura antracite  
Aluminium wall lamp with PC opal diffuser anthracite finish


IP54



informazioni tecniche - technical information

I-ATLANTA-AP  
8031440312257

1xE27 max 42w  
non include - not included

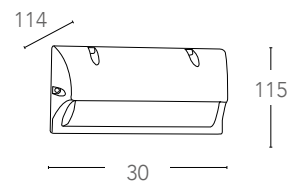

## DENVER

Applique in alluminio con diffusore opale in policarbonato finitura antracite  
Aluminium wall lamp with PC opal diffuser anthracite finish


IP54



informazioni tecniche - technical information

I-DENVER-AP  
8031440312264

1xE27 max 42w  
non include - not included

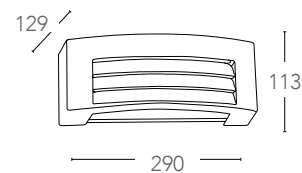


## MEMPHIS


Applique in alluminio con diffusore opale in policarbonato finitura antracite  
Aluminium wall lamp with PC opal diffuser anthracite finish



informazioni tecniche - technical information

I-MEMPHIS-AP  
8031440312226

 1xE27 max 42w  
non include - not included

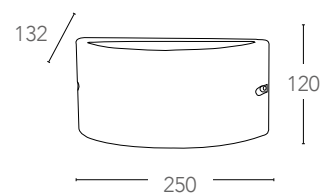


## ORLANDO


Applique in alluminio con diffusore opale in policarbonato finitura antracite  
Aluminium wall lamp with PC opal diffuser anthracite finish



informazioni tecniche - technical information

I-ORLANDO-AP  
8031440312271

 1xE27 max 42w  
non include - not included

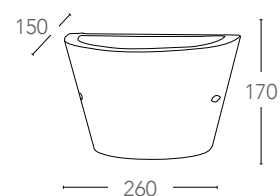

## SEATTLE


Appliche in alluminio con diffusore opale in policarbonato finitura antracite  
Aluminium wall lamp with PC opal diffuser anthracite finish



informazioni tecniche - technical information

I-SEATTLE-AP  
8031440312233

1xE27 max 42w  
non include - not included

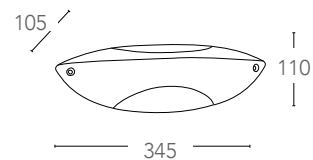

CE



## AUSTIN

Applique in alluminio bronzo, bianco, silver o nero con diffusore in policarbonato  
Aluminium wall lamp bronze, white, silver or black PC diffuser

IP54



### informazioni tecniche - technical information

I-AUSTIN-AP BCO  
8031440362122

1xE27 max 42w  
non include - not included



I-AUSTIN-AP BRO  
8031440362108

1xE27 max 42w  
non include - not included




I-AUSTIN-AP NER  
8031440362139

1xE27 max 42w  
non include - not included



I-AUSTIN-AP SIL  
8031414862429

1xE27 max 42w  
non include - not included

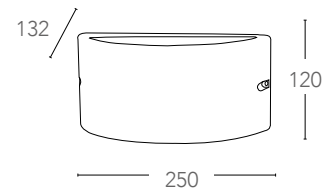

CE
















RoHS  
WEEE COMPLIANT


## TOKYO



Collezione in acciaio inox con diffusore in policarbonato. Finiture bianco, bronzo e nickel spazzolato.  
*Stainless steel collection with diffuser in PC. White, bronze or brush nickel finish.*



### informazioni tecniche - technical information

	<b>I-ST021</b> 8031421451081	 1xE27 max 60w non include - <i>not included</i>		
	<b>I-ST022-1100</b> 8031421661084	 1xE27 max 60w non include - <i>not included</i>		
	<b>I-TOKYO-AP BCO</b> 8031414864447	 1xE27 max 60w non include - <i>not included</i>		
	<b>I-TOKYO-P BCO</b> 8031414864416	 1xE27 max 60w non include - <i>not included</i>		
	<b>I-TOKYO-AP BRO</b> 8031414864423	 1xE27 max 60w non include - <i>not included</i>		
	<b>I-TOKYO-P BRO</b> 8031414864393	 1xE27 max 60w non include - <i>not included</i>		

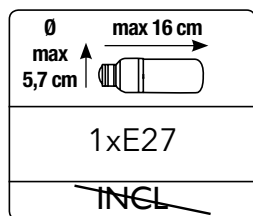

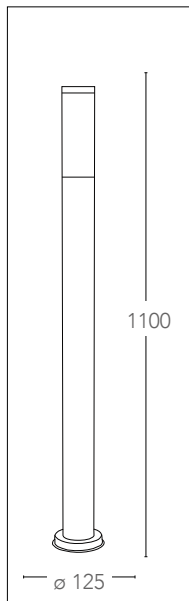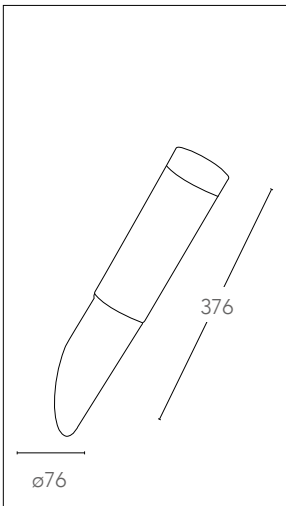

## ROMA

Lanterne in alluminio pressofuso con diffusore in vetro  
 Diecast aluminium lantern with glass diffuser



### informazioni tecniche - technical information



**LANT-ROMA/AP1A**

8031430751172

1xE27 max 60w  
 non include - not included



**LANT-ROMA/AP1A BCO**

8031434661217



**LANT-ROMA/AP1B**

8031430761171

1xE27 max 60w  
 non include - not included



**LANT-ROMA/AP1B BCO**

8031434671216



**LANT-ROMA/S1**

8031430791178

1xE27 max 60w  
 non include - not included



**LANT-ROMA/S1 BCO**


8031434681215







**LANT-ROMA/AP1A-S**

8031435921235

1xE27 max 60w  
 non include - not included



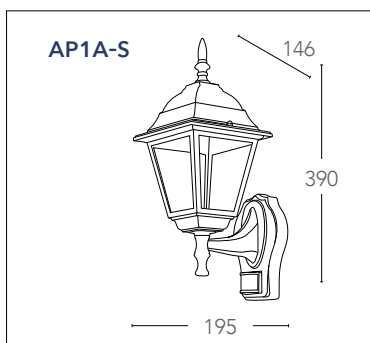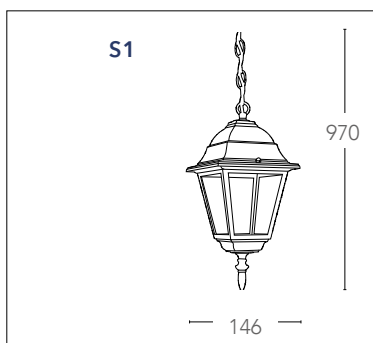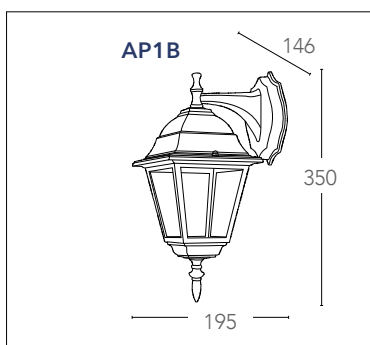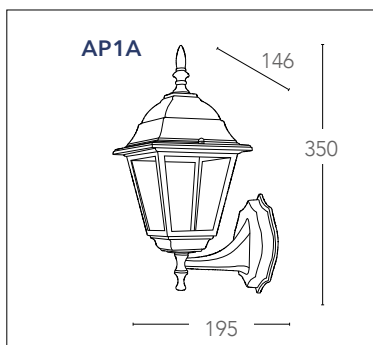

## ROMA

Lanterne in alluminio pressofuso con diffusore in vetro  
*Diecast aluminium lantern with glass diffuser*





**LANT-PALETTO**

8031414042203

1xE27 max 60w  
non include - *not included*



**LANT-ROMA/L1 BCO**

8031436951248

**LANT-ROMA/P1**

8031430771170

1xE27 max 60w  
non include - *not included*






**LANT-ROMA/P1 BCO**

8031436941249

**LANT-ROMA/P3**

8031430781179

3xE27 max 60w  
non include - *not included*

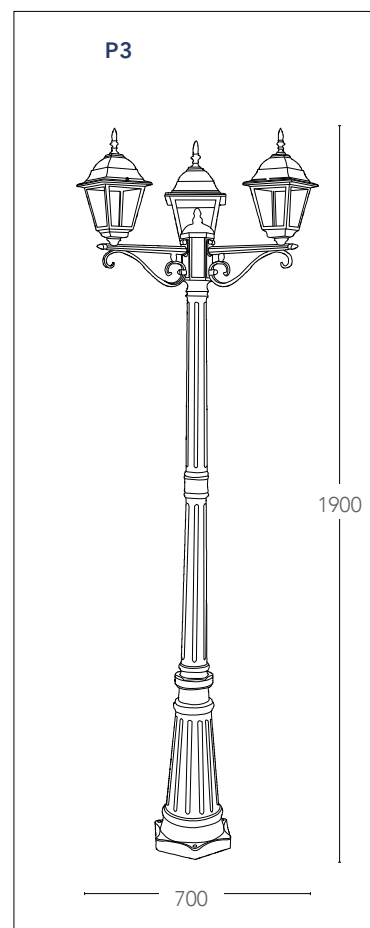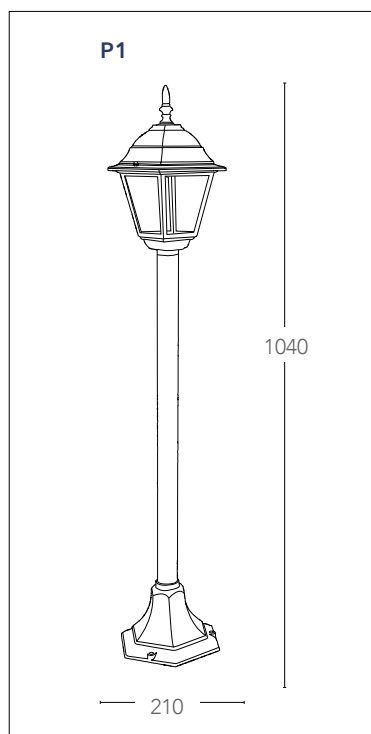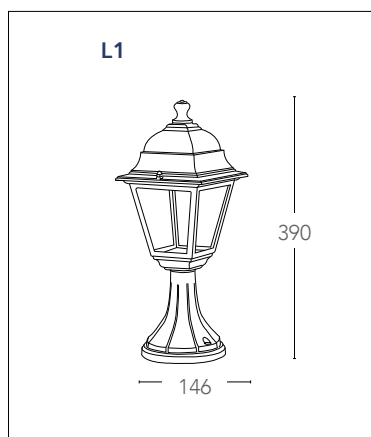

## MILANO


Lanterne in alluminio pressofuso con diffusore in vetro  
Diecast aluminium lantern with glass diffuser



### informazioni tecniche - technical information

#### LANT-MILANO/AP1A

8031436921241

 1xE27 max 60w  
non include - not included




#### LANT-MILANO/AP1A BCO

8031436931240

#### LANT-MILANO/AP1B

8031436901243

 1xE27 max 60w  
non include - not included




#### LANT-MILANO/AP1B BCO

8031436911242

#### LANT-MILANO/S1

8031436841235

 1xE27 max 60w  
non include - not included




#### LANT-MILANO/S1 BCO

8031436851234

#### LANT-MILANO/L1

8031436881248

 1xE27 max 60w  
non include - not included




#### LANT-MILANO/L1 BCO

8031436891247

#### LANT-MILANO/P1






8031436971246

 1xE27 max 60w  
non include - not included



#### LANT-MILANO/P1 BCO

8031436871232

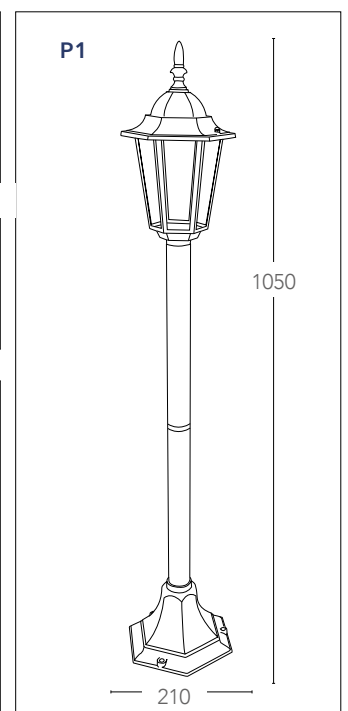


















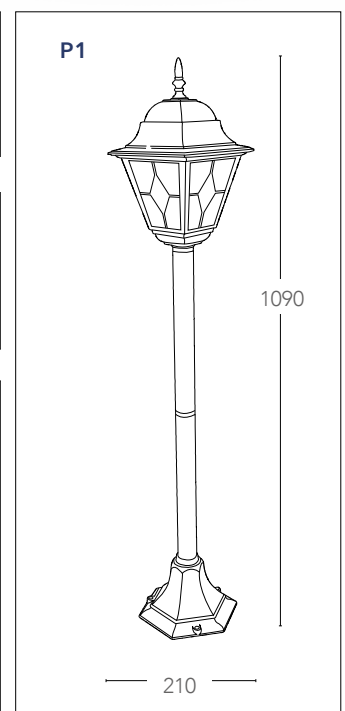


## PISA

Lanterne in alluminio pressofuso nero pennellato oro con diffusore in vetro cattedrale  
Diecast aluminium lantern black brush gold finish with glass diffuser



### informazioni tecniche - technical information

LANT-PISA/AP1A 8031435561226	 1xE27 max 60w non include - not included		
LANT-PISA/AP1B 8031435571225	 1xE27 max 60w non include - not included		
LANT-PISA/L1 8031435551227	 1xE27 max 60w non include - not included		
LANT-PISA/S1 8031435541228	 1xE27 max 60w non include - not included		
LANT-PISA/P1 8031435531229	 1xE27 max 60w non include - not included		














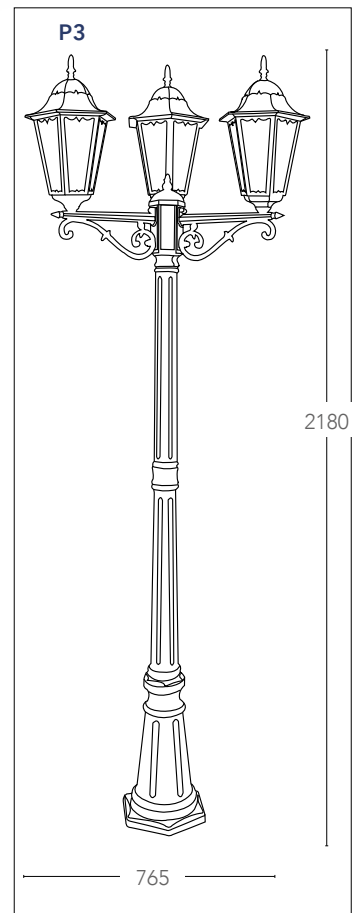

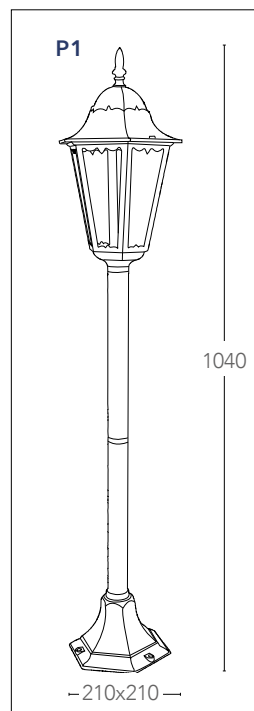


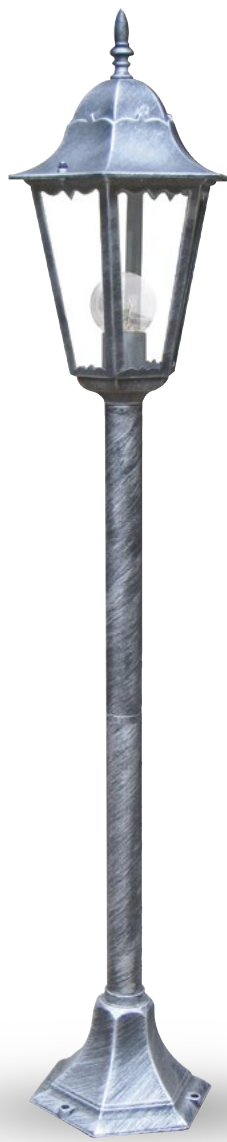
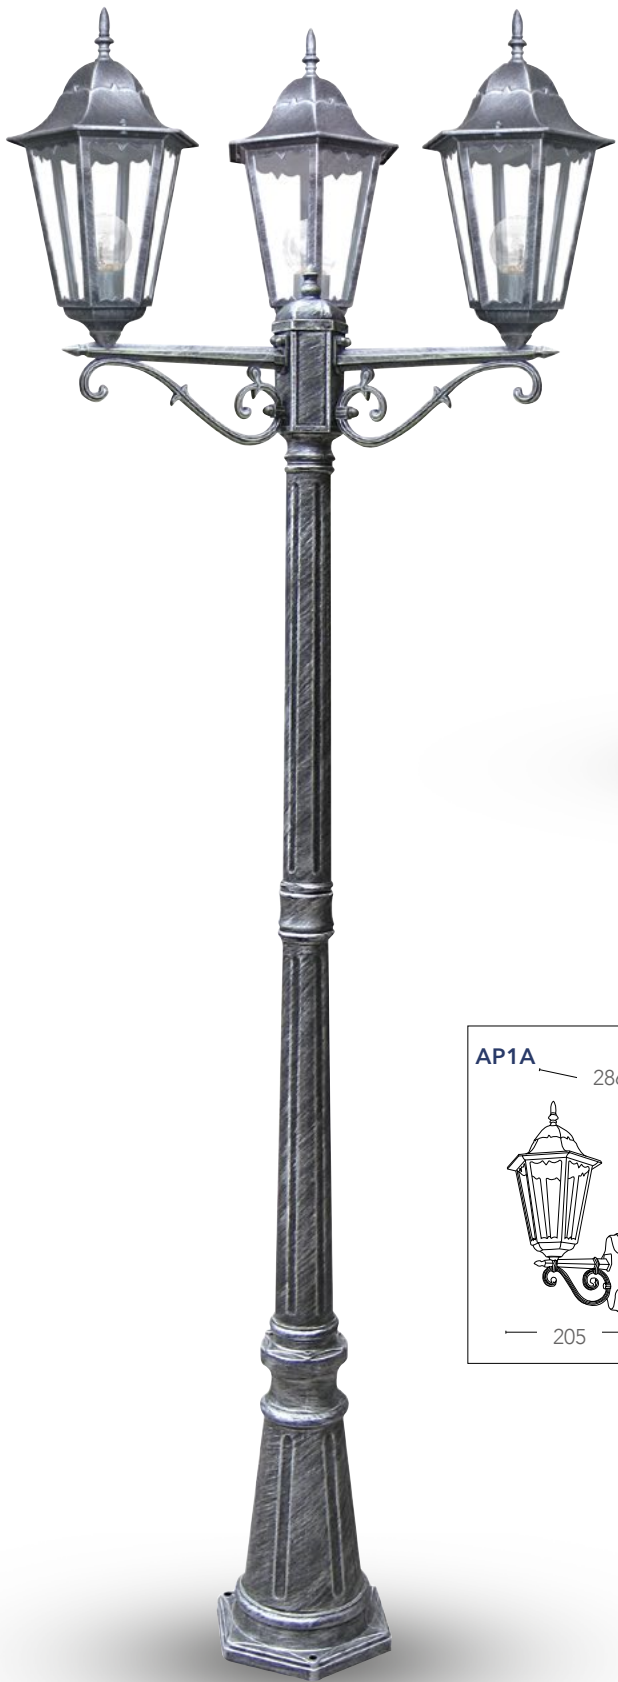
## FIRENZE

Lanterne in alluminio pressofuso nero pannelato argento con diffusore in vetro  
Diecast aluminium lantern black brush silver with glass diffuser



informazioni tecniche - technical information

LANT-FIRENZE/AP1A 8031430701177	 1xE27 max 60w non include - not included		
LANT-FIRENZE/AP1B 8031430711176	 1xE27 max 60w non include - not included		
LANT-FIRENZE/P1 8031430721175	 1xE27 max 60w non include - not included		
LANT-FIRENZE/S1 8031430741173	 1xE27 max 60w non include - not included		
LANT-FIRENZE/P3 8031430731174	 3xE27 max 60w non include - not included		






















## SANTIAGO

Lanterne in alluminio pressofuso nero pennellato verde con diffusore in vetro  
Diecast aluminium lantern black brush green with glass diffuser



informazioni tecniche - *technical information*

LANT-SANTIAGO/AP1A 8031430801174	 1xE27 max 60w non include - not included		
LANT-SANTIAGO/AP1B 8031430811173	 1xE27 max 60w non include - not included		
LANT-SANTIAGO/P1 8031430821172	 1xE27 max 60w non include - not included		
LANT-SANTIAGO/S1 8031430841170	 1xE27 max 60w non include - not included		
LANT-SANTIAGO/P3 8031430831171	 3xE27 max 60w non include - not included		

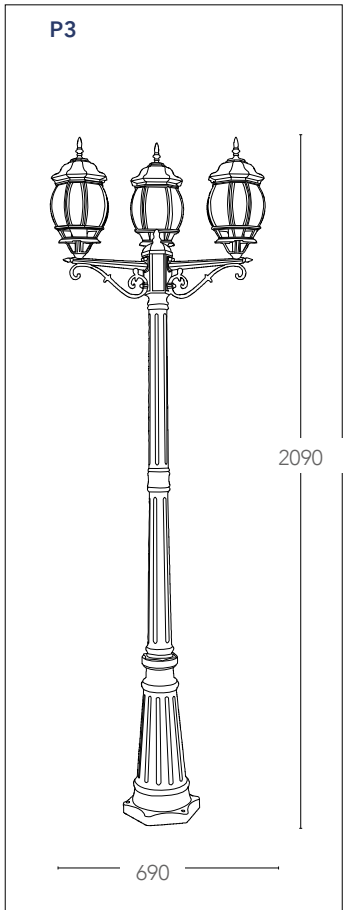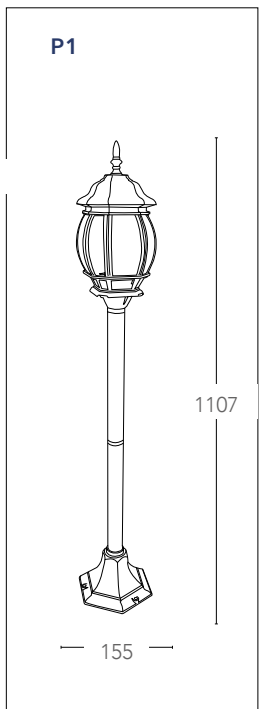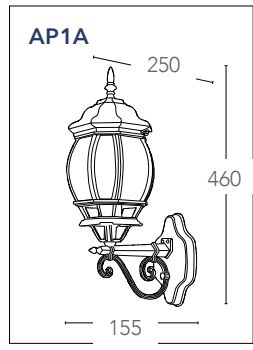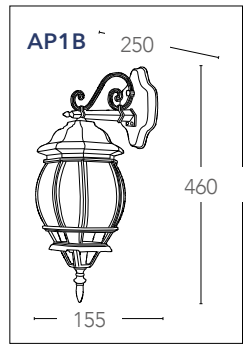

























## VENEZIA

Lanterne in alluminio pressofuso con diffusore in policarbonato  
Diecast aluminium lantern with PC diffuser



### informazioni tecniche - technical information

LANT-VENEZIA-AP1B 8031440311991	 1xE27 max 60w non include - not included		
LANT-VENEZIA-AP1A 8031440312004	 1xE27 max 60w non include - not included		
LANT-VENEZIA-L1 8031440311984	 1xE27 max 60w non include - not included		
LANT-VENEZIA-S1 8031440313285	 1xE27 max 60w non include - not included		
LANT-VENEZIA-P1 8031440313308	 1xE27 max 60w non include - not included		
LANT-VENEZIA-P3 8031440313292	 3xE27 max 60w non include - not included		

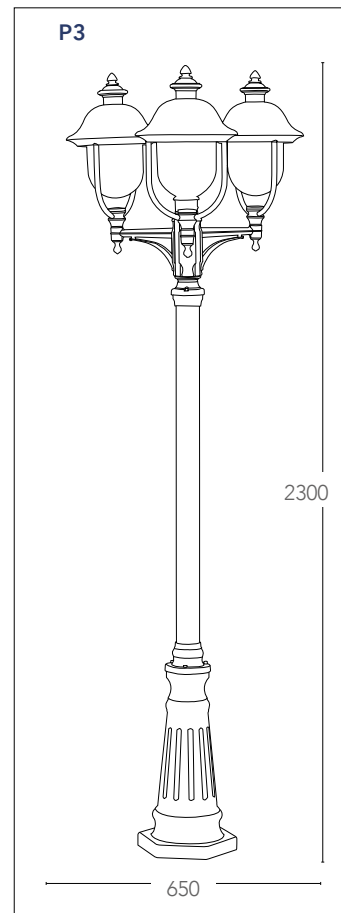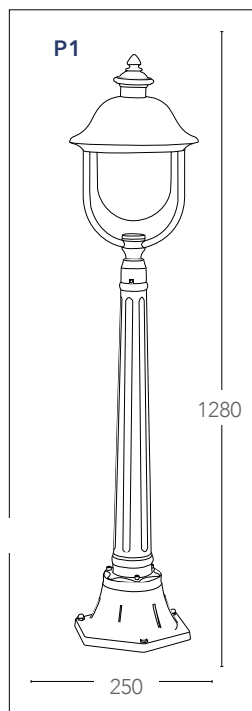

















## PAVIA

Lantern in alluminio pressofuso con diffusore in policarbonato  
Diecast aluminium lantern with PC diffuser



### informazioni tecniche - technical information

LANT-PAVIA-AP1 8031440312028	 1xE27 max 60w non include - not included		
LANT-PAVIA-S1 8031440312042	 1xE27 max 60w non include - not included		
LANT-PAVIA-P1 8031440312035	 1xE27 max 60w non include - not included		
LANT-PAVIA-P3 8031440312011	 3xE27 max 60w non include - not included		

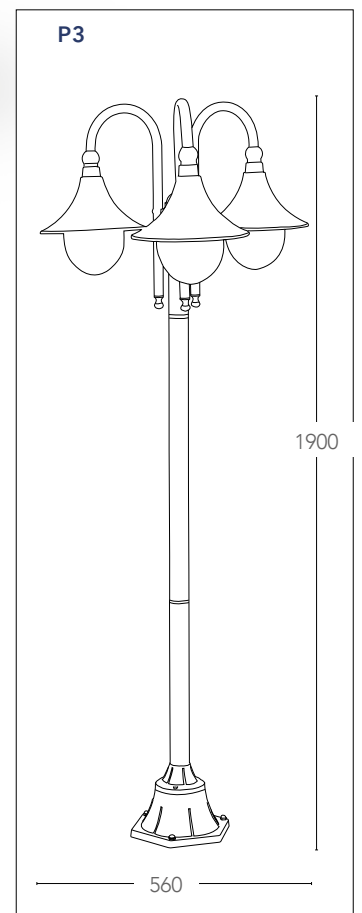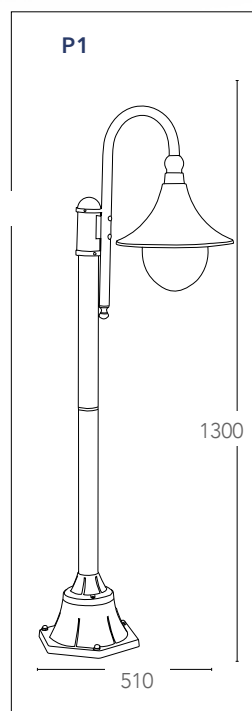

## GAETA


Lanterne in alluminio finitura nero-oro pressofuso con diffusore in vetro  
Diecast aluminium black-gold finish lantern with glass


IP23



informazioni tecniche - *technical information*

LANT-GAETA-AP1  
8031440313278

 1xE27 max 60w  
non include - not included



CE

















## BABILON





Lampada da giardino diffusore in materiale polivinilico finitura moka e sfera opale in PMMA  
Garden lamp with shade in polyvinil moka finish and sphere opal in PMMA



### informazioni tecniche - technical information

I-BABILON-S 8031440356329	 1xE27 max 25w non include - <i>not included</i>		
I-BABILON-L 8031440356305	 1xE27 max 25w non include - <i>not included</i>		
I-BABILON-AP 8031440356336	 1xE27 max 25w non include - <i>not included</i>		
I-BABILON-PT 8031440356312	 1xE27 max 25w non include - <i>not included</i>		



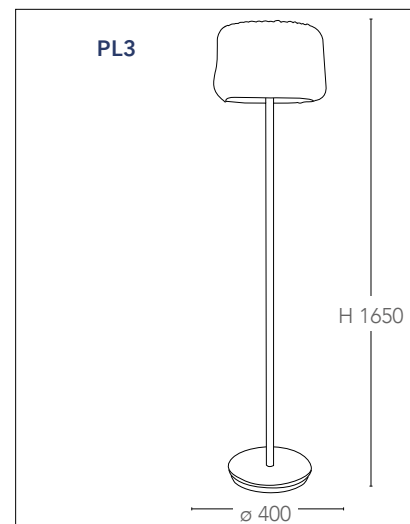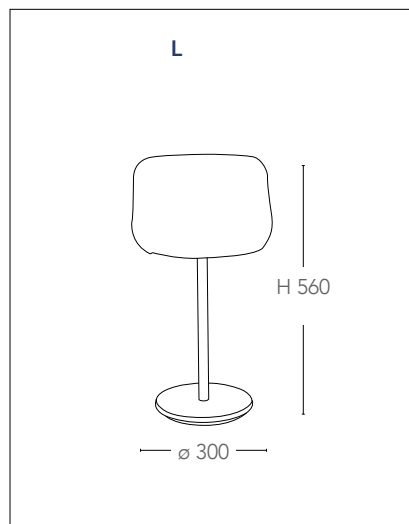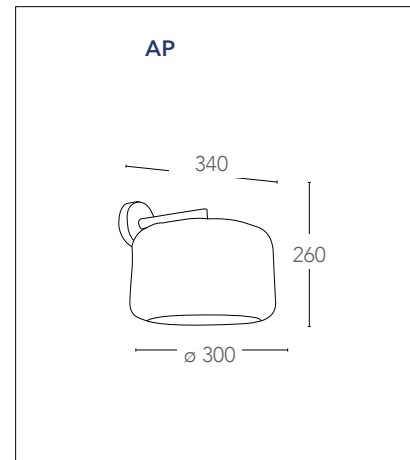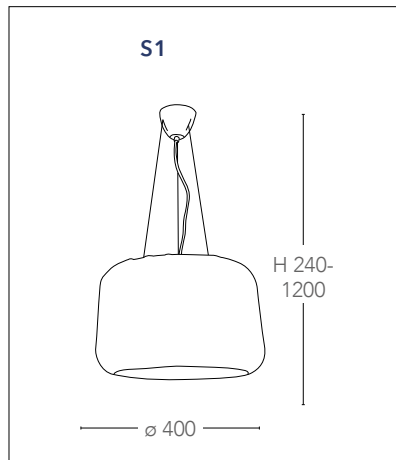

## PICNIC

Stringa elettrificata E27/E14 per esterno inclusiva di spina shuko e presa modulabile  
Light string E27/E14 for outdoor inclusive of schuko plug and modular socket




I-PICNIC-E14  
8031414862726

10xE14 max 25w  
non incluse - not included



5 MT.

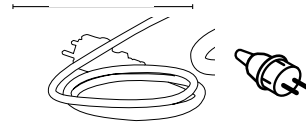


I-PICNIC-E27  
8031414862719

10xE27 max 25w  
non incluse - not included




10 MT.

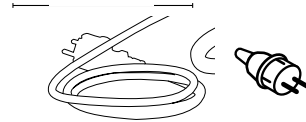

CE

RoHS  
WEEE COMPLIANT




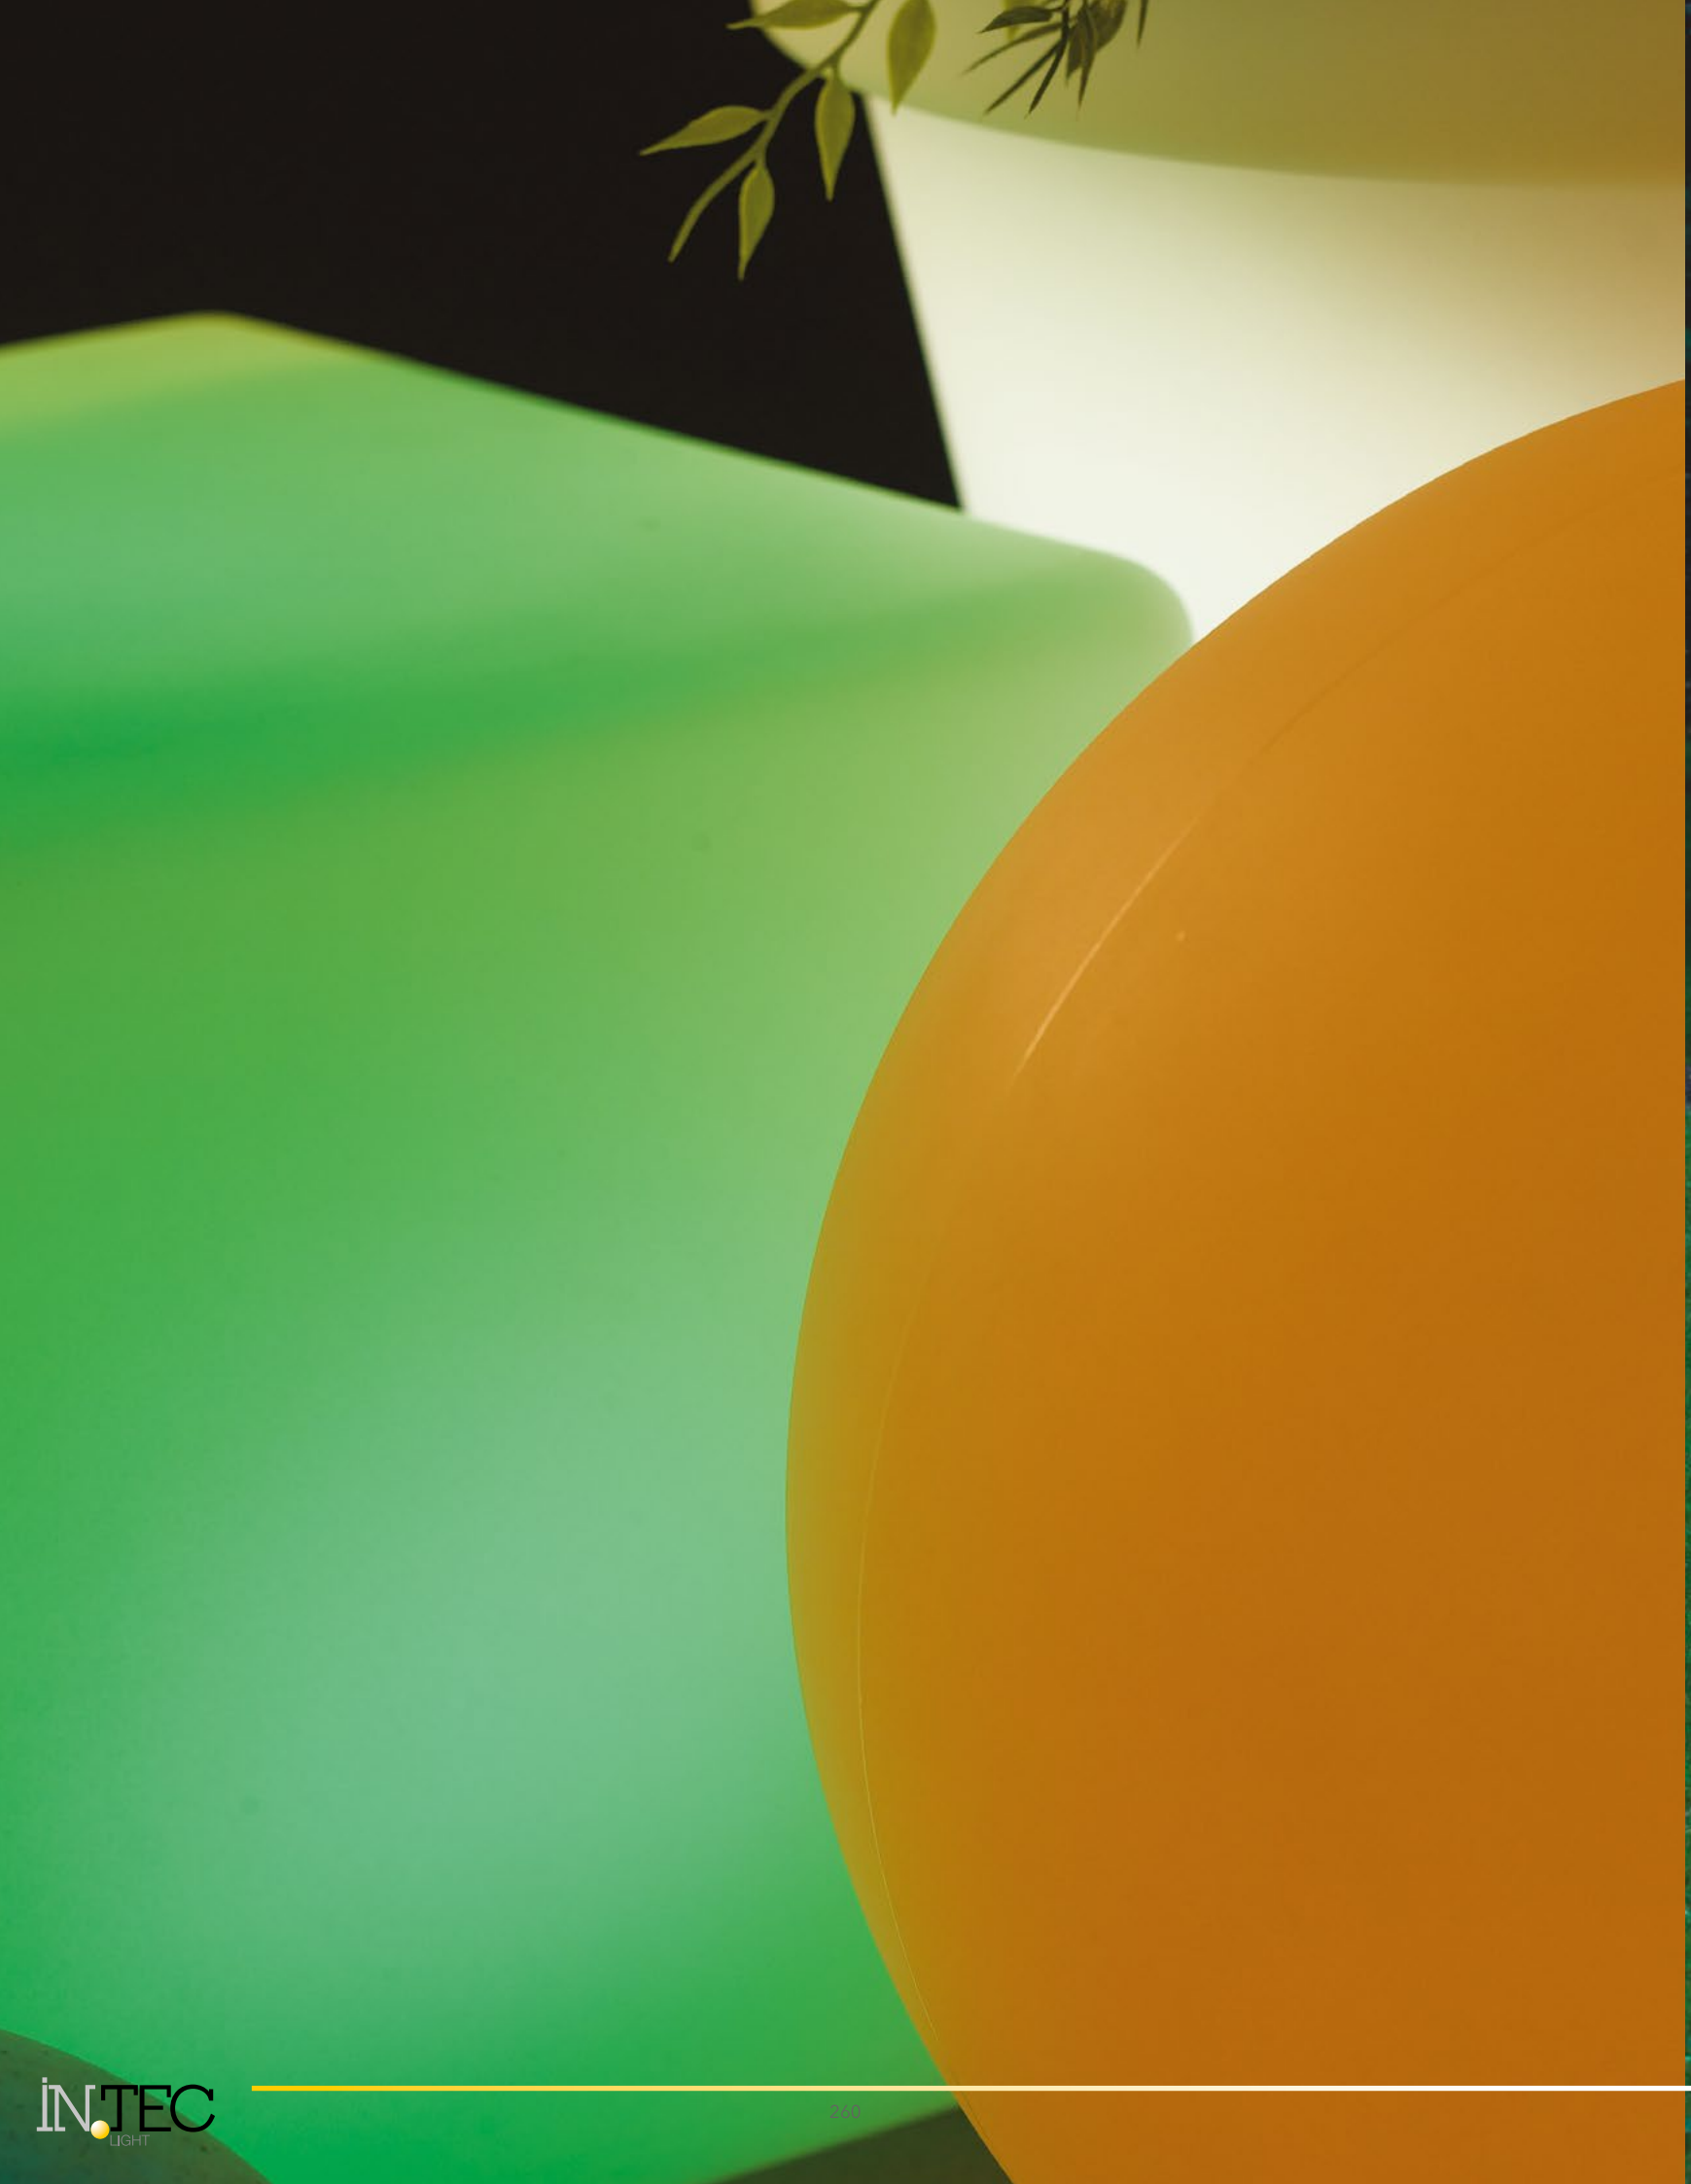



## GECO

Lampada portatile LED RGB in polietilene con speaker bluetooth incorporato.  
LED portable RGB lamp with speaker bluetooth included polyethylene material

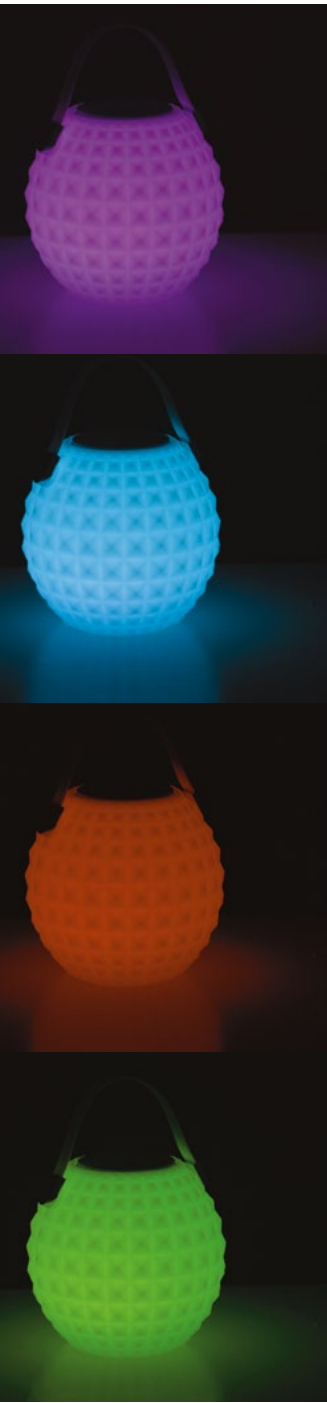

### informazioni tecniche - technical information

I-GECO-DJ-L25  
8031414862542



3W

180 Lumen



carica/recharge 6h

durata/charge lasting time 8h  
speaker 2h



5V DC 1A

Speaker 10W Bluetooth 4.0 connection distanza 15mt.

H 235  
ø 255

SMD




CE

RoHS  
WEEE COMPLIANT

## GECO

Sospensione e piantana materiale polietilene  
PE pendant lamp and floor lamp

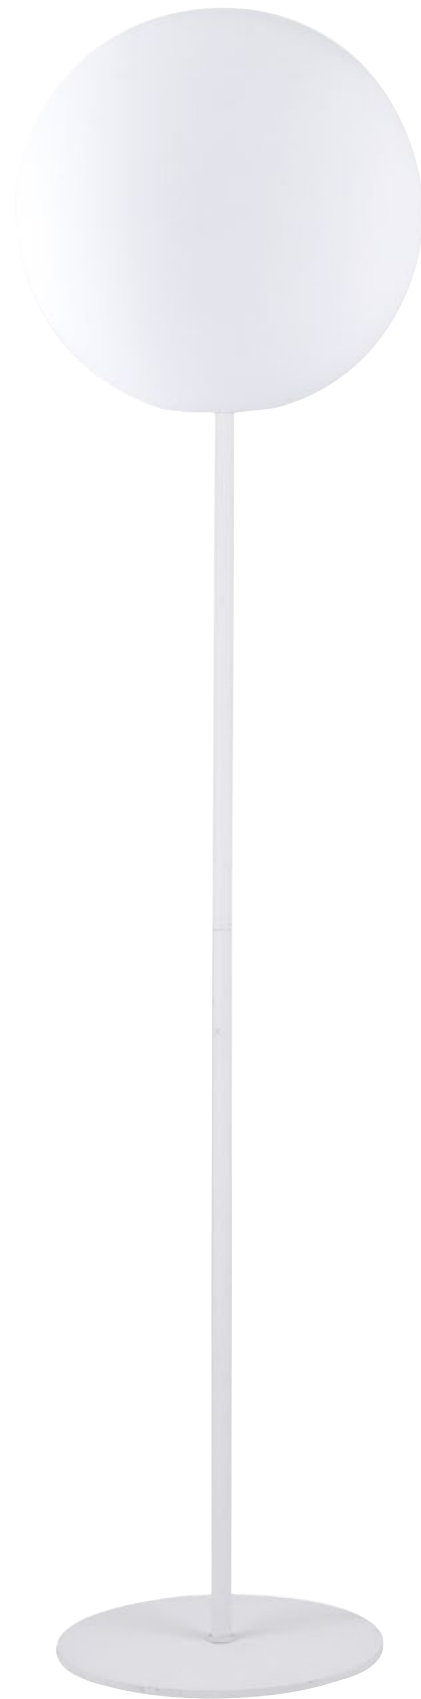

### informazioni tecniche - technical information

I-GECO-SFERA-S30  
8031414864461

1xE27 max 60w  
non include - not included




I-GECO-SFERA-S40  
8031414864454

1xE27 max 60w  
non include - not included



I-GECO-SFERA-PT30  
8031414864430

1xE27 max 60w  
non include - not included

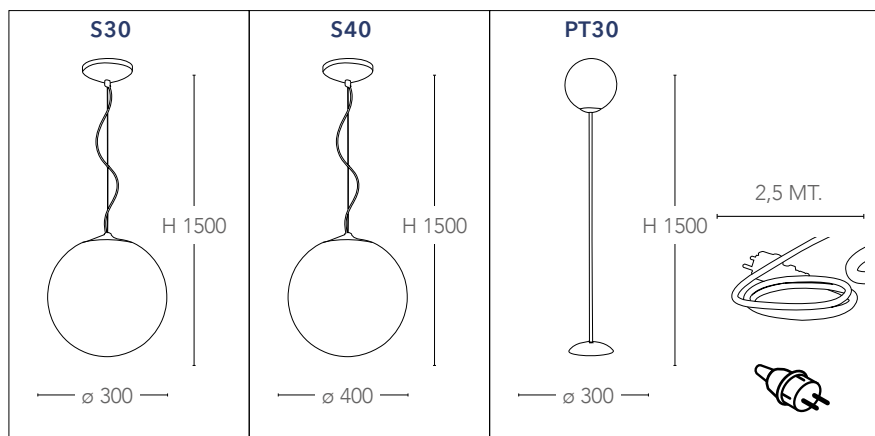

CE

RoHS  
WEEE COMPLIANT

# GECO

Lampada portatile LED RGB in polietilene  
PE LED portable RGB lamp



## informazioni tecniche - technical information

**I-GECO-CUBO-L30**  
8031414862467

**I-GECO-CUBO-L40**  
8031414862474

**I-GECO-CUBO-L50**  
8031414862481

**I-GECO-SFERA-L30**  
8031414862436

**I-GECO-SFERA-L40**  
8031414862443

**I-GECO-SFERA-L50**  
8031414862450



4W

☀️ 240 Lumen



🔋 carica/recharge 6h

🕒 durata/charge lasting time 8h



5V DC 1A



4W

☀️ 240 Lumen



🔋 carica/recharge 6h

🕒 durata/charge lasting time 8h



5V DC 1A

L30	L40	L50	L30	L40	L50
300x300x300	400x400x400	500x500x500	∅ 300	∅ 400	∅ 500



# GECO

Vaso LED RGB in polietilene  
PE LED RGB vase



## informazioni tecniche - technical information

I-GECO-VASO-Q-L  
8031414862535



4W 240 Lumen



carica/recharge 6h



I-GECO-VASO-Q-XL  
8031414864713

durata/charge lasting time 8h

5V DC 1A

I-GECO-VASO-R-L  
8031414862528



4W 240 Lumen



carica/recharge 6h



I-GECO-VASO-R-XL  
8031414864720

durata/charge lasting time 8h

5V DC 1A

Q-XL	Q-L	R-XL	R-L
900	600	900	600
380x380	280x280	Ø 380	Ø 280







## PLAFONIERE E APPLIQUE DA ESTERNO

Le nostre plafoniere da esterno offrono una vasta gamma di prodotti dal design moderno , resistenti agli agenti atmosferici ideali per illuminare e creare il migliore ambiente a parete e a soffitto  
Costruiti in alluminio o in composito plastico .

## OUTDOOR CEILING LAMP

*Our outdoor ceiling lights offer a wide range of products with modern design, weather resistant ideal for illuminating and create the best environment wall and ceiling  
built in aluminum or plastic composite.*

## EXTRA

Plafoniera LED integrato materiale base PP bianco o antracite con diffusore opale PC  
 Plycarbonate built-in LED ceiling lamp PP base white or anthracite with opal PC diffuser



### informazioni tecniche - technical information




BCO

**LED-EXTRA-BCO**  
8031440361071

**LED-EXTRA-ANT**  
8031440361064



**10W**



>10 000 on/off




h 25 000

**230V**  
DRIVER FREE



ANT

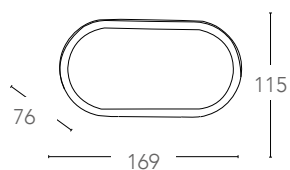

## SENSITIVE

Plafoniera LED integrato materiale base PP bianco o antracite con diffusore opale PC con sensore  
Plycarbonate built-in LED ceiling lamp PP base white or anthracite with opal PC diffuser with sensor



informazioni tecniche - technical information

### LED-SENSITIVE-BCO

8031440361750

### LED-SENSITIVE-ANT

8031440361743



14W



1000 Lumen



10-2000 Lux




>10 000 on/off



h 25 000

230V  
DRIVER FREE

10 sec.- 1 min.

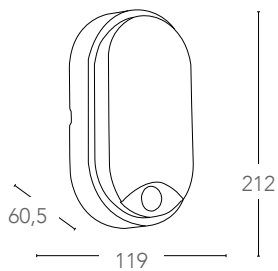

CLASSE  
**A**



SMD



Ra  
>80

CE



RoHS  
WEEE COMPLIANT

# SHELLY

Plafoniera LED integrato materiale policarbonato con diffusore opale  
*Plycarbonate built-in LED ceiling lamp with opal diffuser*



## informazioni tecniche - technical information






BCO



ANT

<b>LED-SHELLY-L BCO</b> 8031440351713	4000K	20W	1600 Lumen	120°	IP65	>10 000 on/off	h 25 000	230V DRIVER FREE
<b>LED-SHELLY-S BCO</b> 8031440351720	4000K	15W	1200 Lumen	120°	IP65	>10 000 on/off	h 25 000	230V DRIVER FREE
<b>LED-SHELLY-L ANT</b> 8031440351690	4000K	20W	1600 Lumen	120°	IP65	>10 000 on/off	h 25 000	230V DRIVER FREE
<b>LED-SHELLY-S ANT</b> 8031440351706	4000K	15W	1200 Lumen	120°	IP65	>10 000 on/off	h 25 000	230V DRIVER FREE

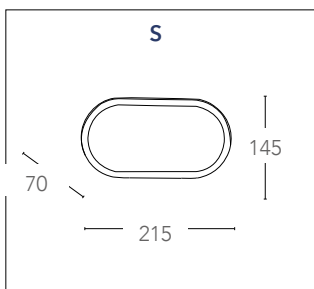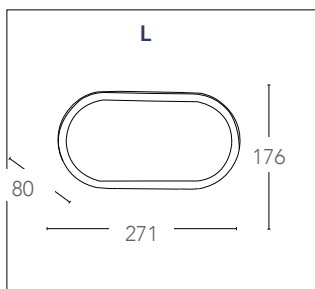

# EVER



Plafoniera LED integrato materiale policarbonato con diffusore opale  
*Plycarbonate built-in LED ceiling lamp with opal diffuser*



## informazioni tecniche - technical information



<b>LED-EVER-L BCO</b> 8031440351676	4000K	20W	1600 Lumen	120°	IP65	>10 000 on/off	h 25 000	230V DRIVER FREE
<b>LED-EVER-S BCO</b> 8031440351683	4000K	15W	1200 Lumen	120°	IP65	>10 000 on/off	h 25 000	230V DRIVER FREE
<b>LED-EVER-L ANT</b> 8031440351645	4000K	20W	1600 Lumen	120°	IP65	>10 000 on/off	h 25 000	230V DRIVER FREE
<b>LED-EVER-S ANT</b> 8031440351638	4000K	15W	1200 Lumen	120°	IP65	>10 000 on/off	h 25 000	230V DRIVER FREE

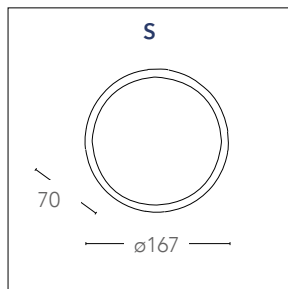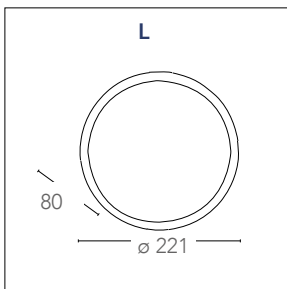

# EVER

Plafoniera LED integrato materiale policarbonato con diffusore opale  
Polycarbonate built-in LED ceiling lamp with opal diffuser




## informazioni tecniche - technical information



SIL

BCO

<b>LED-EVER-XL-SIL</b> 8031440355605	4000K	<b>30W</b>	☀️ 2400 Lumen	🔦 120°	🔻 IP65	🔌 >10 000 on/off	🕒 h 25 000	<b>PF 0,90</b>
<b>LED-EVER-XL-BCO</b> 8031440355612	4000K	<b>30W</b>	☀️ 2400 Lumen	🔦 120°	🔻 IP65	🔌 >10 000 on/off	🕒 h 25 000	<b>PF 0,90</b>

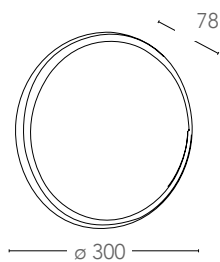

CLASSE <b>A+</b>		<b>SMD</b>		<b>Ra &gt;80</b>	<b>CE</b>		<b>RoHS</b> WEEE COMPLIANT
------------------	--	------------	--	------------------	-----------	--	-------------------------------

# EVER

Plafoniera LED integrato materiale policarbonato con diffusore opale  
*Plycarbonate built-in LED ceiling lamp with opal diffuser*






## informazioni tecniche - technical information



BCO

ANT

LED-EVER-XLP-BCO 8031440355636	4000K	30W	☀️ 2300 Lumen	📐 120°	💧 IP65	🔌 >10 000 on/off	🕒 h 25 000	230V DRIVER FREE
LED-EVER-LP-BCO 8031440355650	4000K	20W	☀️ 1600 Lumen	📐 120°	💧 IP65	🔌 >10 000 on/off	🕒 h 25 000	230V DRIVER FREE
LED-EVER-XLP-ANT 8031440355629	4000K	30W	☀️ 2300 Lumen	📐 120°	💧 IP65	🔌 >10 000 on/off	🕒 h 25 000	230V DRIVER FREE
LED-EVER-LP-ANT 8031440355643	4000K	20W	☀️ 1600 Lumen	📐 120°	💧 IP65	🔌 >10 000 on/off	🕒 h 25 000	230V DRIVER FREE

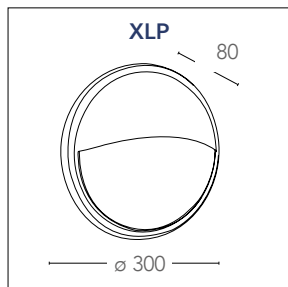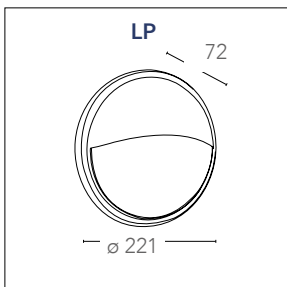

## EASY

Plafoniera in poliammide con diffusore in vetro  
Polyamide plastic ceiling lamp with glass diffuser




informazioni tecniche - technical information



NERO


BCO


**I-EASY-S-NERO**  
8031440357890

 1xE27 max 42w  
non include - not included



**I-EASY-S-BCO**  
8031440357883

 1xE27 max 42w  
non include - not included

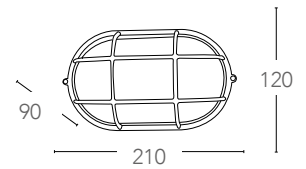


## TOLEDO


Plafoniera in poliammide con diffusore in vetro  
Polyamide plastic ceiling lamp with glass diffuser



informazioni tecniche - technical information


**I-TOLEDO-BCO**  
8031440312073

 1xE27 max 42w  
non include - not included



## SMART

Plafoniera in poliammide con diffusore in vetro  
Polyamide plastic ceiling lamp with glass diffuser

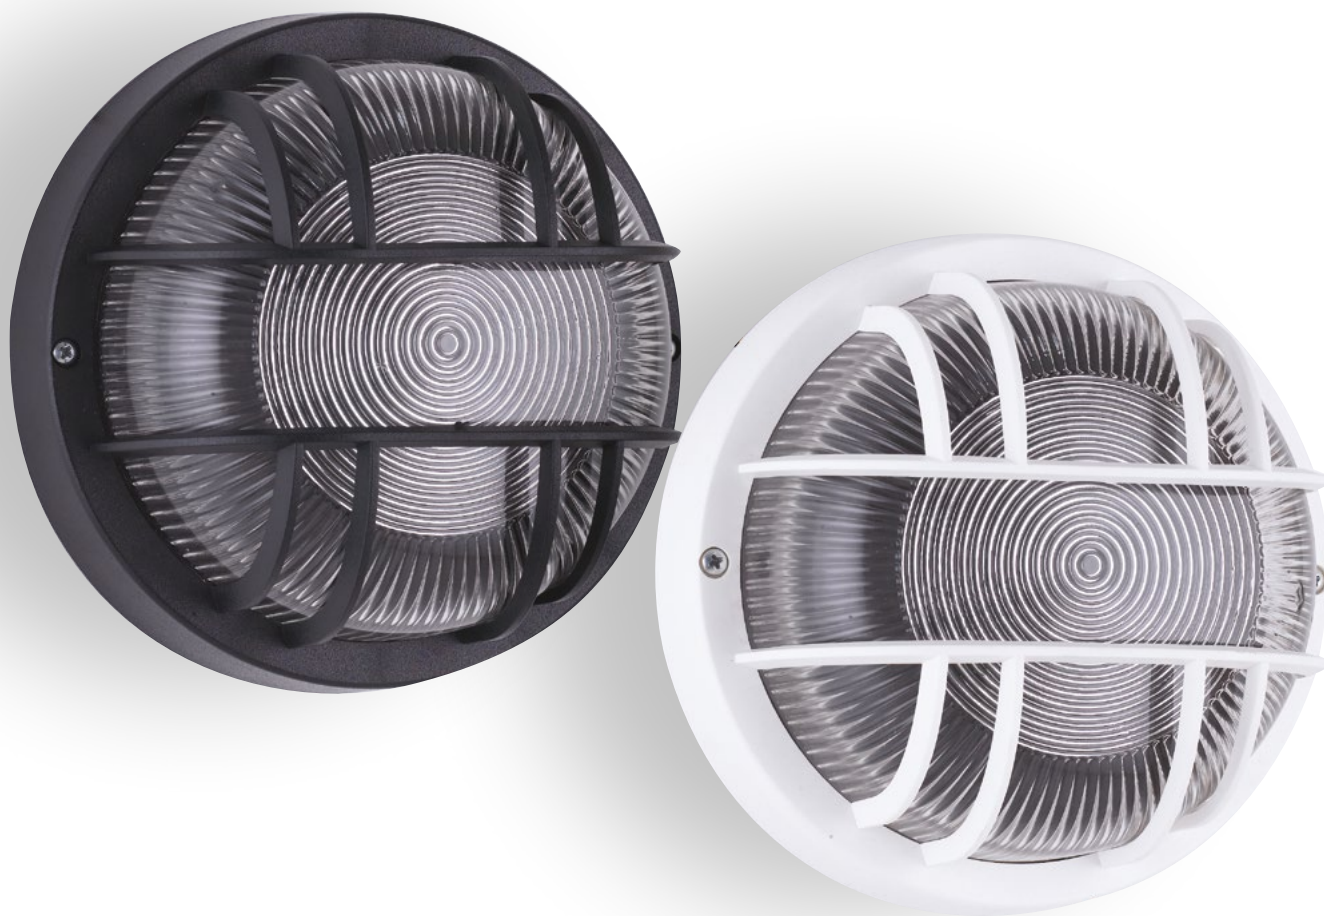

### informazioni tecniche - technical information



NERO

I-SMART-S-NERO  
8031440357876


1xE27 max 42w  
non include - not included



BCO

I-SMART-S-BCO  
8031440357869

1xE27 max 42w  
non include - not included



# IBIZA

Plafoniera in alluminio pressofuso e diffusore in vetro  
*Aluminium die-cast ceiling lamp with glass diffuser*



## informazioni tecniche - technical information




NERO



BCO

<b>I-IBIZA-LD-NERO</b> 8031440312172	1xE27 max 42w non include - not included		
<b>I-IBIZA-SD-NERO</b> 8031440312158	1xE27 max 42w non include - not included		
<b>I-IBIZA-LD-BCO</b> 8031440312127	1xE27 max 42w non include - not included		
<b>I-IBIZA-SD-BCO</b> 8031440312097	1xE27 max 42w non include - not included		

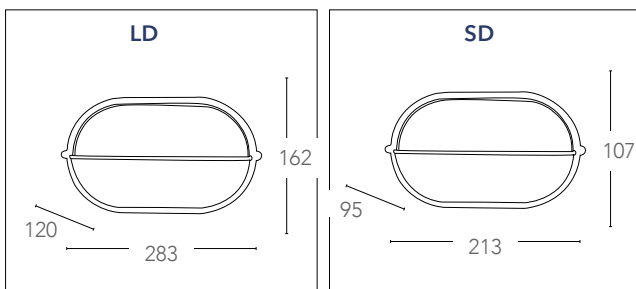

## IBIZA

Plafoniera in alluminio pressofuso e diffusore in vetro  
Aluminium die-cast ceiling lamp with glass diffuser



### informazioni tecniche - technical information



NERO

BCO

**I-IBIZA-L-NERO**  
8031440312189

1xE27 max 42w  
non include - not included



**I-IBIZA-S-NERO**  
8031440312165

1xE27 max 42w  
non include - not included




**I-IBIZA-L-BCO**  
8031440312134

1xE27 max 42w  
non include - not included



**I-IBIZA-S-BCO**  
8031440312103

1xE27 max 42w  
non include - not included

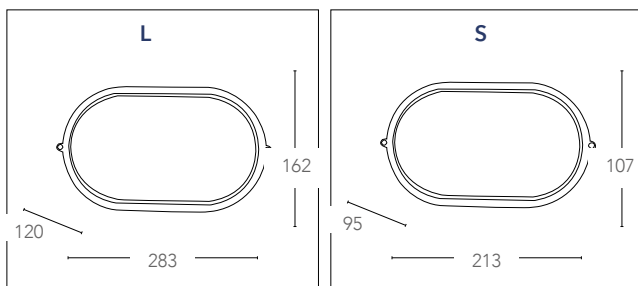


CE



## IBIZA

Plafoniera in alluminio pressofuso e diffusore in vetro  
Aluminium die-cast ceiling lamp with glass diffuser

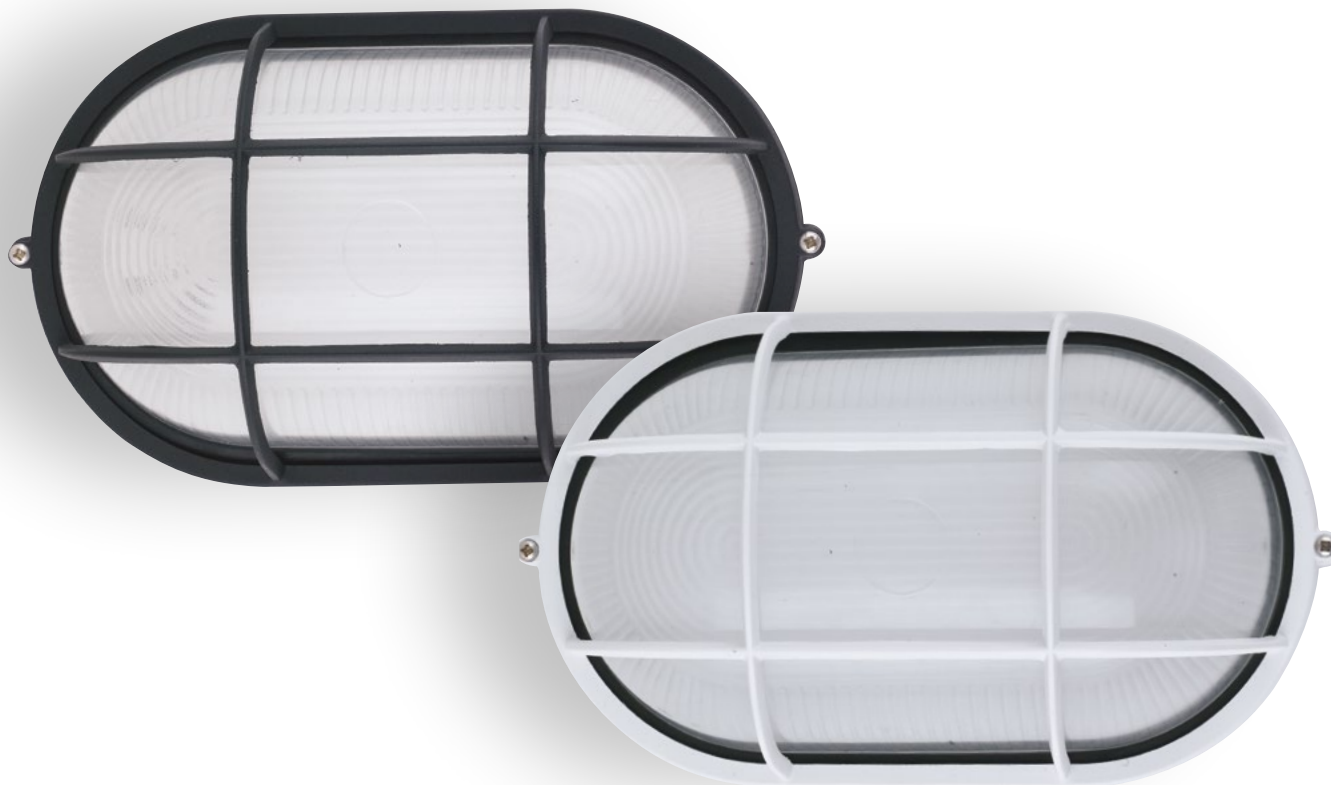

### informazioni tecniche - technical information



NERO

I-IBIZA-LP-NERO  
8031440312196

1xE27 max 42w  
non include - not included



I-IBIZA-SP-NERO  
8031440312141

1xE27 max 42w  
non include - not included



I-IBIZA-LP-BCO  
8031440312110

1xE27 max 42w  
non include - not included




I-IBIZA-SP-BCO  
8031440312080

1xE27 max 42w  
non include - not included



BCO

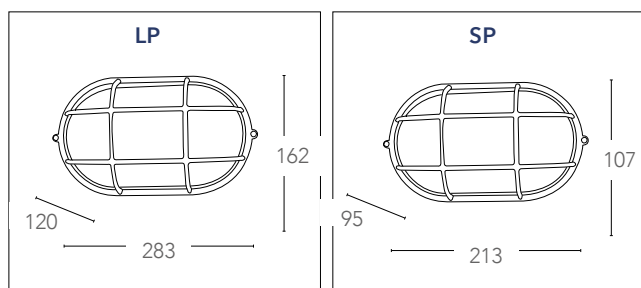

## BARCELLONA

Plafoniera in alluminio con diffusore in vetro  
Diecast ceiling lamp with glass diffuser



### informazioni tecniche - technical information



**I-3072L/NERO**

8031421501083

1xE27 max 42w  
non include



**I-3072S/NERO**

8031421521081

not included

**I-3074L/NERO**

8031421461080

1xE27 max 42w  
non include



**I-3074S/NERO**

8031421481088

not included



**I-3072L/SILVER**

8031421531080

1xE27 max 42w  
non include - not



**I-3072S/SILVER**

8031421551088

included

**I-3074L/SILVER**

8031421491087

1xE27 max 42w  
non include - not




**I-3074S/SILVER**


8031421511082

included

**3072**

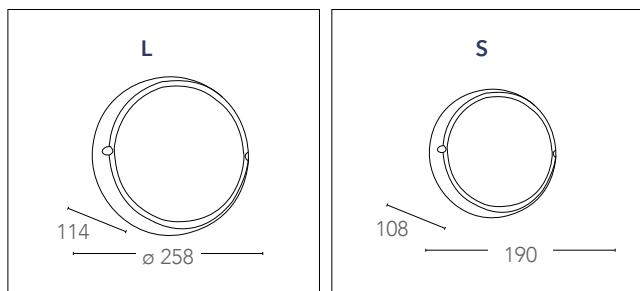

**3074**

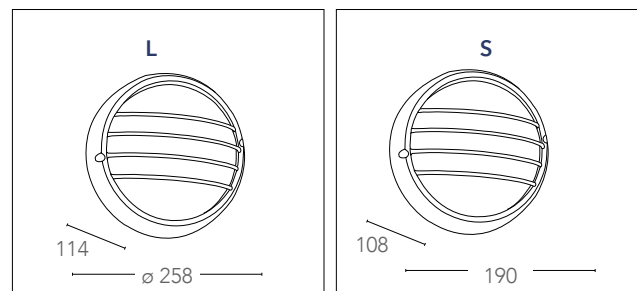



### **CALPESTABILI**

La nostra serie di faretto segnapassi, calpestatibili e carrabili da esterno , si integrano perfettamente in ambienti classici e moderni , possono avere una illuminazione diretta dal suolo o semplicemente diffusa, che valorizza con effetto la vostra casa o contesti architettonici .  
costruiti in acciaio o alluminio resistenti agli agenti atmosferici.

### **LED IN-GROUND**

*Series of inground spotlights, walkable and driveways for outdoor, are perfectly integrated into both classic and modern environments, can have a direct illumination from the ground or simply widespread, with effect that enhances your home or architectural settings.  
made of steel or aluminum, weather resistant.*


# BARRET

Segnapassi in alluminio incasso a pavimento o parete LED integrato finitura nickel  
*LED built-in aluminium in ground or wall spot light nickel finish*




## informazioni tecniche - technical information

<b>LED-BARRET-R24</b> 8031440364416	4000K	<b>1W 3,5V DC</b>	80 Lumen	40°	>10 000 on/off
	IP67	driver output min. 1w 3,5V 350mA non include - not included	h 25 000		
<b>LED-BARRET-R24C</b> 8031440355070	3000K	<b>1W 3,5V DC</b>	80 Lumen	40°	>10 000 on/off
	IP67	driver output min. 1w 3,5V 350mA non include - not included	h 25 000		

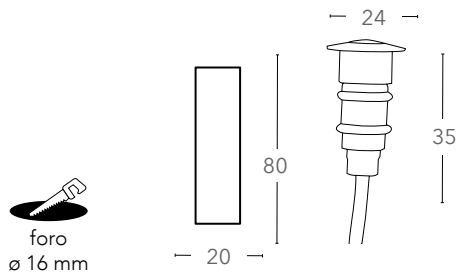


Connessione in serie  
 Serie connection sistem

Driver page 379  
 I-DRIVER/4W  
 I-DRIVER/18W



## RIDER

Kit segnapassi in alluminio incasso a pavimento o parete LED integrato finitura nickel  
LED built-in aluminium in ground or wall spot light nickel finish

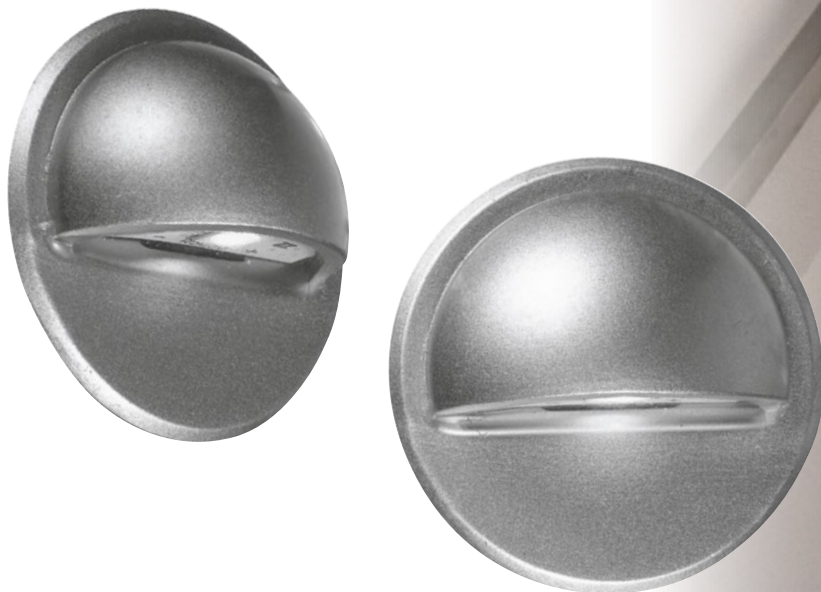

informazioni tecniche - technical information

LED-RIDER-R6-DIR  
8031439921279

4000K

6X0,6W


100 Lumen

105°

>10 000 on/off

h 25 000

driver incluso

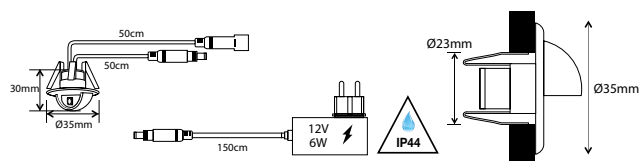

foro  
ø 23 mm

CLASSE  
A



SMD



Ra  
>80

CE



# RIDER



Kit segnapassi in alluminio incasso a pavimento o parete LED integrato finitura nickel  
 LED built-in aluminium in ground or wall spot light nickel finish



## informazioni tecniche - technical information

**LED-RIDER-R6**  
 8031436141236


	<b>4000K</b>		<b>6X0,6W</b>		<b>100 Lumen</b>		<b>120°</b>		<b>&gt;10 000 on/off</b>
			<b>driver incluso</b>		<b>IP65</b>		<b>h 25 000</b>		

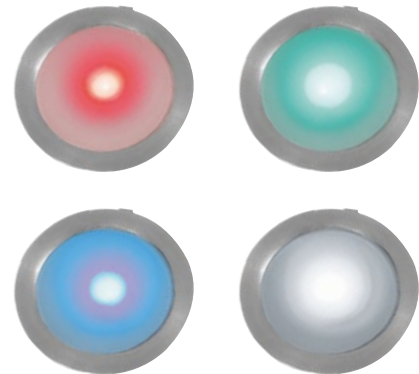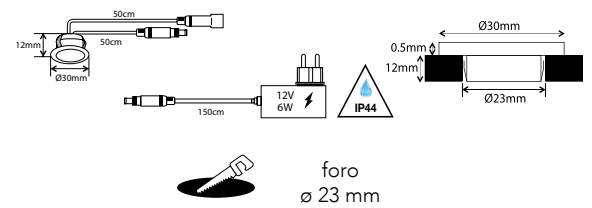

## informazioni tecniche - technical information

**LED-RIDER-R6-RGB**  
 8031439871260

	<b>4000K</b>		<b>6X0,6W</b>		<b>100 Lumen</b>		<b>120°</b>		<b>&gt;10 000 on/off</b>
			<b>driver incluso</b>		<b>IP65</b>		<b>h 25 000</b>		

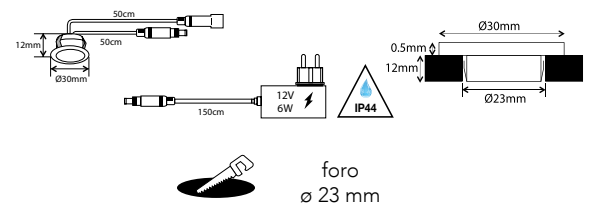

CLASSE <b>A</b>		SMD		Ra <b>&gt;80</b>	CE		
--------------------	--	-----	--	---------------------	----	--	--

## STEP

Kit segnalpassi in alluminio incasso a pavimento o parete LED integrato finitura nickel  
LED built-in aluminium in ground or wall spot light nickel finish



informazioni tecniche - technical information

LED-STEP-R-4  
8031434011210




1W 3,5V  
DC

80 Lumen



>10 000 on/off



driver output min.  
1w 3,5V 350mA  
non include - not included

h 25 000



Connessione in serie  
Serie connection system

Driver page 379  
I-DRIVER/4W  
I-DRIVER/18W



informazioni tecniche - technical information

LED-STEP-R-1  
8031434001211




1W 3,5V  
DC

80 Lumen



>10 000 on/off




driver output min.  
1w 3,5V 350mA  
non include - not included

h 25 000



Connessione in serie  
Serie connection system

Driver page 379  
I-DRIVER/4W  
I-DRIVER/18W



# IMPACT

Kit segnapassi in alluminio incasso a pavimento o parete LED integrato finitura nickel  
*LED built-in aluminium in ground or wall spot light nickel finish*



informazioni tecniche - *technical information*

LED-IMPACT-Q-1W  
 803143440331272




1W 3,5V  
 DC



80 Lumen



>10 000 on/off



45x45



driver output min.  
 1w 3,5V 350mA

h 25 000



foro  
 ø 35 mm

non include - *not included*

Connessione in serie  
*Serie connection system*

Driver page 379  
 I-DRIVER/4W  
 I-DRIVER/18W



informazioni tecniche - *technical information*

LED-IMPACT-R-1W  
 8031440321273




1W 3,5V  
 DC



80 Lumen



>10 000 on/off



40



driver output min.  
 1w 3,5V 350mA

h 25 000




foro  
 ø 35 mm

non include - *not included*


Connessione in serie  
*Serie connection system*

Driver page 379  
 I-DRIVER/4W  
 I-DRIVER/18W






# WALK

Faro calpestabile da incasso a pavimento LED integrato acciaio inox  
Walkable stainless steel built-in LED light

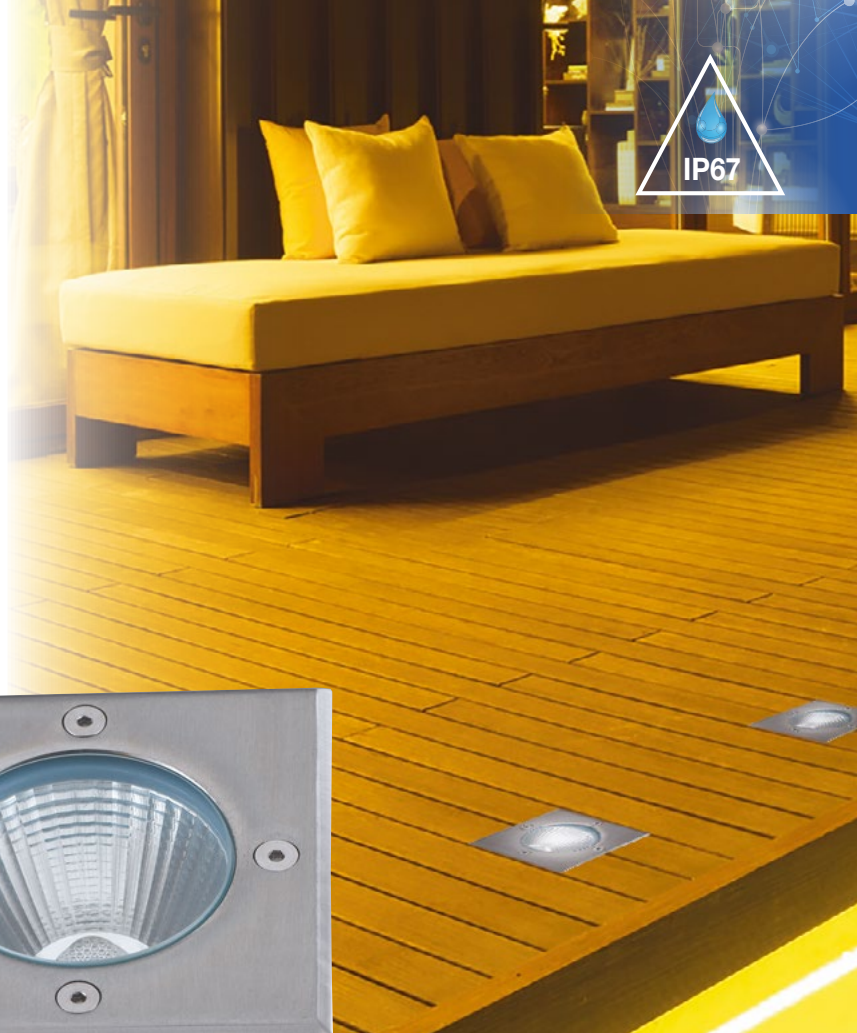

## informazioni tecniche - technical information

LED-WALK-Q7 8031440355599	4000K	3W	☀️ 240 Lumen	🔺 30°	🚶	🔻 IP67	🔌 >10 000 on/off	🕒 h 25 000	230V DRIVER FREE
LED-WALK-Q11 8031440355575	4000K	10W	☀️ 800 Lumen	🔺 30°	🚶	🔻 IP67	🔌 >10 000 on/off	🕒 h 25 000	230V DRIVER FREE
LED-WALK-Q14 8031440355551	4000K	15W	☀️ 1200 Lumen	🔺 30°	🚶	🔻 IP67	🔌 >10 000 on/off	🕒 h 25 000	230V DRIVER FREE

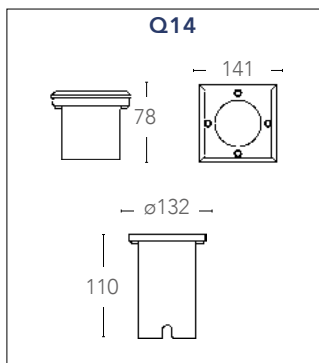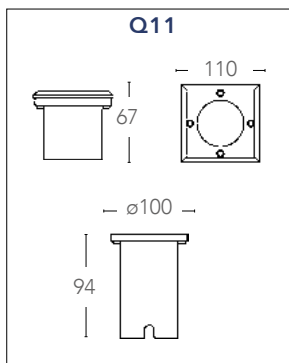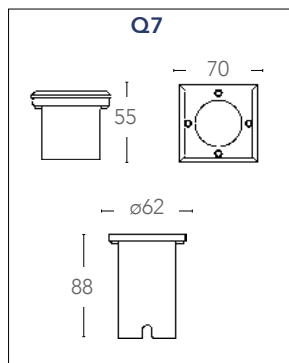

CLASSE **A**
🚫
COB
⚡
Ra >80
CE
EMC
RoHS WEEE COMPLIANT




# WALK

Faro calpestabile da incasso a pavimento LED integrato acciaio inox  
Walkable stainless steel built-in LED light



## informazioni tecniche - technical information

LED-WALK-R7 8031440355582	4000K	3W	☀️ 240 Lumen	🔺 30°	🚶	🔻 IP67	🔌 >10 000 on/off	🕒 h 25 000	230V DRIVER FREE
LED-WALK-R11 8031440355568	4000K	10W	☀️ 800 Lumen	🔺 30°	🚶	🔻 IP67	🔌 >10 000 on/off	🕒 h 25 000	230V DRIVER FREE
LED-WALK-R14 8031440355544	4000K	15W	☀️ 1200 Lumen	🔺 30°	🚶	🔻 IP67	🔌 >10 000 on/off	🕒 h 25 000	230V DRIVER FREE

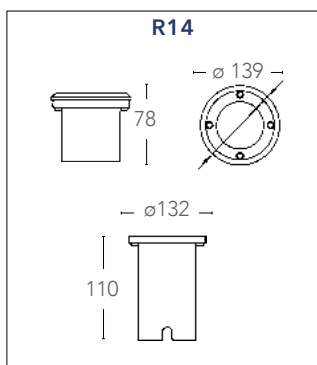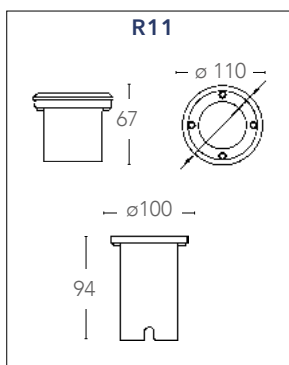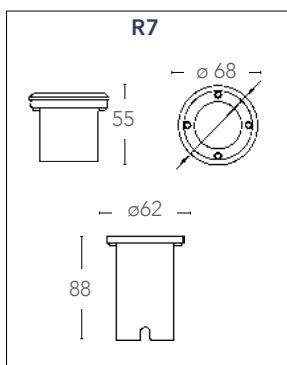

CLASSE **A**
🚫
COB
⚡
Ra >80
CE
EMC
RoHS WEEE COMPLIANT

## DRIVE


Faro calpestabile da incasso a pavimento acciaio inox  
Walkable stainless steel built-in



informazioni tecniche - technical information

I-DRIVE-R1  
8031440313261


1xGU10 max 42w  
non include - not included

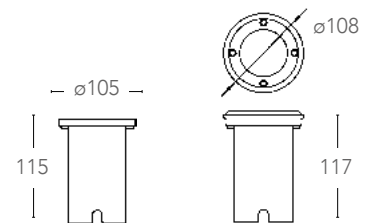


informazioni tecniche - technical information

I-DRIVE-Q1  
8031440313254

1xGU10 max 42w  
non include - not included

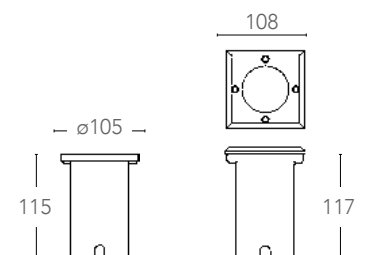


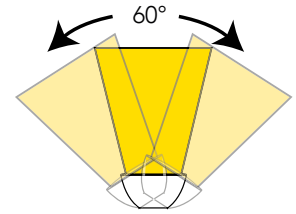

informazioni tecniche - *technical information*

**I-DRIVE-M-R1**  
8031440313247


1xGU10 max 42w  
non include - *not included*

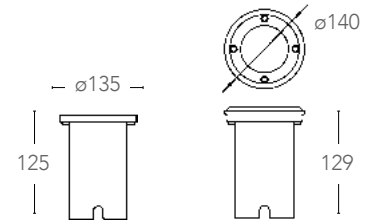

informazioni tecniche - *technical information*



**I-DRIVE-E27**  
8031440313230

1xE27 max 60w  
non include - *not included*

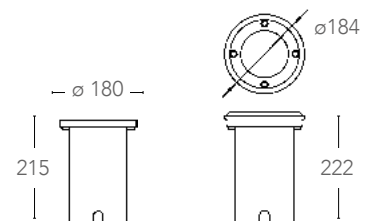

# ONYX

Incasso a parete segnapassi in alluminio LED integrato finitura goffrato nero o bianco  
*LED built-in aluminium in ground or wall spot light nickel finish*



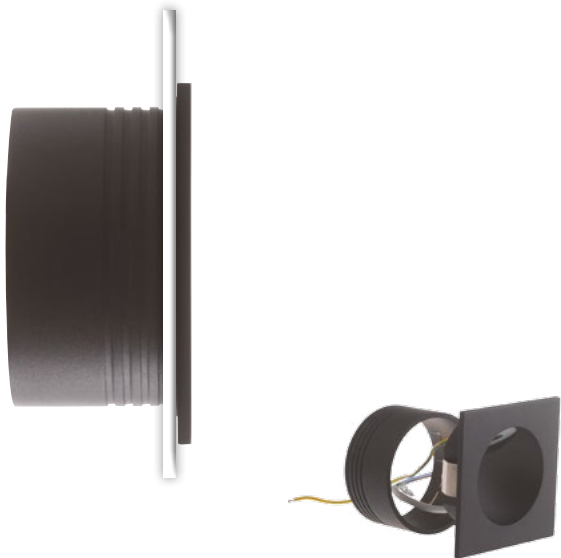


informazioni tecniche - *technical information*

**INC-ONYX-Q1 NERO**  
8031440361262



**2W**



**230V**  
DRIVER FREE



foro  
ø 70 mm





informazioni tecniche - *technical information*


**INC-ONYX-R1 NERO**  
8031440361225



**2W**






**230V**  
DRIVER FREE



**INC-ONYX-R1 BCO**  
8031440361248




**2W**



**230V**  
DRIVER FREE




foro  
ø 70 mm



# SHELBY

Applicare a LED in alluminio  
Aluminium LED wall lamp

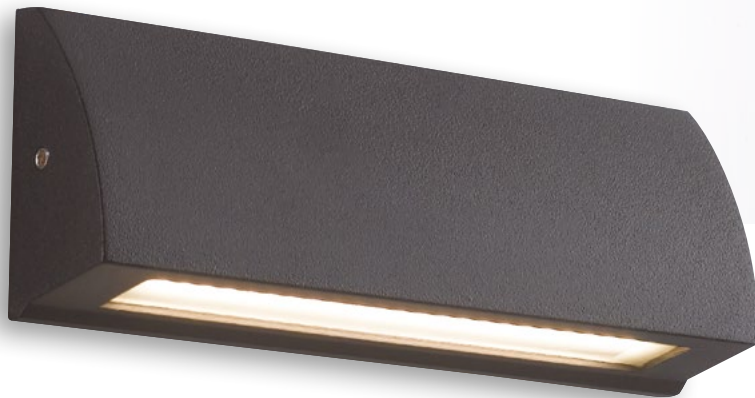

## informazioni tecniche - technical information

LED-W-SHELBY-130  
8031440361002



4W



120Lumen



>10 000 on/off



h 25 000

230V  
DRIVER FREE

LED-W-SHELBY-170  
8031440361019



6W



240 Lumen





>10 000 on/off



h 25 000

230V  
DRIVER FREE

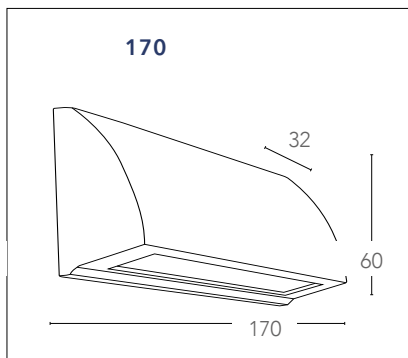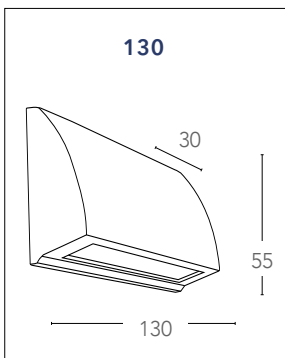

CLASSE  
**A**



SMD



Ra  
>80


CE



RoHS  
WEEE COMPLIANT

# LYKAN

Segnapassi in alluminio incasso a parete LED integrato finitura nickel  
*LED built-in aluminium wall spot light nickel finish*


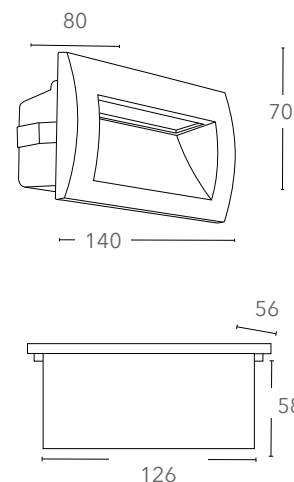


informazioni tecniche - *technical information*


**INC-LYKAN-RT**  
8031440361057



**3W**



**230V**  
DRIVER FREE


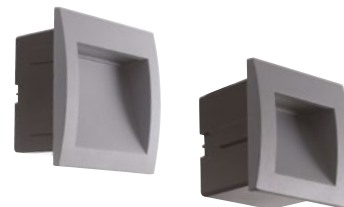


informazioni tecniche - *technical information*

**INC-LYKAN-Q90**  
8031440361033



**2W**





**230V**  
DRIVER FREE



**INC-LYKAN-Q140**  
8031440361040



**3W**



**230V**  
DRIVER FREE

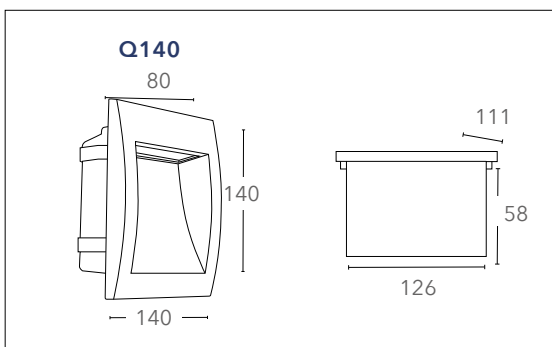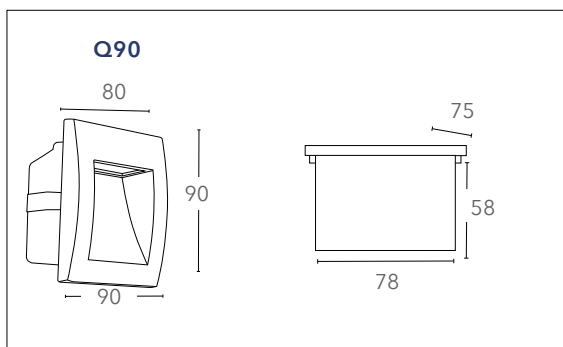

CLASSE  
**A**



**SMD**  
SMD



**Ra >80**

**CE**



## BOLT

Incasso segnapassi alloggio in cassetta di derivazione 503, LED integrato placchetta intercambiabile bianca o nickel.  
*Down wall-light for recess box 503 built-in LED with replaceable buckle white or nickel finish.*



### informazioni tecniche - technical information

INC-BOLT-503  
8031414862580



3W



200Lumen



120°




>10 000 on/off



h 25 000

230V  
DRIVER FREE

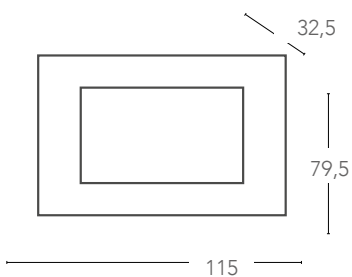

CLASSE  
**A**



SMD



Ra  
>80


CE



RoHS  
WEEE COMPLIANT

# BOLT

Segnapassi in alluminio incasso a parete LED integrato finitura nickel  
*LED built-in aluminium wall spot light nickel finish*



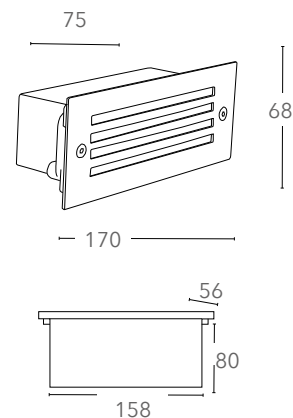


informazioni tecniche - *technical information*

**INC-BOLT-GRILL**  
8031440363532



**6W**






informazioni tecniche - *technical information*

**INC-BOLT-Q71**  
8031440363556








**3W**



**INC-BOLT-RT170**  
8031440363525



**6W**

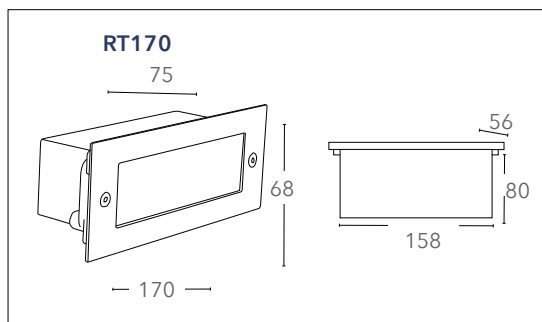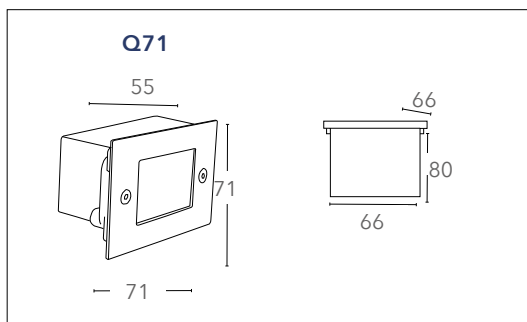

CLASSE <b>A</b>		<b>SMD</b> 		<b>Ra &gt;80</b>	<b>CE</b>		
--------------------	--	----------------	--	------------------	-----------	--	--

## AKRON


Faro in alluminio con picchetto incluso  
*Aluminium flood light with spike included*



informazioni tecniche - *technical information*


I-AKRON-PR  
 8031440312219

1xGU10 max 42w  
 non incluse - not included

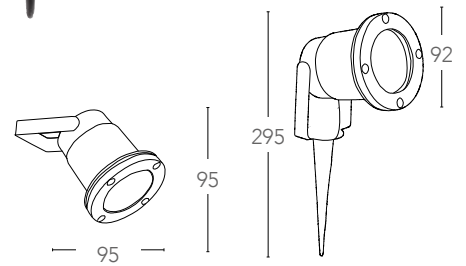

## KRONOS

Proiettore LED integrato con picchetto finitura silver  
*LED built-in LED flood light with spike silver finish*

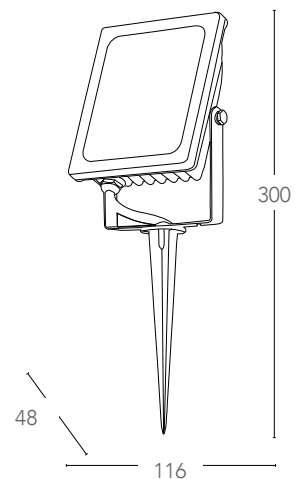

informazioni tecniche - *technical information*

LED-KRONOS/SPK-10W  
 8031435991238



10W

800 Lumen

120°



>10 000 on/off

h 20 000

driver incluso





## PROIETTORI

la nostra gamma di fari a LED e alogeni , adatti per illuminare sia i dettagli che i più ampi spazi esterni con sensore di movimento , telecamera e connessione WIFI costruiti in pressofusione di alluminio , resistenti agli agenti atmosferici

## FLOOD LIGHT

*Our range of LED and halogen flood lamps , suitable for illuminating both the details that the most wide open spaces with motion sensor, camera and WIFI connection made of die-cast aluminum, weather resistant*

## COSMO

Proiettore LED con sensore in policarbonato alimentato a batteria colore nero  
 LED flood light in PC material powered by battery black color




informazioni tecniche - technical information

LED-COSMO/S  
 8031439821265



2X0,5W



>10 000 on/off




3x1,2V  
 AAA



10-2000LUX

5sec.- 5Min.

h 25 000



## COSMO

Proiettore LED con sensore ricaricabile tramite pannello solare colore nero  
 LED flood light with sensor rechargeable by solar panel black color



informazioni tecniche - technical information

LED-COSMO/S-FV  
 8031439841263



2X0,5W



>10 000 on/off



3x1,2V  
 AAA




1-12m

10-2000LUX


5sec.- 5Min.

h 25 000

include  
 included



Ricaricabile 4000 volte. Durata 6 ore  
 Battery charge life 4000x6h



# ELIOS

Proiettore LED con sensore e pannello solare policristallino  
LED flood light with sensor and polycrystalline solar panel



## informazioni tecniche - technical information

LED-ELIOS-SOLAR  
8031440355124



9W

620 Lumen

120°



12 m

INCL. 120°

LUX 2- LUX 2000

10SEC. - 1MIN.



>10 000 on/off

h 25 000

driver incluso

lithium 7,4V 1800 mAh

carica/recharge 12h

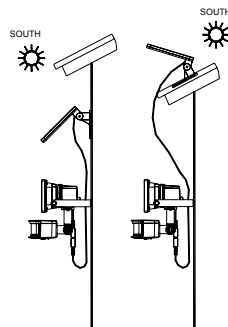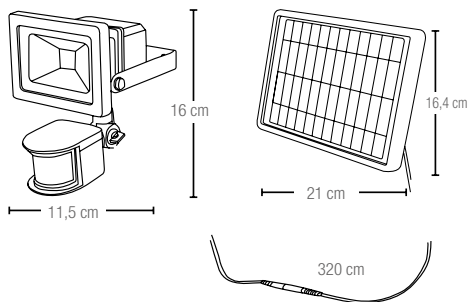

CLASSE  
**A**



SMD



Ra  
>80

CE



# EOS

Appique solare LED 3 funzioni  
Solar LED wall lamp with 3 function



## informazioni tecniche - technical information

LED-EOS-SOLAR  
8031414862740

4000K

4W

100°

IP66

450 Lumen



INCL. 120°





lithium 3,9V 4400 mAh

driver incluso

carica/recharge 6h

durata/charge lasting time 8h

4-6 mt

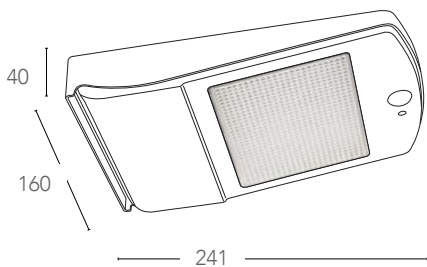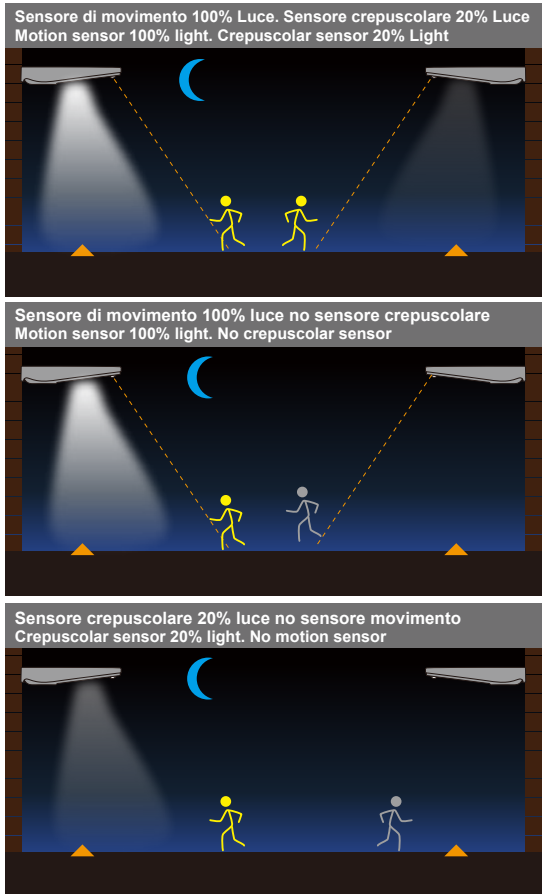

# SHEDAR

Proiettore orientabile LED integrato con sensore colore nero  
 LED built-in adjustable flood lamp with sensor black color



## informazioni tecniche - technical information

LED-SHEDAR-S/10W  
8031439971274

4000K 10W 720 Lumen

120°



120°

>10 000 on/off

driver incluso



10-2000LUX

10sec.- 60Sec.

h 25 000

8m

LED-SHEDAR-S/20W  
8031439981273

4000K 2X10W 2x720 Lumen

120°



140°

>10 000 on/off

driver incluso





10-2000LUX

5sec.- 5Min.

h 25 000

1-12m

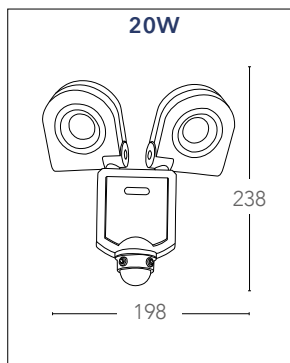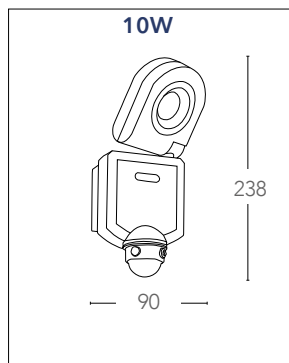

CLASSE <b>A+</b>		<b>SMD</b> 		<b>Ra</b> <b>&gt;80</b>	<b>CE</b>		<b>RoHS</b> WEEE COMPLIANT
---------------------	--	----------------	--	----------------------------	-----------	--	-------------------------------

# SHEDAR

Proiettore orientabile LED integrato colore bianco  
*LED Built-in adjustable flood lamp white color*



## informazioni tecniche - technical information

LED-SHEDAR/10W  
 8031440001274



10W

720 Lumen



>10 000 on/off

h 25 000

driver incluso

LED-SHEDAR/20W  
 8031440011273



2X10W



2x720 Lumen



>10 000 on/off

h 25 000

driver incluso

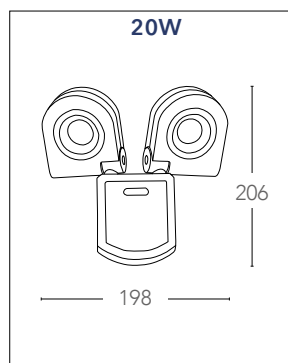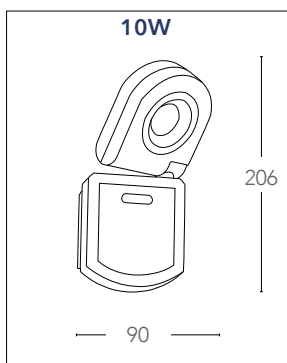

# TITAN

Proiettore in alluminio LED integrato finitura silver  
Built-in LED aluminium flood lamp silver finish



## informazioni tecniche - technical information

**LED-TITAN/10W**  
8031437941255



**10W**

800 Lumen



>10 000 on/off

h 25 000

driver incluso

**LED-TITAN/30W**  
8031437931256



**30W**

2400 Lumen



**PF 0,90**



>10 000 on/off

h 25 000

driver incluso

**LED-TITAN/50W**  
8031437911258



**50W**

4000 Lumen






**PF 0,90**



>10 000 on/off

h 25 000

driver incluso

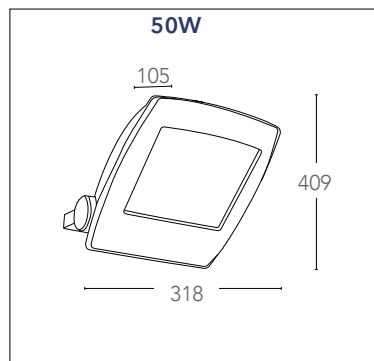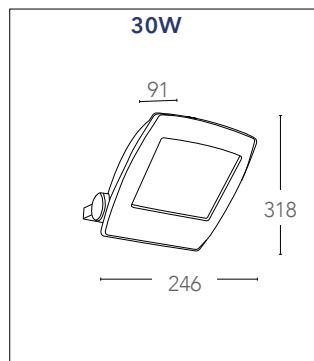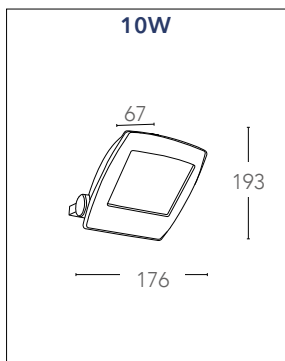

CLASSE  
**A**



**COB**



**Ra >80**

**CE**



# TITAN

Proiettore in alluminio LED integrato finitura silver con sensore  
Built-in LED aluminium flood lamp silver finish



## informazioni tecniche - technical information

LED-TITAN-S/10W  
8031440360616



10W

800 Lumen



>10 000 on/off

driver incluso




10-2000LUX

10sec.- 60Sec.

h 25 000

1-8m



# KRONOS

Proiettore in alluminio LED integrato finitura bianco goffrato  
 Built-in LED aluminium flood lamp embossed white finish



## informazioni tecniche - technical information

LED-KRONOS/10W  
 8031436031230



**10W**

800 Lumen



>15 000 on/off

h 25 000

**230V**  
 DRIVER FREE

LED-KRONOS/20W  
 8031436001233



**20W**

1600 Lumen



>15 000 on/off

h 25 000

**230V**  
 DRIVER FREE

LED-KRONOS/50W  
 8031436011232



**50W**

4000 Lumen






**PF 0,90**



>15 000 on/off

h 25 000

**230V**  
 DRIVER FREE

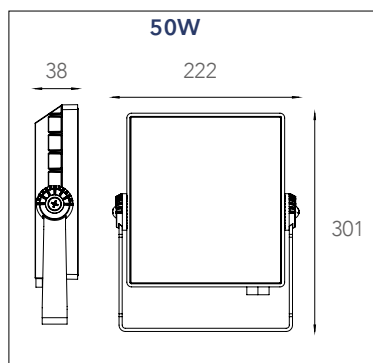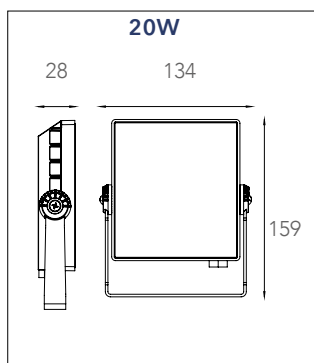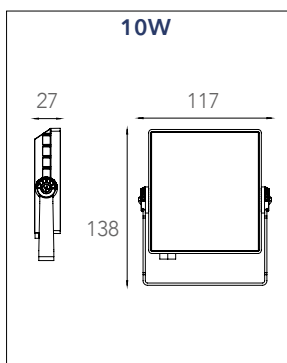

CLASSE  
**A+**



**SMD**



**Ra >80**

**CE**



**RoHS**  
 WEEE COMPLIANT







# ELIOS

Proiettore in alluminio finitura silver LED integrato  
Built-in LED aluminium flood lamp silver finish



## informazioni tecniche - technical information

LED-ELIOS/10W 8031431291189	4000K	10W	800 Lumen	120°	IP65	>15 000 on/off	h 25 000	230V DRIVER FREE
LED-ELIOS/20W 8031431281180	4000K	20W	1600 Lumen	120°	IP65	>15 000 on/off	h 25 000	230V DRIVER FREE
LED-ELIOS/30W 8031437391241	4000K	30W	2400 Lumen	120°	PF 0,90 IP65	>15 000 on/off	h 25 000	230V DRIVER FREE
LED-ELIOS/50W 8031432091191	4000K	50W	4000 Lumen	120°	PF 0,90 IP65	>15 000 on/off	h 25 000	230V DRIVER FREE

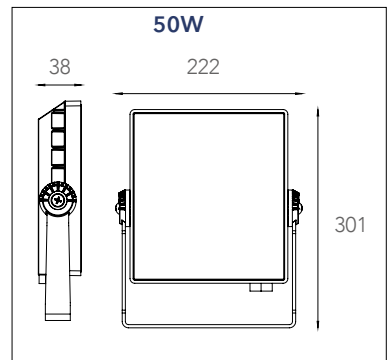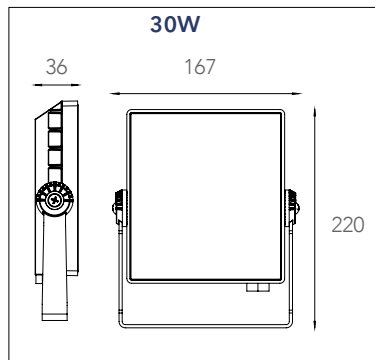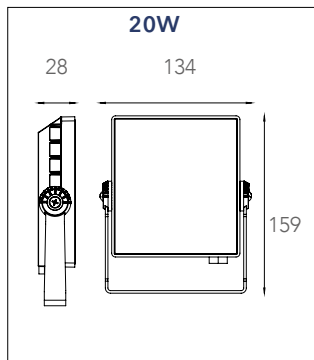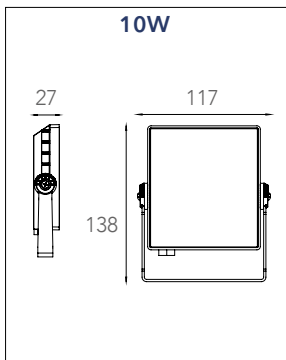

CLASSE <b>A+</b>		SMD		Ra <b>&gt;80</b>	CE	EMC	RoHS WEEE COMPLIANT
---------------------	--	-----	--	---------------------	----	-----	------------------------

# ELIOS

Proiettore in alluminio finitura silver LED integrato con sensore  
 Built-in LED aluminium flood lamp silver finish with sensor



## informazioni tecniche - technical information

**LED-ELIOS-S/10W**  
8031437381242



10W

800 Lumen



120°



>10 000 on/off

**230V**  
DRIVER FREE



>30 Lux

0-10 Lux

50 sec.

MAX 12m

h 25 000

**LED-ELIOS-S/30W**  
8031436391235



30W

2400 Lumen



120°



>10 000 on/off

**230V**  
DRIVER FREE




>30 Lux

0-10 Lux

50 sec.

MAX 12m

h 25 000

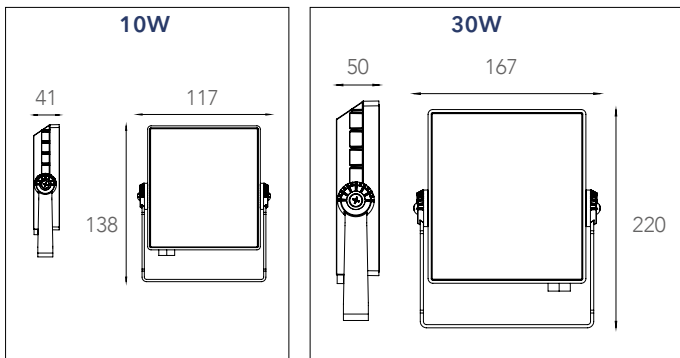

CLASSE  
**A+**



**SMD**



**Ra**  
>80

**CE**



**RoHS**  
WEEE COMPLIANT

# ELIOS

Proiettore LED portatile  
LED portable flood light



informazioni tecniche - technical information

LED-ELIOS-P/20W  
8031436381236

4000K

20W

1600 Lumen

120°

PF 0,90




>15 000 on/off



h 20 000

230V  
DRIVER FREE



365

215

1,6 MT.



CLASSE  
**A**



SMD



Ra  
>80

CE



# URANO

Proiettore in alluminio finitura nera LED integrato  
Built-in LED aluminium flood lamp black finish



## informazioni tecniche - technical information

LED-URANO-10  
8031414861392

4000K

10W

700 Lumen

120°



>15 000 on/off

h 20 000

230V  
DRIVER FREE

LED-URANO-20  
8031414861415

4000K

20W

1400 Lumen

120°



>15 000 on/off

h 20 000

230V  
DRIVER FREE

LED-URANO-30  
8031414861422

4000K

30W

2100 Lumen

120°

PF 0,90



>15 000 on/off

h 20 000

230V  
DRIVER FREE

LED-URANO-50  
8031414861439

4000K

50W

3500 Lumen

120°




PF 0,90



>15 000 on/off

h 20 000

230V  
DRIVER FREE

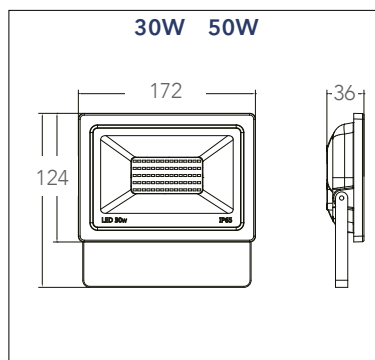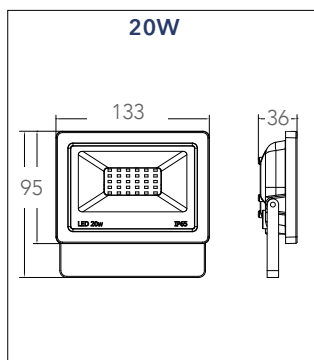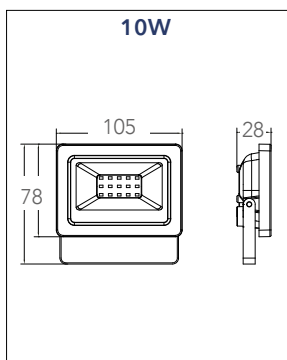

CLASSE  
**A**



SMD



Ra  
>80


CE



RoHS  
WEEE COMPLIANT

## URANO

Proiettore in alluminio finitura nera LED integrato  
Built-in LED aluminium flood lamp black finish

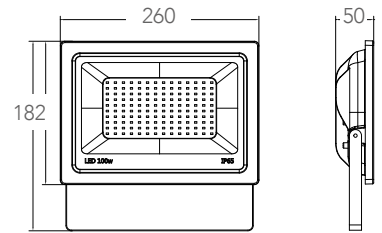

informazioni tecniche - technical information

LED-URANO-80  
8031414861446



80W

5600 Lumen



PF  
0,90




>10 000 on/off



h 20 000

230V  
DRIVER FREE

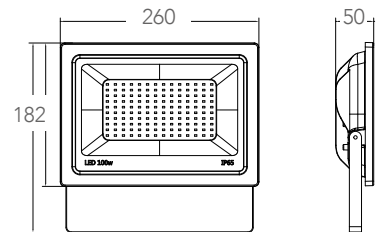

informazioni tecniche - technical information

LED-URANO-100  
8031414861408



100W

7000 Lumen



PF  
0,90



>10 000 on/off



h 20 000

230V  
DRIVER FREE

CLASSE  
A<sup>+</sup>



SMD




Ra  
>80

CE



## URANO

Proiettore in alluminio finitura nera LED integrato  
Built-in LED aluminium flood lamp black finish

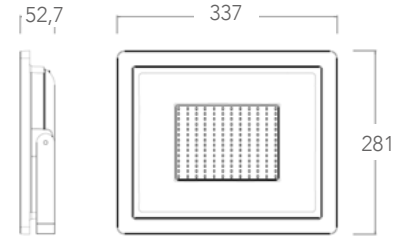

informazioni tecniche - technical information

LED-URANO-150  
8031414861934

4000K

150W

10 500 Lumen

120°


PF  
0,90

IP65

>10 000 on/off

h 20 000

230V  
DRIVER FREE

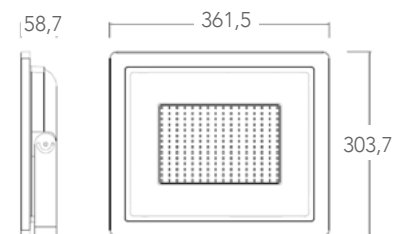

informazioni tecniche - technical information

LED-URANO-200  
8031414861910

4000K

200W

14 000 Lumen

120°

PF  
0,90

IP65

>10 000 on/off

h 20 000

230V  
DRIVER FREE

CLASSE  
A+



SMD



Ra  
>80

CE



RoHS  
WEEE COMPLIANT

# URANO

Proiettore in alluminio finitura nera LED integrato con sensore  
*Built-in LED aluminium flood lamp black finish with sensor*



## informazioni tecniche - technical information

**LED-URANO-S10**  
8031414861460



10W

700 Lumen



>10 000 on/off

**230V**  
DRIVER FREE



5-2000LUX  
 min 7-15 second  
 max 8-12min

h 20 000


8-10 m

**LED-URANO-S30**  
8031414861477



30W

2100 Lumen



>10 000 on/off



**230V**  
DRIVER FREE



5-2000LUX  
 min 7-15 second  
 max 8-12min

h 20 000

8-10 m

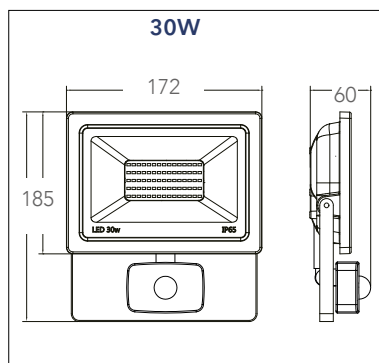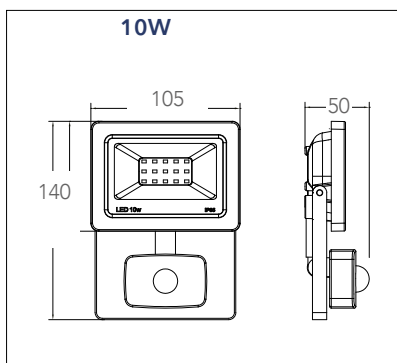

CLASSE <b>A+</b>		<b>SMD</b> 		<b>Ra &gt;80</b>	<b>CE</b>		<b>RoHS</b> WEEE COMPLIANT
------------------	--	----------------	--	------------------	-----------	--	-------------------------------

# URANO

Proiettore LED portatile  
LED portable flood light



informazioni tecniche - technical information

LED-URANO-P20  
8031414861453

4000K

20W

1400 Lumen



120°



>15 000 on/off

h 20 000

230V  
DRIVER FREE

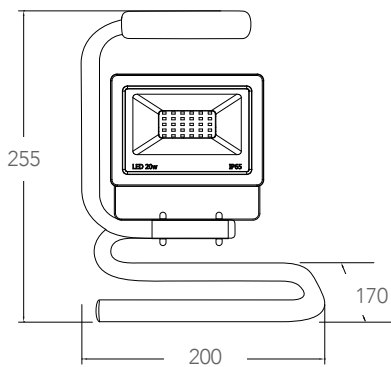

CLASSE  
**A**



SMD



Ra  
>80

CE




RoHS  
WEEE COMPLIANT

## TRIPOD

Accessori per proiettori  
Flood light accessories




Sistema di fissaggio singolo e doppio  
Single and double connection system

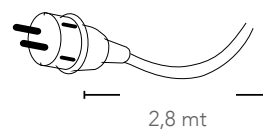

informazioni tecniche - technical information

I-TRIPOD  
8031440361729

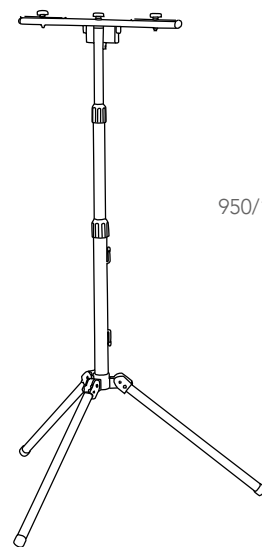

950/1800

555

## FRAME

Accessori per proiettori  
Flood light accessories



### I-FRAME-L-GR

8031440361880

Staffa fissaggio angolare colore **grigio**  
Metal corner wall arms **gray** color



### I-FRAME-L-BCO

8031440364577

Staffa fissaggio angolare colore **bianco**  
Metal corner wall arms **white** color



### I-FRAME-V-GR

8031440364584

Staffa V mobile 30° fissaggio parete colore **grigio**  
Metal wall arms orientable 30° **gray** color



### I-FRAME-V-BCO

8031440364553

Staffa V mobile 30° fissaggio parete colore **bianco**  
Metal wall arms orientable 30° **white** color







## LAMPADE INDUSTRIALI

La nostra gamma di prodotti industriali a LED appositamente disegnati per l'illuminazione di strade , capannoni , zone di lavoro , ampi spazi , emergenza , dispongono delle ultime tecnologie illuminotecniche a lunga durata che ottimizzano e permettono un grande risparmio del consumo energetico

## HIGHT BAY

*Our range of LED industrial products specially designed for the streets lighting , buildings, work areas, large spaces, emergency, have the latest long-life lighting technologies that optimize and preliminary matter a great saving of energy consumption*




# ATLANTIC ST

Plafoniera stagna per tubi a LED bilampada in PC+PC  
 Waterproof lamp for double LED tube in PC+PC



## informazioni tecniche - technical information

LED-ATLANTIC-ST-60 88031440355315	2xT8 230V non include - not included		
LED-ATLANTIC-ST-120 8031440355322	2xT8 230V non include - not included		
LED-ATLANTIC-ST-150 8031440355292	2xT8 230V non include - not included		

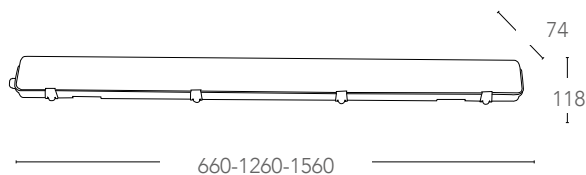

# OCEAN

Plafoniere stagno LED integrato in policarbonato  
Built-in LED waterproof ceiling lamps in PC



## informazioni tecniche - technical information

LED-OCEAN-30 8031440357760	4000K	9W	☀️ 765 Lm	🔺 120°	💧 IP65	🔌 >15 000 on/off	🕒 h 25 000	🔋 driver incluso
LED-OCEAN-60 8031440357777	4000K	18W	☀️ 1530 Lm	🔺 120°	💧 IP65	🔌 >15 000 on/off	🕒 h 25 000	🔋 driver incluso
LED-OCEAN-120 8031440357784	4000K	36W	☀️ 3060 Lumen	🔺 120°	💧 IP65	🔌 >15 000 on/off	🕒 h 25 000	🔋 driver incluso
LED-OCEAN-150 8031440357791	4000K	45W	☀️ 3820 Lumen	🔺 120°	💧 IP65	🔌 >15 000 on/off	🕒 h 25 000	🔋 driver incluso



328-628-1228-1528



# UFO


Lampada LED ufo high bay in alluminio  
Aluminium ufo high bay LED lamp




## informazioni tecniche - technical information

LED-UFO-100 8031414861927	4000K	100W	☀️ 13000Lumen	PF 0,90	90°	IP65	⏻ >30 000 on/off	🕒 h 50 000	🔌 driver incluso
LED-UFO-150 8031414861958	4000K	150W	☀️ 19500 Lumen	PF 0,90	90°	IP65	⏻ >30 000 on/off	🕒 h 50 000	🔌 driver incluso
LED-UFO-NR-100 8031414864584	4000K	100W	☀️ 13000Lumen	PF 0,90	60°	IP65	⏻ >30 000 on/off	🕒 h 50 000	🔌 driver incluso
LED-UFO-NR-150 8031414862733	4000K	150W	☀️ 19500 Lumen	PF 0,90	60°	IP65	⏻ >30 000 on/off	🕒 h 50 000	🔌 driver incluso

### 100W

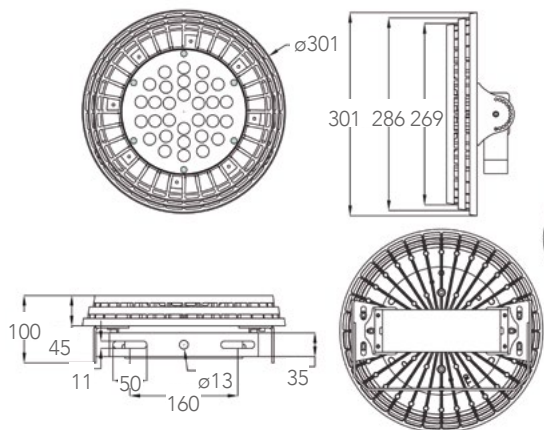

### 150W

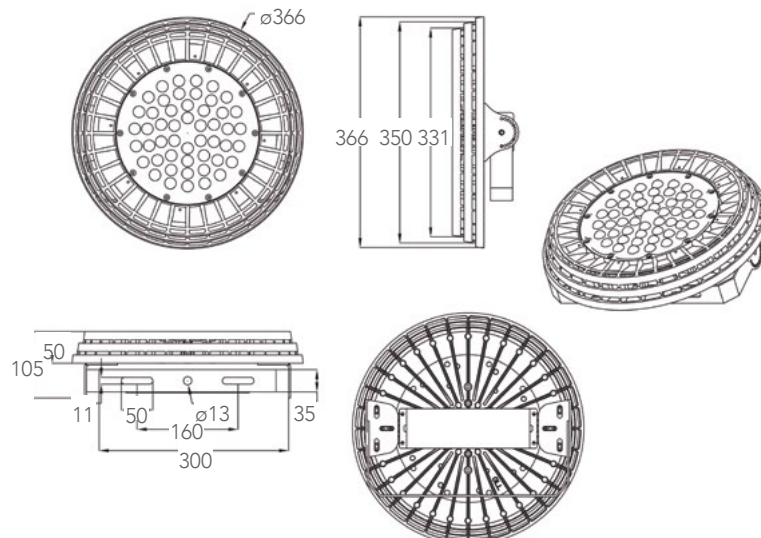

CLASSE <b>A+</b>		SMD		Ra <b>&gt;80</b>	CE	EMC	RoHS WEEE COMPLIANT
---------------------	--	-----	--	---------------------	----	-----	------------------------


# UFO

Lampada LED ufo high bay in alluminio  
Aluminium ufo high bay LED lamp



## informazioni tecniche - technical information

LED-UFO-200 8031414861941	4000K	200W	☀️ 26000 Lumen	PF 0,90	90°	IP65	⏻ >30 000 on/off	🕒 h 50 000	🔌 driver incluso
LED-UFO-NR-200 8031414864591	4000K	200W	☀️ 26000 Lumen	PF 0,90	60°	IP65	⏻ >30 000 on/off	🕒 h 50 000	🔌 driver incluso

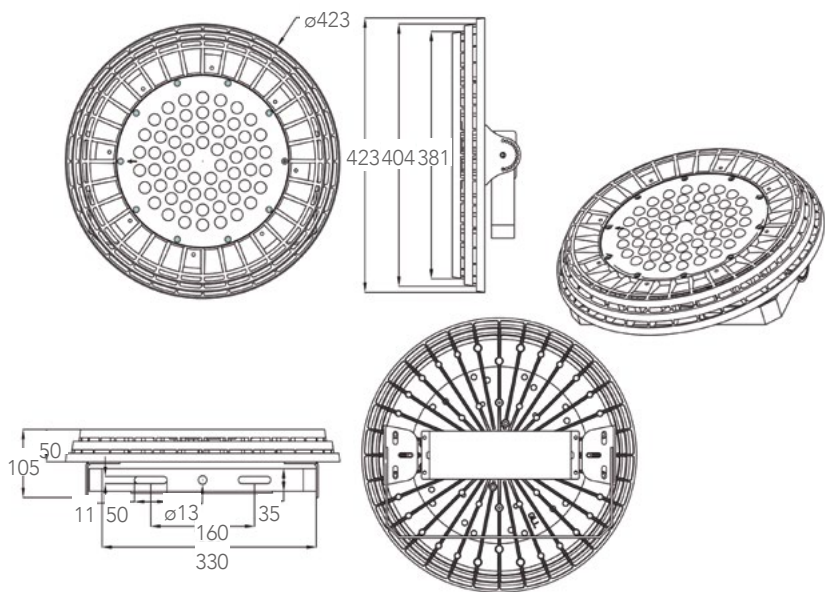





# FUTURA

Lampada LED high bay in alluminio  
Aluminium high bay LED lamp



## informazioni tecniche - technical information

LED-FUTURA-NR-100W 8031440358910	4000K	100W	☀️ 9500Lumen	PF 0,90	55°	IP65	⏻ >15 000 on/off	🕒 h 25 000	🔌 driver incluso
LED-FUTURA-NR-150W 8031440358880	4000K	150W	☀️ 14500 Lumen	PF 0,90	55°	IP65	⏻ >15 000 on/off	🕒 h 25 000	🔌 driver incluso
LED-FUTURA-NR-200W 8031440358897	4000K	200W	☀️ 19500 Lumen	PF 0,90	55°	IP65	⏻ >15 000 on/off	🕒 h 25 000	🔌 driver incluso

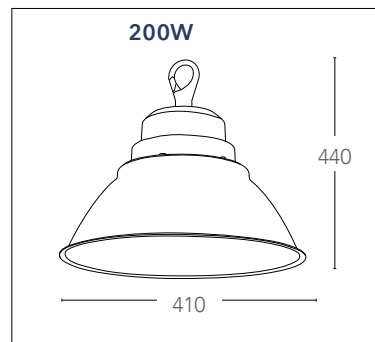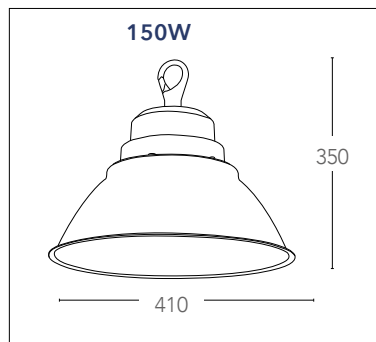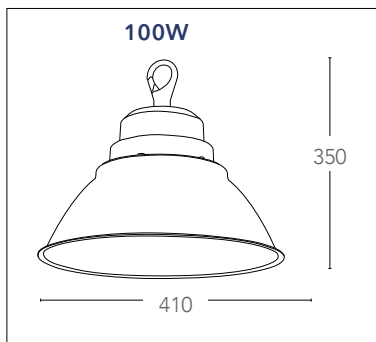


# FUTURA

Lampada LED high bay in alluminio  
Aluminium high bay LED lamp



## informazioni tecniche - technical information

LED-FUTURA-100W 8031440355254	4000K	100W	☀️ 9500 Lumen	PF 0,90	100°	IP65	⏻ >15 000 on/off	🕒 h 25 000	🔌 driver incluso
LED-FUTURA-150W 8031440355247	4000K	150W	☀️ 14500 Lumen	PF 0,90	100°	IP65	⏻ >15 000 on/off	🕒 h 25 000	🔌 driver incluso
LED-FUTURA-200W 8031440355230	4000K	200W	☀️ 19500 Lumen	PF 0,90	100°	IP65	⏻ >15 000 on/off	🕒 h 25 000	🔌 driver incluso

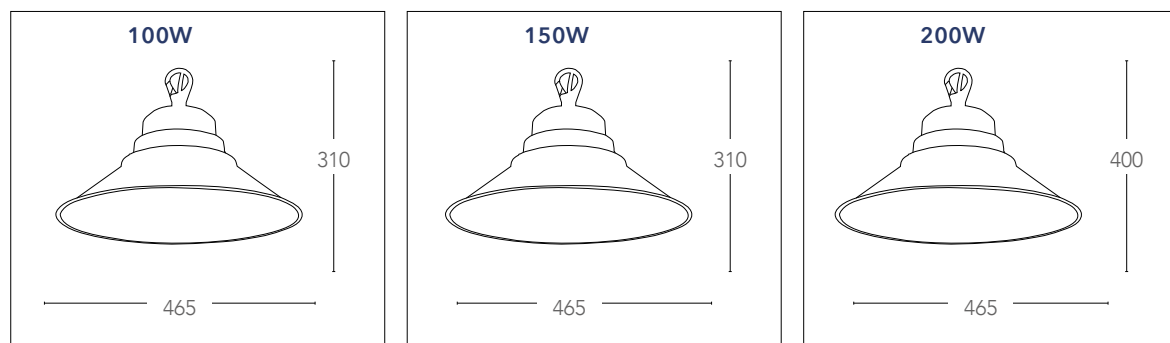

CLASSE <b>A</b>		SMD 		Ra >80	CE		RoHS WEEE COMPLIANT
--------------------	--	---------	--	-----------	----	--	------------------------

## VISION

Armatura stradale a LED in alluminio  
Aluminium LED street light



### informazioni tecniche - technical information

LED-VISION-20 8031440358866	4000K	20W	☀️ 2000 Lumen		150x90°	IP65	⏻ >15 000 on/off	🕒 h 40 000	230V DRIVER FREE
LED-VISION-60 8031440358873	4000K	60W	☀️ 6000 Lumen	PF 0,90	150x90°	IP65	⏻ >15 000 on/off	🕒 h 40 000	230V DRIVER FREE
LED-VISION-100 8031440358842	4000K	100W	☀️ 10000 Lm	PF 0,90	150x90°	IP65	⏻ >15 000 on/off	🕒 h 40 000	230V DRIVER FREE
LED-VISION-150 8031440358859	4000K	150W	☀️ 15000 Lm	PF 0,90	150x90°	IP65	⏻ >15 000 on/off	🕒 h 40 000	230V DRIVER FREE







**LED-VISION-ADAT50**  
8031440358828

Adattatore per 20W e 60W



**LED-VISION-ADAT60**  
8031440358835

Adattatore per 100W e 150W

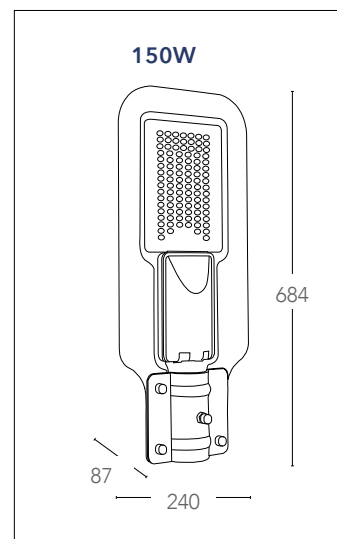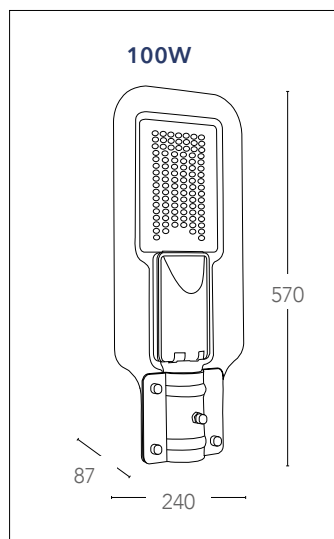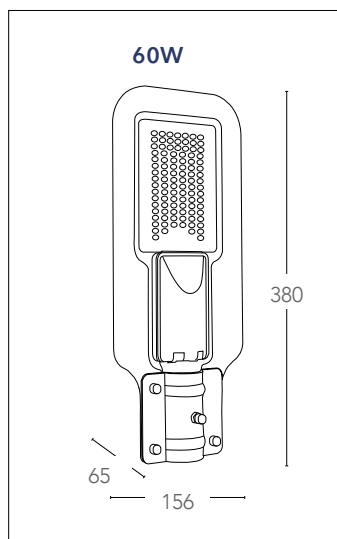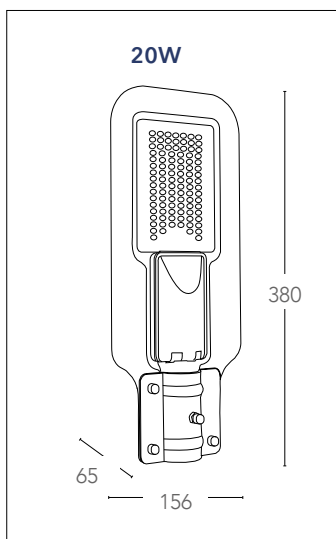

CLASSE <b>A</b>		<b>SMD</b> 		<b>Ra</b> <b>&gt;80</b>	<b>CE</b>		<b>RoHS</b> WEEE COMPLIANT
--------------------	--	----------------	--	----------------------------	-----------	--	-------------------------------





# MASTER

Proiettore in alluminio LED integrato  
Aluminium built-in LED floor light



## informazioni tecniche - technical information

LED-MASTER-240  
8031414862092



240W



32400Lumen



>25 000 on/off



h 50 000



driver incluso

LED-MASTER-480  
8031414862115



480W



64800Lumen





>25 000 on/off



h 50 000




driver incluso

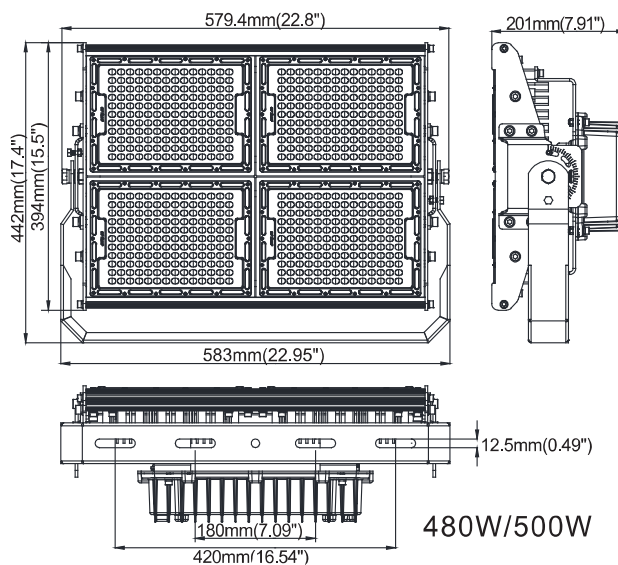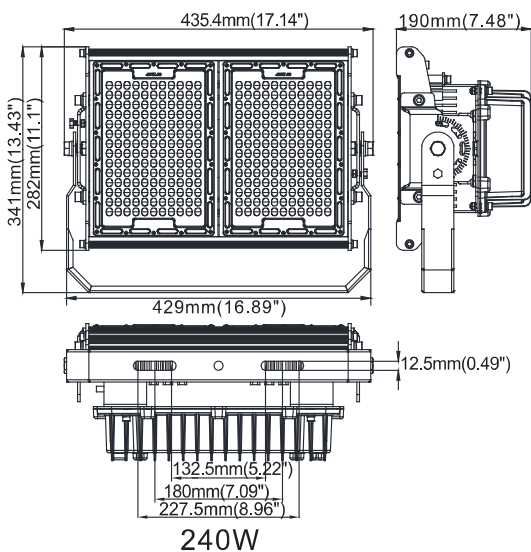

CLASSE <b>A+</b>		<b>SMD</b> 		<b>Ra</b> <b>&gt;80</b>	<b>CE</b>		
---------------------	--	----------------	--	----------------------------	-----------	--	--

# MASTER

Proiettore in alluminio LED integrato  
Aluminium built-in LED floor light

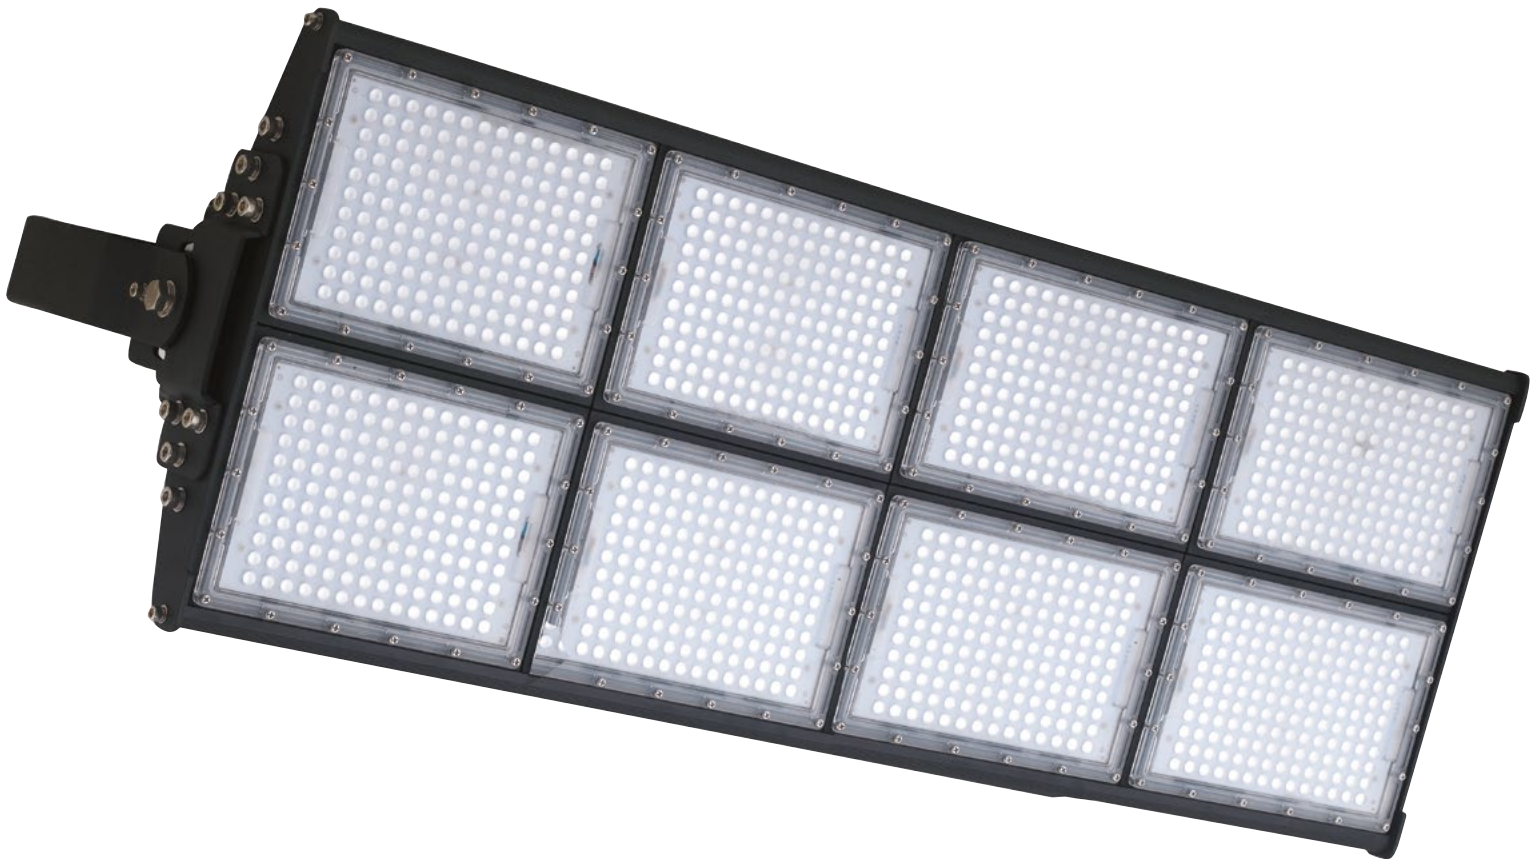

## informazioni tecniche - technical information

LED-MASTER-960  
8031414862122



960W



129600Lumen



60X100°




>25 000 on/off



h 50 000



driver incluso

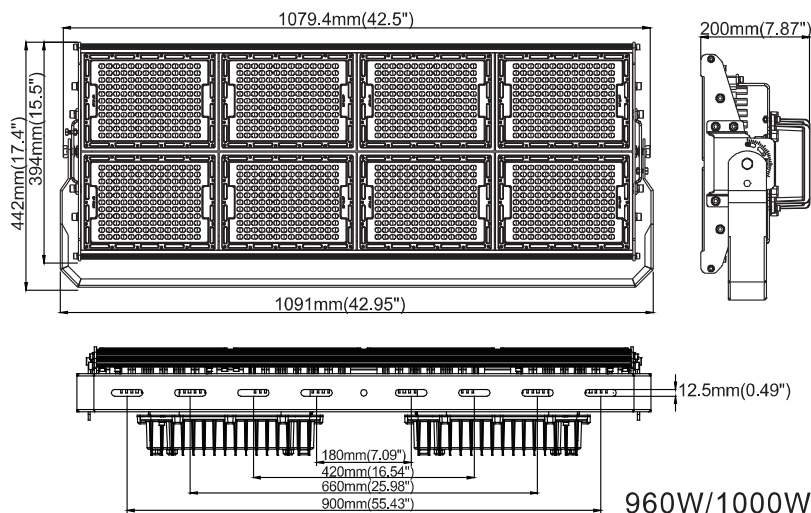

CLASSE  
**A**



SMD



Ra  
>80


CE



RoHS  
WEEE COMPLIANT


# ENERGY

Faro LED integrato per pensiline  
Gas station built-in LED light

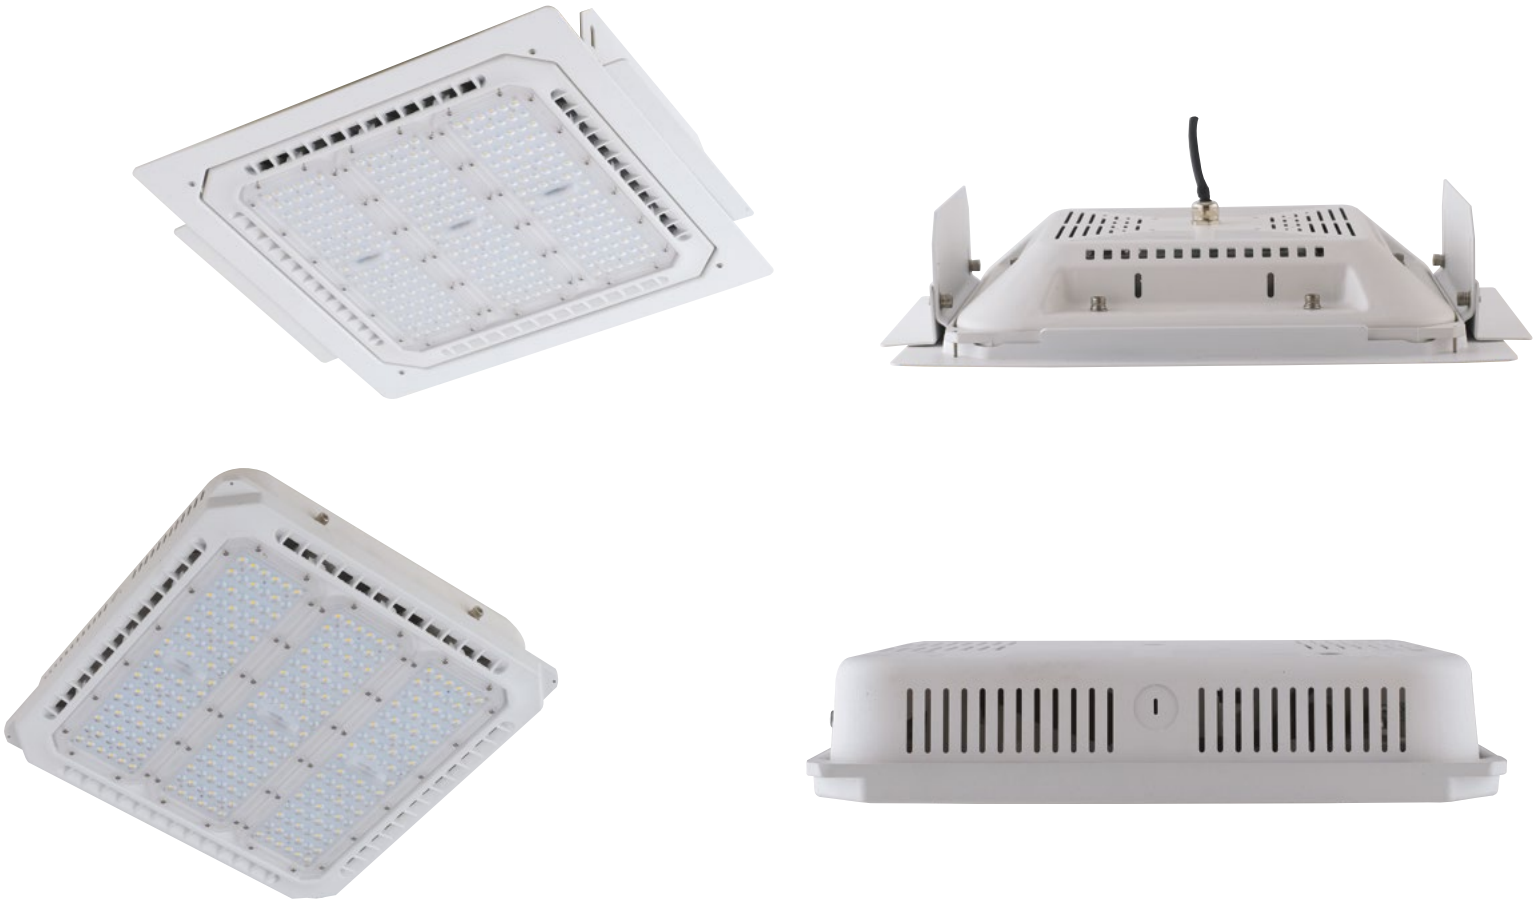

## informazioni tecniche - technical information

LED-ENERGY-80-INC 8031414862085	4000K	80W	☀️ 10500Lumen	80°	IP65	⏻ >25 000 on/off	🕒 h 50 000	🔌 driver incluso
LED-ENERGY-80-PL 8031414862078	4000K	80W	☀️ 10500 Lumen	80°	IP65	⏻ >25 000 on/off	🕒 h 50 000	🔌 driver incluso

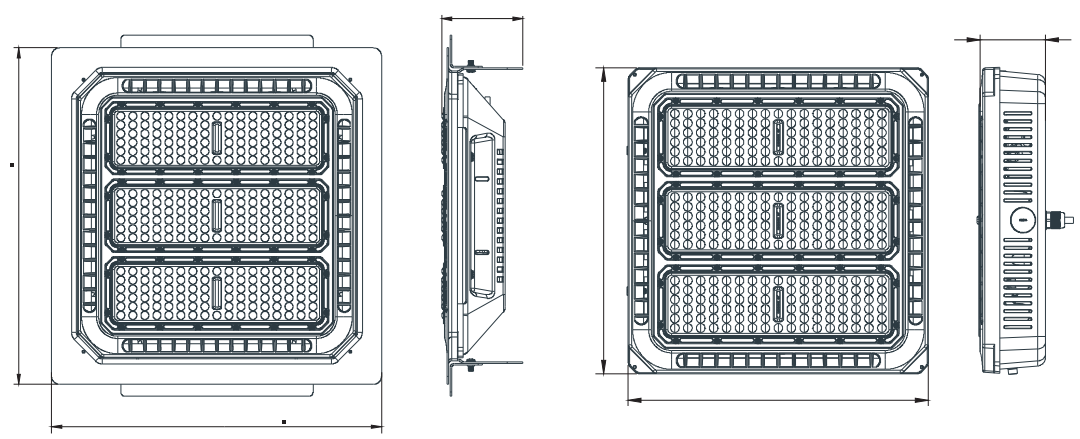

L'apparecchiatura o il sistema fa riferimento ai seguenti contrassegni:  
The equipment shall refer to the following symbols:

Ex II 2 G Ex d IIC T4 Gb	Ex II 2 D Ex tb IIIC T4 Db IP66	CLASSE A+	⊘	SMD	⏚	Ra >80	CE	EMC	RoHS WEEE COMPLIANT
--------------------------	---------------------------------	-----------	---	-----	---	--------	----	-----	---------------------



1112

112

9

## HELP

Lampade di emergenza LED in policarbonato batteria Ni-Cd  
Emergency LED lamp in PC with Ni-Cd battery



informazioni tecniche - technical information

LED-HELP-30  
8031440354837



4W



195 Lumen

Ni-Cd 4,8V 900 mAh




carica/recharge 12h

life time 4 years



3h full emergency light

adesivi inclusi - labels included

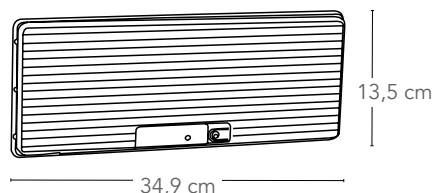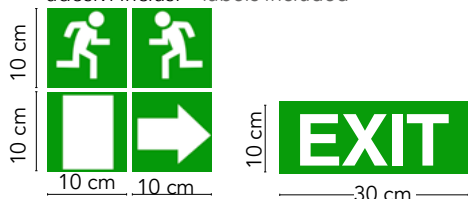

X	1	****	180
---	---	------	-----

CLASSE  
**A+**



**SMD**  
SMD



**Ra**  
>80

**CE**



**RoHS**  
WEEE COMPLIANT

## HELP

Lampade di emergenza LED in policarbonato batteria Ni-Cd incasso cassetta di derivazione 503.  
Emergency LED lamp in PC with Ni-Cd battery, fit with recess box 503.




informazioni tecniche - *technical information*


LED-HELP-503  
8031414862573



2,5W

 Ni-Cd 2,4V 800 mAh

 carica/recharge 12h

 life time 4 years



3h full emergency light

X	1	****	180
---	---	------	-----

SMD  




Ra  
>80

CE



## HELP

Lampade di emergenza LED in policarbonato batteria Ni-Cd  
Emergency LED lamp in PC with Ni-Cd battery



informazioni tecniche - technical information


LED-HELP-511  
8031414862566



3,8W

 Ni-Cd 3,6V 1000 mAh



 carica/recharge 12h

 life time 4 years



3h full emergency light

adesivo incluso - label included

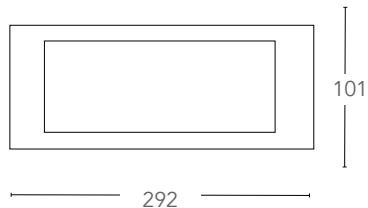

X	1	****	180
---	---	------	-----



Ra  
>80



## HELP

Lampade di emergenza LED in policarbonato batteria Ni-Cd  
Emergency LED lamp in PC with Ni-Cd battery





### informazioni tecniche - technical information

LED-HELP-12  
8031440353496




3W

 170 Lumen

 Ni-Cd 4,8V 900 mAh



 carica/recharge 12h

 life time 4 years



3h full emergency light

adesivo incluso - label included

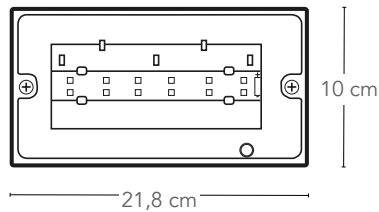

X	1	****	180
---	---	------	-----

CLASSE  
**A**



SMD  




Ra  
>80

CE



# ETERNA

Plafoniera LED in policarbonato batteria Ni-Cd e funzione d'emergenza combinata e permanente  
 Ceiling LED lamp in PC with Ni-Cd battery and double emergency function



## informazioni tecniche - technical information

LED-ETERNA-120  
 8031440358538



20W

lampada emergenza  
 ☀️ 200 Lumen

lampada emergenza  
 📡 DC

🔌 >10 000 on/off

🔋 Ni-Cd 4,8V 900 mAh



plafoniera  
 ☀️ 1600 Lumen

plafoniera  
 ⚡ AC



🕒 h 30 000

🔋 carica/recharge 12h

🔋 life time 4 years



3h full emergency light

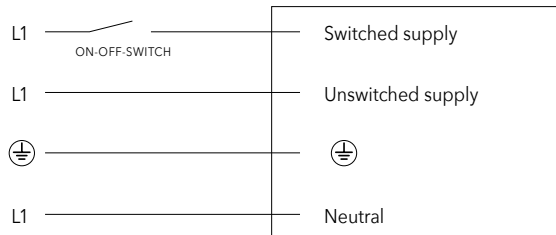

X	1	****	180
---	---	------	-----





informazioni tecniche - *technical information*

**LED-ETERNA-54**  
8031440358521



16W

lampada emergenza  
☀️ 120 Lumen

lampada emergenza  
🔌 DC

🕒 >10 000 on/off

🔋 Ni-Cd 4,8V 900 mAh



plafoniera  
☀️ 900 Lumen

plafoniera  
⚡ AC



🕒 h 30 000

🔋 carica/recharge 12h

🕒 life time 4 years



3h full emergency light

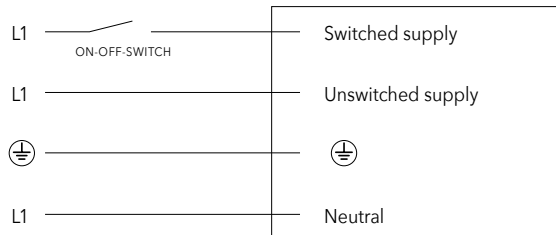

X	0	****	180
---	---	------	-----







## LUCI DECORATIVE TECNICHE

La nostra gamma di prodotti offrono molteplici soluzioni per realizzare regie luminose per l'illuminazione decorativa di strutture architettoniche, facciate palazzi, fontane. Offerte con un'ampia gamma di fasci ed effetti luminosi, modulabili a seconda delle più svariate esigenze, costruiti in acciaio e pressofusione di alluminio, resistenti agli agenti atmosferici.

## TECHNICAL DECORATION LIGHTING

*Our range of products offer multiple solutions to create lighting directions for decorative lighting of architectural structures, exteriors building, fountains. Offers a wide range of beams and lighting effects, modulated according to the various needs, made of steel and die-cast aluminum, weather resistant*

# RAYS



Proiettore LED RGB full color in alluminio  
LED RGB full color lamp in aluminium



**LED-RAYS-30P**  
8031440358071





30X1W  
230V

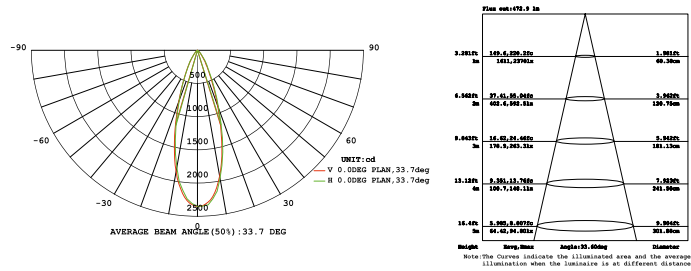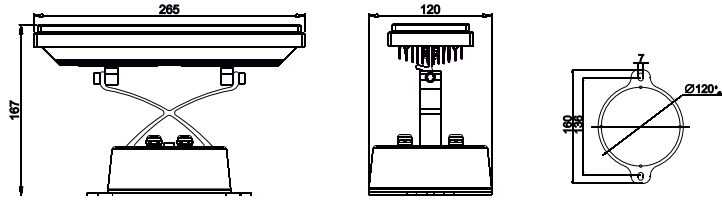

**LED-RAYS-36P**  
8031440355445





36X1W  
230V

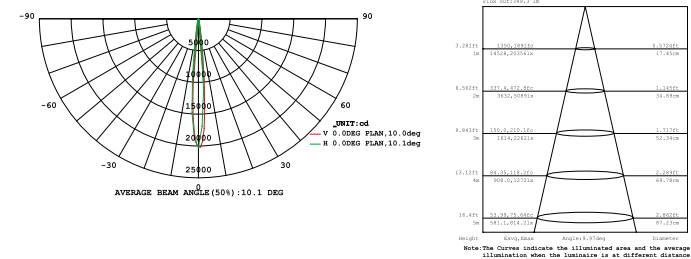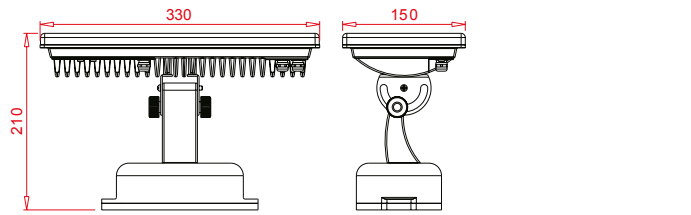

**LED-RAYS-72P**  
8031440358040



72X2W  
230V

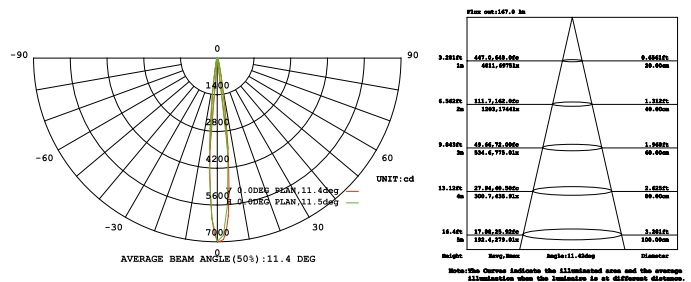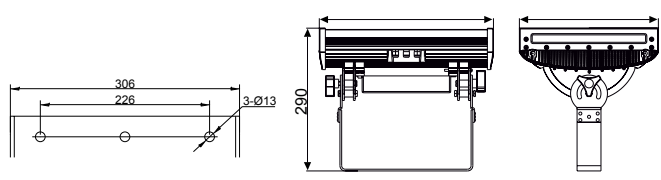

# WALLWASHER





Barra LED RGB full color in alluminio  
LED wallwasher RGB full color in aluminium



LED-WALLWASHER-18  
8031440359559






18X2W  
230V

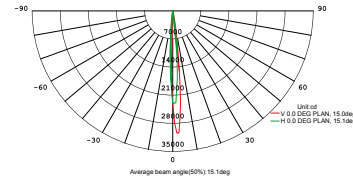

LED-WALLWASHER-36  
8031440359528



36X2W  
230V

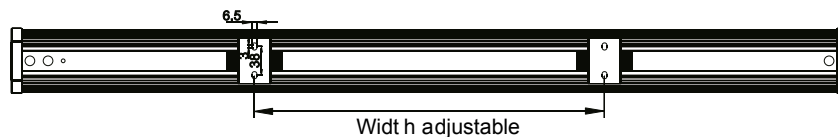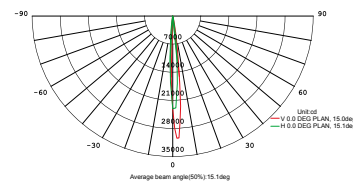

# IRIDE

Proiettore LED RGB FULL COLOR in alluminio  
LED RGB full color lamp in aluminium



**LED-IRIDE-3P**  
8031440358101



3X1W  
12-24V DC






**LED-IRIDE-3P-BCO**  
8031440359719



3X1W  
12-24V DC



240 Lumen

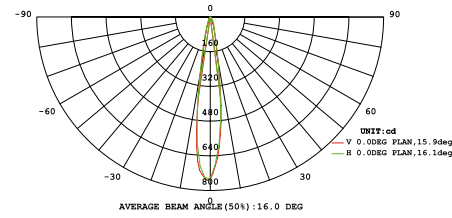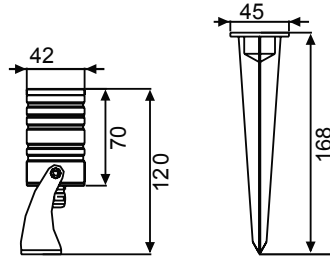

**LED-IRIDE-9P**  
8031440358118



9X1W  
12-24V DC






**LED-IRIDE-9P-BCO**  
8031440359702



9X1W  
12-24V DC



720 Lumen

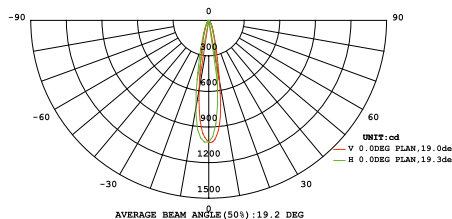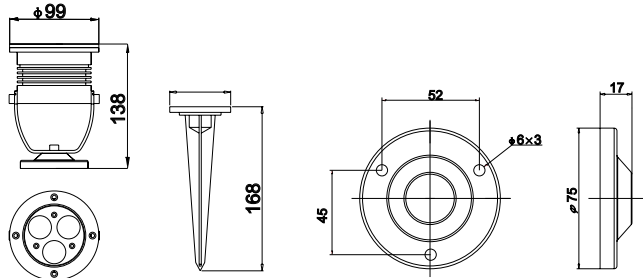



**LED-IRIDE-18P**  
8031440358088



18X1W  
24V DC





**LED-IRIDE-18P-BCO**  
8031440359689



18X1W  
24V DC



1620 Lumen

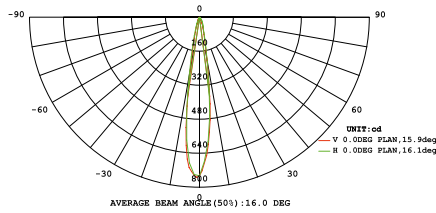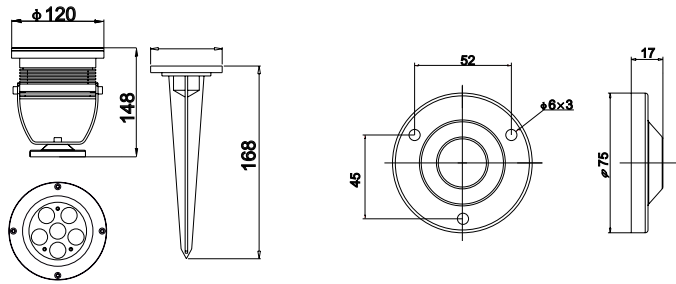

Flux out 18W-3 3m

Height	Beam Area	Beam Diameter	Average Illumination
3.280ft 1m	73.41, 134.37ft <sup>2</sup> 706.6, 1222ft <sup>2</sup>	2.135ft 64.76cm	2.135ft 64.76cm
6.560ft 2m	146.82, 268.74ft <sup>2</sup> 1363.2, 2444ft <sup>2</sup>	4.270ft 129.52cm	1.067ft 32.43cm
9.840ft 3m	220.23, 403.11ft <sup>2</sup> 2044.8, 3666ft <sup>2</sup>	6.405ft 195.17cm	0.711ft 216.81cm
13.120ft 4m	293.64, 537.48ft <sup>2</sup> 2726.4, 4888ft <sup>2</sup>	8.540ft 259.92cm	0.533ft 162.90cm
16.400ft 5m	367.05, 671.85ft <sup>2</sup> 3398.0, 6410ft <sup>2</sup>	10.675ft 324.45cm	0.426ft 130.00cm

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

# RAINBOW

Incasso LED RGB in alluminio CROMATO O BIANCO  
LED RGB down light in chrome or white aluminium



**R** **G** **B** **W**  
RED GREEN BLUE WHITE



## informazioni tecniche - technical information

INC-RAINBOW-M  
8031414862603



5W



DC 12V



non include  
not included

Driver non incluso  
Driver not included

INC-RAINBOW-M BCO  
8031414862627



5W




DC 12V



non include  
not included


Driver non incluso  
Driver not included



ø 100



Connessione in parallelo  
Parallel connection system









# NEPTUNE


Proiettore LED RGB full color in alluminio  
 LED RGB full color lamp in aluminium





LED-NEPTUNE-36P  
 8031440358057



36X1W  
 24V DC



LPL-6-36 P

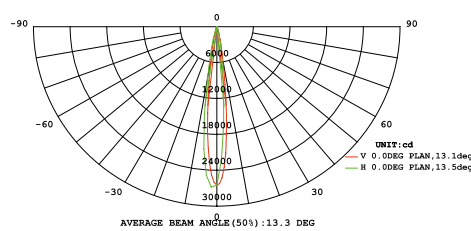

Height	Beam	Area (m²)	Quantity
3.281ft	1.600, 2.882ft	0.163221	1
6.562ft	3.200, 5.764ft	0.652884	1
9.843ft	4.800, 8.646ft	1.632211	1
13.124ft	6.400, 11.528ft	2.912442	1
16.405ft	8.000, 14.410ft	4.192673	1


Note: The Curves indicate the illuminated area and the average illumination when the luminaires is at different distance.



INC-POOL-PAR56  
8031440359511

ARMATURA ABS PER PAR56

**CAVO INCLUSO CABLE INCLUDED**

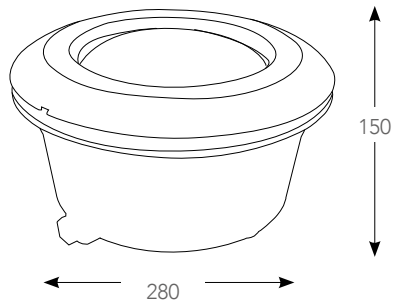

# PAR56





Lampada LED a immersione  
Immersion LED bulb-light



LED-PAR56-RGB  
8031440359535



19X1W  
12V DC

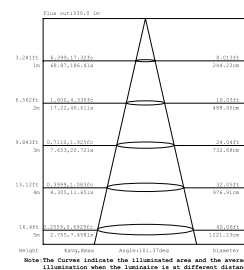
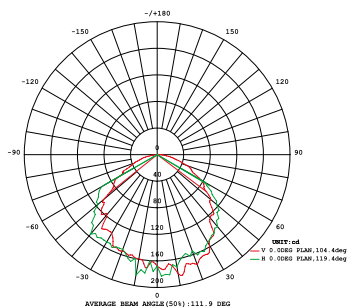
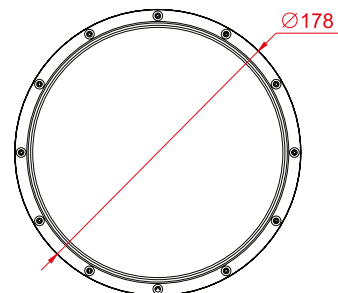
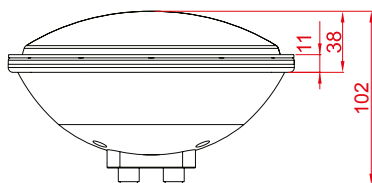


LED-PAR56-BCO  
8031440359504



1050 Lumen

19X1W  
12V DC

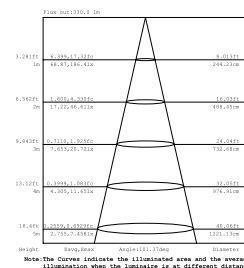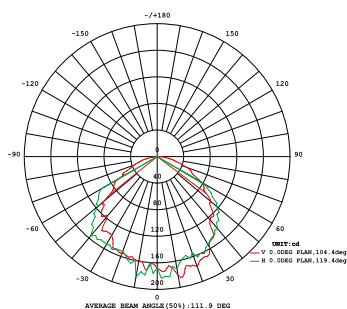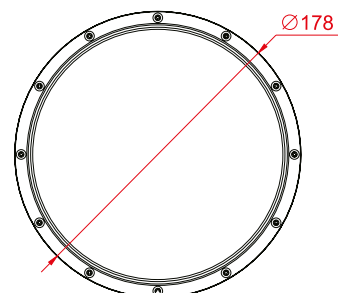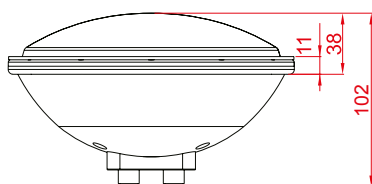

## CONTROLLER

Scatola comando fari proiettori LED 6 canali collegabili DMX 18 canali  
*LED lamp control box 6 output ports, connectable with DMX 18-channel*





**CONTROLLER-CTR-RGB**  
 8031440358026

CONTROLLO C/PORTA DMX512 LED RGB INPUT 230V AC  
 OUTPUT 12V/24V DC 300W 6 CANALI RGB (50W)

**CONTROLLER-CTR-RGB12**  
 8031440355438


CONTROLLO C/PORTA DMX512 LED RGB INPUT 230V AC  
 OUTPUT 12V DC 300W 6 CANALI RGB (50W)

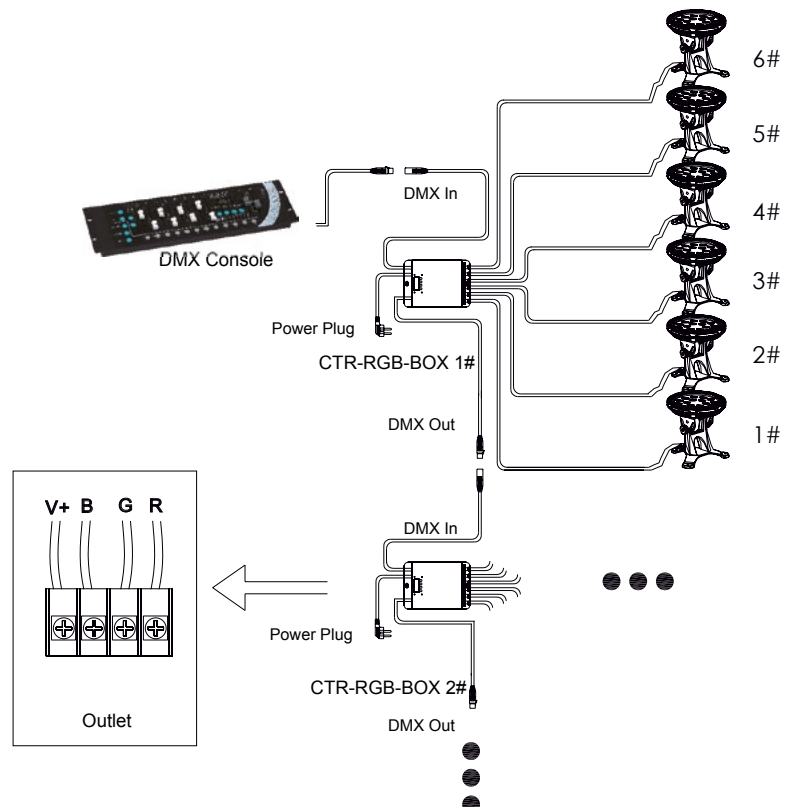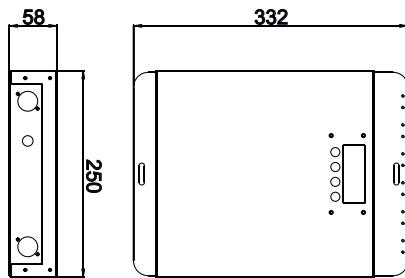





**CONTROLLER-PRO-3**  
8031440358033

CONTROLLER MASTER 3 CANALI PER USO PROIETTORI IN MODALITA EASY IN 230V OUT DMX/XLR-3 2 CANALI IP20

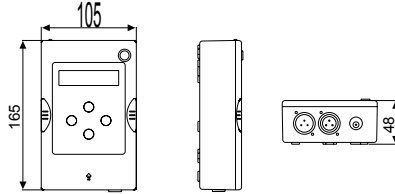

**CONTROLLER-PRO-2**  
8031440358002

CONTROLLER DMX LED 3 CANALI RGB SEGNALE OUTPUT DMX/XLR-3 (DUE USCITE) IP20 CON CAVO CARICATORE

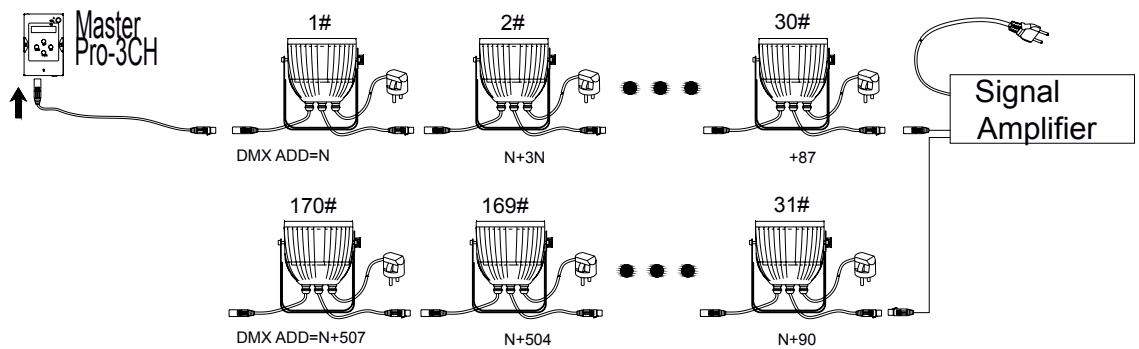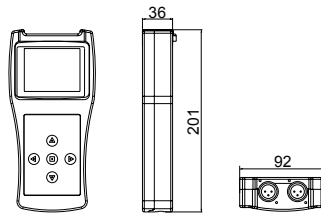



LED-SUNLITE-DE3  
8031440359498

SUNLITE 2X512 DMX ESA PRO/SUITE 2




## SUNLITE



LED-SUNLITE-U9  
8031440359467

SUNLITE CONTROLLER 256 CANALI INPUT  
(218 STEPS MAX)



## SUNLITE



LED-SUNLITE-GU2  
8031422251093

SUNLITE DMX STICK-GU2 128 CANALI INPUT  
240V




# CONTROLLER




**CONTROLLER-POOL**  
8031440359481


CONTROLLER 240V AC MAX 5A/1100W IP65 DISTANZA MAX 30MT

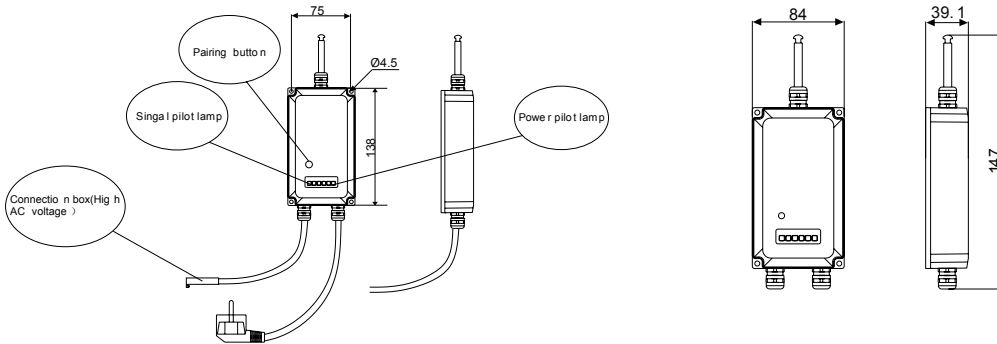

## E-1. Recommended control mode and lamp

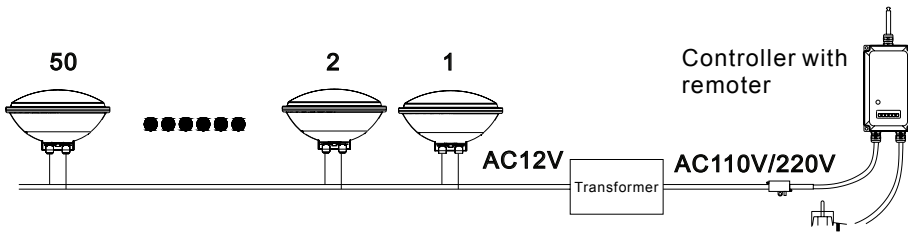

## E-2. Other control modes and lamps



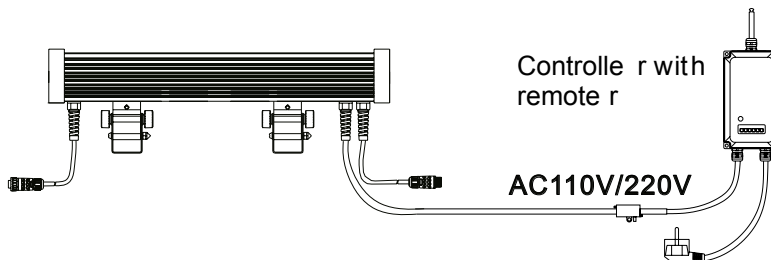


# SPLITTER



SPLITTER-DMX-4  
8031440359542

SPLITTER DMX 6W XLR-3X4PCS XLR-5X4PCS

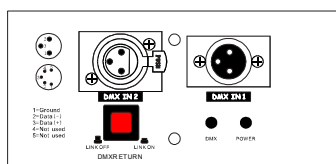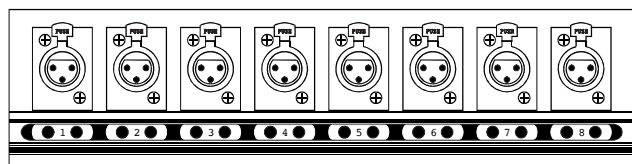

## DRIVER - ACCESSORI



### I-DRIVER-HLG-120-12

8031440360272  
ALIMENTATORE MW HLG  
120W 12V IP67  
mis. 220x68x38,8

### I-DRIVER-HLG-120-24

8031440360241  
ALIMENTATORE MW HLG  
120W 24V IP67  
mis. 220x68x38,8



### I-DRIVER-HLG-320-12

8031440360258  
ALIMENTATORE MW HLG  
320W 12V IP67  
mis. 252x90x43,8

### I-DRIVER-HLG-320-24

8031440360227  
ALIMENTATORE MW HLG  
320W 24V IP67  
mis. 252x90x43,8



### TRASFORMATORE-120

8031440355094  
TRASFORMATORE DI TEN-  
SIONE 120W INPUT 240V AC  
OUTPUT 12V AC IP44 10A  
mis. 180x13,3 mm



### LED-IRIDE-CAVO-2M-2P

8031440355452  
CAVO 2 POLI X FARO IRIDE  
BIANCO ALLUMINIO IP65  
2 mt



### LED-IRIDE-CAVO-2M

8031440358095  
CAVO RGB 4 POLI X FARO IRIDE  
RGB ALLUMINIO IP65 BIANCO  
2 mt



### CONNETTORE-M

8031440355469  
CONNETTORE **IP68**  
MASCHIO PER DMX



### CONNETTORE-F

8031440355476  
CONNETTORE **IP68**  
FEMMINA PER DMX



### CONNECTBOX-IP68-3

8031440358903  
SCATOLA CONNESSIONE  
**IP68** A TRE POLI  
Misure 35x115x71 mm



### CONNECTBOX-IP68-2

8031440358927  
SCATOLA CONNESSIONE  
**IP68** A DUE POLI  
Misure 30x115x41 mm



### GUAINA

8031440355483  
GUAINA ISOLANTE **IP65**





## KIT STRIP E FIBRE OTTICHE

la nostra gamma di strip led per soddisfare le molteplici esigenze di applicazione , per illuminazione di arredo interno ed esterna , disponibili in varie potenze e wattaggi 12-24-230 V con gamma di colori bianchi e rgb , profili di alluminio , e driver

## STRIP

*our LED strip range to meet the multiple needs of application, for ambience lighting internal and external, available in various power and wattage 12-24-230V ,with range of white colors and rgb, aluminum profiles, and drivers*

# TAYLOR

Kit 12 pezzi luci LED fuga piastrelle  
LED 12 pcs set for tiles drain



## informazioni tecniche - technical information


LED-TAYLOR-KIT NERO  
8031440061278




12X0,275W



tot 60 Lumen



>10 000 on/off





h 25 000



driver incluso



On / Off

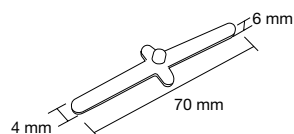

CLASSE  
**A**



SMD



Ra  
>80

CE



RoHS  
WEEE COMPLIANT

# STRIP

Strip LED comando touch con attacco USB  
LED strip light with switch touch control and USB connection



informazioni tecniche - technical information

STRIP-SURROUND  
8031440354202






3,5W  
15LED/80CM



>15 000 on/off

h 25 000



CLASSE <b>A</b>		SMD 		Ra <b>&gt;80</b>	CE	EMC	RoHS WEEE COMPLIANT
--------------------	--	---------	--	---------------------	----	-----	------------------------

## STRIP

Kit strisce luci LED monocolor  
LED strip light set single color



informazioni tecniche - technical information

2 strisce da 60 cm - 2 strisce da 30 cm - accessori e driver inclusi  
2 strip 60 cm - 2 strip 30 cm - accessories and driver included

STRIP-3528-KIT  
8031436561232

4200K

10W 12V

SMD

580 Lumen



On / Off



>10 000 on/off




h 25 000



driver incluso

SMD3528

Kit strisce luci LED RGB  
RGB LED strip set

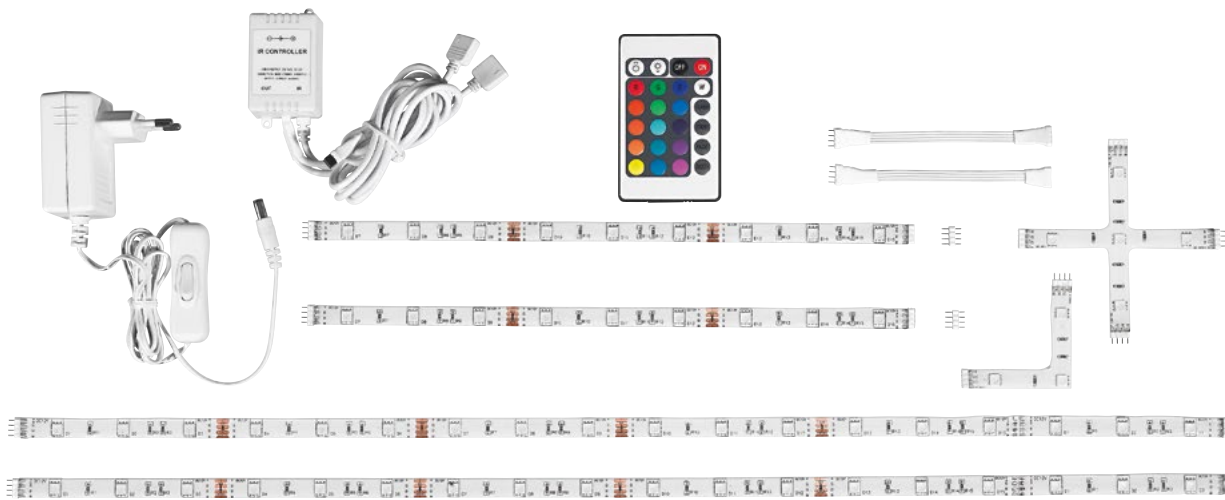

informazioni tecniche - technical information

2 strisce da 60 cm - 2 strisce da 30 cm - accessori e driver inclusi  
2 strip 60 cm - 2 strip 30 cm - accessories and driver included

STRIP-5050-KIT-RGB  
8031436571231



15W 12V

SMD

510 Lumen



On / Off



>10 000 on/off



h 25 000



driver incluso

SMD5050



CLASSE  
A



SMD



Ra  
>80

CE



RoHS  
WEEE COMPLIANT


# NEON FLEX

Neon flex LED 20 mt.  
LED neon flex 20 mt



## informazioni tecniche - technical information

<b>NEON-FLEX-BIANCO</b> 8031440361842		<b>240W</b> DC 24V	24000 Lumen	<b>SMD</b>  2800XLED SMD2835	>15 000 on/off	h 25 000	AC/DC 24V 10A 240W non include - not included	
<b>NEON-FLEX-BLU</b> 8031440364454		<b>240W</b> DC 24V	20000 Lumen	<b>SMD</b>  2800XLED SMD2835	>15 000 on/off	h 25 000	AC/DC 24V 10A 240W non include - not included	
<b>NEON-FLEX-GIALLO</b> 8031440364515		<b>240W</b> DC 24V	20000 Lumen	<b>SMD</b>  2800XLED SMD2835	>15 000 on/off	h 25 000	AC/DC 24V 10A 240W non include - not included	
<b>NEON-FLEX-ROSSO</b> 8031440364560		<b>240W</b> DC 24V	20000 Lumen	<b>SMD</b>  2800XLED SMD2835	>15 000 on/off	h 25 000	AC/DC 24V 10A 240W non include - not included	
<b>NEON-FLEX-VERDE</b> 8031440364546		<b>240W</b> DC 24V	20000 Lumen	<b>SMD</b>  2800XLED SMD2835	>15 000 on/off	h 25 000	AC/DC 24V 10A 240W non include - not included	





**NEON-FLEX-CAP**  
8031440364522

Kit 4 tappi in silicone



**NEON-FLEX-NEX**  
8031440364478

Connettore di giunzione entrata  
più uscita 15cm



**NEON-FLEX-NEX-T**  
8031440364485

Connettore T a 3 entrate





**NEON-FLEX-POWER**  
8031440364508

Innesto elettrico




**NEON-FLEX-STAFFE**  
8031440364492

Kit 2pz staffe

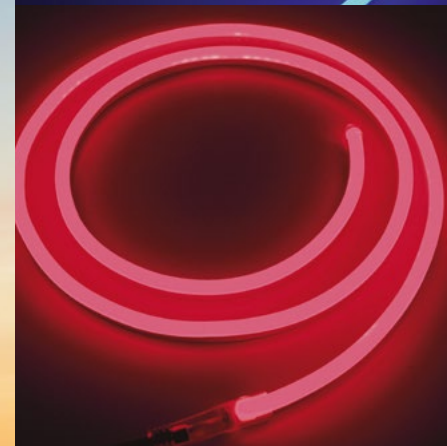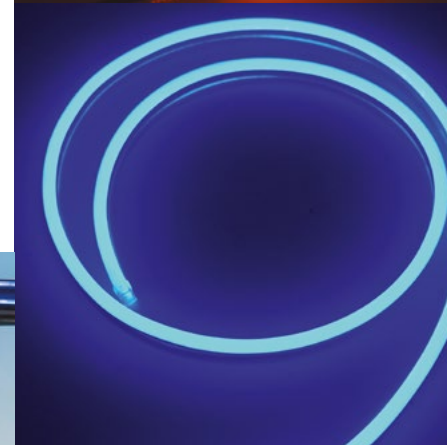

## STRIP LED CORRENTE COSTANTE

Strip LED corrente costante rotoli 30mt.  
Constant current strip light LED 30mt. roll




informazioni tecniche - technical information

<b>STRIPLED-CC30-C</b> 8031414864409		<b>7,2W/M</b> 36V	720 Lm/M	<b>SMD</b>  90XLED SMD2835	>15 000 on/off	h 25 000	DC 36V <b>constant voltage</b> non include - not included	<b>IP20</b>  senza silicone without silicon
<b>STRIPLED-CC30-F</b> 8031414864386		<b>7,2W/M</b> 36V	720 Lm/M	<b>SMD</b>  90XLED SMD2835	>15 000 on/off	h 25 000	DC 36V <b>constant voltage</b> non include - not included	<b>IP20</b>  senza silicone without silicon
<b>STRIPLED-CC30-M</b> 8031414864379		<b>7,2W/M</b> 36V	720 Lm/M	<b>SMD</b>  90XLED SMD2835	>15 000 on/off	h 25 000	DC 36V <b>constant voltage</b> non include - not included	<b>IP20</b>  senza silicone without silicon

## STRIP LED CORRENTE COSTANTE

Strip LED RGB corrente costante rotoli 15mt.  
Constant current strip light RGB LED 15mt. roll



informazioni tecniche - technical information

<b>STRIPLED-CC15-RGB</b> 8031414864560		<b>10W/M</b> 24V	<b>SMD</b>  60XLED SMD5050	>15 000 on/off	h 25 000	DC 24V <b>constant voltage</b> non include not included	 non include not included	<b>IP20</b>  senza silicone without silicon
---	--	---------------------	-------------------------------------	----------------	----------	--	---------------------------------	--



## STRIP



















Striscia luci LED rotoli da 5mt.  
LED strip light 5mt. roll



Per una corretta dissipazione  
applicare la strip su un supporto d'alluminio.

*For correct dissipation fix the strip light on  
aluminium support.*



### informazioni tecniche - technical information

<b>STRIPLED-240-C</b> 8031440359962	 <b>3200K</b>	<b>96W 24V</b>	 7200 Lumen	<b>SMD</b>  1200XLED SMD3528	 >15 000 on/off	 h 25 000	 AC/DC 24V 4,5A 96W non include - not included	<b>IP20</b> senza silicone without silicon
<b>STRIPLED-240-F</b> 8031440359948	 <b>5500K</b>	<b>96W 24V</b>	 7200 Lumen	<b>SMD</b>  1200XLED SMD3528	 >15 000 on/off	 h 25 000	 AC/DC 24V 4,5A 96W non include - not included	<b>IP20</b> senza silicone without silicon
<b>STRIPLED-240-M</b> 8031440359979	 <b>4200K</b>	<b>96W 24V</b>	 7200 Lumen	<b>SMD</b>  1200XLED SMD3528	 >15 000 on/off	 h 25 000	 AC/DC 24V 4,5A 96W non include - not included	<b>IP20</b> senza silicone without silicon




## STRIP

Striscia luci LED rotoli da 5mt.  
LED strip light 5mt. roll





informazioni tecniche - technical information

<b>STRIPLED-5050-C</b> 8031440355902		<b>72W 12V</b>	3600 Lumen	<b>SMD</b>  300XLED SMD5050	>15 000 on/off	h 25 000	AC/DC 12V 6A 72W non include - not included	<b>IP20</b> senza silicone without silicon
<b>STRIPLED-5050-F</b> 8031440355889		<b>72W 12V</b>	3600 Lumen	<b>SMD</b>  300XLED SMD5050	>15 000 on/off	h 25 000	AC/DC 12V 6A 72W non include - not included	<b>IP20</b> senza silicone without silicon
<b>STRIPLED-5050-M</b> 8031440355919		<b>72W 12V</b>	3600 Lumen	<b>SMD</b>  300XLED SMD5050	>15 000 on/off	h 25 000	AC/DC 12V 6A 72W non include - not included	<b>IP20</b> senza silicone without silicon

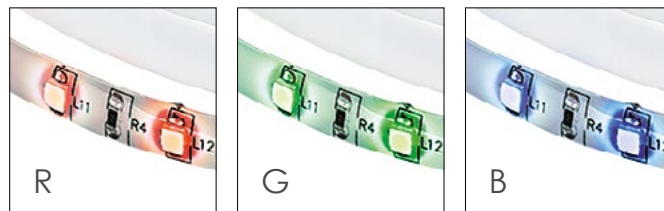

informazioni tecniche - technical information

<b>STRIPLED-5050-RGB</b> 8031440355896		<b>72W 12V</b>	<b>SMD</b>  300XLED SMD5050	>15 000 on/off	h 25 000	AC/DC 12V 6A 72W non include not included	non include not included	<b>IP20</b> senza silicone without silicon
---	--	----------------	--------------------------------------	----------------	----------	--	-----------------------------	--



# STRIP

Striscia luci LED rotoli da 5mt.  
LED strip light 5mt. roll



## informazioni tecniche - technical information

STRIP-5050-60/C  
8031433231206



72W 24V

3600 Lumen

**SMD**

300XLED  
SMD5050

>10 000 on/off

h 25 000

AC/DC  
24V 3A 72W

non include - not included



con silicone  
with silicon

STRIP-5050-60/F  
8031433241205



72W 24V

3600 Lumen

**SMD**

300XLED  
SMD5050

>10 000 on/off



h 25 000

AC/DC  
24V 3A 72W

non include - not included



con silicone  
with silicon




## STRIP

Striscia luci LED rotoli da 5mt.  
LED strip light 5mt. roll





### informazioni tecniche - technical information

<b>STRIPLED-5050-IP67-C</b> 8031440355865	<b>3200K</b>	<b>72W 12V</b>	3000 Lumen	<b>SMD</b>  300XLED SMD5050	>15 000 on/off	h 25 000	AC/DC 12V 6A 72W non include - not included	 <b>con silicone with silicon</b>
<b>STRIPLED-5050-IP67-F</b> 8031440355841	<b>5500K</b>	<b>72W 12V</b>	3000 Lumen	<b>SMD</b>  300XLED SMD5050	>15 000 on/off	h 25 000	AC/DC 12V 6A 72W non include - not included	 <b>con silicone with silicon</b>
<b>STRIPLED-5050-IP67-M</b> 8031440355872	<b>4000K</b>	<b>72W 12V</b>	3000 Lumen	<b>SMD</b>  300XLED SMD5050	>15 000 on/off	h 25 000	AC/DC 12V 6A 72W non include - not included	 <b>con silicone with silicon</b>

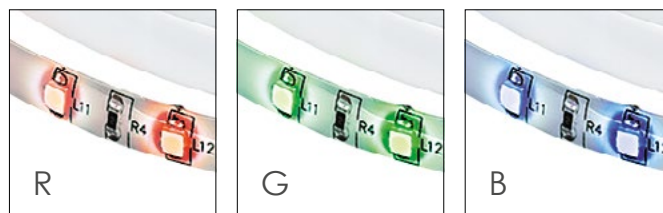

### informazioni tecniche - technical information

<b>STRIPLED-5050-IP67-RGB</b> 8031440355858		<b>72W 12V</b>	<b>SMD</b>  300XLED SMD5050	>15 000 on/off	h 25 000	AC/DC 12V 6A 72W non include not included	non include not included	 <b>con silicone with silicon</b>
--	--	----------------	--------------------------------------	----------------	----------	--	-----------------------------	--



## STRIP

Striscia luci LED rotoli da 5mt.  
LED strip light 5mt. roll



### informazioni tecniche - technical information

STRIP-3528-60/C  
8031433191203



24W 12V



1200 Lumen

**SMD**

300XLED  
SMD3528



>15 000 on/off



h 25 000



AC/DC  
12V 2A 24W

non include - not included



con silicone  
with silicon

STRIP-3528-60/F  
8031433201209



24W 12V



1200 Lumen

**SMD**

300XLED  
SMD3528



>15 000 on/off



h 25 000



AC/DC  
12V 2A 24W

non include - not included



con silicone  
with silicon

STRIPLED-3528-C  
8031440359955



24W 12V



1200 Lumen

**SMD**

300XLED  
SMD3528



>15 000 on/off



h 25 000



AC/DC  
12V 2A 24W

non include - not included

**IP20**

senza silicone  
without silicon

STRIPLED-3528-F  
8031440359924



24W 12V



1200 Lumen

**SMD**

300XLED  
SMD3528



>15 000 on/off



h 25 000




AC/DC  
12V 2A 24W

non include - not included

**IP20**

senza silicone  
without silicon



CLASSE  
**A**




Ra  
>80

CE



## STRIP

Doppia striscia luci LED rotolo da 5 mt.  
LED double strip 5mt. roll

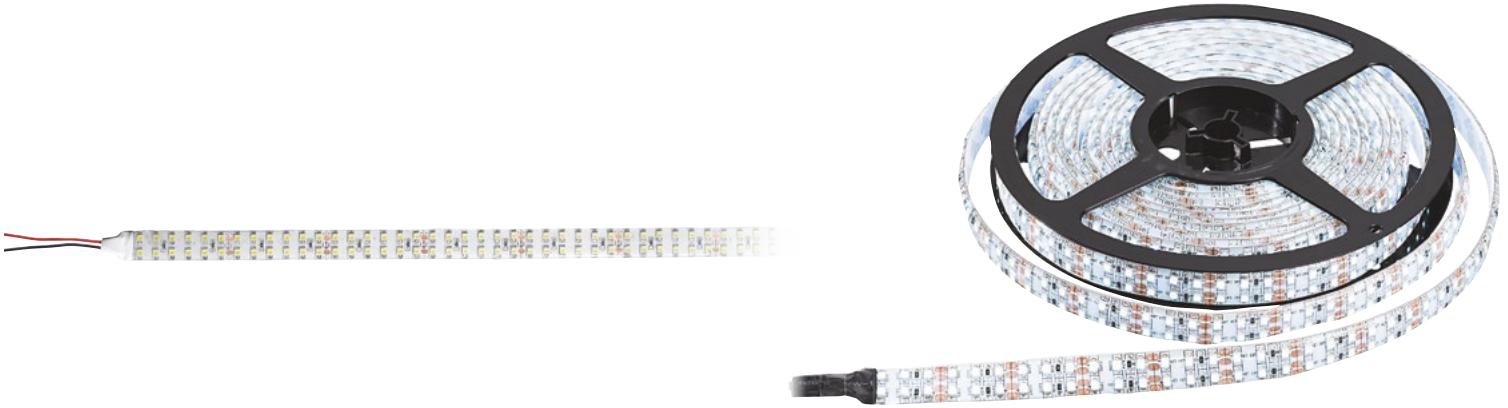

informazioni tecniche - technical information

STRIP-3528-240/M  
8031433181204

4000K

96W 24V

7200 Lumen

SMD

1200XLED  
SMD3528


>10 000 on/off

h 25 000

AC/DC  
24V 4,5A 96W  
non include  
not included

15 MM  
5 M

Strisce luci LED RGB da 5mt.  
RGB LED strip 5 mt. roll

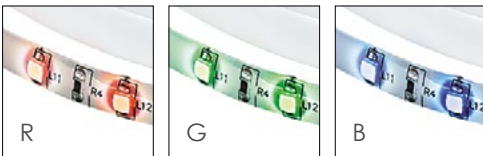

informazioni tecniche - technical information

STRIP-3528-60/RGB  
8031433211208



24W 12V

SMD

300XLED  
SMD3528



>10 000 on/off


h 25 000

AC/DC  
12V 2A 24W  
non include  
not included



1200Lumen

8 MM  
5 M



## KIT STRIP

Striscia luci LED rotoli da 3mt.  
LED strip light 3mt. roll



informazioni tecniche - technical information

STRIP-LINE-3M/C  
8031440353281



18W 12V

810 Lumen



SMD



>15 000 on/off



h 25 000



driver incluso

90XLED  
SMD5050

STRIP-LINE-3M/F  
8031440353250



18W 12V

900 Lumen



SMD



>15 000 on/off



h 25 000



driver incluso

90XLED  
SMD5050



informazioni tecniche - technical information

STRIP-LINE-3M/RGB  
8031440353267



18W 12V



SMD



>10 000 on/off




h 25 000



driver incluso

90XLED  
SMD5050



CLASSE  
A



Ra  
>80

CE



## KIT STRIP

Striscia luci LED rotoli da 5mt.  
LED strip light 5mt. roll




150 LED RED



150 LED GREEN



150 LED BLU



150 LED WHITE

informazioni tecniche - technical information

STRIP-RGBW-KIT  
8031436831236



48W 12V



On / Off

SMD



600XLED  
SMD3528



>10 000 on/off




h 25 000



driver incluso



2400 Lumen



CLASSE  
**A**



Ra  
>80

CE



## KIT STRIP

Striscia luci LED rotoli da 5mt.  
LED strip light 5mt. roll



## 164 giochi di colore



informazioni tecniche - *technical information*

STRIP-RGB-XL-KIT  
8031436801239



24W 12V



SMD



>10 000 on/off



h 25 000



driver incluso

150XLED  
SMD3528



CLASSE  
**A**



Ra  
>80

CE



## KIT STRIP


Striscia luci LED rotoli da 5mt.  
LED strip light 5mt. roll



R



G



B



W

### informazioni tecniche - technical information

STRIP-IP68-RGB-KIT  
8031436811238



20W 12V



SMD



>10 000 on/off



driver incluso




1000 Lumen

150XLED  
SMD5050



h 25 000



CLASSE  
**A**



Ra  
>80

CE



## KIT STRIP

Striscia luci LED rotoli da 5mt.  
LED strip light 5mt. roll



LUCE CALDA



LUCE FREDDA

informazioni tecniche - technical information

STRIP-IP68-WW-KIT  
80314368781234



24W 12V



**SMD**

300XLED  
SMD3528





>10 000 on/off



h 25 000




driver incluso



## PROFILI

Profili in alluminio per strip LED  
diffusore opale  
*Aluminium profile for strip LED  
with opale diffuser*



informazioni tecniche - *technical information*



**I-PROFILO-BERLINO**  
8031434611212

mis. 1MT

**I-PROFILO-BERLINO-2**  
8031440359405

mis. 2MT

Tappi e clip di  
fissaggio inclusi  
*Caps fixing brackets  
included*

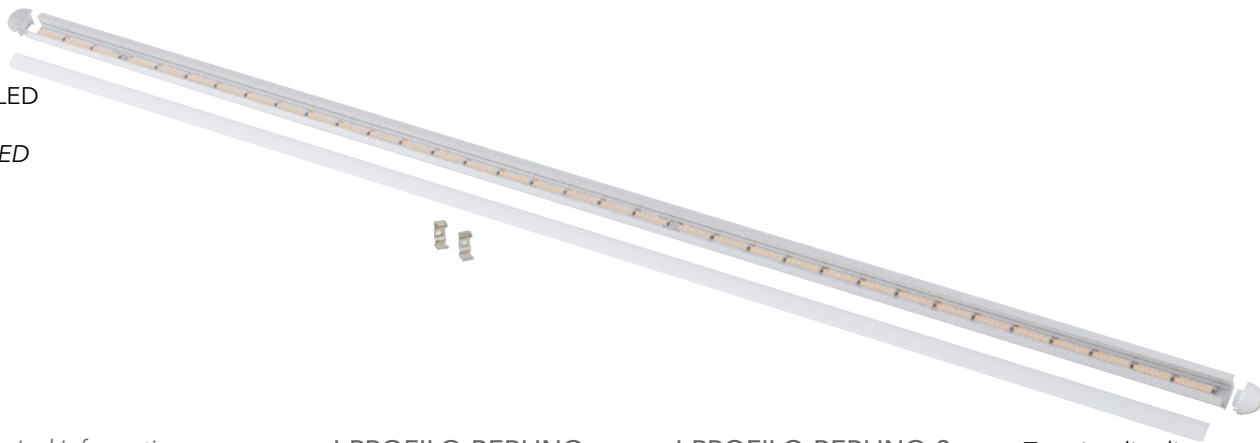

informazioni tecniche - *technical information*



**I-PROFILO-ROMA**  
8031434601213

mis. 1MT

**I-PROFILO-ROMA-2**  
8031440359399

mis. 2MT

Tappi e clip di  
fissaggio inclusi  
*Caps fixing brackets  
included*

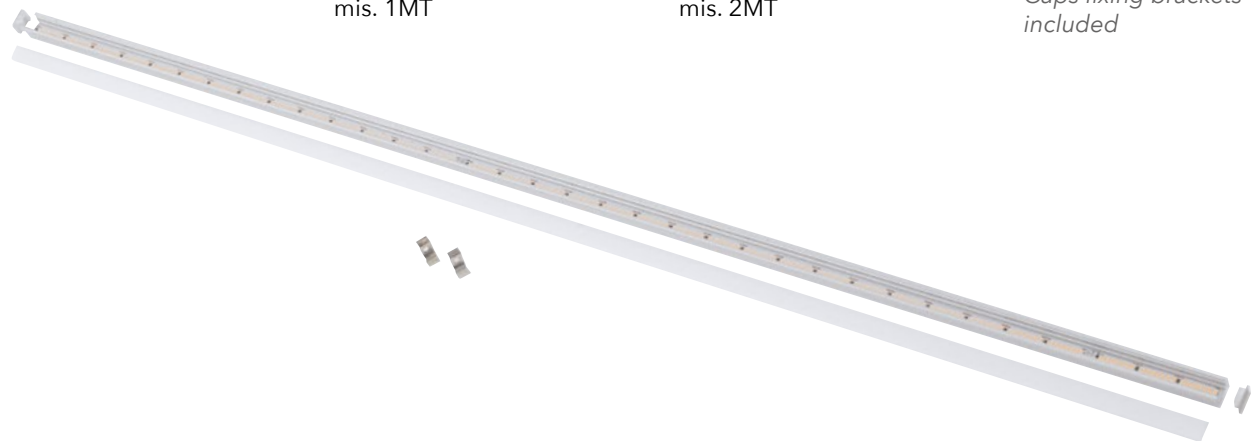

informazioni tecniche - *technical information*



**I-PROFILO-NEWYORK**  
8031434581218

mis. 1MT

**I-PROFILO-NEWYORK-2**  
8031440359382

mis. 2MT

Tappi e clip di  
fissaggio inclusi  
*Caps fixing brackets  
included*

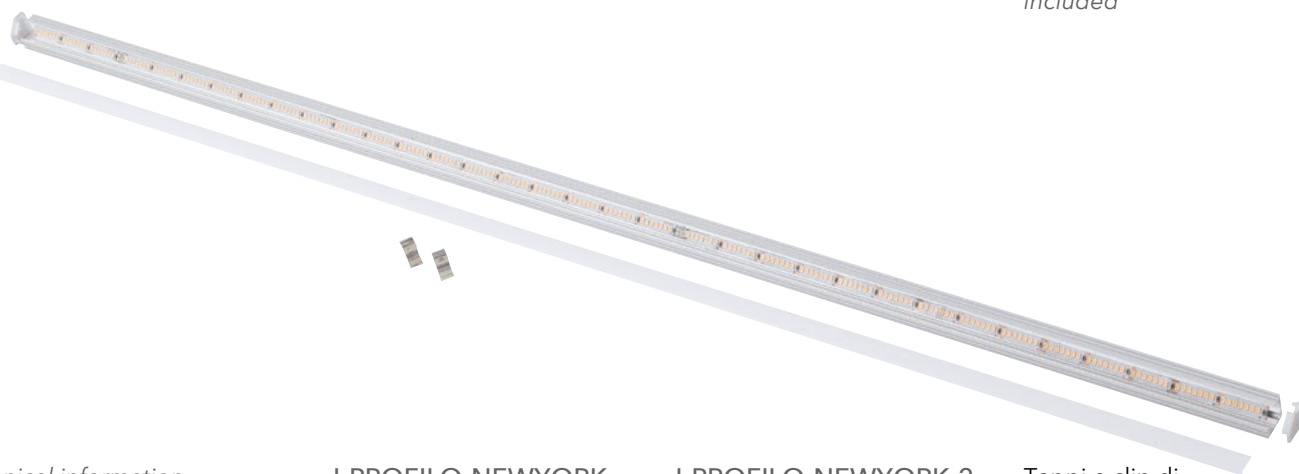

informazioni tecniche - *technical information*


**I-PROFILO-MILANO**  
8031434611854

mis. 1MT

**I-PROFILO-MILANO-2**  
8031440359412

mis. 2MT

Tappi e clip di  
fissaggio inclusi  
*Caps fixing brackets  
included*

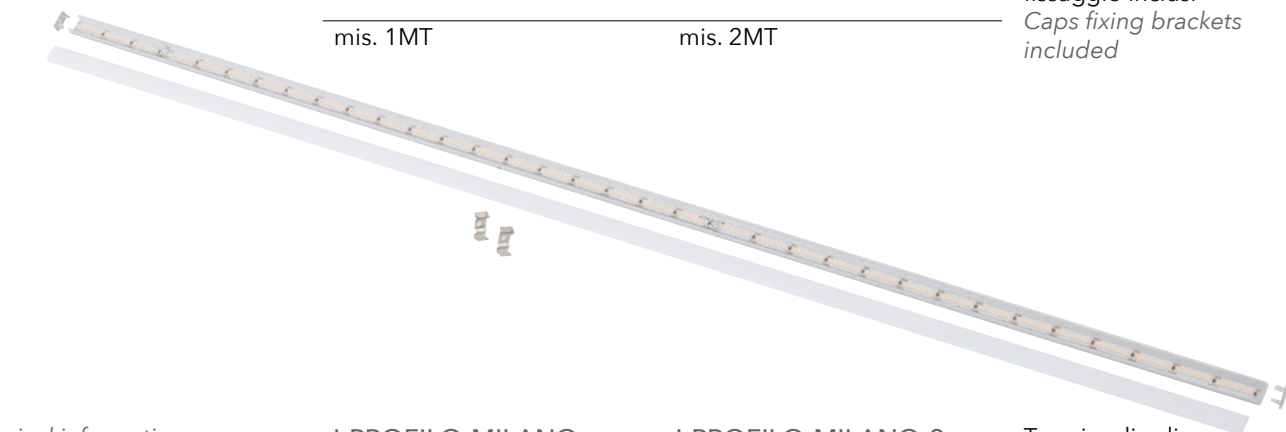

## CONNETTORI - ACCESSORI

Accessori e connettori per strisce LED basso voltaggio  
*LED strip light accessories and connectors low voltage*



**STRIP-NEX-JACK**  
8031434491210

Kit 2pz connettore clip per strip  
3528 e 5050 12/24V+jack 5,5 (F)



**STRIP-JACK-MF**  
8031434471212

Kit 2pz jack 5,5 1xmaschio 1xfemmina  
x strip 12/24V



**STRIP-NEX+C-LV**  
8031434441215

Kit 2pz connettore 1clip + cavo x strip  
3528 e 5050 12V/24



**STRIP-NEX-LV**  
8031434511215

Kit 2pz connettore 2clip x strip 3528 e  
5050 12/24V



**STRIP-NEX+C-LVRGB**  
8031434451214

Kit 2pz connettore 1clip + cavo x strip  
RGB 12/24V



**STRIP-NEX-LVRGB**  
8031434461213

Kit 2pz connettore 12xclip x strip RGB  
12/24V



**STRIP-NEX-LVRGB-PIN**  
8031434481211

Kit 2pz connettore 1clip +1 pin x strip  
RGB 12/24V



**STRIP-SEAL**  
8031434501216

20cm tubo silicone sigillante strip sigil-  
lante a caldo connessioni strip



**I-PROF-BERLINO2-DIFF**  
8031440357647

Diffusore trasparente profilo Berlino  
2m alluminio



**I-PROF-MILANO2-DIFF**  
8031440357654

Diffusore trasparente profilo Milano  
2mt alluminio



**I-PROF-NEWYORK2-DIFF**  
8031440357623

Diffusore trasparente profilo New York  
2mt angolare alluminio



**I-PROF-ROMA2-DIFF**  
8031440357630

Diffusore trasparente profilo Roma  
2mt alluminio

## DRIVER



### STRIP-DRIVER-150W

8031433351201

Adattatore tensione costante  
24V 150W  
Multientrata Output 24V 6A  
INPUT 100-240V  
Misure 200X100X44mm  
IP20 CLASSE 1

### STRIP-DRIVER-240W

8031433361200

Adattatore tensione costante  
24V 240W  
Multientrata Output 24V 10A  
INPUT 100-240V  
Misure 200X100X44mm  
IP20 CLASSE 1



### STRIP-DRIVER12V-35W

8031440360265

Adattatore tensione costante  
Output 12V 3A 36W  
multipla entrata serracavo  
Misure 99X82X30mm

### STRIP-DRIVER12V-75W

8031439581268

Adattatore tensione costante  
12V 6A 72W  
multipla entrata serracavo  
Misure 99X97X30 mm

### STRIP-DRIVER12V-100W

8031440359368

Adattatore tensione costante  
12V 8.5A 102W  
multipla entrata serracavo  
Misure 129X97X30mm

### STRIP-DRIVER12V-150W

8031439611262

Adattatore tensione costante  
12V 12.5A 150W  
multipla entrata serracavo  
Misure 159X97X30mm

### STRIP-DRIVER12V-200W

8031440359375

Adattatore tensione costante  
12V 16,7A 200,4W  
multipla entrata serracavo  
Misure 215X115X30mm

### STRIP-DRIVER12V-320W

8031440359344

Adattatore tensione costante  
12V 26,7A 320,4W  
multipla entrata serracavo  
Misure 215X115X30mm

### STRIP-DRIVER24V-50W

8031440364744

Adattatore tensione costante  
Output 24V 2.2A 52,8W  
multipla entrata serracavo  
Misure 99X82X30mm

### STRIP-DRIVER24V-100W

8031440364751

Adattatore tensione costante  
24V 4,5A 108W  
multipla entrata serracavo  
Misure 129X97X30mm

### STRIP-DRIVER24V-200W

8031440364737

Adattatore tensione costante  
24V 8,4A 201,6W  
multipla entrata serracavo  
Misure 215X115X30mm

### STRIP-DRIVER24V-320W

8031414864959

Adattatore tensione costante  
24V 13.4A 321,6W  
multipla entrata serracavo  
Misure 215X115X30mm

### STRIP-DRIVER36V-320W

8031414864829

Adattatore tensione costante  
36V 8.9A 320W  
multipla entrata serracavo  
Misure 215X115X30mm



### STRIP-ADAT-12W

8031433141208

Adattatore tensione costante  
x strip LED 12V 12W - SPINA  
CEE 7/16 IP20 OUTPUT 12V  
1A INPUT 110-240V 0,5A  
MISURE 38X67X42mm  
- CAVO 1500MM - IP20 -  
CLASSE 2



### STRIP-ADAT-24W

8031433251204

Adattatore tensione costante  
x strip LED 12V 24W - SPINA  
CEE 7/16 IP20 - OUTPUT 12V  
2A INPUT 110-240V 0,6A  
MISURE 38X80X50MM  
- CAVO 1500mm - IP20 -  
CLASSE 2



### STRIP-ADAT-36W

8031436601235

Adattatore tensione costante  
x strip LED 12V 36W - SPINA  
CEE 7/16 IP20 - OUTPUT 12V  
3A INPUT 110-240V 0,6A  
MISURE 35X100X50Mmm  
- CAVO 1500MM - IP20 -  
CLASSE 2



### STRIP-ADAT-72W

8031433261203

Adattatore tensione costante x strip LED 24V 72W - SPINA CEE 7/16 IP20 -  
OUTPUT 24V 3A INPUT 110-240V 1,5A  
MISURE 37X115X50MM - CAVO 1500+1500mm - IP20 - CLASSE 2



### I-DRIVER-DIMM-LCM40

8031439591267

Driver dimmerabile 40W corrente costante - OUTPUT DC 2-100V  
350mA; 2-80V 500mA; 2-67V 600mA; 2-57V 700mA; 2-45V 900mA;  
2-40V 1050mA  
MISURE 123,5X81,5X23mm



### I-DRIVER-DIMM-LCM60

8031439561260

Driver dimmerabile 60,3W corrente costante - OUTPUT DC 2-90V  
500mA; 2-90V 600mA; 2-86V 700mA; 2-67V 900mA; 2-57V 1050mA  
; 2-42V 1400mA  
MISURE 123,5X81,5X23mm



### I-DRIVER/4W

8031414862801

DRIVER 4W LED OUTPUT  
350mA 2-12V DC INPUT 100-  
240V 0,08A IP65  
MISURE 38X27X21mm



### I-DRIVER/18W

8031439571269

Driver 16,8W corrente costante  
Output DC 350mA 48V  
Misure 140X30X20mm



### I-DRIVER/3W

8031436791233

Driver corrente costante 3W - INPUT AC 100-240V 0,09A  
OUTPUT DC 350mA 9-12V MISURE 40X40X22mm



### I-DRIVER/5W

8031436761236

Driver corrente costante 5W - INPUT AC 100-240V 0,06A  
OUTPUT DC 300mA 9-18V - MISURE 40X40X22mm

## DRIVER



### I-DRIVER/6W

8031436191231

Driver corrente costante 6W - INPUT AC 100-240V 0,09A  
OUTPUT DC 350mA 9-18V - MISURE 40X40X22mm



### I-DRIVER/10W550MA

8031439511265

Driver corrente costante 10W - INPUT AC 100-240V 0,07A -  
OUTPUT DC 350mA 9-18V  
MISURE 104X37X22mm



### I-DRIVER/12W

8031436161234

Driver corrente costante 12W  
INPUT AC 100-240V 0,1A OUTPUT DC 350mA 18-24V  
MISURE 104X37X22mm



### I-DRIVER/12W550MA

8031439471262

Driver corrente costante 12W  
INPUT AC 100-240V 0,1A OUTPUT DC 550mA 18-24V  
MISURE 104X37X22mm



### I-DRIVER/24W

8031434561210

Driver corrente costante 24W  
INPUT AC 100-240V 0,15A OUTPUT DC 550mA 24-49V  
MISURE 114X44X29mm



### I-DRIVER/36W

8031436771235

Driver corrente costante 36W  
INPUT AC 100-240V 0,23A - OUTPUT DC 850mA 24-49V  
MISURE 130X44X24mm

## DRIVER - ACCESSORI



### STRIP-AMPLIFIER

8031440359443

AMPLIFICATORE RGB DC 12-24V 24A  
MISURE 117X64X25mm



### STRIP-CONTROL-WIFI

8031440359474

CONTROLLER RGB WIFI TOUCH DC 12/24V 6AX3CH MAX DI-  
STANZA 20MT  
MISURE 81X84X32mm



### STRIP-SOUND

8031434531213

Ricevitore musicale + telecomando RGB 12V PER STRIP LED  
MISURE 50X70X20mm


## DRIVER EMERGENZA



### I-DRIVER-HELP

8031414862559

DRIVER DI EMERGENZA 3-40W.EMERGENZA 120MIN.  
2,7V 2.4Ah Lithium battery  
135x55x21 mm

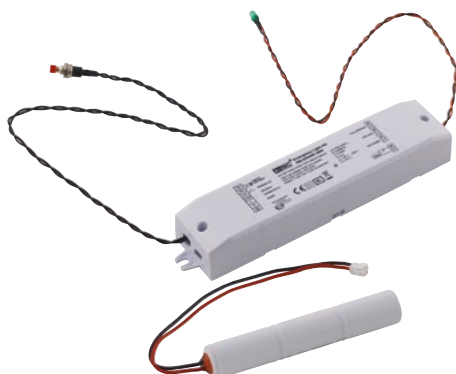

### I-DRIVER-EMERGENCY

8031414864751

DRIVER DI EMERGENZA 6-60V 400-40mA. 180MIN  
BATTERY 3,6V 3.0Ah Ni-Cd/Ni\_MH  
160x38x28 mm


# STRIP

Bobina striscia luci LED 50 mt.  
LED strip light roll 50mt.






## informazioni tecniche - technical information

	<b>STRIP-R-5050HV-30/C</b> 8031435351223		<b>9,6W/M</b> <b>230V</b>	1080 Lm/M	<b>SMD</b> 	>10 000 on/off	h 25 000	
					3600XLED SMD5050			
	<b>STRIP-R-5050HV-30/F</b> 8031428901169		<b>9,6W/M</b> <b>230V</b>	1080 Lm/M	<b>SMD</b> 	>10 000 on/off	h 25 000	
					3600XLED SMD5050			

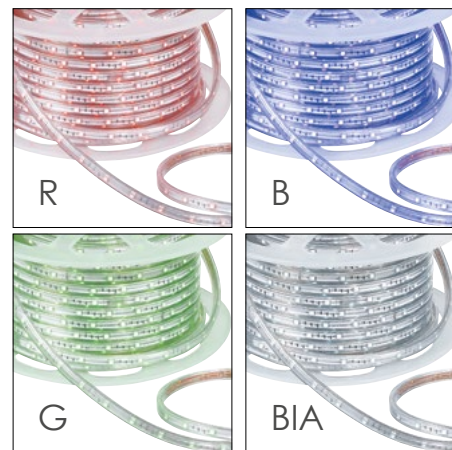

## informazioni tecniche - technical information

<b>STRIP-R-5050HV-30RGB</b> 8031435451220			<b>9,6W/M</b> <b>230V</b>	1080 Lm/M	<b>SMD</b> 	>10 000 on/off	h 25 000	
					3600XLED SMD5050			



## STRIP

Accessori e connettori per strisce LED alto voltaggio  
LED strip light accessories and connectors high voltage



X 3



X 10

STRIP-ADAPT-HV  
8031435381220



STRIP-ADAPT-HR-RGB  
8031435401225



MAX 600W

STRIP-NEX-RGB-MINI Mini connettore per strip 220V RGB  
8031439131265 IP65 con viti e tappo



STRIP-NEX-IP65-MINI Mini connettore per strip 220V IP65  
8031435441221 con viti e tappo



STRIP-NEX-IP65-60 Connettore per strip 220V 60cm  
8031435431222 con viti



STRIP-NEX-RGB-60 Connettore per strip 220V RGB  
8031439121266 60cm con viti



STRIP-CAP-IP65 Kit 3pz tappi in silicone per strip  
8031435411224 220V 14x7mm

STRIP-FIXIT Kit 10pz staffe fissa strip 220V  
8031433371209 14x8mm

## CLAY

Prodotti in porcellana e cavi elettrici a treccia  
*Porcelain products and braid cables*



### I-CLAY-SCADER

8031414865031

SCATOLA DI DERIVAZIONE  
ELETTRICA CLAY IN PORCEL-  
LANA BIANCA

*white porcelain external jun-  
ction box CLAY*



### I-CLAY-INTERRUTTORE

8031414865048

INTERRUTTORE ROTATIVO  
CLAY IN PORCELLANA  
BIANCA 10A AC230V 50Hz

*white porcelain rotating switch  
CLAY 10A AC230V 50Hz*



### I-CLAY-PRESA

8031414865055

PRESA ELETTRICA CLAY PO-  
LIVALENTE IN PORCELLANA  
BIANCA 10/16A AC230V  
50Hz

*white porcelain universal  
socket CLAY 10/16A AC230V  
50Hz*



#### I-CLAY-PRESA-F

8031414865062

PRESA ELETTRICA SCHUKO  
CLAY IN PORCELLANA  
BIANCA AC230V 50Hz



#### I-CLAY-ISOLATORI

8031414865079

KIT 4PZ ISOLATORI CLAY IN  
PORCELLANA BIANCA

*white porcelain pulleys CLAY  
set 4pcs*



#### I-CLAY-CAVO-BCO

8031414865086

CAVO ELETTRICO CLAY  
TRECCIATO CON RIVESTI-  
MENTO TESSILE IN BIANCO  
5M 3X0,75

*twisted white fabric wire CLAY  
5M 3X0,75*

#### I-CLAY-CAVO-ORO

8031414865093

CAVO ELETTRICO CLAY  
TRECCIATO CON RIVESTI-  
MENTO TESSILE IN ORO 5M  
3X0,75

*twisted white fabric wire CLAY  
5M 3X0,75*

## REFLEX

Strutture incasso per lampade MR16 o GU10  
MR16 or GU10 down light frame



INC-REFLEX-Q-SF1 NIK

8031414861545




INC-REFLEX-Q-SF1 BCO

8031414861538



ø foro  
60 mm



— 80X80 —



INC-REFLEX-Q-SM1 NIK

8031440363280



INC-REFLEX-Q-SM1 BCO


8031440363310



ø foro  
70 mm




15°



— 82X82 —

## REFLEX

Strutture incasso per lampade MR16 o GU10  
MR16 or GU10 down light frame

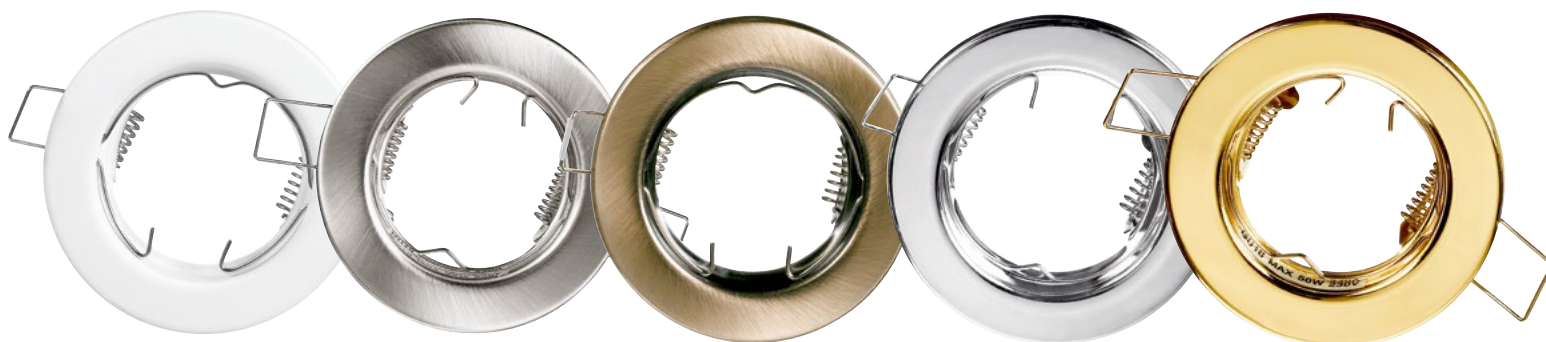

INC-REFLEX-SF1 BCO

8031439321260

INC-REFLEX-SF1 NIK

8031439311261

INC-REFLEX-SF1 BR

8031439331269

INC-REFLEX-SF1 CR

8031439301262


INC-REFLEX-SF1 ORO

8031439341268



INC-REFLEX-SF1 NER

8031414861552



INC-REFLEX-SM1 BCO

8031439251260

INC-REFLEX-SM1 NIK

8031439261269

INC-REFLEX-SM1 BR

8031439291266

INC-REFLEX-SM1 CR

8031439281267


INC-REFLEX-SM1 ORO

8031439271268



INC-REFLEX-SM1 NER

8031414861569

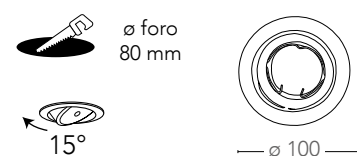

## VIPER

Strutture incasso per lampade MR16 o GU10 IP65  
IP65 MR16 or GU10 down light frame




informazioni tecniche - *technical information*

**INC-VIPER-R-NIK**




8031414861576

**INC-VIPER-R-BCO**

8031414861590



foro  
ø 74 mm

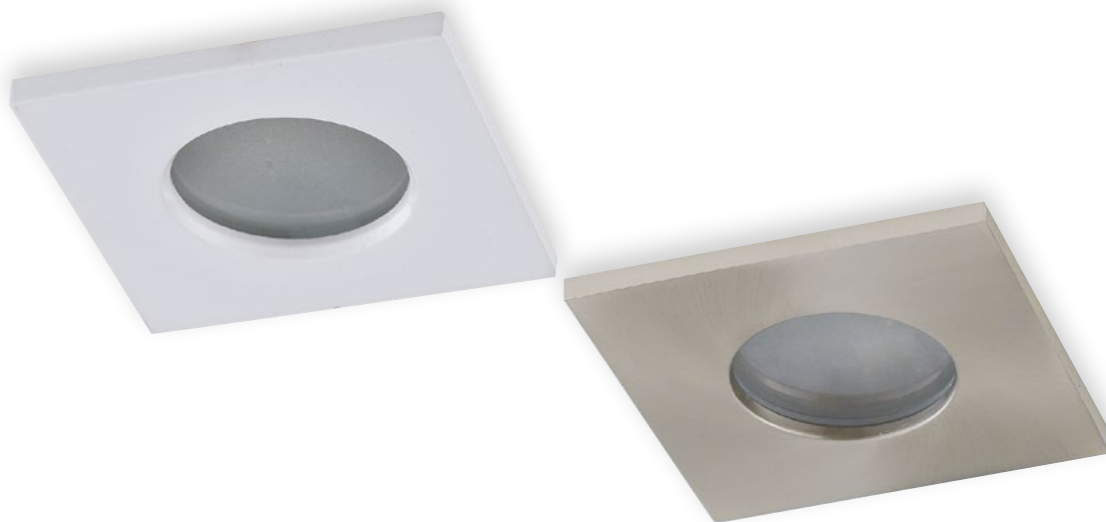


informazioni tecniche - *technical information*

**INC-VIPER-Q-NIK**



8031414861873

**INC-VIPER-Q-BCO**

8031414861866

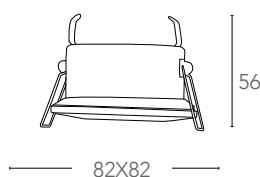

foro  
ø 74 mm




## ALAN

Incasso in metallo con gemme in acrilico  
Metal down light with acrylic beads



informazioni tecniche - *technical information*

INC-ALAN-CR  
8031440311915



103x103



foro  
ø 70 mm




## GEMMA

Incasso in metallo con gemme in acrilico  
Metal down light with acrylic beads



informazioni tecniche - *technical information*


INC-GEMMA-CR  
8031439951276



ø 90



foro  
ø 77 mm




## ANTHEA

Incasso in porcellana lavorato a mano  
Hand made porcelain down light



informazioni tecniche - *technical information*

INC-ANTHEA-BCO  
8031439791261



— ø 122 —



foro  
ø 65 mm

## BLUMA

Incasso in porcellana lavorato a mano decoro blu  
Hand made porcelain down light with blue decoration



informazioni tecniche - *technical information*

INC-BLUMA-BLU  
8031439731267



— ø 115 —



foro  
ø 70 mm


## ZARAH

Incasso in porcellana lavorato a mano decoro oro  
*Hand made porcelain down light with gold decoration*



informazioni tecniche - *technical information*

INC-ZARAH-ORO  
8031440121279



foro  
ø 80 mm


## FLORENZA

Incasso in porcellana lavorato a mano  
*Hand made porcelain down light*



informazioni tecniche - *technical information*

INC-FLORENZA-BCO  
8031439771263




foro  
ø 80 mm

## SENSORI




I-SENSORE-360  
8031435901237

Sensore PIR 230V max 1600W 360°  
distanza massima 5mt.  
time 10 sec. - 4 min.  
lux 2 - 2000 IP44

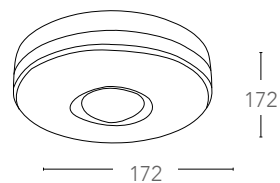


I-SENSORE-130  
8031434401219

Sensore PIR 230V max 1000W 130°  
distanza massima 12mt.  
time 10 sec. - 4 min.  
lux 2 - 2000 IP44  
base accessoria angolare

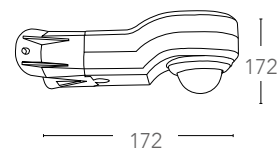

I-SENSORE-180  
8031434411218

Sensore PIR 230V max 1000W 180°  
distanza massima 12mt.  
time 10 sec. - 4 min.  
lux 2 - 2000 IP44

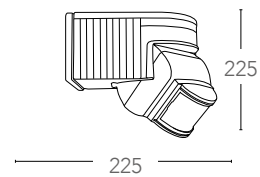

## ADATTATORI



ADATTATORE-E14-E27

8031439351267



ADATTATORE-E27-E14

8031439391263



ADATTATORE-E27-2E27

80314439371265



ADATTATORE-E27-GU10

8031436171233



ADATTATORE-E14-GU10

8031439361266



ADATTATORE-GU10-E14

8031439431266



ADATTATORE-GU10-E27

8031439421267



ADATTATORE-G9-E14

8031439401269



ADATTATORE-G9-E27

8031439411268



ADATTATORE-E27-E27

8031439451264

FLESSIBILE 20 CM

## PORTALAMPADE E ACCESSORI



I-PORTALAMPADE-E14-L  
8031440354592



I-PORTALAMPADE-E14-S  
8031440354578



I-PORTALAMPADE-E14-T  
8031440354585



I-PORTALAMPADE-E27-L  
8031440354554



I-PORTALAMPADE-E27-P  
8031440354561



I-PORTALAMPADE-E27-S  
8031440354530



I-PORTALAMPADE-E27-T  
8031440354547



I-PORTALAMPADE-GU10  
8031435751221



I-PORTALAMPADE-MR16  
8031439761264



I-PORTALAMPADE-T8  
8031439851262




I-PORTALAMPADE-R7S  
118mm con 15cm cavo  
8031414861491



I-PORTALAMPADE-E27-WS  
8031440364867



I-PORTALAMPADE-E27-WO  
8031440364874



INC-MATRIX-KIT  
8031436551233



I-VFUSION  
8031439721268



I-COPRICANDELA/CR  
8031436541234

## ACCESSORI



**I-POWER-SC3**  
8031414864843

Adattatore multipresa con interruttore on/off 3xschuko 230v 10/16a cavo 1,5m spina h05vv-f



**I-POWER-SC2-BP4**  
8031414864881

Adattatore multipresa interruttore on/off 2xschuko+4 bipasso 230v 10/16a cavo 1,5m spina h05vv-f



**I-POWER-SC4**  
8031414864850

Adattatore multipresa con interruttore on/off 4xschuko 230v 10/16a cavo 1,5m spina h05vv-f



**I-POWER-SC3-BP6**  
8031414864904

Adattatore multipresa interruttore on/off 3xschuko+6x bipasso 230v 10/16a cavo 1,5m spina h05vv-f




**I-POWER-SC5**  
8031414864867

Adattatore multipresa con interruttore on/off 5xschuko 230v 10/16a cavo 1,5m spina h05vv-f



**I-POWER-SC-BP2-USB2**  
8031414864911

Adattatore multipresa on/off 1xschuko+2 bipasso+2usb2.1a 230v 10/16a cavo 1,5m spina h05vv-f

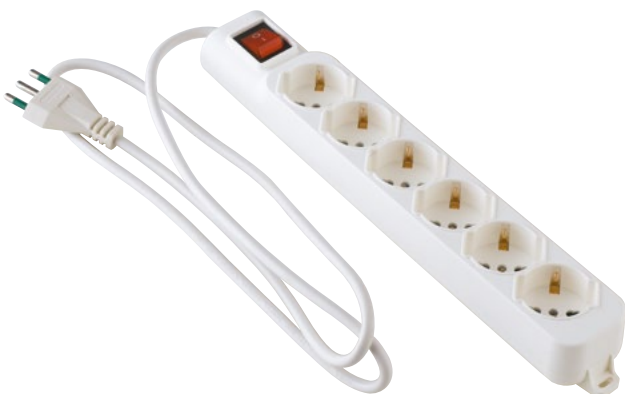

**I-POWER-SC6**  
8031414864874

Adattatore multipresa con interruttore on/off 6xschuko 230v 10/16a cavo 1,5m spina h05vv-f











