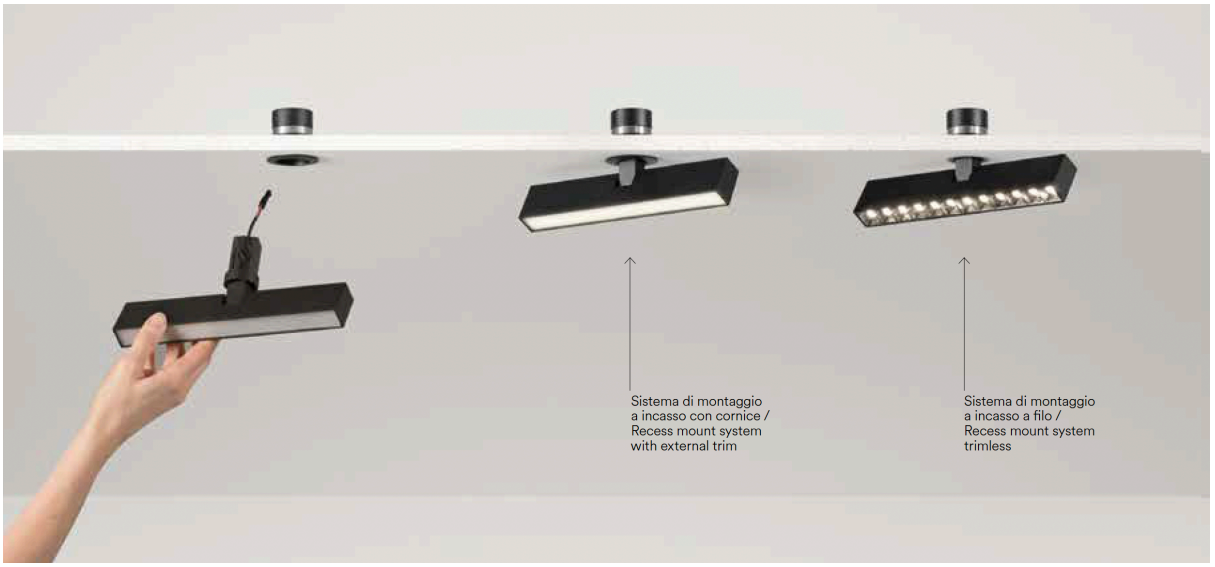


SHIFT-LINE22

Faneurope code	SHIFT-LINE22
BARCODE	8031414936281
DESCRIZIONE	**Lampada lineare orientabile a LED in termoplastica e alluminio con finitura nero opaco.**
DESCRIPTION	*Linear adjustable LED lamp in thermoplastic and aluminum with matt black finish.*
FAMIGLIA	SHIFT
CATEGORIA	INCASSI / RECESSED LAMPS
CATEGORY	INCASSI / RECESSED LAMPS
TIPOLOGIA	INCASSO MODULARE, MODULO LINE
TIPOLOGY	LINE MODULE, MODULAR RECESSED
MISUR PRODUCT	95 × 219 × 31 mm
sorgente	LED SMD
Light_source	LED SMD
LAMPADINA INCLUSA/NON INCLUSA	led integrato
BULD INCLUDED/ NOT INCLUDED	built-in led
Lumen nominali	1200 lm
Watt nominali	12W
Kwh/1000h	
SWITCH-CCT_ITA	
SWITCH-CCT_ENG	
KELVIN	3000K
CRI	90
BEAM-ANGLE	90°
CLASSE ISOLAMENTO	3
IP-DEGREE	IP20
IK-DEGREE	

DIMMER	SI
Volt	DC 48V
Hertz	50/60hz
MaterialeStruttura	Alluminio
StructureMaterial	Aluminum
colore	Nero
Colour	Black
ColoreDiffusore	
DiffuserColour	
InfoDriverITA	DC48V non incluso
DriverinfoENG	DC48V not included
Hz	
BATTERY-Amh	
Life/H	
Power-Wh	
H-CHARGE	
Garanzia	3 Anni
Warranty	3 years
Nomenclatura doganale/CustomCode	94059190
InnerBoxHeight	
InnerBoxDepth	
InnerBoxWeight	
RemoteControl_ITA	
RemoteControl_ENG	
Dedicated_App	
DettagliProdottiAggiuntivo	**Per l'installazione del punto luce sono disponibili due sistemi di montaggio: ad incasso a filo SHIFT-TL-NER oppure ad incasso con cornice SHIFT-INC-BCO, SHIFT-INC-NER. I sistemi di montaggio non sono inclusi, per maggiori dettagli vedi p. 135. Driver 48V per Sistema Shift da p. 944 /**
dettaglio aggiuntivo eng	*For the installation of the light point, two mounting systems are available: invisible recessed trimeless-mounted SHIFT-TL-NER or recessed-mounted with a frame SHIFT-INC-BCO, SHIFT-INC-NER. The mounting systems are not included; for more details see p. 135. 48V driver for Shift System p. 944*
ACCESSORI	**Adattatore dimmer 0-10V**
ACCESSORIES	*0-10V dimmer adapter*