bright solutions

INTEC® LIGHT

bright solutions

INTEC LIGHT

Quando la ricerca trova risposte
alle esigenze, vecchie e nuove.
Quando la tecnologia risolve problemi.
Quando tecnica ed estetica
si fondono armoniosamente.

Lì, nascono le soluzioni più brillanti.

When research finds solutions
to needs, both old and new.
When technology solves problems.
When technology and aesthetic
appeal harmoniously merge.

That's when the bright solutions are born.

faneurope



Milano



Napoli

BRIGHT SOLUTIONS

IERI E OGGI, PRESENTI / YESTERDAY AND TODAY, PRESENT



Un'evoluzione lunga oltre 100 anni

La nostra storia comincia a Napoli agli inizi del '900. È una storia di impegno, di evoluzione, di coraggio. Una storia che corre lungo il filo del tempo intrecciandosi costantemente con quella del vetro.
Generazione dopo generazione, **FAN Europe Lighting** evolve, cambia forma, sviluppa la sua idea di prodotto e di servizio, con l'obiettivo di diventare un punto di riferimento per tutto il settore dell'illuminazione.

La nostra azienda, oggi

Oggi **FAN Europe Lighting** è una grande squadra di persone e di risorse. Alla ricerca dell'eccellenza nella qualità dei prodotti, abbiniamo un ecosistema di servizi e garanzie che abbiamo sviluppato e strutturato a misura di esigenza e di cliente.
La nostra italian heritage non ci fa dimenticare l'importanza dell'originalità e della cura nel prodotto.
La nostra voglia di crescere ci spinge ad essere sempre al passo con la luce di oggi e di domani, una luce sempre più smart, sempre più green, sempre in evoluzione.

An evolution spanning more than 100 years

Our history began in Naples in the early 1900s. It's a history of commitment, evolution and courage. A history that follows the thread of time, constantly intertwining with that of glass.
Generation after generation, **FAN Europe Lighting** has evolved, changing shape, developing its concept of products and services to become a benchmark for the entire lighting industry.

Our company, today

Today, **FAN Europe Lighting** is a vast team of people and resources. In addition to pursuing excellence in product quality, we combine an ecosystem of services and guarantees, which we have developed and tailored to our customers' needs.
Our Italian heritage does not allow us to forget the importance of originality and product care. Our desire to grow motivates us to always keep up with the lighting of today and tomorrow, lighting that is always smarter, more eco-friendly and evolving.







CUSTOM-MADE LIGHTING

UNA SINERGIA DI RISORSE E GARANZIE / A SYNERGY OF RESOURCES AND GUARANTEES



La qualità, al primo posto

Componenti di qualità, controlli multipli, collaudi in fase di realizzazione: per la qualità non scendiamo mai a compromessi. Grazie a un team di esperti riusciamo a garantire la tecnologia più avanzata, finiture ogni anno più curate e nuovi design a prova di tempo!

La gamma più completa di prodotti

Siamo una delle poche aziende al mondo a coprire così tanti settori di destinazione: dall'illuminazione industriale al prodotto decorativo. Siamo "appassionati ricercatori" e ogni anno arricchiamo la gamma con collezioni di tendenza e le innovazioni più efficienti in materia di tecnologia e sostenibilità.

L'evoluzione stilistica e tecnologica dell'illuminazione ha indirizzato la ricerca illuminotecnica verso progetti di illuminazione su misura, in cui i corpi illuminanti sono strumenti al servizio del progetto architettonico.
Questa fase evolutiva ci ha spinto ad ampliare la nostra divisione Project ed Illuminotecnica dedicata ai progetti su misura. La divisione esegue già servizi di progettazione, realizzazione prototipi, test e controllo di produzione per ogni prodotto presente sul nostro catalogo.
Quando i prodotti non incontrano le esigenze del cliente, realizziamo prodotti "customizzati" su misura per le esigenze del progetto e per valorizzare al massimo gli ambienti del disegno illuminotecnico. Grazie a strumenti informatici e software di calcolo fotometrico possiamo fornire per ogni nuovo prodotto i calcoli fotometrici per un adeguato sviluppo progettuale illuminotecnico.

Quality components, multiple checks, testing during the manufacturing process: we never compromise on quality. With our team of experts, we can guarantee cutting-edge technology, new improved finishes every year and new designs that will stand the test of time!

Quality comes first

We are one of the few companies in the world to cover so many target sectors: from industrial lighting to decor products. As "passionate researchers" every year we enrich our range with trend-setting collections and the most efficient innovations in terms of technology and sustainability.

The most comprehensive range of products

The stylistic and technological evolution of lighting has steered lighting research towards custom-made lighting projects, in which luminaires are used to support architectural design.
This evolutionary phase encouraged us to expand our Project and Lighting department focusing on custom-made projects. The department already provides design, prototyping, testing and production monitoring services for all the products in our catalogue. When products don't meet the customer's needs, we make bespoke products to meet project requirements and fully enhance lighting design contexts. Using computer tools and photometric calculation software, we can provide photometric calculations for each new product thereby appropriately developing the lighting design project.





CUSTOMER EXPERIENCE

UN'ASSISTENZA SEMPRE ATTIVA / ASSISTANCE ALWAYS AVAILABLE



Massima disponibilità di prodotti

Noi ci siamo, sempre! Con disponibilità, professionalità e un obiettivo chiaro: semplificare la vita dei nostri clienti. È una promessa che facciamo a chi non ci conosce. E' una garanzia consolidata per chi lavora con noi da anni! Abbiamo a disposizione una delle più vaste gamme di articoli sul mercato ma riusciamo ad assicurare in ogni momento il 98% di disponibilità. Garantiamo che il restante 2% torni disponibile in 30 giorni!

We are always here for you! With our helpfulness, professionalism and a clear goal: to make life easier for our customers. It's a promise we make to those who don't know us. It's an established guarantee for those who have worked with us for years! We have one of the widest ranges of items on the market, but we can guarantee 98% availability at all times. We guarantee that the remaining 2% will be available in 30 days!

Maximum product availability

Spedizioni Veloci e sicure

Abbiamo sviluppato negli anni un sistema logistico efficiente in grado di garantire consegne in 24h per l'Italia e 48 per l'Europa, assicurando la massima cura nel trasporto. Un team multilingua è inoltre al servizio dei clienti per offrire supporto e assistenza.

Over the years, we have developed an efficient logistics system that guarantees deliveries within 24h in Italy and 48h in Europe, ensuring maximum care during transport. Our multilingual team also provides customers with support and assistance.

Quick and safe shipments



REASON WHY

SOSTENIAMO IL GREEN / WE ARE ECO-FRIENDLY

Abbiamo eliminato la plastica dai nostri packaging. Selezioniamo e prediligiamo materiali provenienti da risorse sostenibili. Ricerchiamo le tecnologie con miglior efficienza energetica abbinati a sistemi smart in grado di ridurre ulteriormente i consumi. Questi e molti altri sono i nostri impegni a sostegno della sostenibilità!

We no longer use plastic in our packaging. We select and prefer materials from sustainable resources. We research the most energy-efficient technologies combined with smart systems that further reduce consumption. All this, and much more, shows our commitment to sustainability!



GUIDA ALLA LETTURA DELLE TABELLE /
GUIDE TO READING THE TABLES

Ogni collezione è accompagnata da uno o più simboli per precisare la destinazione d'uso del prodotto
Every collection will be distinguished by a symbol for intended use

Nome e caratteristiche collezione
Collection name and characteristics

Certificazione e normative
Certification and regulations

Caratteristiche prodotto
Product characteristics

Codice prodotto e codice ean
Product code and EAN code

Variante colore
Colour variance
ove esistente / where existing

Potenza Power
Per i prodotti senza LED integrato, dati attacco lampadina con potenza massima certificata /
For the products without built-in LED max lamp holder power as required by CE certificate

Temperatura colore LED espressa in Kelvin + lumen
Colour temperature in Kelvin + lumen
ove esistente / where existing

Accessori
Accessories
ove esistente / where existing

Fotometria del prodotto
Photometric curve
ove esistente / where existing



indoor use
uso domestico / domestic use

outdoor use
esterno / outdoor use

accommodation areas use
strutture ricettive / accommodation areas use

office use
uffici / office use

commercial areas use
aree commerciali / commercial areas

urban areas use
aree urbane / urban use

industrial areas use
aree industriali / industrial use

bathroom use
ambiente bagno / bathroom use

APP INTEC
GOOD SOLUTION FOR YOUR SMART LIFE!

EASY DOMOTICA

WI-FI SMART INTEC

SMART INTEC BLUETOOTH SIG MESH

Sistemi di controllo per i nostri prodotti SMART / Control system easy installation




Smart Intec WIFI



RF 2.4G control system



Alexa e Google Home voice control

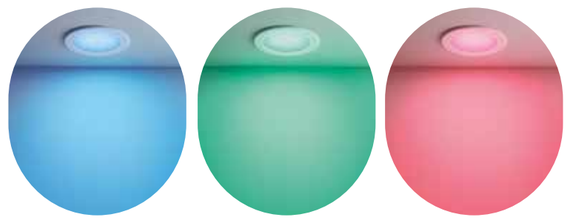

EASY DOMOTICA Con questo segmento tecnico intendiamo soddisfare al meglio la crescente esigenza di migliorare la qualità di vita domestica, e lavorativa attraverso l'utilizzo di dispositivi di illuminazione sempre più interconnessi fra loro tramite collegamenti sempre più semplificati dalle tecnologie wireless. I dispositivi di illuminazione diventano uno strumento estremamente personalizzato e modulabile che si fondono, anche in diversi momenti della giornata, con le evolute esigenze di illuminazione non più fine a se stessa ma adattata ai diversi umori sia di una utenza professionale che di una utenza domestica o ludica. Questa sezione raggruppa prodotti a bassa tensione che è possibile collegare con alimentatori a tensione costante in parallelo e si caratterizzano per la estrema flessibilità e modularità essendo essi compatibili con centraline di controllo in Radio Frequenza 2.4G, Infrarossi, Wifi o Buetooth. Le centraline a loro volta prevedono interfacce wifi, bluetooth oppure possono essere controllate tramite wall pad o radiocomandi.

EASY DOMOTICA With this technical segment, we intend meet in the best way the growing need to improve the quality of home and working life through the use of lighting devices that are increasingly interconnected with each other through connections that are increasingly simplified by wireless technologies.
The lighting devices become an extremely personalized and modular tool that merge, even at different times of the day, with the evolved lighting needs no longer as light source itself but light adapted to the different moods of both professional users, domestic users, playful users. This section groups low voltage products that can be connected with constant voltage power supply in parallel connection system and are characterized by extreme flexibility and modularity as they are compatible with 2.4G Radio Frequency, Infrared, Wifi or Bluetooth control units. The control units can be controlled by wifi, bluetooth devices or can be controlled via a wall pad or remote control.

SMART INTEC

È possibile controllare da remoto tutti gli apparecchi luminosi, con le APP INTEC e SMART LIFE / All luminaires can be remotely controlled with INTEC and SMART LIFE APPs.

Scarica l'app Smart Intec su / Download App Smart Intec on:

Download on the App Store

GET IT ON Google Play

SMART INTEC

SMART LIFE

Powered by tuya

APP INTEC WI-FI Ogni momento della vita quotidiana richiede la giusta luce. Grazie all'illuminazione Smart, creare l'atmosfera ideale per tutti i momenti sarà possibile con i nostri prodotti Wi-fi e Bluetooth. Tramite la **nostra app Smart INTEC** è possibile comandare da remoto tutti gli apparecchi luminosi per accendere o spegnere, cambiare temperatura colore Kelvin della luce e anche impostare scene. Tra i nostri articoli troverai una selezione di prodotti a LED integrato pronti all'installazione ma anche tutti gli accessori necessari per rendere smart qualunque apparecchio domestico e non. Una volta collegata e scaricata l'app INTEC, la creazione delle varie stanze sarà semplice e intuitivo grazie alle istruzioni step by step. Per controllare i nostri prodotti smart è possibile anche utilizzare gli smart speaker e video Amazon e Google. Abilita la skill e controlla i dispositivi semplicemente parlando.

APP INTEC WI-FI Every moment of everyday life require the right light. Thank to the Smart lighting it will be possible to create the ideal atmosphere connecting them and controlling them thorough Wi-fi or Bluetooth connection. **With our APP Smart Intec** it is possible to control from remote all the lighting devices with on-off, kelvin colour temperature changing, light colour and scenes functions. To instore some smart lamps it is necessary just your standard home electric connection, and wifi connection. Once connected the lamp and downloaded the APP Smart Intec it will be very easy to create groups and rooms in very easy process thank to the instructions step by step on the App. The smart lamps can be controlled also with Wifi voice control devices.

SMART INTEC Bluetooth Sig Mesh La rete Bluetooth è stata ben accolta nell'illuminazione industriale, commerciale e domestica, in quanto uno dei sistemi di controllo dell'illuminazione intelligente più semplici e convenienti che svolge un ruolo chiave nel facilitare l'inter-dialogo tra i dispositivi di illuminazione. I nostri articoli Bluetooth Sig Mesh possono essere collegati con i dispositivi intelligenti tramite l'APP Smart Intec e ogni dispositivo di illuminazione può comunicare con un altro numero infinito di dispositivi attraverso la rete mesh entro una distanza di 15m per ogni dispositivo. La rete Mesh Bluetooth può essere controllata da remoto tramite Wifi grazie alla connessione del gateway Bluetooth il quale a sua volta può connettersi ai dispositivi voice control Alexa e Google. Per tutti gli utenti, i prodotti mesh Bluetooth sono anche comodi da usare. Abilitata da una rete di dispositivi su larga scala e in grado di sfruttare il basso consumo energetico, una rete mesh Bluetooth può supportare migliaia di dispositivi che lavorano contemporaneamente. Quindi, non importa se sei a casa o in ufficio, puoi sempre eseguire un gran numero di dispositivi intelligenti connessi allo stesso tempo. Di conseguenza, i prodotti Bluetooth mesh smart forniscono una gamma completa di comodità per vivere e lavorare senza preoccuparsi degli alti costi energetici. Nella casa intelligente, il Bluetooth abbassa la soglia di utilizzo dei dispositivi domestici intelligenti con il suo basso consumo energetico, l'elevata compatibilità e le caratteristiche di alta sicurezza, fornendo un'esperienza domestica più economica, più user-friendly e più intelligente. Senza l'autorizzazione dell'utente, il segnale Bluetooth non sarà in grado di connettersi e tracciare il dispositivo, proteggendo la privacy dell'utente.

SMART INTEC Bluetooth Sig Mesh Bluetooth mesh has been well received across the industrial, commercial and domestic lighting, as one of the easiest and much convenient smart lighting control systems playing a key role in facilitating the inter-dialogue between lighting devices. Our Bluetooth mesh items can be connected with the smart devices through the APP Smart Intec and each lighting device can communicate with other infinite number of devices through the mesh network with all other devices within a distance of 15m.
The Bluetooth mesh network can be controlled from remote area through Wifi thank to the connection of Bluetooth gateway that can connect in turn to Alexa and Google voice controls. For individual users, Bluetooth mesh products are also convenient to use. Enabled by a large-scale device network and able to take advantage of low power consumption, a Bluetooth mesh network can support thousands of devices working simultaneously. So, no matter if you are at home or in the office, you can always run a large number of connected smart devices at the same time. As a result, Bluetooth mesh smart products provide a full range of conveniences for living and working without worrying about high energy costs. In the smart home, Bluetooth lowers the threshold of using smart home devices with its low power consumption, high compatibility, and high-security characteristics, providing a lower cost, more user-friendly, and smarter home experience. Without the user's permission, the Bluetooth signal will not be able to connect and track any device, protecting the user's privacy.

CARATTERISTICHE PRODOTTO / PRODUCT FEATURES



LED integrato SMD /
Built-in SMD LED



LED integrato COB /
Built-in COB LED



Prodotto ad alta efficienza luminosa /
High luminous efficiency product



Prodotto RGB /
RGB product

Prodotto RGB+UV /
RGB+UV product

Prodotto RGB+bianco+UV /
RGB+white+UV product



Prodotto RAINBOW /
RAINBOW product



Prodotto CCT
(bianco dinamico) /
Adjustable white



Selectable color temperature (2700K 3000K 4000K)
Interruttore interno per la personalizzazione dei Kelvin /
Internal switch for customization of Kelvin



Selectable color temperature (3000K 4000K 6000K)
Interruttore interno per la personalizzazione dei Kelvin /
Internal switch for customization of Kelvin




Selectable color temperature (3000K 4000K)
Interruttore interno per la personalizzazione dei Kelvin /
Internal switch for customization of Kelvin




3 step CCT
Regolazione luce calda, naturale, fredda. Memory function tramite interruttore a parete /
Warm, natural and cold light control. Memory function by means of a wall switch



Touch dimmer
Intensità di luce regolabile /
Dimmable light intensity




Dimming
Intensità di luce regolabile a taglio di fase /
Adjustable light intensity by phase cut-out dimmer



3 step DIM
I prodotti 3 step dimmer permettono di regolare l'intensità luminosa utilizzando l'interruttore di casa /
3 step dimming function: modulation of light intensity by wall switch



Touch step dimming
Interruttore touch
3 luminosità /
Step - 3 step brightness touch switch



Interruttore touch integrato /
Built-in touch switch



Indice resa cromatica /
Colour rendering index



Prodotto UGR /
Unified glare rating

UGR è un indice unificato in campo internazionale, sviluppato dalla CIE (commission international de l'Enclairage), per la valutazione dell'abbagliamento diretto derivante dall'impianto di illuminazione. La norma europea per l'illuminazione dei posti di lavoro in interni **UNI-EN 12464-1** richiede un valore UGR specifico per ogni applicazione, compreso tra **10 e 30: più basso è il valore, minore è l'abbagliamento.**

UGR is an international unified data, developped by CIE (commission international de l'Enclairage) for the avaluation of the glaning degree of the light sources. The European norme for the lighting of te specifical working place **UNI-EN 12464-1** requires a value UGR for every application, included between **10 and 30: lower is the value, lower is the anti glare ratee.**



















Attacco sorgente /
Light source



Misura lampadina consigliata /
Recommended bulb size



Luce emergenza /
Emergency light



Prodotto ad energia solare /
Solar energy product



Calpestabile /
Walkable

max 2000kg



Prodotto indoor e outdoor /
Indoor e outdoor product



Connessione bluetooth /
Bluetooth connection



Gesso verniciabile /
Gypsun paintable



Cemento /
Concrete



Prodotto gallegiante /
Floating product




Prodotto anticorrosione /
Corrosion-free




Incassi: direzione fascio di luce assimetrica /
Recessed lamps: description of asymmetrical light emission type



Plafoniere:
direzione fascio di luce /
Ceiling lamps: description of light emission type



Applique: direzione fascio di luce /
Wall lamps: description of light emission type



Incassi e segnapassi:
direzione fascio di luce /
Inground and walk lights:
description of light emission type

GRADI DI PROTEZIONE / IP PROTECTION RATE



Classe IP / IP Class

Tutti i prodotti presenti nel catalogo senza specifica grado IP si intendono IP20.
All items in the catalogue without IP rating specific are IP20.



Protezione da corpi solidi
Protection against solid bodies

0
Nessuna protezione /
No protection

1
Protetto contro corpi solidi di dimensioni superiori a 50 mm /
Protected against solid bodies larger than 50 mm

2
Protetto contro corpi solidi di dimensioni superiori a 12 mm /
Protected against solid bodies larger than 12 mm

3
Protetto contro corpi solidi di dimensioni superiori a 2,5 mm /
Protected against solid bodies larger than 2,5 mm

4
Protetto contro corpi solidi di dimensioni superiori a 1 mm /
Protected against solid bodies larger than 1 mm

5
Protetto dalla polvere senza deposito dannoso /
Protected against dust no harmful deposit

6
Completamente protetto dalla polvere /
Completely protected against dust

Protezione da liquidi
Protection against liquids

0
Nessuna protezione /
No protection

1
Protetto contro le gocce d'acqua a caduta verticale /
Protected against vertically-falling drops of water

2
Protetto contro le gocce d'acqua che cadono fino a 15° dalla verticale /
Protected against drops of water falling at up to 15° from the vertical

3
Protetto contro le gocce d'acqua che cadono fino a 60° dalla verticale /
Protected against drops of water falling at up to 60° from the vertical

4
Protetto contro le gocce d'acqua da tutte le direzioni /
Protected against projections of water from all directions

5
Protetto da getti d'acqua da tutte le direzioni /
Protected against jets of water from all directions

6
Protetto da getti d'acqua con una forte forza d'impatto /
Protected against jets of water of similar force heavy seas

7
Protetto dagli effetti dell' immersione /
Protected against the effects of immersion

8
Protetto contro gli effetti prolungati dell'immersione sotto pressione /
Protected against pro-longed the effects of immersion under pressure



Classe IK / IK Class

Gradi di protezione degli involucri per apparecchiature elettriche contro impatti meccanici esterni.
Degrees of protection for enclosures for electrical equipment against external mechanical impacts.

IK	Energia d'impatto (in Joules) / Impact energy (in Joules)
00	0
01	0,15
02	0,2
03	0,35
04	0,5
05	0,7
06	1
07	2
08	5
09	10
10	20

LEGENDA SIMBOLI / LEGEND OF SYMBOLS

Classe isolamento elettrico / Appliance class

Le classi di isolamento elettrico sono il raggruppamento omogeneo definito dall'IEC (International Electrotechnical Commission) delle caratteristiche tecniche applicabili ad un dispositivo elettrico per limitare i rischi di folgorazione conseguenti ad un guasto dello stesso.
The electrical insulation classes are the homogeneous grouping defined by the IEC (International Electrotechnical Commission) of the technical characteristics applicable to an electrical device to limit the risk of electrocution resulting from its failure.

I	Questi apparecchi devono avere il telaio collegato alla terra elettrica da un conduttore di terra separato / These appliance must have their chassis connected to electrical earth by a separate earth conductor
II	Questi apparecchi sono progettati in modo da non richiedere la connessione delle messe a terra / These appliance are designed in such a way that it does not require a safety connection to electrical earth
III	Questi apparecchi sono progettati per essere alimentati da una fonte di alimentazione a bassissima tensione separata di sicurezza / These appliance are designed to be supplied from a separated/safety extra-low voltage power source

Certificazione e normative / Certification and regulations

Tutti i nostri prodotti sono certificati e conformi alle normative vigenti nella comunità Europea / All our products comply with CE norms and current European standards

EMC - Direttiva Europea sulla compatibilità elettromagnetica / EMC - European electromagnetic compatibility directive

Prodotto dimmerabile / Product dimmable

Prodotto non dimmerabile / Product not dimmable

DALI - Digital Addressable Lighting Interface
Sistema di controllo domotico della luce / DALI - Digital Addressable Lighting Interface
Domotic lightingh control system

Dimensione foro quadrato per incasso a soffitto / Square cut-out size for ceiling recessed lamps

Dimensione foro rotondo per incasso a soffitto / Round cut-out size for ceiling recessed lamps

Dimensione foro quadrato per incasso a parete / Square cut-out size for wall recessed lamps

Dimensione foro rotondo per incasso a parete / Round cut-out size for wall recessed lamps

INDICE PER CATEGORIE /
INDEX BY CATEGORY

Indoor:

034 SISTEMA BINARI /
TRACK LIGHTS

126 INCASSI /
RECESSED LAMPS

224 SISTEMI D'ILLUMINAZIONE
MULTIFUNZIONE /
MULTI-FUNCTION
LIGHTING SYSTEM

260 APPLIQUE E PLAFONIERE /
WALL LAMP AND CEILING LAMPS

286 VENTILATORI /
FANS

314 SOTTOPENSILI E BARRE LED /
CABINETS AND LEDBARS

336 PROFILI E STRIP LED /
PROFILES AND STRIP LED

Emergency:

436 LAMPADE D'EMERGENZA /
EMERGENCY LAMPS

Outdoor:

446 APPLIQUE /
WALL LAMPS

528 PLAFONIERE /
CEILING LAMPS

566 APPLIQUE, SOSPENSIONI
E PALETTI CORRELATI /
WALL, SUSPENSION AND
FLOOR LAMPS COMBINED

662 LAMPADE DA TAVOLO
RICARICABILI /
RECHARGEABLE
TABLE LAMPS

684 INCASSI E SEGNAPASSI /
INGROUND AND WALK LIGHTS

720 SOLARI /
SOLAR LAMPS

740 PROIETTORI /
FLOOD LIGHTS

770 STRADALI /
STREET LIGHTS

Industrial:

786 HIGH BAY & TRI-PROOF

Decorative:

798 EASY DOMOTIC 24V /

812 LUCI DECORATIVE
TECNICHE DMX /
DMX TECHNICAL
DECORATION LIGHTING

Accessories:

840 COMPONENTISTICA /
LIGHTING COMPONENTS

INDICE FOTOGRAFICO /
PHOTOGRAPHIC INDEX

Indoor:
SISTEMA BINARI /
TRACK LIGHTS



SHOT
48



GOAL
49



FANS
50



TEMA
52



LINE
54




SLIDE
56



TUBO
57



CYMBAL
59



DA VINCI
accessories
60-65




BERNINI LINE
70-72



BERNINI FANS
74

BERNINI TUBO
75



BERNINI
accessories
76-79



EXPLORER
84



PLANE
86



JET ALTO
LUMEN
88



JET
90



JET FOOD
92



OBOE
93



ROCKET
94



ROCKET
applique
95



SQUIB
96



EXPRESS
96



CLOCK
97



MAXWELL
98




HELP TRACK
100



RAIL
accessories
102-107



RAIL accessories
108-113



TRACK
accessories
114-115



BUSBAR
120-123



BUSBAR
accessories
124-125

Indoor:
INCASSI /
RECESSED LAMPS



APOLLO
128-130



OUTSIDER
132-134



DELTA INC
136



LYBRA
138



DAMA
139



FIBRA OTTICA
140



STARLIGHT
142



STARLIGHT30
142



ASSO KIT 3
144



ASSO
146



DOT
148



HYDE
150



SINKRO
152



ELITE
154



QUARK
156



XANTO
158-160



MACK
162



TRON
164



SLIM CCT
166



FLAP CCT
168



TOTAL
170



PLUS
172



SNIPER
174



GLOW
175



POLARIS
176



ORIONE
177



FUSION
178



BLITZ
180



NEMO
181



RAINBOW
182



ZENIT
183



QUANTUM
184



HORUS
186



MATRIX
188-190



TUBEX
192



STARRY
194



GHOST
195



VULKAN
196



ENTITY
197



GOBLET
198



SHADOW
199



PHANTOM
200



SPETTRO
201



MINI
202



HIVE
203



SPIRIT
204



SNOW
205



MORGANA
206



SENSO
207



BRICK
208



EVA
209



SKILIFT
210



ARIEL
212



ANIMA
214



STENOS
216



VIPER
218



AYRIS
220



REFLEX
222

Indoor:
SISTEMI D'ILLUMINAZIONE MULTIFUNZIONE /
MULTI-FUNCTION LIGHTING SYSTEM


SHAPE
226


SHAPE
accessories
231


NEXT
232-236


NEXT
accessories
237


SEGMENTO
238-241


METRO
242


PANEL PRO
244



PANEL BK CCT
246


PANEL BK
248


PANEL RGB
250


PANEL IP65
250


PANEL FR
252


PANEL EDG
252


PANEL SM
253


PANEL BIS
254


PANEL
accessories
256


PANEL DJ
258

Indoor:
APPLIQUE E PLAFONIERE /
WALL LAMPS AND CEILING LAMPS


KLIO CCT
262


MIG
264


GENESIS
266


TOWN
268


DOMO
270


BLASTER
272


CRUISE
273


YACHT
274


NOIR
275


LANCER
276


SACS
278


RIVA
279


AQA
280


WALLY
281


DIVA
282


F1
284


ROBY
284


Q1
285

Indoor:
VENTILATORI /
FANS


HERON
288


BLYTH
290


ALBATROS
292


MAGNUS
294


HADLEY
296


AUSTER
298


STORM
300


BOREA
303


SKYRON
303


ALISEO
305


FOEHN
305


GRECALE
306


LEVANTE
309


SCIROCCO
309


ETESIA
310


PONENTE
311


ESPERO
313


NASHI
313

Indoor:
SOTTOPENSILI E BARRE LED /
CABINETS AND LEDBARS


UNIX
316-318


T8
320


BATTEN
322


HABILIS
324


T5
326


MOVIE
328


ZAK
330


GTO
332


AURIKA
332


BLAM
333


CLOSET
334


TRIGGER
334


SHELF
335

Indoor:
PROFILI E STRIP LED /
PROFILES AND STRIP LED


GORIZIA PROFILE **340**



BEND PROFILE **342**


EDGE PROFILE **344**


RIDGE PROFILE **346**


ANGLE PROFILE **347**


BERLINO PROFILE **348**


ROMA PROFILE **350**


MICRO PROFILE **352**


INCRO PROFILE **353**


LOOP PROFILE **356**


LINEA PROFILE **358**


MILANO PROFILE **360**


ULTRA PROFILE **362**


CAMELOT PROFILE **364**


TUBE PROFILE **366**


NEWYORK PROFILE **368**


DORIK PROFILE **370**


IONIK PROFILE **371**


STEPWAY PROFILE **372**


DRIVEWAY PROFILE **374**


GASH PROFILE **378**


TRIM PROFILE **380**


MOP PROFILE **381**


VEIL PROFILE **382**


WING PROFILE **383**


DUAL PROFILE **384**


INVISILINE PROFILE **388**


PROFY BIS PROFILE **390**


PROFY MONO PROFILE **390**


PROFY GIMEL PROFILE **392**


PROFY VELA PROFILE **392**


PIANO PROFILE **395**


PROFILE accessories **396**


STRIP24V COB DIGITAL **398**


STRIP24V COB RGB DIGITAL **399**


STRIP24V 2835 IP67 120 **400**


STRIP24V 2835 5W **401**


STRIP24V R20 2835 120 **402**


STRIP24V R20 COB 480 **403**


STRIP24V 2835 HL 128 **404**

STRIP24V FOOD **405**

STRIP24V COB **406**

STRIP24V COB IP67 **407**

STRIP24V 2835 3D **408**

STRIP24V SLIM 120 **409**

STRIP24V 2835 60 **410**

STRIP24V 2835 60 IP67 **411**

STRIP24V 2835 120 **412**

STRIP24V 2835 120 IP68 **413**

STRIP24V 2835 CCT **414**

STRIP24V 2835 240 **415**

STRIP24V 5050 60 **416**

STRIP24V 5050 60 IP67 **417**

STRIP24V 5050 RGB **418**

STRIP24V 5050 RGB IP67 **419**

STRIP24V 5050 RGBW **420**

STRIP24V 5050 RGBW IP68 **421**

STRIP230V SMD **422**

STRIP230V COB **423**

STRIP24V 5050 3D RGBW **424**

STRIP 24V 5050 RGB CCT **425**

STRIP24V 3838 168 RGB **426**

STRIP24V 5050 RGBW INT **428**

STRIP24V 2835 INT **429**

INSIGN **430**

STRIP SURROUND **431**

FLEX24V 10X10 **432**

FLEX24V 6X6 **433**

FLEX24V 6X13 **434**

Indoor:
LAMPADE D'EMERGENZA /
EMERGENCY LAMPS

HUBLOT HELP **438**

HELP INC **440**

HELP TRACK **441**

HELP EXIT **442**

HELP 511 **443**

HELP 503 **444**

BOLT HELP **445**

Outdoor:
APPLIQUE /
WALL LAMPS

COMPACT **448**

DETROIT **449**

ZODIAC **450**

STEALTH **452**

MIURA **454**

GAMMA **455**

VEYRON **456**

BIOME **458**

GOLF **460**

POLO **462**

RAY **464**

TWIN **466-468**

DESERT **470**

DUKROT **472**

WEISS **474**

BORDER **476**

LUXON **478**

GRIS **480**

AGERA **482**

BOXTER **484**

KLEIN **486**

BEETLE **488**

RIBBON **490**

LASER **492**

ALFA **494-496**

DELTA **498**

PARKER **500-502**

PORTLAND **504**

OAKLAND **505**

JUMP **506**

ONE **508**

QUBO **510**

TUCSON **512**

HURACAN **514**

SEATTLE **515**

AUSTIN **516**

BOSTON **518**

ATLANTA **519**

DENVER **519**

MONDRIAN **520**

GAETA **521**

GRUBB **522**

AKRON **523**

PEG **524**

TOGO **526**

Outdoor:
PLAFONIERE /
CEILING LAMPS



ZOOM **530**


CITIZEN **532**


TOWER **534**


ISCHIA **536**


CAPRI **537**


ALWAYS **538**


HUBLOT SENS **539**


SENSITIVE **540**


EXTRA **542**


SHELLY **544-546**


EVER Q **548**


EVER LP **550**


EVER S **551**


EVER XL **552**


FLIPPY **554**


SPEEDY **556**


TURTLE **558**


PICNIC COLOR
PICNIC RGB **560, 564**


PICNIC **562**



PICNIC INT **565**

Outdoor:
APPLIQUE SOSPENSIONI E PALETTI CORRELATI /
WALL SUSPENSION AND FLOOR LAMPS COMBINED


POLLY **568**


POLLY
accessories **573-575**


WAMI **576**


SAIL **578**


DISCOVERY **580-582**


IDEM **584**


REVERSE **586**


SINTESI **588**


ALYSON **590**


BITT **592**


NISMO **594**


STATION **597**


UNDERWOOD **598**


FOCUS **600**


DARK **602**


TOKYO **604-606**


WAX **608**


PUCK **610**


DROP **612**


BOOSTER **614**

GECO DJ **616**

GECO LED **618**

GECO E27 **620-627**

solar
GECO LED **628**

MANDALA **631**

YORK **633**

PAVÈ **634**

LUMINA **636**

MIRAGE **638**

SKITTLE **640**

ORBIT **642**

PRISMA **644**

ROMA **646**

MILANO **650**

FIRENZE **652**

SANTIAGO **654**

VENEZIA **656**

PAVIA **658**

BRIGHTMAX **660**

Outdoor:
LAMPADE DA TAVOLO RICARICABILI /
RECHARGEABLE TABLE LAMP

PARTY **664**

LIBERTY **667**

SMALL DRINK **668**

DRINK **670**

JAMMIN **672**

BRIO **674**

MYKES **676**

COCKTAIL **678**

CLIMAX **680**

OBERON **683**

Outdoor:
INCASSI E SEGNAPASSI /
INGROUND AND WALK LIGHTS

BARRET **686**

SUBWAY **687**

RIDER **688-690**

IMPACT **691**

STEP **692**

WALK **694-696**

HUMMER **698**

DRIVE **700**

ELMO **702**

GROUND **704**

ONYX **706**

STRATOS **708**

SLAB **710**

BREEN **712**

SMILE **714**

BOLT **716**

STEPLIGHT **718**

SHELBY **719**

Outdoor:
SOLARI /
SOLAR LAMPS

KYOTO **722**

ENYA **723**

TED **724**

ALBERT **725**

COSMO **726**

ELIOS **728**

EOS **729**

SKYP **730**

OPEN **731**

ARGO **733**

SHIVA **734**

ULYSSE **735**

GLASER **736**

LUXOR **739**

Outdoor:
PROIETTORI /
FLOOD LIGHTS


VYSOR **742**



BANNER **744**


SAT **746**


AXEL **748-750**


AXEL SENSOR **752**


AXEL PORTABLE **753**


BULL **754**


KNOX **756**


ATHOS **758**


TAURUS **760**


FLOOD LIGHTS accessories **762**


GIOVE **764**


MASTER **766**


ENERGY **768**

Outdoor:
STRADALI /
STREET LIGHTS


AUREUS **772**


RADIUS **774**


FEBO **776**


IPERION **778**


STREETWAY **780**


HIGHWAY **782**


POLIS **784**

Outdoor:
HIGH BAY & TRI-PROOF


AVATAR **788**


ATLANTIC **790**


NAUTILUS **792**


ARTIC **794**


OCEAN **796**

Decorative:
EASY DOMOTIC 24V


XANTO-RF **802**

XANTO-RF **803**


STRIP24V 5050 RGBW **804**


STRIP24V 5050 RGBW IP68 **804**


TARGET **805**


AGILITY **806**


QUICK **808**


SPRINT **810**


RUNNER **811**

Decorative:
LUCI DECORATIVE TECNICHE DMX /
DMX TECHNICAL DECORATION LIGHTING


SHOW WALLWASHER **814**


SHOW PAR **816**


SHOW Q **818**



SHOW TUBE **820**


RAYS **822**


WALLWASHER **824**


IRIDE **826**


IRIDE R **828**


NEPTUNE **830**


CROWN **831**


TREVIS **832**


PAR56 **834**


PELPS **835**


CONTROLLER **836-839**

Outdoor:
COMPONENTISTICA /
LIGHTING COMPONENTS


ACCESSORIES **842**


DRIVER MINI-LT **843**


POWER SUPPLY **844-846**


DRIVER LPHC-LPH-LCM **847**


DRIVER HLG **847**


DRIVER ELG **848**


DRIVER XLG **849**


DRIVER PWM **849**


DRIVER HDR-NDR-SDR **850**


DIMMER **851**


EMERGENCY DRIVER **851**


DRIVER **852**


DIMMER **853**


POWER SUPPLY **853**


REMOTE CONTROL **854-857**


SPI CONTROL **858-859**


SENSORS **860-861**


CLAY **862-863**


LAMPHOLDERS ADAPTERS **864-867**


SMART INTEC **868-869**

INDICE ALFABETICO / ALPHABETICAL INDEX

articolo / article	pagina / page
AGERA	482
AGILITY Easy Domotica 24V	806
AKRON	523
ALBATROS	292
ALBERT	725
ALFA	494-497
ALISEO	305
ALWAYS	538
ALYSON	590
ANGLE PROFILE	347
ANIMA	214
APOLLO	128-131
AQA	280
ARGO	733
ARIEL	212
ARTIC	794
ASSO	146
ASSO KIT 3	144
ATHOS	758
ATLANTA	519
ATLANTIC	790
AUREUS	772
AURIKA	332
AUSTER	298
AUSTIN	516
AVATAR	788
AXEL	748-751
AXEL PORTABLE	753
AXEL SENSOR	752
AYRIS	220
BANNER	744
BARRET	686
BATTEN	322
BEETLE	488
BEND PROFILE	342
BERLINO PROFILE	348
BERNINI FANS	74

articolo / article	pagina / page
BERNINI LINE	70-73
BERNINI PROJECT 48V	66-69
BERNINI PROJECT 48V Accessories	76-79
BERNINI TUBO	75
BIOME	458
BITT	592
BLAM	333
BLASTER	272
BLITZ	180
BLYTH	290
BOLT	716
BOLT HELP	445
BOOSTER	614
BORDER	476
BOREA	303
BOSTON	518
BOXTER	484
BREEN	712
BRICK	208
BRIGHTMAX	660
BRIO	674
BULL	754
BUSBAR	120-123
BUSBAR Accessories	124
BUSBAR Trunking System	116-119
CAMELOT PROFILE	364
CAPRI	537
CITIZEN	532
CLAY	862
CLIMAX	680
CLOCK	97
CLOSET	334
COCKTAIL	678
COMPACT	448
CONTROLLER	836-839

articolo / article	pagina / page
COSMO	726
CROWN	831
CRUISE	273
CYMBAL	59
DA VINCI PROJECT 48V	36-47
DA VINCI PROJECT 48V Accessories	60-65
DAMA	139
DARK	602
DELTA	498
DELTA INC	136
DENVER	519
DESERT	470
DETROIT	449
DIMMER	851, 853
DISCOVERY	580-583
DIVA	282
DOMO	270
DORIK PROFILE	370
DOT	148
DRINK	670
DRIVE	700
DRIVER	843 847-852
DRIVEWAY PROFILE	374
DROP	612
DUAL PROFILE	384
DUKROT	472
EDGE PROFILE	344
ELIOS	728
ELITE	154
ELMO	702
ENERGY	768
ENTITY	197
ENYA	723
EOS	729
ESPERO	313
ETESIA	310

articolo / article	pagina / page
EVA	209
EVER	548-553
EXPLORER	84
EXPRESS	96
EXTRA	542
F1	284
FANS	50
FEBO	776
FIBRA OTTICA	140
FIRENZE	652
FLAP CCT	168
FLEX24V 10X10	432
FLEX24V 6X13	434
FLEX24V 6X6	433
FLIPPY	554
FLOOD LIGHTS Accessories	762
FOCUS	600
FOEHN	305
FUSION	178
GAETA	521
GAMMA	455
GASH PROFILE	378
GECO DJ	616
GECO E27	620-627
GECO LED	618
GECO LED SOLAR	629
GENESIS	266
GHOST	195
GIOVE	764
GLASER	736
GLOW	175
GOAL	49
GOBLET	198
GOLF	460
GORIZIA PROFILE	340
GRECALE	306
GRIS	480

articolo / article	pagina / page
GROUND	704
GRUBB	522
GTO	332
HABILIS	324
HADLEY	296
HELP 503	444
HELP 511	443
HELP EXIT	442
HELP INC	440
HELP TRACK	100
HELP TRACK	441
HERON	288
HIGHWAY	782
HIVE	203
HORUS	186
HUBLOT HELP	438
HUBLOT SENS	539
HUMMER	698
HURACAN	514
HYDE	150
IDEM	584
IMPACT	691
INCRO PROFILE	353
INSIGN	430
INVISILINE PROFILE	388
IONIK PROFILE	371
IPERION	778
IRIDE	826-829
ISCHIA	536
JAMMIN	672
JET	90
JET ALTO LUMEN	88
JET FOOD	92
JUMP	506
KLEIN	486
KLIO CCT	262
KNOX	756
KYOTO	722

articolo / article	pagina / page
LAMPHOLDERS	864-867
LANCER	276
LASER	492
LEVANTE	309
LIBERTY	667
LINE	54
LINEA PROFILE	358
LOOP PROFILE	356
LUMINA	636
LUXON	478
LUXOR	739
LYBRA	138
MACK	162
MAGNUS	294
MANDALA	631
MASTER	766
MATRIX	188-191
MAXWELL	98
METRO	242
MICRO PROFILE	352
MIG	264
MILANO	650
MILANO PROFILE	360
MINI	202
MIRAGE	638
MIURA	454
MONDRIAN	520
MOP PROFILE	381
MORGANA	206
MOVIE	328
MYKES	676
NASHI	313
NAUTILUS	792
NEMO	181
NEPTUNE	830
NEWYORK PROFILE	368
NEXT	232-237
NISMO	594

articolo / article	pagina / page
NOIR	275
OAKLAND	505
OBERON	683
OBOE	93
OCEAN	796
ONE	508
ONYX	706
OPEN	731
ORBIT	642
ORIONE	177
OUTSIDER	132-135
PANEL Accessories	256
PANEL Easy Domotica 24V	803
PANEL BIS	254
PANEL BK	248
PANEL BK CCT	246
PANEL FR / EDG	252
PANEL IP65	250
PANEL PRO	244
PANEL RGB	250
PANEL SM	253
PANEL-DJ	258
PAR56	834
PARKER	500-503
PARTY	664
PAVÈ	634
PAVIA	658
PEG	524
PELPS	835
PHANTOM	200
PIANO PROFILE	395
PICNIC	562
PICNIC COLOR	560
PICNIC INT	565
PICNIC RGB	564
PLANE	86

articolo / article	pagina / page
PLUS	172
POLARIS	176
POLIS	784
POLLY	568-575
POLO	462
PONENTE	311
PORTLAND	504
POWER SUPPLY	844-846 853
PRISMA	644
PROFILE Accessories	396-397
PROFY BIS PROFILE	390
PROFY GIMEL PROFILE	392
PROFY MONO PROFILE	390
PROFY VELA PROFILE	392
PUCK	610
Q1	285
QUANTUM	184
QUARK	156
QUBO	510
QUICK Easy Domotica 24V	808
RADIUS	774
RAIL Accessories	102-107
RAIL DALI Accessories	108-113
RAINBOW	182
RAY	464
RAYS	822
REFLEX	222
REMOTE CONTROL	854-857
REVERSE	586
RIBBON	490
RIDER	688-690
RIDGE PROFILE	346
RIVA	279


articolo / article	pagina / page
ROBY	284
ROCKET	94-95
ROMA	646
ROMA PROFILE	350
RUNNER Easy Domotica 24V	811
SACS	278
SAIL	578
SANTIAGO	654
SAT	746
SCIROCCO	309
SEATTLE	515
SEGMENTO	238-241
SENSITIVE	540
SENSO	207
SENSOR	860-861
SHADOW	199
SHAPE	226-231
SHELBY	719
SHELF	335
SHELLY	544-547
SHIVA	734
SHOT	48
SHOW PAR	816
SHOW Q	818
SHOW TUBE	820
SHOW WALLWASHER	814
SINKRO	152
SINTESI	588
SKILIFT	210
SKITTLE	640
SKYP	730
SKYRON	303
SLAB	710
SLIDE	56
SLIM CCT	166
SMALL DRINK	669
SMART INTEC	868

articolo / article	pagina / page
SMILE	714
SNIPER	174
SNOW	205
SPEEDY	556
SPETTRO	201
SPI CONTROLLER	858-859
SPIRIT	204
SPRINT Easy Domotica 24V	810
SQUIB	96
STARLIGHT	142
STARLIGHT30	142
STARRY	194
STATION	597
STEALTH	452
STENOS	216
STEP	692
STEPLIGHT	718
STEPWAY PROFILE	372
STORM	300
STRATOS	708
STREETWAY	780
STRIP Easy Domotica 24V	804
STRIP SURROUND	431
STRIP230V COB	423
STRIP230V SMD	422
STRIP24V 2835 120	412
STRIP24V 2835 120 IP68	413
STRIP24V 2835 240	415
STRIP24V 2835 3D	408
STRIP24V 2835 5W	401
STRIP24V 2835 60	410
STRIP24V 2835 60 IP67	411
STRIP24V 2835 CCT	414
STRIP24V 2835 HL 128	404
STRIP24V 2835 INT	429
STRIP24V 2835 IP67 120	400

articolo / article	pagina / page
STRIP24V 3838 168 RGB	426
STRIP24V 5050 3D RGBW	424
STRIP24V 5050 60	416
STRIP24V 5050 60 IP67	417
STRIP24V 5050 RGB	418
STRIP24V 5050 RGB CCT	425
STRIP24V 5050 RGB IP67	419
STRIP24V 5050 RGBW	420
STRIP24V 5050 RGBW INT	428
STRIP24V 5050 RGBW IP68	421
STRIP24V COB	406
STRIP24V COB DIGITAL	398
STRIP24V COB IP67	407
STRIP24V COB RGB DIGITAL	399
STRIP24V FOOD	405
STRIP24V R20 2835 120	402
STRIP24V R20 COB 480	403
STRIP24V SLIM 120	409
SUBWAY	687
T5	326
T8	320
TARGET Easy Domotica 24V	805
TAURUS	760
TED	724
TEMA	52
TOGO	526
TOKYO	604-607
TOTAL	170
TOWER	534
TOWN	268
TRACK Accessories	114
TRACK RAIL Three-phase	80-83
TREVIS	832
TRIGGER	334
TRIM PROFILE	380


articolo / article	pagina / page
TRON	164
TUBE PROFILE	366
TUBEX	192
TUBO	57
TUCSON	512
TURTLE	558
TWIN	466-469
ULTRA PROFILE	362
ULYSSE	735
UNDERWOOD	598
UNIX	316-319
VEIL PROFILE	382
VENEZIA	656
VEYRON	456
VIPER	218
VULKAN	196
VYSOR	742
WALK	694-697
WALLWASHER	824
WALLY	281
WAMI	576
WAX	608
WEISS	474
WING PROFILE	383
XANTO	158-161
XANTO-RF Easy Domotica 24V	802
YACHT	274
YORK	633
ZAK	330
ZENIT	183
ZODIAC	450
ZOOM	530

INDOOR

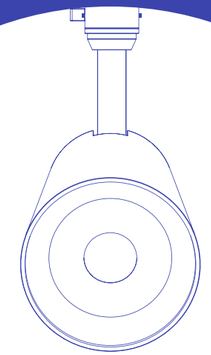

SISTEMA BINARI
TRACK LIGHTS

DA VINCI PROJECT **48V**

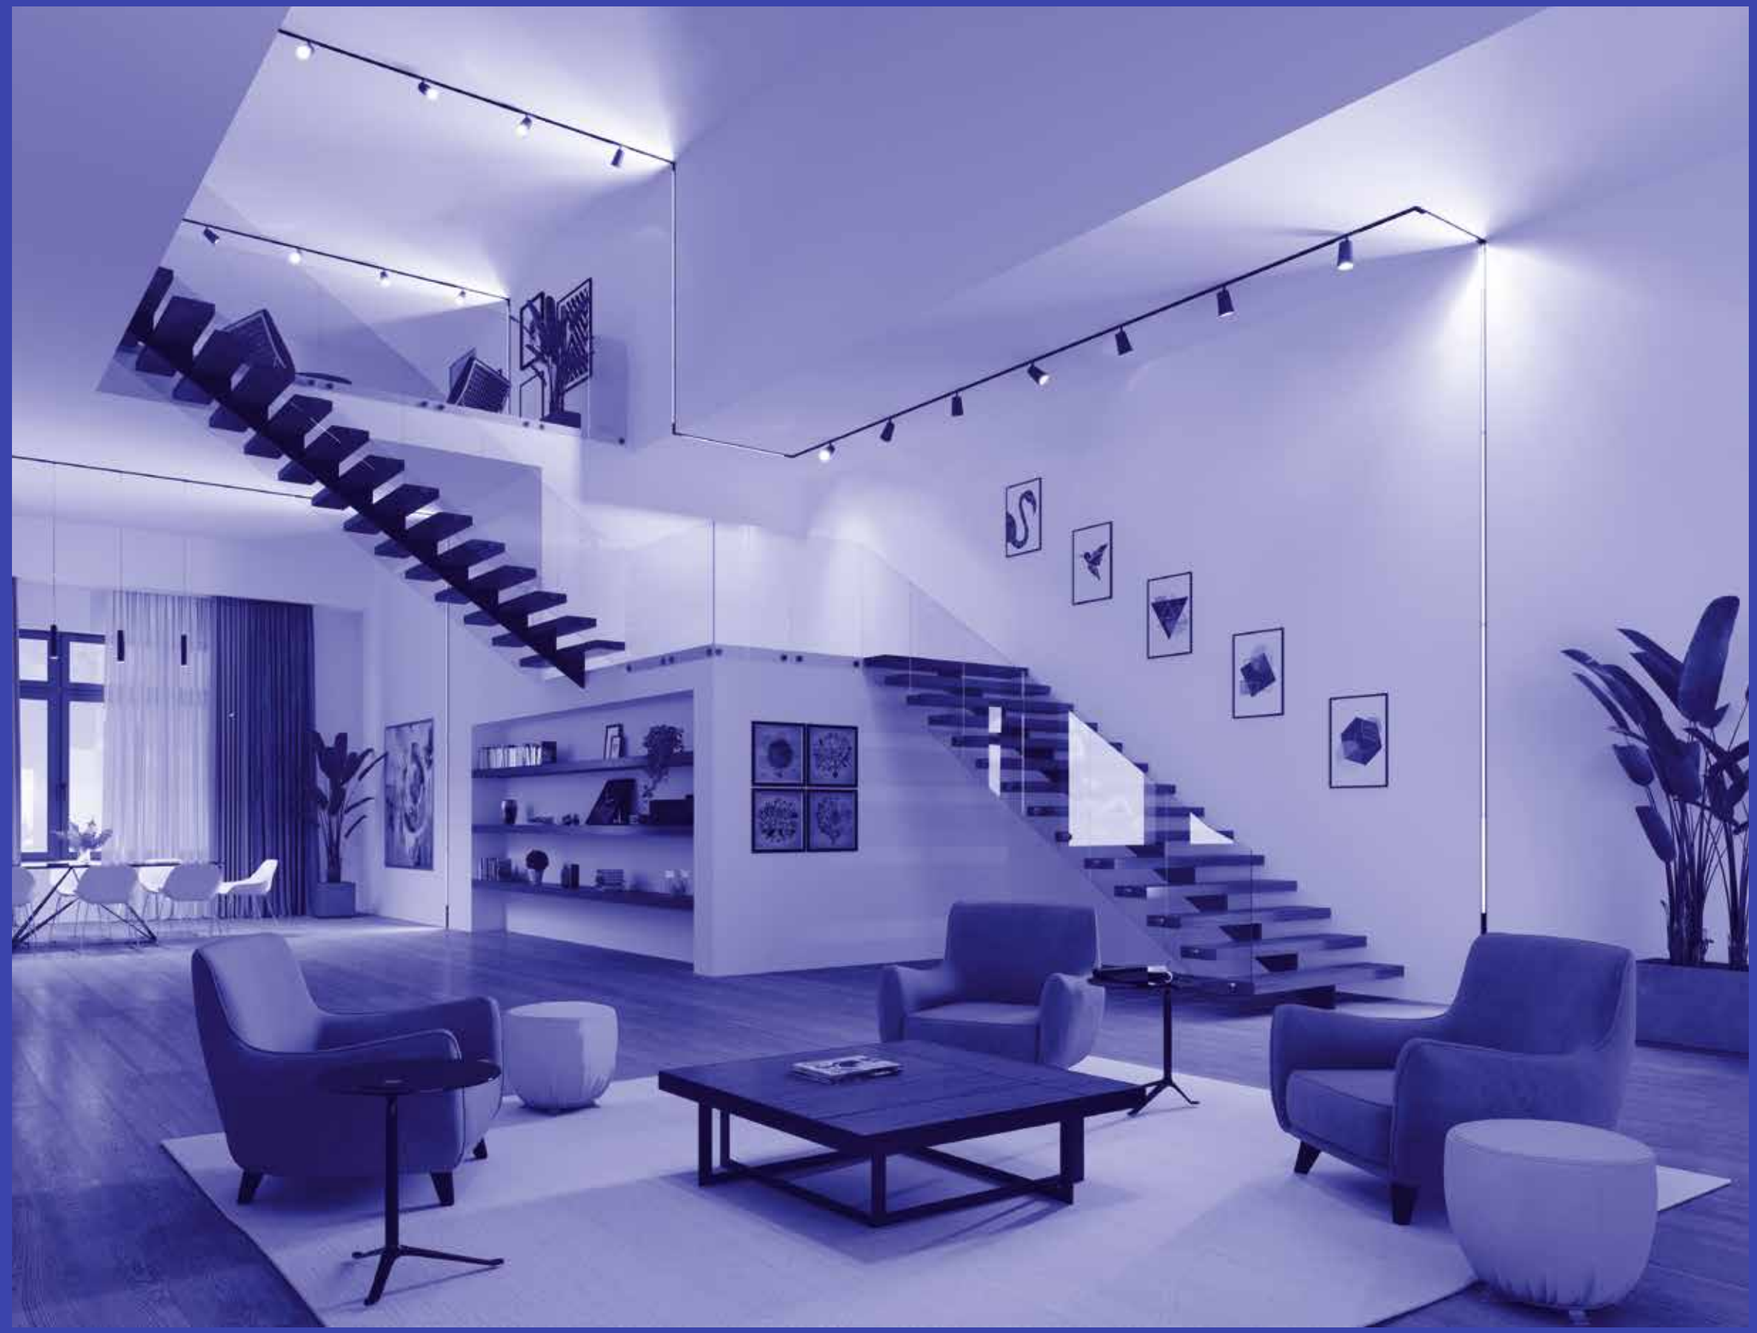

DA VINCI
PROJECT
48V

INTEC fa un salto nel futuro con il sistema Da Vinci, sistema progettato per integrarsi totalmente con l'architettura degli ambienti. Esso può essere fissato al soffitto o alle pareti, inserito nella muratura ad incasso a filo oppure nella versione a sospensione con luce bi-emissione.

Frutto della ricerca tecnologica più avanzata, il sistema consente di creare luce che scaturisce direttamente dalle pareti o dal soffitto, e gioca con gli spazi abitativi tracciando segni luminosi che variano a seconda della posizione del corpo illuminante, posizione che può essere modificata con la massima versatilità in ogni momento grazie al semplice inserimento dei corpi illuminanti all'interno del binario tramite il fluido sistema di innesti a sfere volventi.

INTEC leap forward into the future with the Da Vinci system, system designed to fully integrate with the architecture environments. It can be fixed to the ceiling or to the walls, Inserted in the flush-mounted masonry or mounted in suspension version with single or bi-emission light.

Fruit of most advanced technological research, the system allows you to create light that springs directly from the walls or ceiling, and plays with living spaces by drawing luminous signs that vary according to the position of the luminaire, positon which can be modified with maximum versatility at any time thanks to the simple insertion of the led luminous bodies inside the track by means of the fluid ball bearings.

A

RECESSED TRACK TRIMLESS

Sistema di montaggio a incasso a filo / Recess mount system trimless



B

RECESSED TRACK


Sistema di montaggio a incasso con cornice / Recess mount system with external trim



C

SURFACE MOUNTED

Sistema di montaggio a plafoniera o a sospensione a vista / Ceiling or suspension mounting system



D

PENDANT

Sistema di montaggio a sospensione biemissione / Biemission suspension mounting system







DA VINCI
PROJECT
48V



In base allo spazio da illuminare, è possibile aggiungere, rimuovere o orientare gli apparecchi, quando e dove necessario grazie ad un semplice click. Il sistema Da Vinci a sfere volventi è basato sul sistema plug & play, non ha quindi bisogno di complessi interventi tecnici. Ogni corpo illuminante Da Vinci ha solo bisogno di essere posizionato, inserito ed acceso.

All'interno del binario Da Vinci si può operare con inserimento di una vasta gamma di moduli di illuminazione decorativa sia con fari a spot orientabili, lampade sospese, che con lampade a led lineari fisse o movibili.

Depending on the space to be illuminated, it is possible to add, remove or orient the appliances when and where necessary thanks to a simple click. The Da Vinci rolling ball system is based on the system plug & play, therefore it does not need complex interventions of technicians. Every Da Vinci luminaire just needs to be positioned, inserted and switched on.

Inside the track Da Vinci can be inserted a wide range of decorative lighting modules with headlights, adjustable spots, suspended lamps, and with led linear lamps fixed or movable.

A
LINE

Lampada lineare orientabile a led / Led adjustable linear lamp

B
SLIDE

Lampada lineare orientabile a led / Led adjustable linear lamp

C
GOAL

Faro luce spot orientabile / Spot orientable track light

D
SHOT

Faro luce spot orientabile / Spot orientable track light

E
FANS

Faro luce spot orientabile / Spot orientable track light

F
TEMA

Faro luce spot orientabile / Spot orientable track light

G
CYMBAL

Lampada sospensione led / Suspension led light

H
TUBO

Lampada sospensione led / Suspension led light





Schema di montaggio sistema binari.
Assembling technical sheet track rail system.

DA VINCI
PROJECT
48V

Il binario Da Vinci è un binario completamente elettrificato a bassa tensione e si completa con elementi luminosi a led inseribili semplicemente con un click, grazie all'incastro a sfere volventi, lungo tutto il percorso.
La diversificata gamma di corpi illuminanti Da Vinci, e la ampia scelta di forme, angoli e connessioni permettono la realizzazione di disegni illuminotecnici che esprimono la massima dinamicità e poliedricità delle personalizzazioni.

Da Vinci track is a fully electrified low voltage track system and it is completed with led light elements which can be inserted simply with a click, thanks to the joint a rolling spheres, all along the path.
The diversified range of lighting fixtures Da Vinci, and the wide choice of shapes, angles and connections allow the creation of lighting designs which express the maximum dynamism and versatility of the customizations.

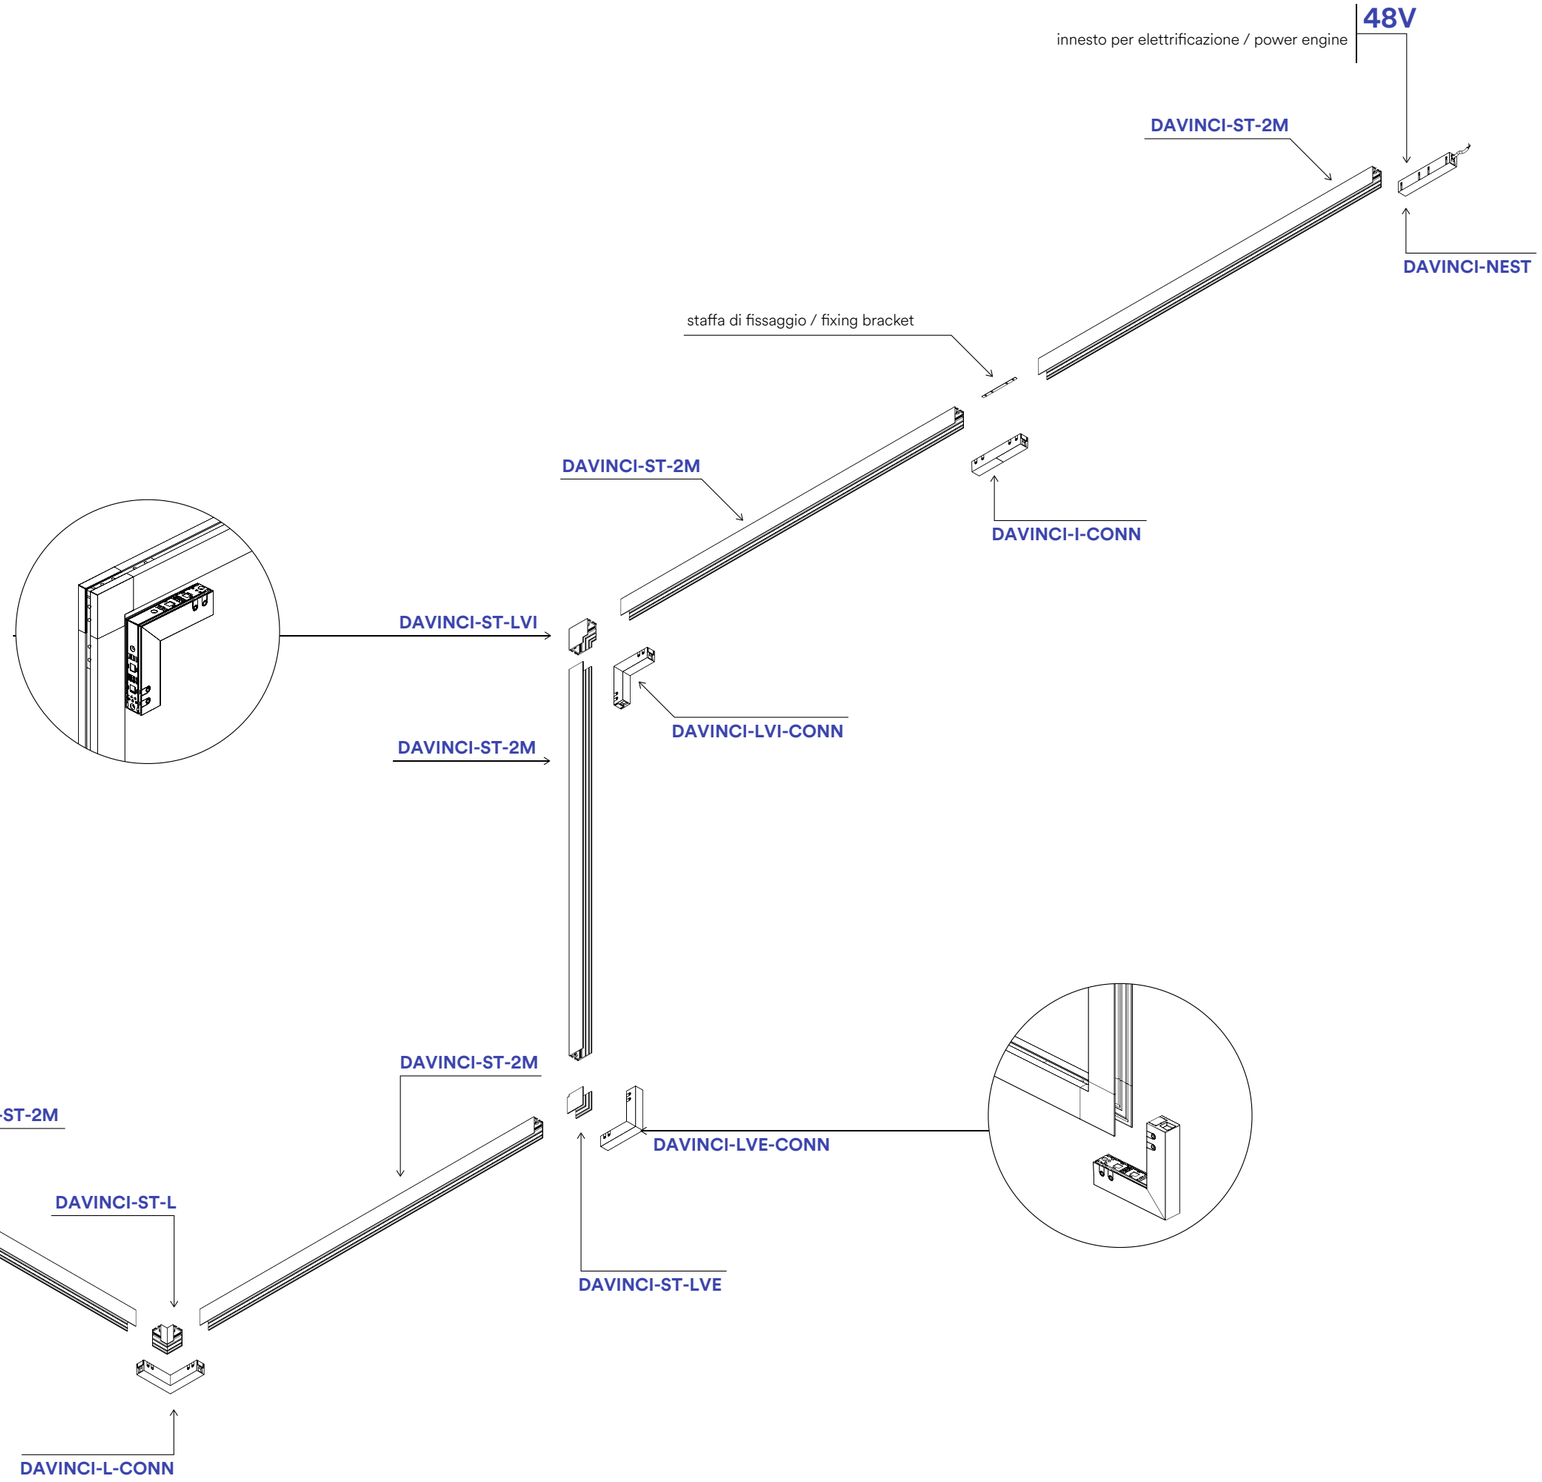




on photo:

TUBO / FANS

Recess mount system trimless



on photo:

CYMBAL / TEMA


Recess mount system with external trim



on photo:

CYMBAL / GOAL

Ceiling or suspension mounting system

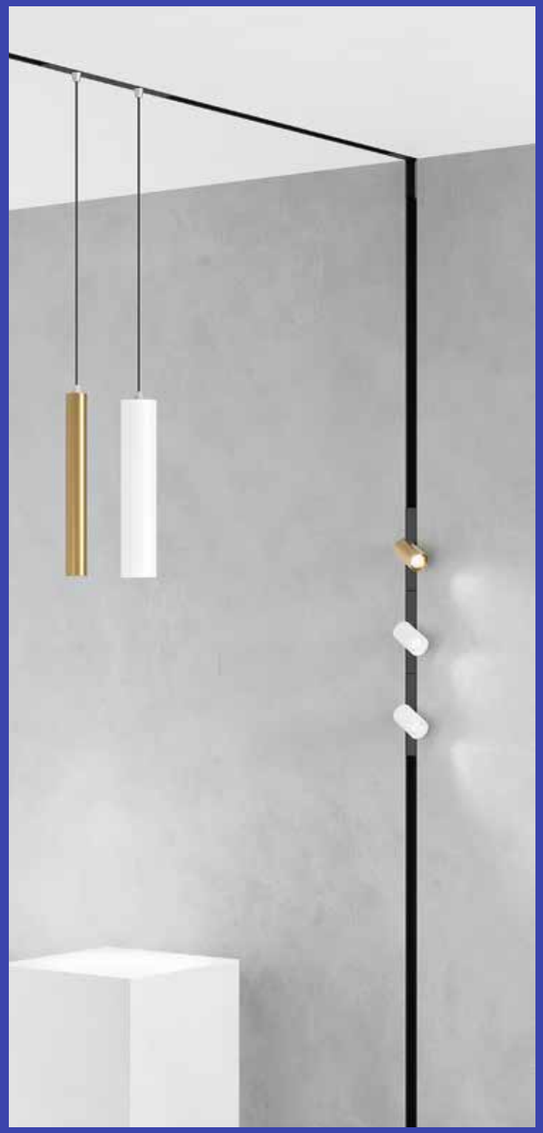








on photo:


LINE UGR / LINE / TEMA
Ceiling or suspension mounting system

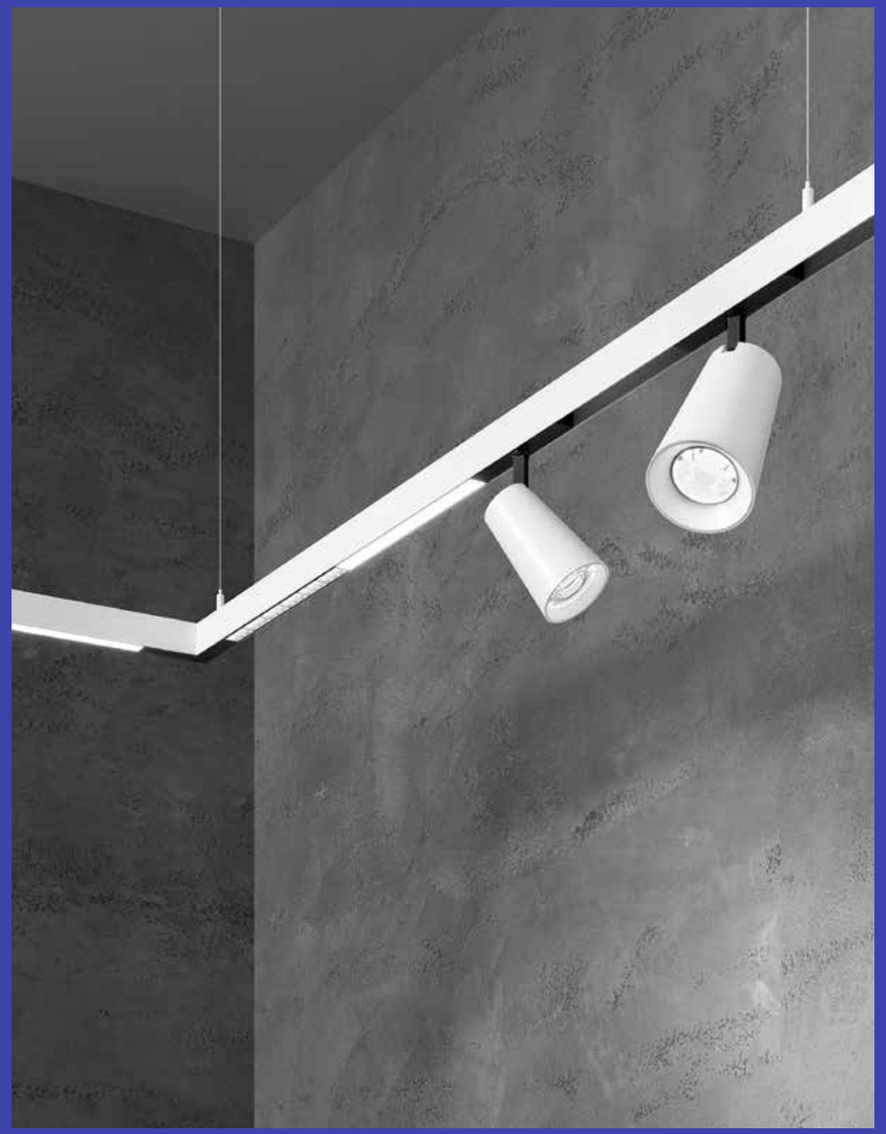



on photo:

SHOT / LINE URG / LINE / SLIDE
Biemission suspension mounting system

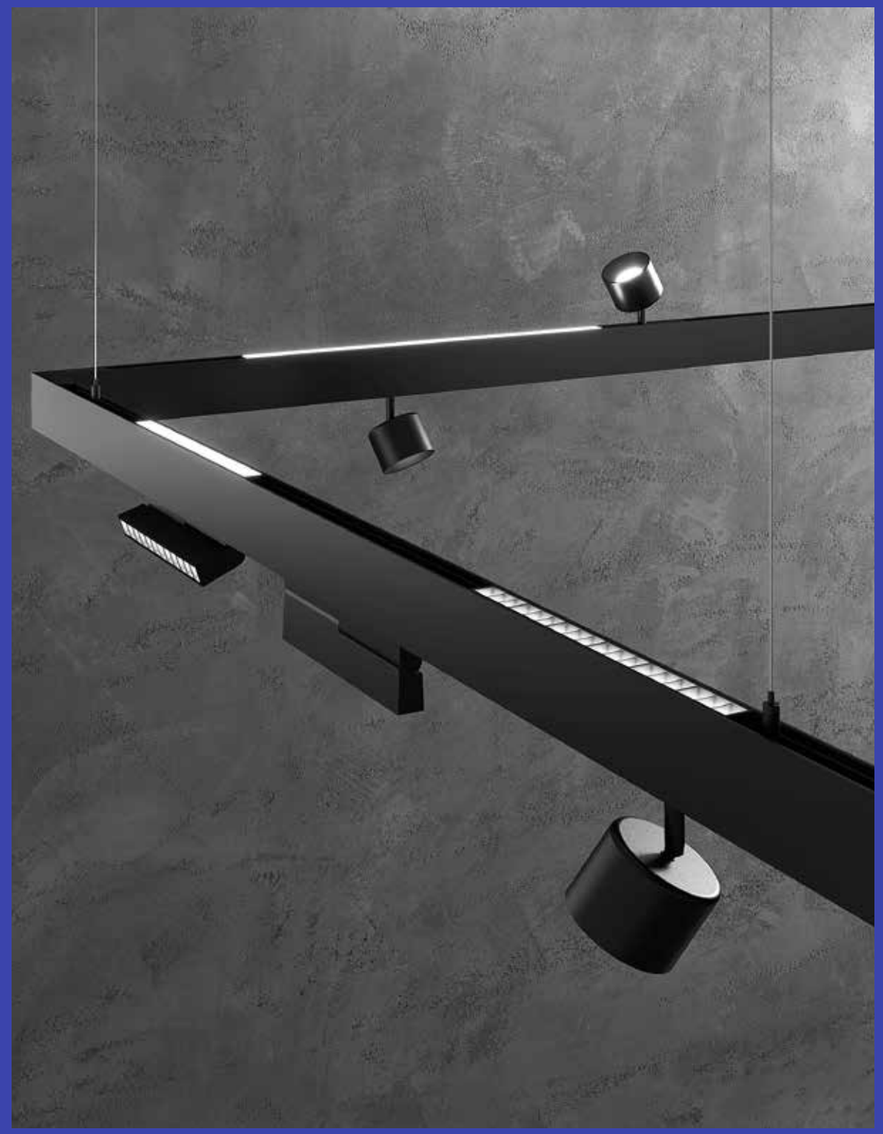

Da Vinci Project 48V
Sfere volventi / Rolling spheres

SHOT

Proiettore a binario con luce spot orientabile per sistema Davinci con struttura in alluminio pressofuso.
Track headlamp with adjustable spot light for Davinci system with die-cast aluminum structure.

indoor use · accommodation areas use · office use · commercial areas use



Materiale
alluminio

Colore
nero goffrato

Temperatura colore
3000K / 4000K


Driver
DC 48V
non incluso

Material
aluminum

Colour
embossed black

Colour temperature
3000K / 4000K

Driver
DC 48V
not included



DAVINCI-SHOT-B


CRI 90 · LED COB







	colour temp.	colour
DAVINCI-SHOT-B-10C		
8031414893911		
lumen	980 lm	
DAVINCI-SHOT-B-10M		
8031414893928		
lumen	980 lm	
watt		10W
beam angle		24°



Da Vinci Project 48V
Sfere volventi / Rolling spheres

GOAL

Proiettore a binario con luce spot orientabile per sistema Davinci con struttura in alluminio pressofuso.
Track headlamp with adjustable spot light for Davinci system with die-cast aluminum structure.

indoor use · accommodation areas use · office use · commercial areas use



Materiale
alluminio

Colore
nero goffrato

Temperatura colore
3000K / 4000K


Driver
DC 48V
non incluso

Material
aluminum

Colour
embossed black

Colour temperature
3000K / 4000K

Driver
DC 48V
not included



DAVINCI-GOAL-B

CRI 90 · LED COB







	colour temp.	colour
DAVINCI-GOAL-B-10C		
8031414893935		
lumen	980 lm	
DAVINCI-GOAL-B-10M		
8031414893942		
lumen	980 lm	
watt		10W
beam angle		24°



FANS

indoor use · accommodation areas use · office use · commercial areas use

Materiale
alluminio

Colore
bianco opaco
nero opaco
oro

Temperatura colore
3000K / 4000K


Driver
DC48V
non incluso

Material
aluminum

Colour
matt white
matt black
gold

Colour temperature
3000K / 4000K

Driver
DC48V
not included



DAVINCI-FANS

CRI 90 · LED COB

Proiettore a binario con luce spot orientabile per sistema Davinci con struttura in alluminio pressofuso.
Track headlamp with adjustable spot light for Davinci system with die-cast aluminum structure.









	colour temp.	colour
DAVINCI-FANS-W-5C 8031414893874		
DAVINCI-FANS-W-5M 8031414893881		
lumen	490 lm	
DAVINCI-FANS-B-5C 8031414893850		
DAVINCI-FANS-B-5M 8031414893867		
lumen	490 lm	
DAVINCI-FANS-G-5C 8031414893898		
DAVINCI-FANS-G-5M 8031414893904		
lumen	490 lm	
watt	5W	
beam angle	24°	

TEMA

Proiettore a binario con luce spot orientabile per sistema Davinci con struttura in alluminio pressofuso. Diffusore in vetro trasparente.
Track projectors with adjustable spot light for Davinci system with die-cast alumi-num structure. Diffuser in clear glass.

Materiale
corpo in alluminio pressofuso

Colore
bianco opaco
nero opaco

Temperatura colore
3000K / 4000K

Driver
DC48V non incluso

Material
aluminum die cust body

Colour
matt white
matt black

Colour temperature
3000K / 4000K


Driver
DC48V not included

indoor use · accommodation areas use · office use · commercial areas use

CRI 90 · LED COB




	colour temp.	colour
DAVINCI-TEMA-5C		
8031414876976		
lumen	490 lm	
DAVINCI-TEMA-5M		
8031414876983		
lumen	490 lm	
watt	5W	
beam angle	38°	





	colour temp.	colour
DAVINCI-TEMA-W-10C		
8031414894031		
lumen	1200 lm	
DAVINCI-TEMA-W-10M		
8031414894048		
lumen	1200 lm	
DAVINCI-TEMA-10C		
8031414876990		
lumen	1200 lm	
DAVINCI-TEMA-10M		
8031414878215		
lumen	1200 lm	
watt	10W	
beam angle	38°	




Accessori inclusi / Included accessories



Kit 2pz fermi per corpi illuminanti sistema con sfere volventi / Kit 2pcs of side brake for Davinci light source modules with rolling spheres joint system



	colour temp.	colour
DAVINCI-TEMA-W-20C		
8031414894055		
lumen	1930 lm	
DAVINCI-TEMA-W-20M		
8031414894062		
lumen	1930 lm	
DAVINCI-TEMA-20C		
8031414878222		
lumen	1930 lm	
DAVINCI-TEMA-20M		
8031414878239		
lumen	1930 lm	
watt	20W	
beam angle	38°	




Accessori inclusi / Included accessories



Kit 2pz fermi per corpi illuminanti sistema con sfere volventi / Kit 2pcs of side brake for Davinci light source modules with rolling spheres joint system



	colour temp.	colour
DAVINCI-TEMA-W-30C		
8031414894079		
lumen	3210 lm	
DAVINCI-TEMA-W-30M		
8031414894086		
lumen	3210 lm	
DAVINCI-TEMA-30C		
8031414878246		
lumen	3210 lm	
DAVINCI-TEMA-30M		
8031414878253		
lumen	3210 lm	
watt	30W	
beam angle	38°	




Accessori inclusi / Included accessories




Kit 2pz fermi per corpi illuminanti sistema con sfere volventi / Kit 2pcs of side brake for Davinci light source modules with rolling spheres joint system


Fotometria del prodotto / Photometric curve




DAVINCI-TEMA-5



DAVINCI-TEMA-10



DAVINCI-TEMA-20



DAVINCI-TEMA-30

Da Vinci Project 48V
Sfere volventi / Rolling spheres

LINE

Lampada lineare a LED per sistema Davinci con struttura in alluminio pressofuso e finitura in nero goffrato. Disponibile in varie misure.
LED linear lamp for Davinci system with die-cast aluminum structure and embossed black finish. Available in various sizes.

Materiale
corpo in alluminio pressofuso

Colore
nero

Temperatura colore
3000K / 4000K

Driver
DC48V non incluso

Material
aluminum die cust body


Colour
black

Colour temperature
3000K / 4000K

Driver
DC48V not included


indoor use · accommodation areas use · office use · commercial areas use

Fotometria del prodotto / Photometric curve

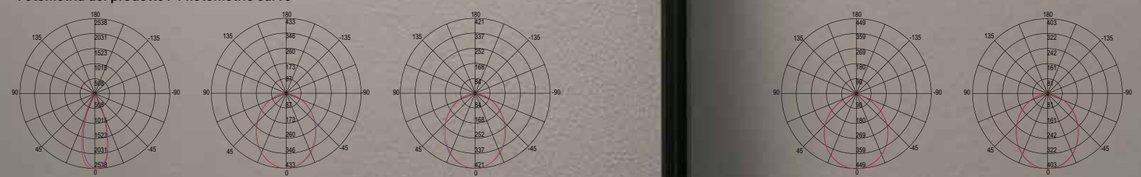


DAVINCI-LINE30 UGR · DAVINCI-LINE30 · DAVINCI-LINE60 · DAVINCI-LINE90 · DAVINCI-LINE120

CRI 90 · LED SMD

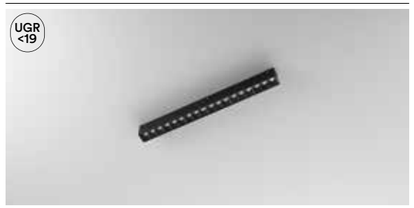


UGR <19

	colour temp.	colour
DAVINCI-LINE30C-UGR 8031414878321		
lumen	1200 lm	
DAVINCI-LINE30M-UGR 8031414878338		
lumen	1200 lm	
watt	10W	
beam angle	30°	






	colour temp.	colour
DAVINCI-LINE30C 8031414878260		
lumen	1150 lm	
DAVINCI-LINE30M 8031414878277		
lumen	1150 lm	
watt	10W	
beam angle	110°	






	colour temp.	colour
DAVINCI-LINE60C 8031414878284		
lumen	2300 lm	
DAVINCI-LINE60M 8031414878291		
lumen	2300 lm	
watt	20W	
beam angle	110°	






	colour temp.	colour
DAVINCI-LINE90C 8031414878666		
lumen	3450 lm	
DAVINCI-LINE90M 8031414878635		
lumen	3450 lm	
watt	30W	
beam angle	110°	





	colour temp.	colour
DAVINCI-LINE120C 8031414878642		
lumen	4600 lm	
DAVINCI-LINE120M 8031414878611		
lumen	4600 lm	
watt	40W	
beam angle	110°	



Da Vinci Project 48V
Sfere volventi / Rolling spheres

SLIDE

Lampada lineare orientabile a LED per sistema Davinci con struttura in alluminio pressofuso.
LED adjustable linear lamp for Davinci system with die-cast aluminum structure.

indoor use · accommodation areas use · office use · commercial areas use

Materiale
corpo in alluminio pressofuso

Colore
nero opaco

Temperatura colore
3000K / 4000K


Driver
DC48V non incluso

Material
aluminum die cust body

Colour
matt black


Colour temperature
3000K / 4000K

Driver
DC48V not included

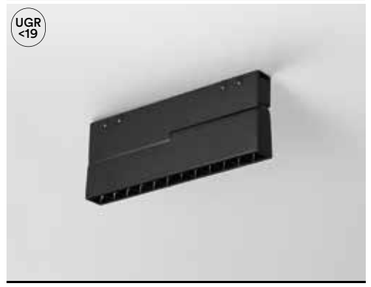





	colour temp.	colour
DAVINCI-SLIDE20C-UGR 8031414878369		
lumen	1020 lm	
DAVINCI-SLIDE20M-UGR 8031414878376		
lumen	1020 lm	
watt		10W
beam angle		30°




	colour temp.	colour
DAVINCI-SLIDE20C 8031414878345		
lumen	980 lm	
DAVINCI-SLIDE20M 8031414878352		
lumen	980 lm	
watt		10W
beam angle		110°



Fotometria del prodotto / Photometric curve



DAVINCI-SLIDE20 UGR



DAVINCI-SLIDE20

LED SMD

Da Vinci Project 48V
Sfere volventi / Rolling spheres

TUBO

Sospensioni tubolari a LED per sistema Davinci con struttura in alluminio pressofuso.
LED tubular suspensions for Davinci system with die-cast aluminum structure.

indoor use · accommodation areas use · office use · commercial areas use

Materiale
corpo in alluminio pressofuso

Colore
bianco opaco
nero opaco
oro

Temperatura colore
3000K / 4000K

Driver
DC48V non incluso

Material
aluminum die cust body

Colour
matt white
matt black
gold

Colour temperature
3000K / 4000K

Driver
DC48V not included


CRI 90 · LED COB




	colour temp.	colour
DAVINCI-W-S35C 8031414894093		
lumen	300 lm	
DAVINCI-W-S35M 8031414894109		
lumen	300 lm	
DAVINCI-S35C 8031414878390		
lumen	300 lm	
DAVINCI-S35M 8031414878406		
lumen	300 lm	
DAVINCI-G-S35C 8031414894116		
lumen	300 lm	
DAVINCI-G-S35M 8031414894123		
lumen	300 lm	
watt		3W
beam angle		24°




	colour temp.	colour
DAVINCI-S60C 8031414878680		
lumen	500 lm	
DAVINCI-S60M 8031414878659		
lumen	500 lm	
watt		5W
beam angle		24°






Fotometria del prodotto / Photometric curve



DAVINCI-S35



DAVINCI-S60



Da Vinci Project 48V
Sfere volventi / Rolling spheres

CYMBAL

Lampada a sospensione LED in alluminio per sistema a binario.
Aluminum LED suspension lamp for track system.

Materiale
alluminio

Colore
bianco opaco
nero opaco

Temperatura colore
3000K / 4000K

Driver
DC 48V
non incluso

Material
aluminum

Colour
matt white
matt black

Colour temperature
3000K / 4000K

Driver
DC 48V
not included

CRI 90 · LED COB


indoor use · accommodation areas use · office use · commercial areas use





	colour temp.	colour
DAVINCI-W-S40C 8031414894017 lumen 1855 lm	●	○
DAVINCI-W-S40M 8031414894024 lumen 1855 lm	●	○
DAVINCI-S40C 8031414893997 lumen 1855 lm	●	●
DAVINCI-S40M 8031414894000 lumen 1855 lm	●	●

watt 18W
beam angle 38°




	colour temp.	colour
DAVINCI-W-S15C 8031414893973 lumen 780 lm	●	○
DAVINCI-W-S15M 8031414893980 lumen 780 lm	●	○
DAVINCI-S15C 8031414893959 lumen 780 lm	●	●
DAVINCI-S15M 8031414893966 lumen 780 lm	●	●


watt 8W
beam angle 38°



Fotometria del prodotto / Photometric curve



DAVINCI-S40



DAVINCI-S15

DA VINCI
PROJECT
48V

Da Vinci Project 48V / RECESSED TRACK TRIMLESS

Sistema di montaggio a incasso a filo / Recess mount system trimless


Binari ed accessori / Track rail and components



DAVINCI-TL-2M
8031414878055

Binario sistema Davinci montaggio ad incasso a filo 2 m nero 48V. Tappi e staffa di fissaggio inclusi.

Davinci system track rail invisible recessed trimeless mount black colour 2 m 48V. Cups and fixing bracket included.






DAVINCI-TL-L
8031414878109

Connettore angolare in alluminio per binario elettrificato incasso a filo (trimeless) sistema sfere volventi.

Angular connection in alluminum for Davinci trimless recessed rail in rolling spheres joint system.





DAVINCI-TL-LVI
8031414878673

Connettore angolare verticale connessione interna per binario elettrificato incasso a filo (trimeless) con sistema sfere volventi.

Vertical anglular connector internal connection for track electrified recessed rail (trimeless) system built in rolling spheres joint system.





DAVINCI-TL-LVE
8031414878147

Connettore angolare verticale con connessione esterna in alluminio per binario elettrificato incasso a filo (trimeless) con sistema sfere volventi.

Angular external emission connection in aluminum for electrified track trimless recessed rail in rolling spheres joint system.





DAVINCI-TL-CAP
8031414878093


Tappo laterale per binario da incasso a filo (trimeless) sistema sfere volventi.

End cap for Davinci trimless recessed rail in rolling spheres joint system.

Da Vinci Project 48V / RECESSED TRACK

Sistema di montaggio a incasso con cornice / Recess mount system with external trim


Binari ed accessori / Track rail and components



DAVINCI-INC-2M-BCO
8031414894130

Binario sistema Davinci montaggio ad incasso 2 m bianco 48V. Tappi e staffa di fissaggio inclusi.


Davinci system track rail recessed mount white colour 2 m 48V. Cups and fixing bracket included.



DAVINCI-INC-2M
8031414878024

Binario sistema Davinci montaggio ad incasso 2 m nero 48V. Tappi e staffa di fissaggio inclusi.

Davinci system track rail recessed mount black colour 2 m 48V. Cups and fixing bracket included.





DAVINCI-INC-L-BCO
8031414894147

Connettore angolare per binario elettrificato incasso sistema sfere volventi.


Angular connector for electrified track built in rolling spheres joint system.



DAVINCI-INC-L
8031414878116

Connettore angolare per binario elettrificato incasso sistema sfere volventi.

Angular connector for electrified track built in rolling spheres joint system.





DAVINCI-INC-LVI-BCO
8031414894154

Connettore angolare verticale connessione interna per binario elettrificato incasso sistema sfere volventi.


Vertical angular connector internal connection for track electrified system built in rolling spheres joint system.



DAVINCI-INC-LVI
8031414878123

Connettore angolare verticale connessione interna per binario elettrificato incasso sistema sfere volventi.

Vertical angular connector internal connection for track electrified system built in rolling spheres joint system.





DAVINCI-INC-LVE-BCO
8031414894161

Connettore angolare verticale connessione esterna per binario elettrificato incasso sistema sfere volventi.


Vertical anglular connector external connection for track electrified system built in rolling spheres joint system.



DAVINCI-INC-LVE
8031414878130

Connettore angolare verticale connessione esterna per binario elettrificato incasso sistema sfere volventi.

Vertical anglular connector external connection for track electrified system built in rolling spheres joint system.





DAVINCI-INC-CAP-BCO
8031414894178

Tappo laterale per binario ad incasso sistema sfere volventi.

End cap for recessed Davinci with rolling spheres joint system.



DAVINCI-INC-CAP
8031414878413

Tappo laterale per binario ad incasso sistema sfere volventi.

End cap for recessed Davinci with rolling spheres joint system.

Da Vinci Project 48V / PENDANT

Sistema di montaggio a sospensione biemissione/ Biemission suspension mounting system


Binari ed accessori / Track rail and components



DAVINCI-H-2M
8031414878017

Binario sistema Davinci per montaggio a sospensione con doppia emissione; nero da 2 m 48V. Tappi e staffa di fissaggio inclusi.

Davinci system rail for suspension mounting with double emission; black 2 m 48V. Cups and fixing bracket included.






DAVINCI-H-L
8031414878048

Connettore angolare in alluminio per binario elettrificato biemissione con sistema sfere volventi.

Aluminum angular connection for double emission electrified track with rolling ball system.





DAVINCI-H-CAP
8031414878451

Tappo laterale per binario biemissione con sistema sfere volventi.


End cap for double emitting Davinci rail in rolling spheres joint system.



DAVINCI-BOX
8031414878598

Scatola per alloggio driver e collegamento elettrico binari Davinci a sospensione.

Canopy for driver and connection box for suspension Davinci rail.






DAVINCI-S-3
8031414879762

Sistema sospensione 2 cavi di acciaio da 3m per binari Davinci.

Suspension kit
2 × 3m steel wire.



Da Vinci Project 48V / SURFACE MOUNTED

Sistema di montaggio a plafoniera o a sospensione a vista/ Ceiling or suspension mounting system

Binari ed accessori / Track rail and components



DAVINCI-ST-2M-BCO
8031414894185

Binario sistema Davinci con montaggio a soffitto o sospensione da 2 m bianco 48V. Tappi e staffa di fissaggio inclusi.

Davinci system rail with ceiling mounting or suspension 2 m white 48V. Cups and fixing bracket included.



DAVINCI-ST-2M
8031414878031

Binario sistema Davinci con montaggio a soffitto o sospensione da 2 m nero 48V. Tappi e staffa di fissaggio inclusi.

Davinci system rail with ceiling mounting or suspension 2 m black 48V. Cups and fixing bracket included.





DAVINCI-ST-L-BCO
8031414894192

Connettore angolare per binario elettrificato montaggio a soffitto o sospensione sistema sfere volventi.

Angular connection for ceiling mounting electrified track or suspension in rolling spheres joint system.



DAVINCI-ST-L
8031414878062

Connettore angolare per binario elettrificato montaggio a soffitto o sospensione sistema sfere volventi.

Angular connection for ceiling mounting electrified track or suspension in rolling spheres joint system.





DAVINCI-ST-LVI-BCO
8031414894208

Connettore angolare per binario elettrificato connessione interna con sistema sfere volventi.

Angular connector for track electrified internal connection with spheres rolling joint system.



DAVINCI-ST-LVI
8031414878079

Connettore angolare per binario elettrificato connessione interna con sistema sfere volventi.

Angular connector for track electrified internal connection with spheres rolling joint system.





DAVINCI-ST-LVE-BCO
8031414894215

Connettore angolare per binario elettrificato connessione esterna e sistema a sfere volventi.


Angular connector for external connection electrified track in rolling spheres joint system.



DAVINCI-ST-LVE
8031414878086

Connettore angolare per binario elettrificato connessione esterna e sistema a sfere volventi.

Angular connector for external connection electrified track in rolling spheres joint system.





DAVINCI-ST-CAP-BCO
8031414894222

Tappo laterale per binario biemissione con sistema sfere volventi.

End cap for double emitting Davinci rail in rolling spheres joint system.



DAVINCI-ST-CAP
8031414878468

Tappo laterale per binario biemissione con sistema sfere volventi.

End cap for double emitting Davinci rail in rolling spheres joint system.



DAVINCI-BOX-BCO
8031414894246

Scatola per alloggio driver e collegamento elettrico binari Davinci a sospensione.


Canopy for driver and connection box for suspension Davinci rail.



DAVINCI-BOX
8031414878598

Scatola per alloggio driver e collegamento elettrico binari Davinci a sospensione.

Canopy for driver and connection box for suspension Davinci rail.





DAVINCI-S-3-BCO
8031414894239

Sistema sospensione 2 cavi di acciaio da 3m per binari Davinci.

Suspension kit
2 × 3m steel wire.



DAVINCI-S-3
8031414879762

Sistema sospensione 2 cavi di acciaio da 3m per binari Davinci.

Suspension kit
2 × 3m steel wire.

Driver 48V per sistema Davinci p. 844
48V drivers for Davinci system p. 844



DAVINCI-NEST
8031414878161

Innesto per elettrificazione 48V compatibile con tutti i modelli di binario del sistema Davinci.

48V power engine for all Davinci rail system models.






DAVINCI-FLEX
8031414894253

Innesto per elettrificazione 48V flessibile compatibile con tutti i modelli di binario Davinci.

Flexible 48V electrification mount compatible with all Davinci rail models.






DAVINCI-I-CONN
8031414878178

Connettore 48V compatibile con i modelli di binario sistema Davinci.

Connector 48V compatible with all the Davinci rail system models.





DAVINCI-COVER-2M
8031414878154

Cover nera compatibile con tutti i modelli di binari Davinci 200 cm.


Cover in black colour compatible with all the Davinci track rail models 200 cm.



DAVINCI-L-CONN
8031414878185

Connettore angolare 48V compatibile con tutti i modelli di binario del sistema Davinci.

Angular connector 48V compatible with all the Davinci rail system models.





DAVINCI-BRAKE
8031414878383

Kit 2pz fermi per corpi illuminanti sistema con sfere volventi.

Kit 2pcs of side brake for Davinci light source modules with rolling spheres joint system.



DAVINCI-LVI-CONN
8031414878192

Connettore angolare interno 48V compatibile con tutti i modelli di binario del sistema Davinci.

Internal angular connector 48V compatible with all the Davinci rail system models.





DAVINCI-DR100
8031414924813

Driver 100W 48V per binario Davinci.

100W 48V driver for Davinci system.






DAVINCI-LVE-CONN
8031414878208

Connettore angolare esterno 48V compatibile con tutti i modelli di binario del sistema Davinci.

External angular connector 48V compatible with all the Davinci rail system models.






DAVINCI-DR200
8031414924820

Driver 200W 48V per binario Davinci.

200W 48V driver for Davinci system.



BERNINI
PROJECT
48V




Schema di montaggio sistema binari.
Assembling technical sheet track rail system.

BERNINI
PROJECT
48V

INTEC proietta il suo sguardo nel futuro e si immerge nel mondo dell'arte illuminotecnica altamente personalizzata, garantendo contemporaneamente efficienza e flessibilità nel design.
Frutto di un attento studio delle tecnologie più avanzate, il binario Bernini è un sistema completamente elettrificato a bassa tensione. La vasta gamma di corpi illuminanti Bernini, insieme al caleidoscopio di forme, angoli e connessioni disponibili, consente di creare aree luminose dalle pareti o dal soffitto, modificandone i giochi di luce in qualsiasi momento tramite gli elementi luminosi a LED che si inseriscono facilmente con un click, grazie al sistema innovativo ad incastro lungo l'intero percorso.

INTEC casts its gaze into the future and plunges into the world of highly customized lighting art, simultaneously ensuring efficiency and flexibility in design.
The result of a careful study of the most advanced technologies, the Bernini track is a fully electrified low-voltage system. Bernini's wide range of luminaires, together with the kaleidoscope of available shapes, angles and connections, makes it possible to create luminous areas from the walls or ceiling, changing the play of light at any time through LED lighting elements that are easily inserted with a click, thanks to the innovative system of interlocking along the entire path.

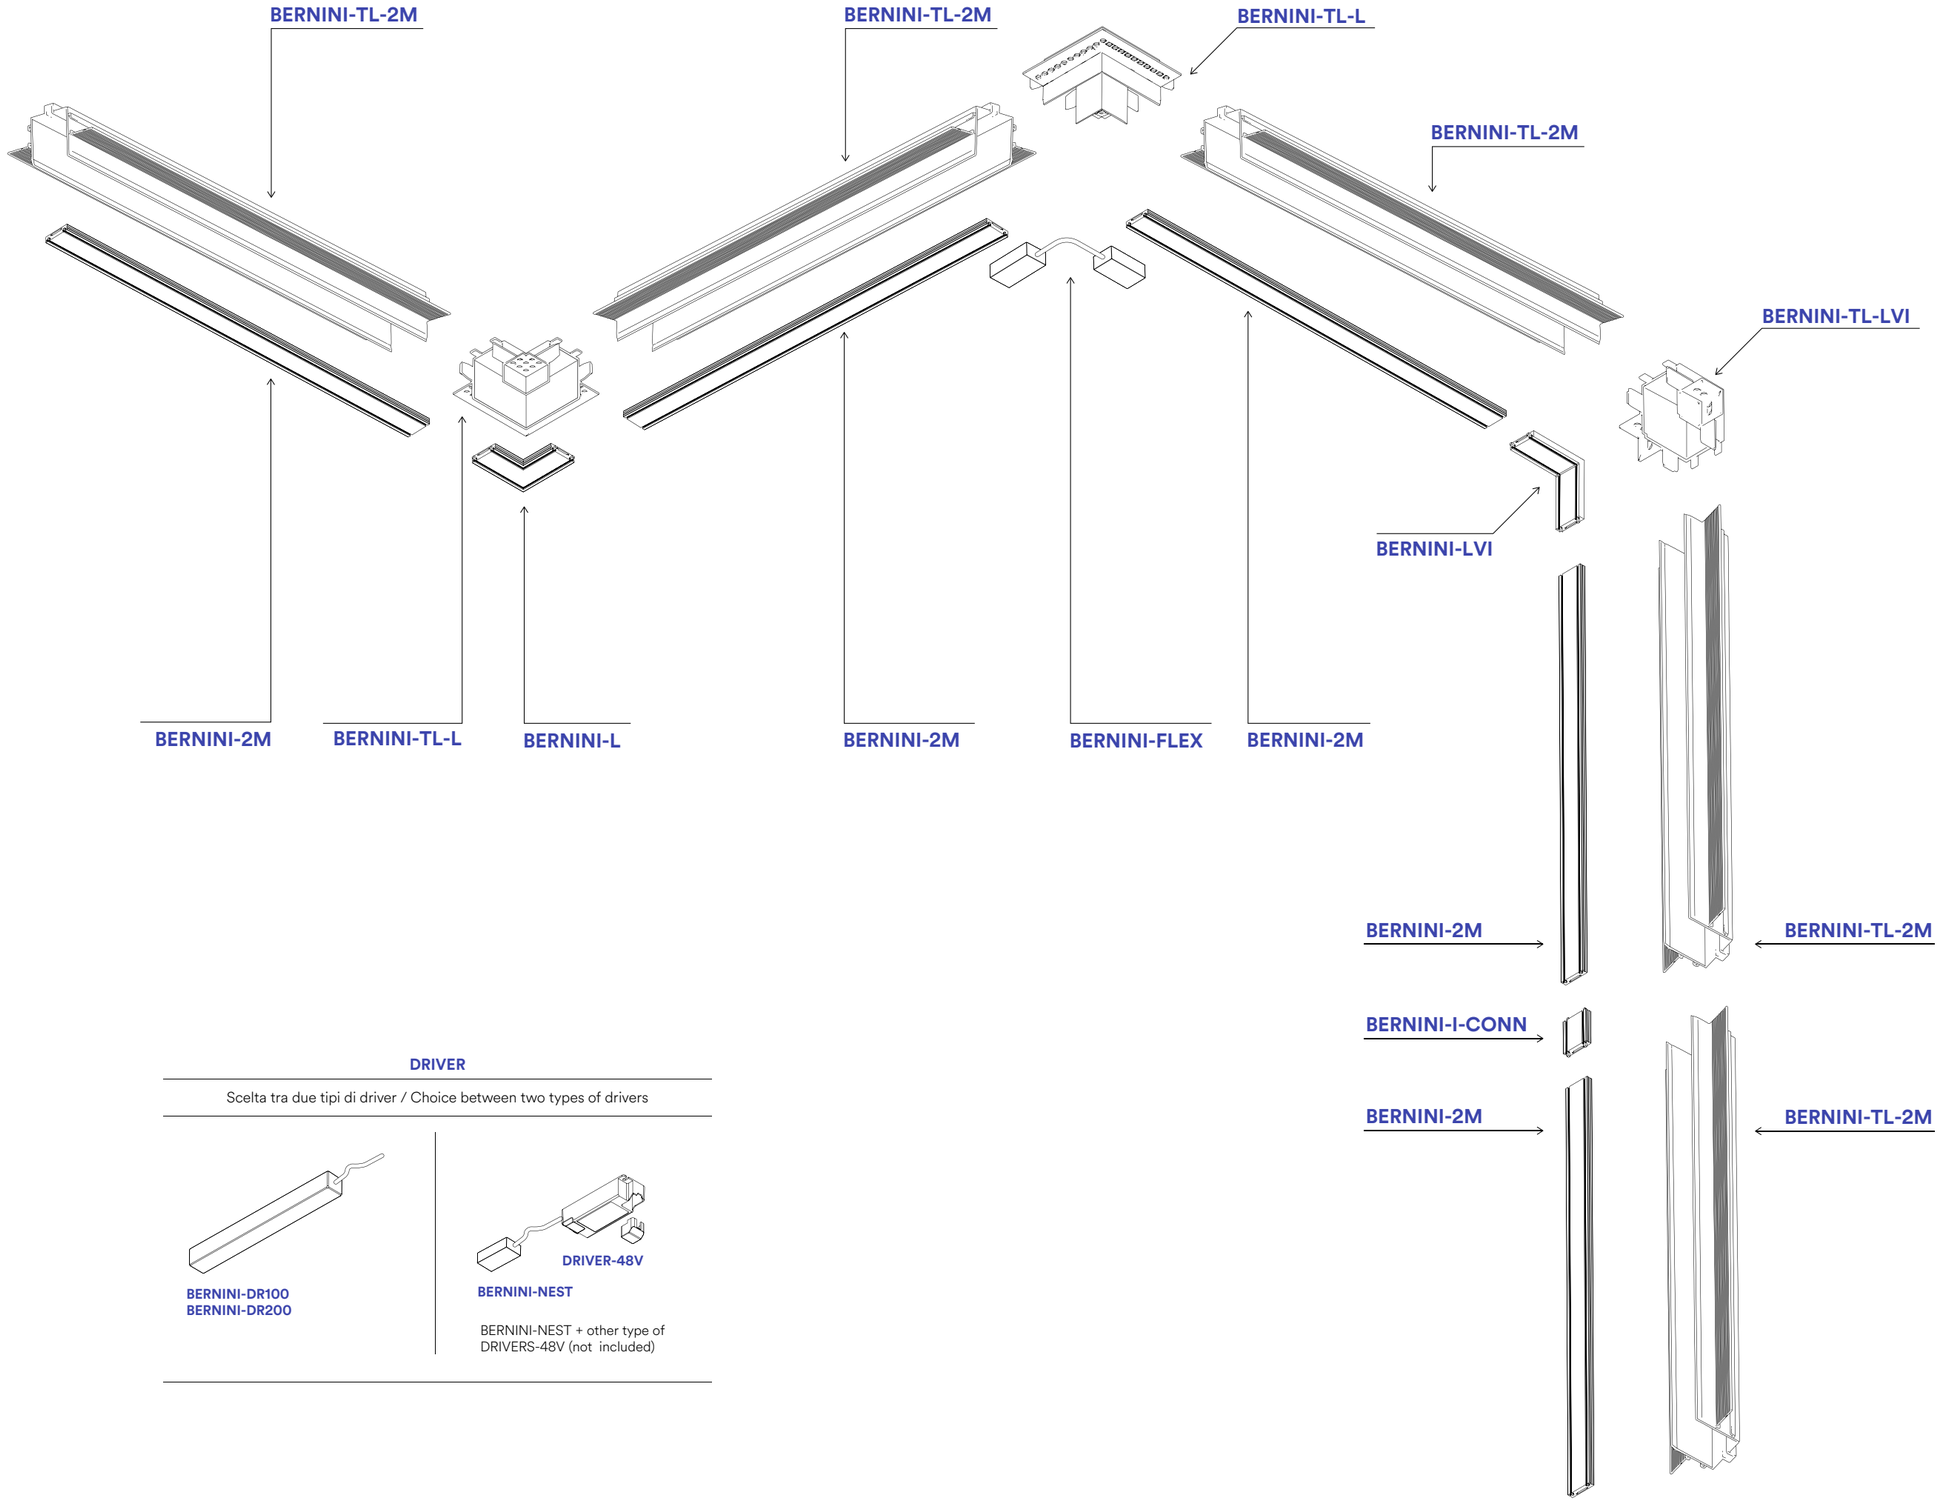

DRIVER

Scelta tra due tipi di driver / Choice between two types of drivers

BERNINI-DR100
BERNINI-DR200

DRIVER-48V

BERNINI-NEST

BERNINI-NEST + other type of DRIVERS-48V (not included)

BERNINI LINE

Lampada lineare orientabile a LED in termoplastica e alluminio con finitura in bianco o nero opaco.
Linear adjustable LED lamp in thermoplastic and aluminum with matt white or black finish.

indoor use
accommodation areas use
office use
commercial areas use



Materiale
alluminio e termoplastica

Colore
bianco opaco
nero opaco

Temperatura colore
3000K / 4000K


Driver
DC48V non incluso

Material
aluminum and thermoplastic

Colour
matt white
matt black

Colour temperature
3000K / 4000K

Driver
DC48V not included

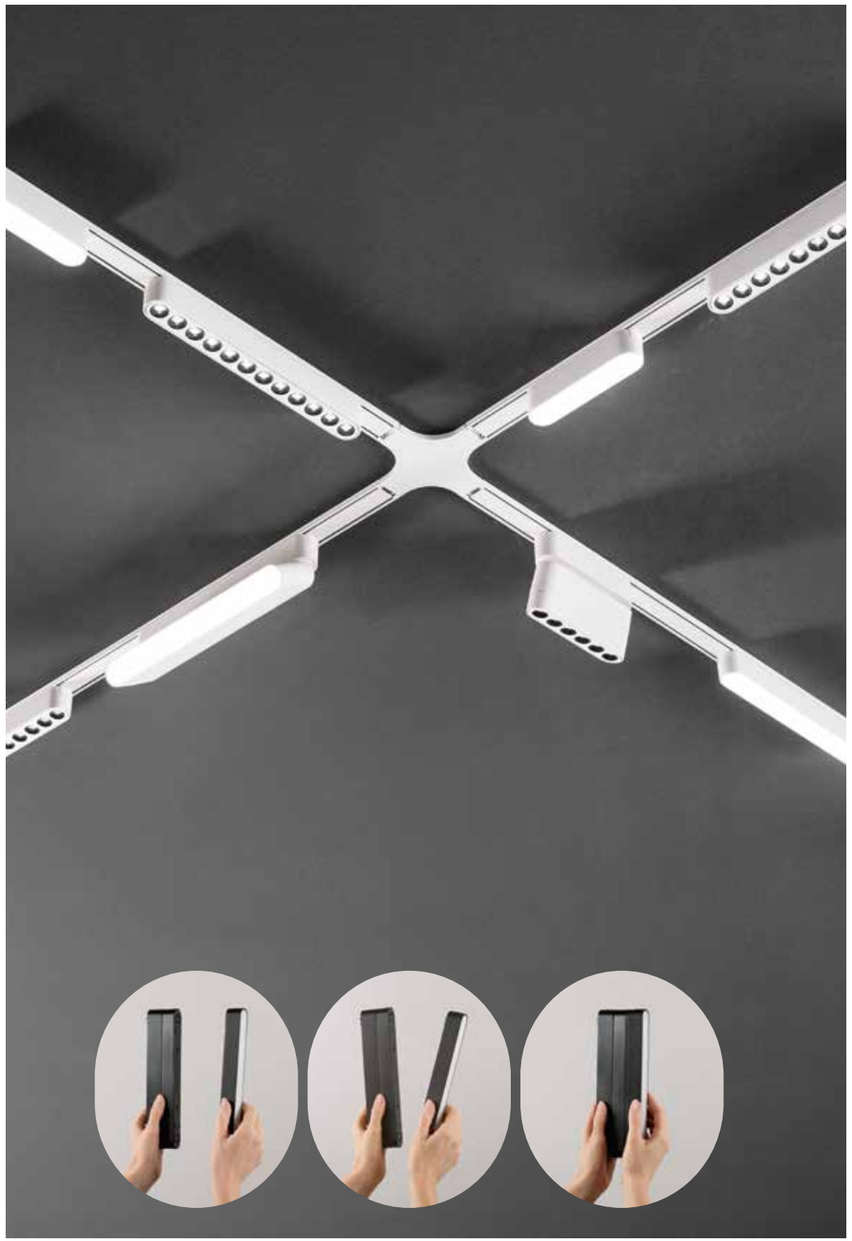

BERNINI LINE

Lampada lineare orientabile a LED in termoplastica e alluminio con finitura in bianco o nero opaco.
Linear adjustable LED lamp in thermoplastic and aluminum with matt white or black finish.

Materiale
alluminio e termoplastica

Colore
bianco opaco
nero opaco

Temperatura colore
3000K / 4000K

Driver
DC48V non incluso

Material
aluminum and thermoplastic

Colour
matt white
matt black

Colour temperature
3000K / 4000K

Driver
DC48V not included

indoor use · accommodation areas use · office use · commercial areas use

CRI >80 · LED SMD · CCT






	colour temp.	colour
BERNINI-LINE12-BCO 8031414920037		
lumen	720 lm	
BERNINI-LINE12 8031414907502		
lumen	720 lm	
watt	6W	
beam angle	30°	





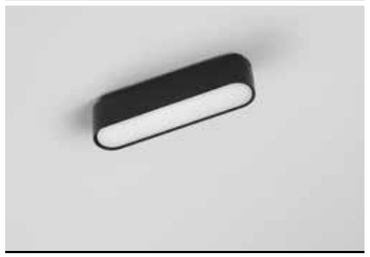

	colour temp.	colour
BERNINI-LINE12-UGR-BCO 8031414920044		
lumen	720 lm	
BERNINI-LINE12-UGR 8031414907519		
lumen	720 lm	
watt	6W	
beam angle	30°	







	colour temp.	colour
BERNINI-LINE22-UGR-BCO 8031414920068		
lumen	1440 lm	
BERNINI-LINE22-UGR 8031414907533		
lumen	1440 lm	
watt	12W	
beam angle	30°	







	colour temp.	colour
BERNINI-LINE22-BCO 8031414920051		
lumen	1500 lm	
BERNINI-LINE22 8031414907526		
lumen	1500 lm	
watt	12W	
beam angle	30°	



Accessorio non incluso / Not included accessory
Adattatore per lampada lineare LED /
Adapter for linear LED lamp

BERNINI-LINE-ADAT12-BCO
8031414920075

BERNINI-LINE-ADAT12
8031414898169





Accessorio non incluso / Not included accessory
Adattatore per lampada lineare LED /
Adapter for linear LED lamp


BERNINI-LINE-ADAT22-BCO
8031414920082

BERNINI-LINE-ADAT22
8031414898176







Fotometria del prodotto / Photometric curve




BERNINI-LINE12-UGR



BERNINI-LINE12



BERNINI-LINE22-UGR



BERNINI-LINE22

BERNINI FANS

Faro luce spot orientabile per sistema a binario in termoplastica con finitura in bianco o nero opaco.
Adjustable spot light in thermoplastic and aluminum track system with matt white or black finish.

indoor use | accommodation areas use | office use | commercial areas use

Materiale
alluminio e termoplastica

Colore
bianco opaco
nero opaco

Temperatura colore
3000K / 4000K

Driver
DC48V non incluso

Material
aluminum and thermoplastic

Colour
matt white
matt black

Colour temperature
3000K / 4000K


Driver
DC48V not included

CRI >80 | LED COB | CCT







	colour temp.	colour
BERNINI-FANS-5-BCO 8031414919994		
lumen	550 lm	
BERNINI-FANS-5 8031414907496		●
lumen	550 lm	
watt	5W	
beam angle	24°	




	colour temp.	colour
BERNINI-FANS-15-BCO 8031414919680		
lumen	1750 lm	
BERNINI-FANS-15 8031414907489		●
lumen	1750 lm	
watt	15W	
beam angle	30°	



Fotometria del prodotto / Photometric curve



BERNINI-FANS-5



BERNINI-FANS-15

BERNINI TUBO

Lampada sospensione LED per sistema binario in termoplastica e alluminio con finitura in nero opaco.
LED suspension lamp in aluminum and thermoplastic rail system with matt black finish.

Materiale
alluminio e termoplastica

Colore
bianco opaco
nero opaco

Temperatura colore
3000K / 4000K

Driver
DC48V non incluso

Material
aluminum and thermoplastic


Colour
matt white
matt black

Colour temperature
3000K / 4000K


Driver
DC48V not included

CRI >80 | LED COB | CCT

	colour temp.	colour
BERNINI-S10-BCO 8031414920112		
lumen	1100 lm	
BERNINI-S10 8031414907540		●
lumen	1100 lm	
watt	9W	
beam angle	24°	



Fotometria del prodotto / Photometric curve



BERNINI-S10

SISTEMA BINARI / TRACK LIGHTS
In.tec light

Driver 48V per sistema Bernini p. 844
48V drivers for Bernini system p. 844

BERNINI

Binari ed accessori.
Track rail and components.



BERNINI-2M-BCO
8031414919598

Binario Bernini
2 metri bianco 48V.
2 Tappi inclusi.

Bernini track rail white
color 2 meters 48V.
2 Cups included.



BERNINI-2M
8031414897735

Binario Bernini
2 metri nero 48V.
2 Tappi inclusi.

Bernini track rail black
color 2 meters 48V.
2 Cups included.






BERNINI-L-BCO
8031414920020

Connettore angolare per
binario elettrificato 48V.


Corner connector
for 48V track.



BERNINI-L
8031414897773

Connettore angolare per
binario elettrificato 48V.

Corner connector
for 48V track.






BERNINI-T-BCO
8031414920129

Connettore a T per
binario elettrificato 48V.


T connector for 48V
electrified track.



BERNINI-T
8031414897780

Connettore a T per
binario elettrificato 48V.

T connector for 48V
electrified track.





BERNINI-X-BCO
8031414920167

Connettore a croce per
binario elettrificato 48V.


Cross connector for
48V electrified track.



BERNINI-X
8031414898091

Connettore a croce per
binario elettrificato 48V.

Cross connector for
48V electrified track.





BERNINI-LVI-BCO
8031414920099

Connettore angolare per
binario elettrificato 48V.

Angular connector for
48V electrified track.



BERNINI-LVI
8031414898107

Connettore angolare per
binario elettrificato 48V.

Angular connector for
48V electrified track.





BERNINI-FLEX-BCO
8031414920006

Innesto per elettrificazione
48V compatibile con tutti
i modelli di binario Bernini.


48V electrification
mount compatible with
all Bernini rail models.



BERNINI-FLEX
8031414898152

Innesto per elettrificazione
48V compatibile con tutti
i modelli di binario Bernini.

48V electrification
mount compatible with
all Bernini rail models.





BERNINI-NEST-BCO
8031414920105

Innesto per elettrificazione
48V compatibile con tutti
i modelli di binario Bernini.


48V electrification
mount compatible with
all Bernini rail models.



BERNINI-NEST
8031414898145

Innesto per elettrificazione
48V compatibile con tutti
i modelli di binario Bernini.

48V electrification
mount compatible with
all Bernini rail models.





BERNINI-I-CONN-BCO
8031414920013

Connettore 48V
compatibile con tutti i
modelli di binario Bernini.

48V connector
compatible with all
Bernini rail models.



BERNINI-I-CONN
8031414898114

Connettore 48V
compatibile con tutti i
modelli di binario Bernini.

48V connector
compatible with all
Bernini rail models.



BERNINI

Binari ed accessori.
Track rail and components.

Driver 48V per sistema Bernini p. 844
48V drivers for Bernini system p. 844



BERNINI-TL-2M-BCO
8031414920136

Alloggio per sistema binario montaggio ad incasso a filo 2 metri.


Housing for recessed trimeless track rail system 2 meters.



BERNINI-TL-2M
8031414897759

Alloggio per sistema binario montaggio ad incasso a filo 2 metri.

Housing for recessed trimeless track rail system 2 meters.





BERNINI-TL-L-BCO
8031414920143

Connettore angolare verticale per alloggio con montaggio ad incasso a filo per binario Bernini.


Angular vertical connector for housing with recessed trimeless track rail system.



BERNINI-TL-L
8031414898138

Connettore angolare verticale per alloggio con montaggio ad incasso a filo per binario Bernini.

Angular vertical connector for housing with recessed trimeless track rail system.





BERNINI-TL-LVI-BCO
8031414920150

Connettore angolare verticale per alloggio con montaggio ad incasso a filo per binario Bernini.


Angular vertical connector for housing with recessed trimeless track rail system.



BERNINI-TL-LVI
8031414898121

Connettore angolare verticale per alloggio con montaggio ad incasso a filo per binario Bernini.

Angular vertical connector for housing with recessed trimeless track rail system.





BERNINI-CAP-BCO
8031414919642

kit 2 pezzi tappi laterali per binario elettrificato 48V.

2 pcs kit caps 48V electrified track.



BERNINI-CAP
8031414897742

kit 2 pezzi tappi laterali per binario elettrificato 48V.

2 pcs kit caps 48V electrified track.



BERNINI-COVER-2M-BCO
8031414919659

Cover nera compatibile con i modelli del binario Bernini.

Black cover compatible with Bernini track rail models.



BERNINI-COVER-2M
8031414897766

Cover nera compatibile con i modelli del binario Bernini.

Black cover compatible with Bernini track rail models.

BERNINI-DR100-BCO
8031414919666

Driver 48V 100W corrente costante.


Driver 48V 100W constant current.



BERNINI-DR100
8031414898183

Driver 48V 100W corrente costante.

Driver 48V 100W constant current.



BERNINI-DR200-BCO
8031414919673

Driver 48V 200W corrente costante.


Driver 48V 200W constant current.



BERNINI-DR200
8031414897940

Driver 48V 200W corrente costante.

Driver 48V 200W constant current.




TRACK RAIL
THREE-PHASE



Schema di montaggio sistema binari.
Assembling technical sheet track rail system.

TRACK RAIL
THREE-PHASE

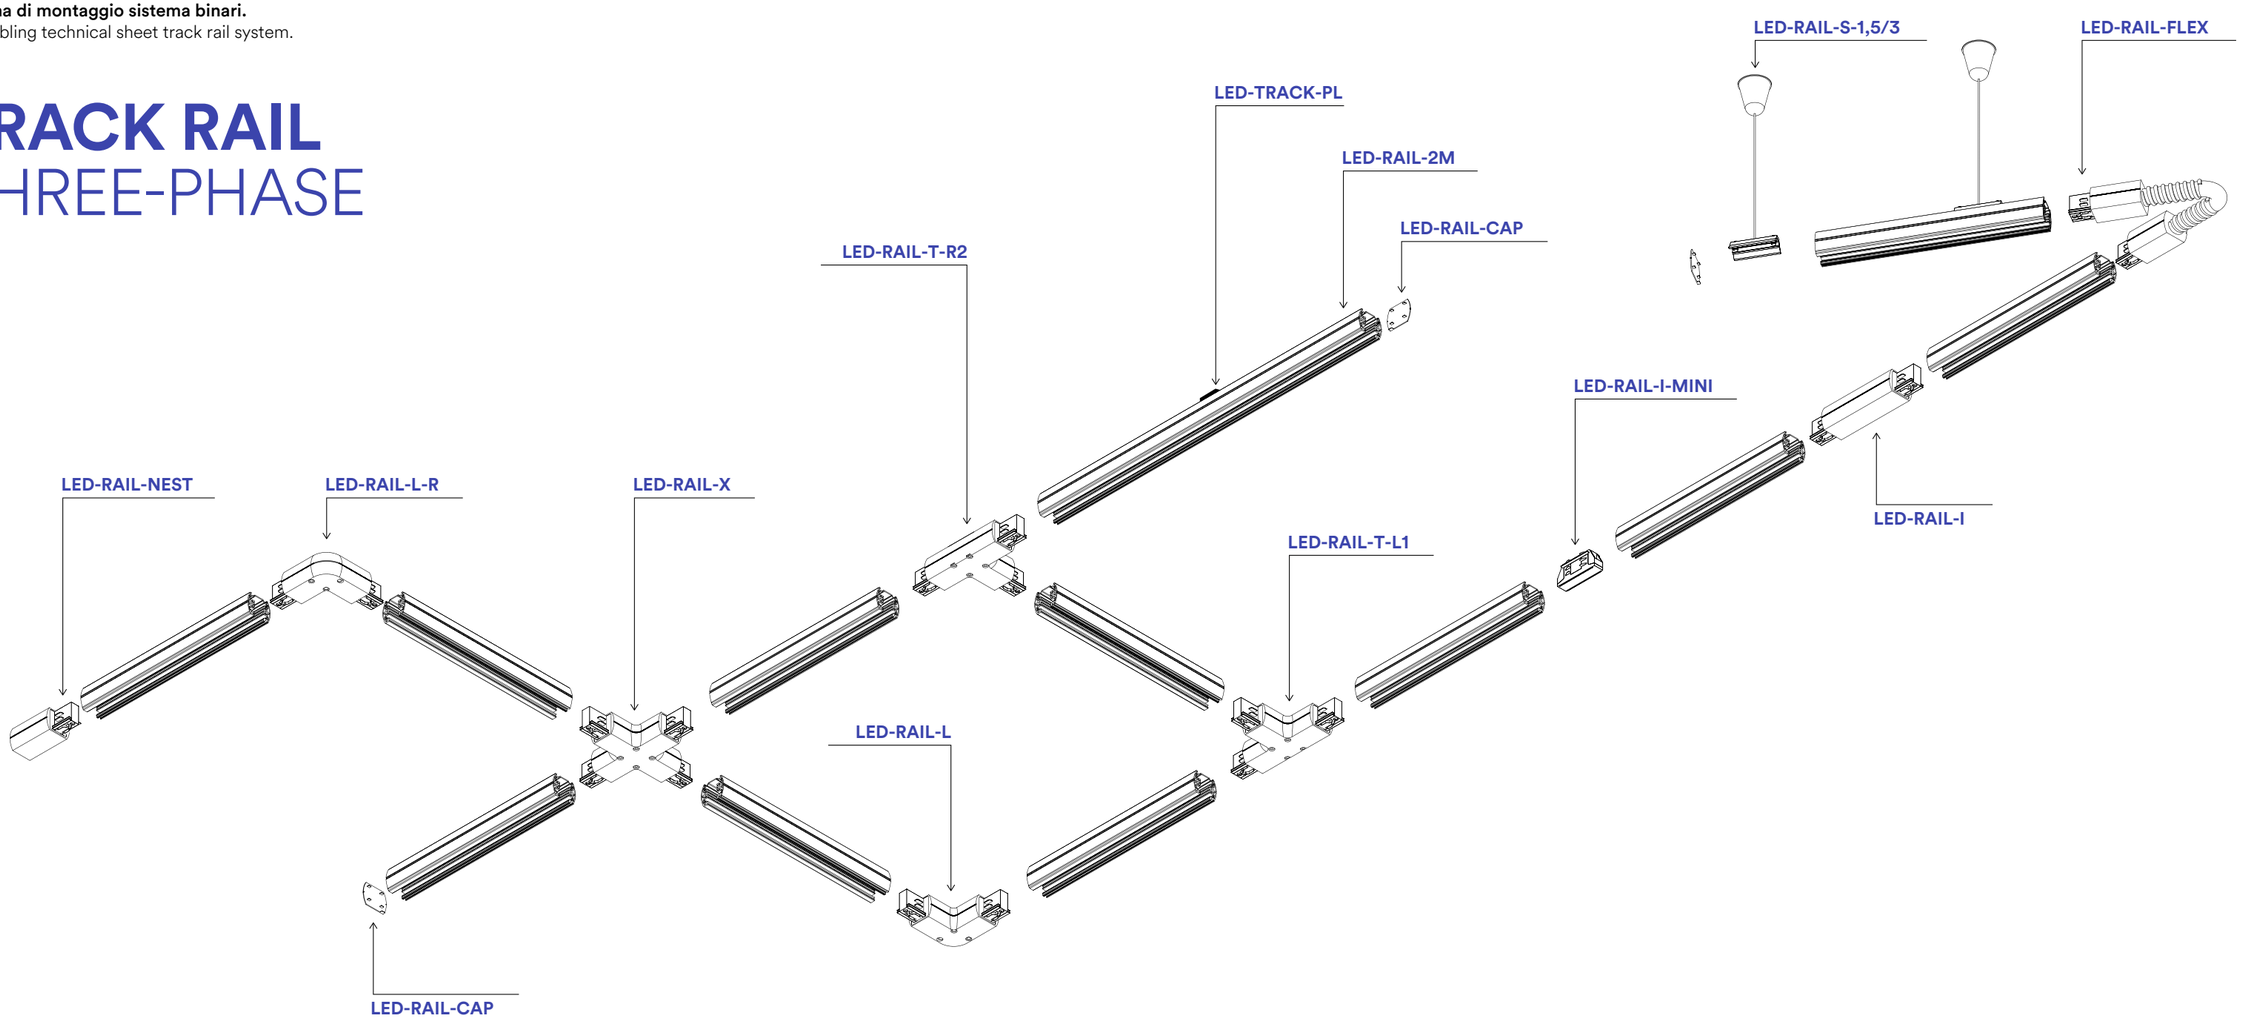


RAIL NEST




RAIL NEST

Innesto per
collegamento elettrico
/
Connector for
electrical connection




RAIL NEST L

Connettore a L con
collegamento elettrico
/
L connector with
electrical connection



RAIL NEST T

Connettore a T con
collegamento elettrico
/
T connector with
electrical connection



RAIL NEST I

Connettore lineare con
collegamento elettrico
/
Linear connector with
electrical connection




RAIL MINI

Connettore
lineare
/
Linear
connector



RAIL S

Kit sospensione
per binario
/
Kit suspension
for track rail



EXPLORER

indoor use · accommodation areas use · office use · commercial areas use

Materiale
alluminio

Colore
bianco opaco
nero opaco

Temperatura colore selezionabile
3000K / 4000K

Driver
incluso

Material
aluminum

Colour
matt white
matt black


Selectable color temperature
3000K / 4000K

Driver
included

Faro a binario in alluminio con adattatore trifase e angolo di luce regolabile.
Aluminum track light with three-phase adapter and adjustable light angle.








Angolo di luce regolabile /
Adjustable beam angle



	colour temp.	colour
LED-EXPLORER-BCO 8031414923946		
lumen	4800 lm	
LED-EXPLORER-NER 8031414923939		
lumen	4800 lm	

watt	30W
beam angle	15°- 55°
pf	0.90



LED-EXPLORER

CRI 90 · LED COB

Trifase / Three-phase

PLANE

Proiettore a binario in alluminio con adattatore trifase.
Aluminum track spotlight with three-phase adapter.



Materiale
corpo in alluminio pressofuso

Colore
bianco opaco
nero opaco

Temperatura colore
3000K / 4000K

Driver
incluso

Material
aluminum die cust body

Colour
matt white
matt black

Colour temperature
3000K / 4000K


Driver
included

CRI 90 · LED COB · CE · EMC






	colour temp.	colour
LED-PLANE-W-20C		
8031414924714		
lumen	2400 lm	
LED-PLANE-W-20M		
8031414924721		
lumen	2400 lm	
LED-PLANE-B-20C		
8031414924691		
lumen	2400 lm	
LED-PLANE-B-20M		
8031414924707		
lumen	2400 lm	
watt	20W	
beam angle	38°	








	colour temp.	colour
LED-PLANE-W-30C		
8031414924752		
lumen	3600 lm	
LED-PLANE-W-30M		
8031414924769		
lumen	3600 lm	
LED-PLANE-B-30C		
8031414924738		
lumen	3600 lm	
LED-PLANE-B-30M		
8031414924745		
lumen	3600 lm	
watt	30W	
beam angle	38°	









	colour temp.	colour
LED-PLANE-W-40C		
8031414924790		
lumen	4800 lm	
LED-PLANE-W-40M		
8031414924806		
lumen	4800 lm	
LED-PLANE-B-40C		
8031414924776		
lumen	4800 lm	
LED-PLANE-B-40M		
8031414924783		
lumen	4800 lm	
watt	40W	
beam angle	38°	




Fotometria del prodotto / Photometric curve



LED-PLANE 20W



LED-PLANE 30W



LED-PLANE 40W

Trifase / Three-phase

JET ALTO LUMEN

Proiettore a binario in alluminio con adattatore trifase.
Aluminum track spotlight with three-phase adapter.



indoor use
accommodation areas use
office use
commercial areas use

Materiale
corpo in alluminio pressofuso

Colore
bianco opaco
nero opaco

Temperatura colore selezionabile
3000K / 4000K

Driver
incluso

Material
aluminum die cust body

Colour
matt white
matt black


Selectable color temperature
3000K / 4000K

Driver
included

JET ALTO LUMEN




	colour temp.	colour
LED-JET-W-20HL 8031414924110		
lumen	4000 lm	
LED-JET-B-20HL 8031414924080		
lumen	4000 lm	
watt	20W	
beam angle	38°	
pf	0.90	





	colour temp.	colour
LED-JET-W-30HL 8031414924127		
lumen	6000 lm	
LED-JET-B-30HL 8031414924097		
lumen	6000 lm	
watt	30W	
beam angle	38°	
pf	0.90	



	colour temp.	colour
LED-JET-W-40HL 8031414924134		
lumen	8000 lm	
LED-JET-B-40HL 8031414924103		
lumen	8000 lm	
watt	40W	
beam angle	38°	
pf	0.90	



Accessori non inclusi / Not included accessories

Retina antiabbagliamento / Anti-glare retina


LED-JET-MESH60 8031414924073	for 20W
LED-JET-MESH70 8031414924066	for 30W
LED-JET-MESH80 8031414924059	for 40W

Deviatore flusso luminoso / Luminous flux diverter




LED-JET-DIFF60 8031414924042	for 20W
LED-JET-DIFF70 8031414924035	for 30W
LED-JET-DIFF80 8031414924028	for 40W


Fotometria del prodotto / Photometric curve



LED-JET ALTO LUMEN 20W



LED-JET ALTO LUMEN 30W




LED-JET ALTO LUMEN 40W

JET

Proiettore a binario in alluminio con adattatore trifase.
Aluminum track spotlight with three-phase adapter.

indoor use · accommodation areas use · office use · commercial areas use

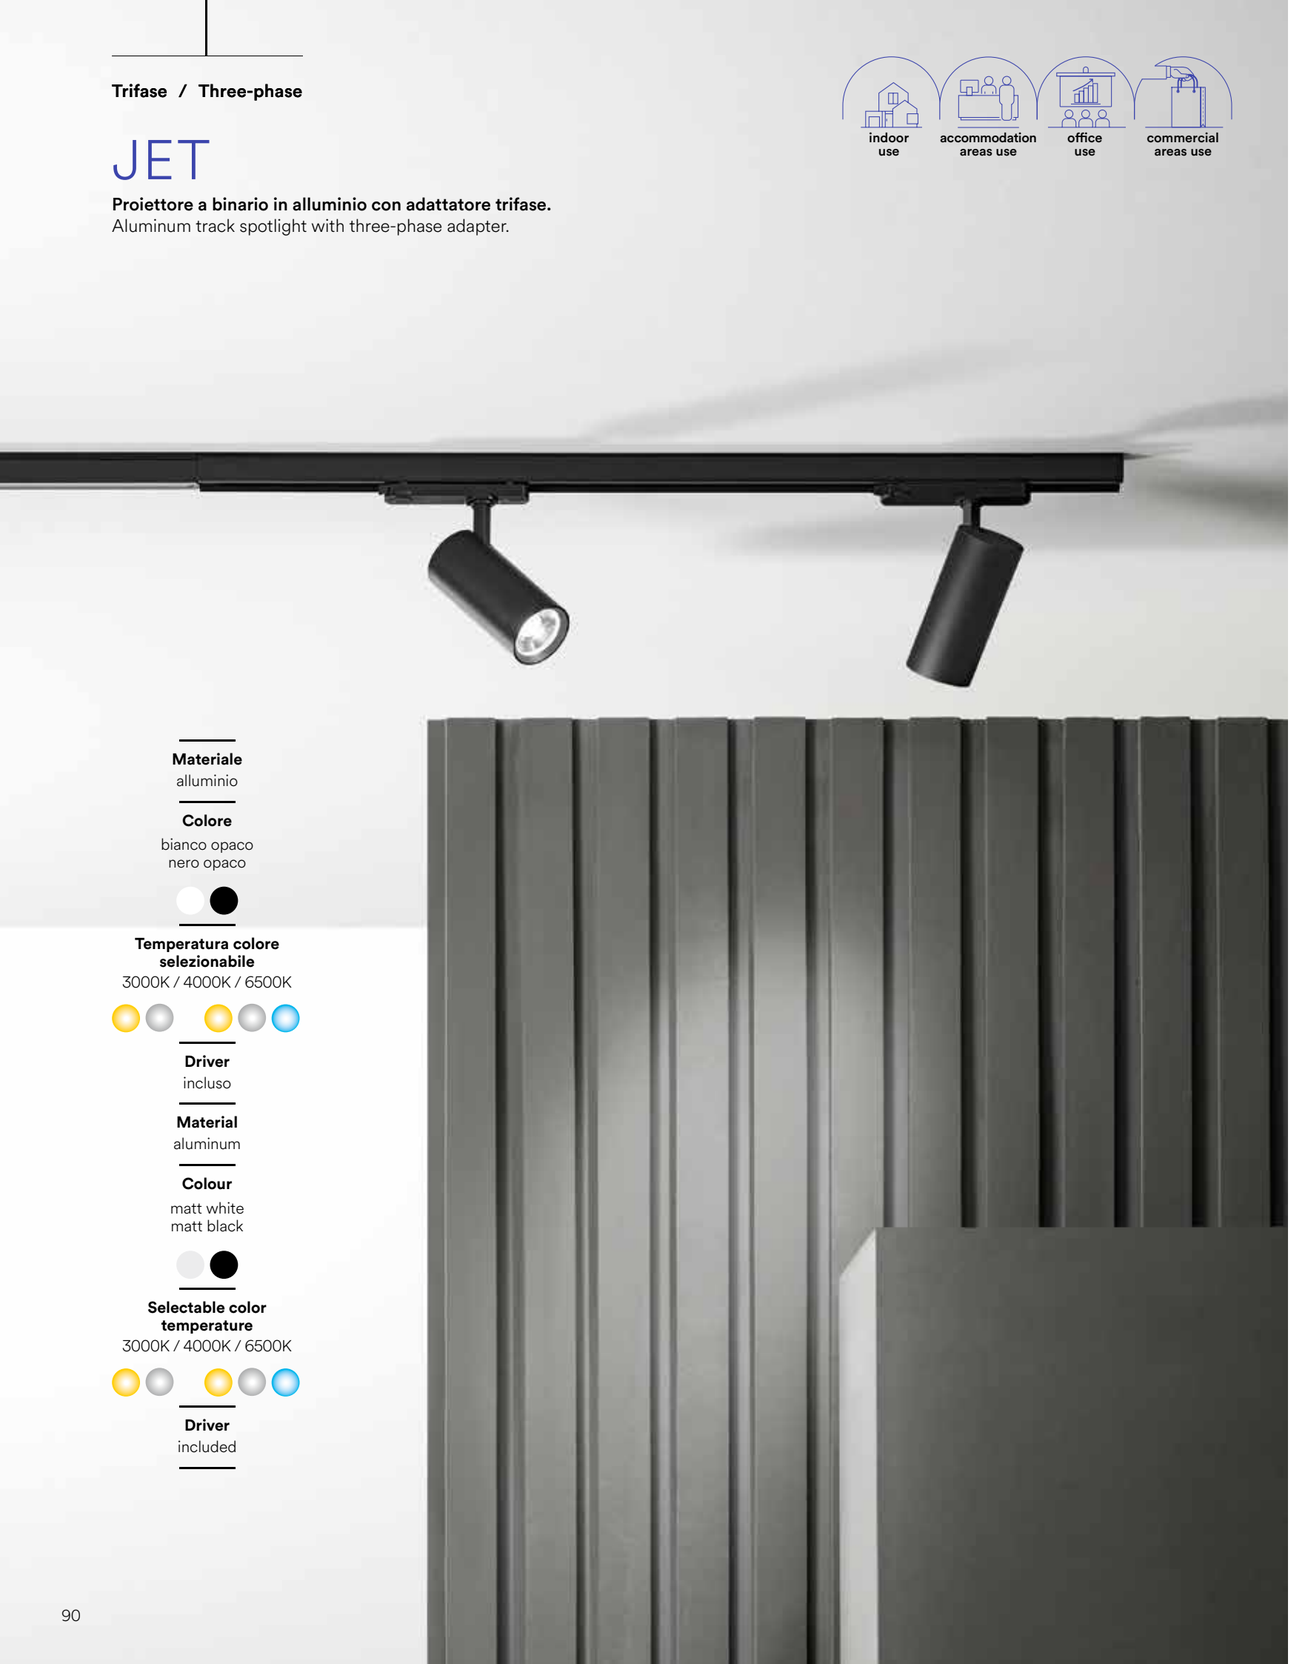

Materiale
alluminio

Colore
bianco opaco
nero opaco

Temperatura colore selezionabile
3000K / 4000K / 6500K

Driver
incluso

Material
aluminum

Colour
matt white
matt black

Selectable color temperature
3000K / 4000K / 6500K

Driver
included

CRI 90 · LED COB






DALI

	colour temp.	colour
LED-JET-W-20DA 8031414923755		
lumen	4000 lm	
LED-JET-B-20DA 8031414923724		
lumen	4000 lm	
watt	20W	
beam angle	38°	
pf	0.90	

	colour
LED-JET-W-20 8031414893805	
lumen	2100 lm
LED-JET-B-20 8031414893775	
lumen	2100 lm
watt	20W
beam angle	38°
pf	0.90








DALI

	colour temp.	colour
LED-JET-W-30DA 8031414923762		
lumen	6000 lm	
LED-JET-B-30DA 8031414923731		
lumen	6000 lm	
watt	30W	
beam angle	38°	
pf	0.90	

	colour
LED-JET-W-30 8031414893812	
lumen	3235 lm
LED-JET-B-30 8031414893782	
lumen	3235 lm
watt	30W
beam angle	38°
pf	0.90









DALI

	colour temp.	colour
LED-JET-W-40DA 8031414923779		
lumen	8000 lm	
LED-JET-B-40DA 8031414923748		
lumen	8000 lm	
watt	40W	
beam angle	38°	
pf	0.90	


	colour
LED-JET-W-40 8031414893829	
lumen	4300 lm
LED-JET-B-40 8031414893799	
lumen	4300 lm
watt	40W
beam angle	38°
pf	0.90




Fotometria del prodotto / Photometric curve



LED-JET 20W



LED-JET 30W



LED-JET 40W

Trifase / Three-phase

JET FOOD

indoor use · accommodation areas use · office use · commercial areas use

Materiale
corpo in alluminio pressofuso

Colore
bianco opaco
nero opaco

Temperatura colore
2500K / 3000K / 3100K

Driver
integrato

Material
aluminum die cust body


Colour
matt white
matt black

Colour temperature
2500K / 3000K / 3100K

Driver
built-in

LED COB

Proiettore a binario in alluminio pressofuso con adattatore trifase per l'illuminazione di generi alimentari.
Die-cast aluminum track projector with three-phase adapter for food lighting.





Illuminazione per generi alimentari / Food lighting







	colour temp.	K	CRI	colour
LED-JET-W-30BR 8031414924189				
LED-JET-B-30BR 8031414924141				
lumen	4800 lm	2550 K	>90	
LED-JET-W-30RM 8031414924196				
LED-JET-B-30RM 8031414924158				
lumen	4800 lm	3100 K	>70	
LED-JET-W-30FM 8031414924202				
LED-JET-B-30FM 8031414924165				
lumen	4800 lm	3000 K	>63	
LED-JET-W-30FR 8031414924219				
LED-JET-B-30FR 8031414924172				
lumen	4800 lm	3000 K	>93	

watt	30W
beam angle	38°
pf	0.90

Trifase / Three-phase

OBOE

indoor use · accommodation areas use · office use · commercial areas use

Materiale
corpo in alluminio pressofuso

Colore
bianco
nero
cromo
oro
bronzo

Temperatura colore
3000K / 4000K


Driver
integrato

Material
aluminum die cust body

Colour
white
black
chrome
gold
bronze

Colour temperature
3000K / 4000K

Driver
built-in



LED-OBOE-SC

CRI >80 · LED COB

Sospensione in alluminio pressofuso con adattatore trifase.
Die-cast aluminum suspension with three-phase adapter.







	colour temp.	colour
LED-OBOE-SC BCO 8031414865109		
LED-OBOE-SM BCO 8031414862047		
lumen	240 lm	
LED-OBOE-SC NERO 8031414865147		
LED-OBOE-SM NERO 8031414862030		
lumen	240 lm	
LED-OBOE-SC CR 8031414865130		
LED-OBOE-SM CR 8031414862061		
lumen	240 lm	
LED-OBOE-SC ORO 8031414865123		
LED-OBOE-SM ORO 8031414862054		
lumen	240 lm	
LED-OBOE-SC BRO 8031414865116		
LED-OBOE-SM BRO 8031414864287		
lumen	240 lm	

watt	3,5W
beam angle	40°

Trifase / Three-phase

ROCKET

indoor use · accommodation areas use · office use · commercial areas use

Materiale
corpo in alluminio pressofuso

Colore
bianco opaco
nero opaco
cromo
oro
bronzo

Temperatura colore selezionabile
3000K / 4000K


Driver
integrato

Material
aluminum die cust body

Colour
matt white
matt black
chrome
gold
bronze

Selectable color temperature
3000K / 4000K


Driver
built-in



LED-ROCKET-7

CRI 90 · LED COB

Proiettore a binario con luce spot in alluminio pressofuso con adattatore trifase.
Track headlamp with spot light in die-cast aluminum with three-phase adapter.















	colour temp.	colour
LED-ROCKET-BCO 8031414923953		
lumen	980 lm	
LED-ROCKET-NER 8031414923984		
lumen	980 lm	
LED-ROCKET-CR 8031414923977		
lumen	980 lm	
LED-ROCKET-ORO 8031414923991		
lumen	980 lm	
LED-ROCKET-BRO 8031414923960		
lumen	980 lm	
watt	7W	
beam angle	38°	

ROCKET

indoor use · accommodation areas use · office use · commercial areas use

Spot applique.
Wall spot light.

Materiale
corpo in alluminio pressofuso

Colore
bianco opaco
nero opaco

Temperatura colore selezionabile
3000K / 4000K

Driver
integrato


Material
aluminum die cust body

Colour
matt white
matt black

Selectable color temperature
3000K / 4000K

Driver
built-in






LED-ROCKET-APC

CRI 90 · LED COB





	colour temp.	colour
LED-ROCKET-AP-BCO 8031414924004		
lumen	980 lm	
LED-ROCKET-AP-NER 8031414924011		
lumen	980 lm	
watt	7W	
beam angle	38°	



Trifase / Three-phase

SQUIB

Proiettore a binario in alluminio con adattatore trifase.
Aluminum track headlamp with three-phase adapter.



Materiale
alluminio

Colore
bianco satinato
nero satinato
oro satinato

Material
aluminum


Colour
satin white
satin black
satin gold



colour

I-SQUIB-BCO
8031414883226
I-SQUIB-NER
8031414883233
I-SQUIB-ORO
8031414895397

1 x GU10 MAX 25W




Lampadina non inclusa / Light bulb not included

Trifase / Three-phase

EXPRESS

Proiettore a binario in alluminio con adattatore trifase.
Aluminum track headlamp with three-phase adapter.

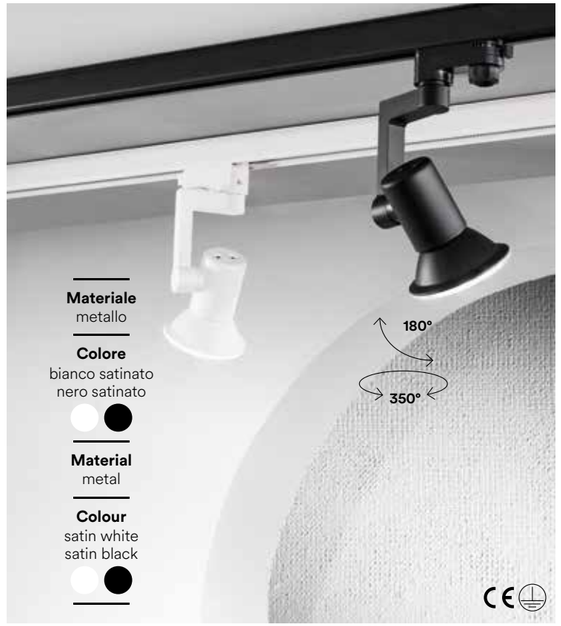

Materiale
metallo

Colore
bianco satinato
nero satinato

Material
metal


Colour
satin white
satin black



colour

LED-EXPRESS
8031440360470
LED-EXPRESS-B
8031414864676

1 x E27 MAX 42W



Lampadina non inclusa / Light bulb not included

Trifase / Three-phase

CLOCK

Materiale
alluminio con cavo in tessuto nero

Colore
cromo
nero anodizzato

Material
aluminum with black fabric cable

Colour
chrome
black anodized



Sospensione in alluminio con adattatore trifase e cavo in tessuto nero.
Pendant lamp in alluminum with three-phase adaptor and black fabric cable.







colour

I-TRACK-CLOCK-CR
8031414864072
I-TRACK-CLOCK-NERO
8031414864096

1 x E27 MAX 60W

Lampadina non inclusa / Light bulb not included

Portalampada incluso / Lampholder included

Trifase / Three-phase

MAXWELL

commercial areas use

industrial areas use

Materiale
alluminio

Colore
bianco
nero

Temperatura colore
3000K / 4000K

Driver
integrato

Durata e on/off
50.000h
>25.000 on/off

Material
aluminum

Colour
white
black

Colour temperature
3000K / 4000K

Driver
built-in


Life time and on/off
50.000h
>25.000 on/off

Lampada lineare in alluminio con adattatore trifase.
Linear aluminum lamp with three-phase adapter.






	colour temp.	colour
MAXWELL-W-25C		
8031414884056		
lumen	3300 lm	
MAXWELL-W-25M		
8031414884049		
lumen	3300 lm	
MAXWELL-B-25C		
8031414884070		
lumen	3300 lm	
MAXWELL-B-25M		
8031414884063		
lumen	3300 lm	



Fotometria del prodotto / Photometric curve




MAXWELL-25

watt	25W
beam angle	90°






	colour temp.	colour
MAXWELL-W-48C		
8031414884018		
lumen	6500 lm	
MAXWELL-W-48M		
8031414884001		
lumen	6500 lm	
MAXWELL-B-48C		
8031414884032		
lumen	6500 lm	
MAXWELL-B-48M		
8031414884025		
lumen	6500 lm	



Fotometria del prodotto / Photometric curve




MAXWELL-48


watt	48W
beam angle	90°



Interruttore per regolazione potenza /
Power switchable:
48W - 44W - 40W - 34W
130 LM/W



Accessori non inclusi / Not included accessories



BUSMAX-LENS-25
8031414884117
Lente per doppio fascio luminoso 25° /
Double lens 25°
Per i modelli **MAXWELL 25** occorrono
2 pezzi per l'intera lampada /
2 pieces need for the
whole **MAXWELL 25** models
Per i modelli **MAXWELL 48** occorrono
4 pezzi per l'intera lampada /
4 pieces need for the
whole **MAXWELL 48** models




BUSMAX-LENS-RL
8031414884124
Lente fascio di luce asimmetrica 25° sx-dx/
Asymmetric lens 25° sx-dx
Per i modelli **MAXWELL 25** occorrono
2 pezzi per l'intera lampada /
2 pieces need for the
whole **MAXWELL 25** models
Per i modelli **MAXWELL 48** occorrono
4 pezzi per l'intera lampada /
4 pieces need for the
whole **MAXWELL 48** models

Trifase / Three-phase

HELP TRACK

Lampade di emergenza LED in policarbonato per sistema binario trifase.
LED emergency lamps in polycarbonate for three-phase track system.





LED SMD

Materiale
policarbonato

Colore
bianco
nero

Temperatura colore
4000K

Material
polycarbonate


Colour
white
black

Colour temperature
4000K

	colour temp.	colour
LED-HELP-W-TRACK 8031414884179		
lumen	250 lm	
LED-HELP-B-TRACK 8031414884162		
lumen	250 lm	
watt		2W
beam angle		140°









LiFePO4 3.2V 3200mAh
Batteria per emergenza inclusa /
Included emergency battery

3 hours

RAIL

Binari ed accessori.
Track rail and components.



LED-RAIL-1M-BCO
8031414917211

Binari elettrificati trifase in alluminio bianco da un 1 m con tappi inclusi.

1 m track rail in white aluminum with three-phase adaptor and endcap included.

LED-RAIL-2M-BCO
8031414917235

Binari elettrificati trifase in alluminio bianco da 2 m con tappi inclusi.

2 m track rail in white aluminum with three-phase adaptor and endcap included.

LED-RAIL-3M-BCO
8031414917259

Binari elettrificati trifase in alluminio bianco da 3 m con tappi inclusi.

3 m track rail in white aluminum with three-phase adaptor and endcap included.

LED-RAIL-PL-BCO
8031414925247

Kit 2 pz. Basette bianche per binario guida trifase.

Kit 2 pcs. white base for track rail three-phase.



LED-TRACK-BASE
8031440361668

Base tonda bianca per faro adattatore trifase (adatto per EXPRESS, ROCKET, SQUIB, OBOE).

White round base for track lamp with three-phase adaptor (useful items EXPRESS, ROCKET, SQUIB, OBOE).



LED-RAIL-CAP-BCO
8031414917273

Tappo per binario trifase bianco.

White cap for three-phase track rail.



LED-TRACK-ADAT
8031414866410

Adattatore bianco per binario trifase.

White adapt for three-phase track rail.



LED-RAIL-S-1,5-BCO
8031414918034

Sistema sospensione 1,5 m per binari bianco.

White suspension 1,5 m for track rail.



LED-RAIL-S-3-BCO
8031414917457

Sistema sospensione 3 m per binari bianco.

White suspension 3 m for track rail.



LED-RAIL-1M-NER
8031414917228

Binari elettrificati trifase in alluminio nero da un 1 m con tappi inclusi.

1 m track rail in black aluminum with three-phase adaptor and endcap included.



LED-RAIL-2M-NER
8031414917242

Binari elettrificati trifase in alluminio nero da 2 m con tappi inclusi.

2 m track rail in black aluminum with three-phase adaptor and endcap included.

LED-RAIL-3M-NER
8031414917266

Binari elettrificati trifase in alluminio nero da 3 m con tappi inclusi.


3 m track rail in black aluminum with three-phase adaptor and endcap included.



LED-RAIL-PL-NER
8031414925254

Kit 2 pz. basette nere per binario guida trifase.

Kit 2 pcs. black base for track rail three-phase.






LED-TRACK-BASE NERO
8031440361675

Base tonda nera per faro adattatore trifase (adatto per EXPRESS, ROCKET, SQUIB, OBOE).

Black round base for track lamp with three-phase adaptor (useful items EXPRESS, ROCKET, SQUIB, OBOE) .






LED-RAIL-CAP-NER
8031414917280

Tappo per binario trifase nero.

Black cap for three-phase track rail.






LED-TRACK-ADAT NERO
8031414866397

Adattatore nero per binario trifase.

Black adapt for three-phase track rail.






LED-RAIL-S-1,5-NER
8031414917440

Sistema sospensione 1,5 m per binari nero.

Black suspension 1,5 m for track rail.






LED-RAIL-S-3-NER
8031414917464

Sistema sospensione 3 m per binari nero.

Black suspension 3 m for track rail.



RAIL

Binari ed accessori.
Track rail and components.



LED-RAIL-I-MINI-BCO
8031414917938

Connettore lineare mini bianco a scomparsa per sistema binari trifase.

White mini invisible connector for three-phase track rail system.



LED-RAIL-NEST-SX-BCO
8031414917990

Innesto bianco sinistro per binari guida entrata L N + cavo di terra per circuito a trifase.

White recess power connector left side for three-phase track rail, L N input + ground cable for three-phase circuit.

LED-RAIL-NEST-DX-BCO
8031414918010

Innesto bianco destro per binari guida entrata L N + cavo di terra per circuito a trifase.

White recess power connector right side for three-phase track rail, L N input + ground cable for three-phase circuit.



LED-RAIL-I-BCO
8031414917914

Connettore bianco lineare per binari sistema trifase.

White straight connector for three-phase track rail system.



LED-RAIL-FLEX-BCO
8031414917891

Connettore bianco flessibile per sistema trifase.

White flexible power connector for three-phase track rail system.



LED-RAIL-X-BCO
8031414917556

Connettore a croce bianco per sistema trifase.

White cross connector for three-phase system.



LED-RAIL-L-DX-BCO
8031414917976

Connettore bianco track destro a L per binari guida trifase.

White L connector right side for three-phase track rail system.

LED-RAIL-L-SX-BCO
8031414917952

Connettore bianco track sinistro a L per binari guida trifase.

White L connector left side for three-phase track rail system.



LED-RAIL-I-MINI-NER
8031414917945

Connettore lineare mini nero a scomparsa per sistema binari trifase.

Black mini invisible connector for three phase track rail system.






LED-RAIL-NEST-SX-NER
8031414918003

Innesto nero sinistro per binari guida entrata L N + cavo di terra per circuito a trifase.


Black recess power connector left side for three-phase track rail, L N input + ground cable for three-phase circuit.



LED-RAIL-NEST-DX-NER
8031414918027

Innesto nero destro per binari guida entrata L N + cavo di terra per circuito a trifase.

Black recess power connector right side for three-phase track rail, L N input + ground cable for three-phase circuit.






LED-RAIL-I-NER
8031414917921

Connettore nero lineare per binari sistema trifase.

Black straight connector for three-phase track rail system.






LED-RAIL-FLEX-NER
8031414917907

Connettore nero flessibile per sistema trifase.

Black flexible power connector for three-phase track rail system.






LED-RAIL-X-NER
8031414917563

Connettore a croce nero per sistema trifase.

Black cross connector for three-phase system.






LED-RAIL-L-DX-NER
8031414917983

Connettore nero track destro a L per binari guida trifase.


Black L connector right side for three-phase track rail system.



LED-RAIL-L-SX-NER
8031414917969

Connettore nero track sinistro a L per binari guida trifase.

Black L connector left side for three-phase track rail system.



RAIL

Binari ed accessori.
Track rail and components.



LED-RAIL-T-DX1-BCO
8031414917518

Connettore bianco destro a T per binari guida entrata L N + cavo di terra per circuito trifase.

Right white T connector for L N input guide rails + ground cable for trhree-phase system.

LED-RAIL-T-SX1-BCO
8031414917495

Connettore bianco sinistro a T per binari guida entrata L N + cavo di terra per circuito trifase.

Left white T connector for L N input guide rails + ground cable for trhree-phase system.

LED-RAIL-T-DX2-BCO
8031414917532

Connettore bianco destro a T per binari guida entrata L N + cavo di terra per circuito trifase.

Right white T connector for L N input guide rails + ground cable for trhree-phase system.

LED-RAIL-T-SX2-BCO
8031414917471

Connettore bianco a T per binari guida entrata L N + cavo di terra per circuito trifase.


White T connector for L N input guide rails + ground cable for three-phase circuit.



LED-RAIL-T-DX1-NER
8031414917525

Connettore nero destro a T per binari guida entrata L N + cavo di terra per circuito trifase.


Right black T connector for L N input guide rails + ground cable for trhree-phase system.



LED-RAIL-T-SX1-NER
8031414917501

Connettore nero sinistro a T per binari guida entrata L N + cavo di terra per circuito trifase.


Left black T connector for L N input guide rails + ground cable for trhree-phase system.



LED-RAIL-T-DX2-NER
8031414917549

Connettore nero destro a T per binari guida entrata L N + cavo di terra per circuito trifase.


Right black T connector for L N input guide rails + ground cable for trhree-phase system.



LED-RAIL-T-SX2-NER
8031414917488

Connettore nero a T per binari guida entrata L N + cavo di terra per circuito trifase.

Black T connector for L N input guide rails + ground cable for three-phase circuit.



RAIL

Binari ed accessori.
Track rail and components.



LED-RAIL-1M-DA-BCO
8031414926169

Binari elettrificati trifase in alluminio bianco da un 1 m con tappi inclusi.

1 m track rail in white aluminum with three-phase adaptor and endcap included.

LED-RAIL-2M-DA-BCO
8031414926183

Binari elettrificati trifase in alluminio bianco da 2 m con tappi inclusi.

2 m track rail in white aluminum with three-phase adaptor and endcap included.

LED-RAIL-3M-DA-BCO
8031414926206

Binari elettrificati trifase in alluminio bianco da 3 m con tappi inclusi.

3 m track rail in white aluminum with three-phase adaptor and endcap included.

LED-RAIL-PL-DA-BCO
8031414926428

Kit 2 pz. Basette bianche per binario guida trifase.

Kit 2 pcs. white base for track rail three-phase.

LED-RAIL-CAP-DA-BCO
8031414926220

Tappo per binario trifase bianco.


White cap for three-phase track rail.



LED-RAIL-S-1,5-DA-BCO
8031414926381

Sistema sospensione 1,5 m per binari bianco.

White suspension 1,5 m for track rail.



LED-RAIL-S-3-DA-BCO
8031414926404

Sistema sospensione 3 m per binari bianco.

White suspension 3 m for track rail.



LED-RAIL-1M-DA-NER
8031414926176

Binari elettrificati trifase in alluminio nero da un 1 m con tappi inclusi.

1 m track rail in black aluminum with three-phase adaptor and endcap included.



LED-RAIL-2M-DA-NER
8031414926190

Binari elettrificati trifase in alluminio nero da 2 m con tappi inclusi.

2 m track rail in black aluminum with three-phase adaptor and endcap included.

LED-RAIL-3M-DA-NER
8031414926213

Binari elettrificati trifase in alluminio nero da 3 m con tappi inclusi.

3 m track rail in black aluminum with three-phase adaptor and endcap included.



LED-RAIL-PL-DA-NER
8031414926435

Kit 2 pz. basette nere per binario guida trifase.

Kit 2 pcs. black base for track rail three-phase.





LED-RAIL-CAP-DA-NER
8031414926237

Tappo per binario trifase nero.

Black cap for three-phase track rail.






LED-RAIL-S-1,5-DA-NER
8031414926398

Sistema sospensione 1,5 m per binari nero.

Black suspension 1,5 m for track rail.






LED-RAIL-S-3-DA-NER
8031414926411

Sistema sospensione 3 m per binari nero.

Black suspension 3 m for track rail.



RAIL

Binari ed accessori.
Track rail and components.



LED-RAIL-I-MINI-DA-BCO
8031414926282

Connettore lineare mini bianco a scomparsa per sistema binari trifase.

White mini invisible connector for three-phase track rail system.



LED-RAIL-NEST-SX-DA-BCO
8031414926343

Innesto bianco sinistro per binari guida entrata L N + cavo di terra per circuito a trifase.

White recess power connector left side for three-phase track rail, L N input + ground cable for three-phase circuit.

LED-RAIL-NEST-DX-DA-BCO
8031414926367

Innesto bianco destro per binari guida entrata L N + cavo di terra per circuito a trifase.

White recess power connector right side for three-phase track rail, L N input + ground cable for three-phase circuit.



LED-RAIL-I-DA-BCO
8031414926268

Connettore bianco lineare per binari sistema trifase.

White straight connector for three-phase track rail system.



LED-RAIL-FLEX-DA-BCO
8031414926244

Connettore bianco flessibile per sistema trifase.

White flexible power connector for three-phase track rail system.



LED-RAIL-X-DA-BCO
8031414926527

Connettore a croce bianco per sistema trifase.

White cross connector for three-phase system.



LED-RAIL-L-DX-DA-BCO
8031414926329

Connettore bianco track destro a L per binari guida trifase.

White L connector right side for three-phase track rail system.

LED-RAIL-L-SX-DA-BCO
8031414926305

Connettore bianco track sinistro a L per binari guida trifase.


White L connector left side for three-phase track rail system.



LED-RAIL-I-MINI-DA-NER
8031414926299

Connettore lineare mini nero a scomparsa per sistema binari trifase.

Black mini invisible connector for three phase track rail system.






LED-RAIL-NEST-SX-DA-NER
8031414926350

Innesto nero sinistro per binari guida entrata L N + cavo di terra per circuito a trifase.

Black recess power connector left side for three-phase track rail, L N input + ground cable for three-phase circuit.



LED-RAIL-NEST-DX-DA-NER
8031414926374

Innesto nero destro per binari guida entrata L N + cavo di terra per circuito a trifase.


Black recess power connector right side for three-phase track rail, L N input + ground cable for three-phase circuit.



LED-RAIL-I-DA-NER
8031414926275

Connettore nero lineare per binari sistema trifase.

Black straight connector for three-phase track rail system.






LED-RAIL-FLEX-DA-NER
8031414926251

Connettore nero flessibile per sistema trifase.

Black flexible power connector for three-phase track rail system.






LED-RAIL-X-DA-NER
8031414926534

Connettore a croce nero per sistema trifase.

Black cross connector for three-phase system.






LED-RAIL-L-DX-DA-NER
8031414926336

Connettore nero track destro a L per binari guida trifase.


Black L connector right side for three-phase track rail system.



LED-RAIL-L-SX-DA-NER
8031414926312

Connettore nero track sinistro a L per binari guida trifase.

Black L connector left side for three-phase track rail system.



RAIL

Binari ed accessori.
Track rail and components.



LED-RAIL-T-DX1-DA-BCO
8031414926480

Connettore bianco destro a T per binari guida entrata L N + cavo di terra per circuito trifase.

Right white T connector for L N input guide rails + ground cable for trhree-phase system.

LED-RAIL-T-SX1-DA-BCO
8031414926466

Connettore bianco sinistro a T per binari guida entrata L N + cavo di terra per circuito trifase.

Left white T connector for L N input guide rails + ground cable for trhree-phase system.

LED-RAIL-T-DX2-DA-BCO
8031414926503

Connettore bianco destro a T per binari guida entrata L N + cavo di terra per circuito trifase.

Right white T connector for L N input guide rails + ground cable for trhree-phase system.

LED-RAIL-T-SX2-DA-BCO
8031414926442

Connettore bianco a T per binari guida entrata L N + cavo di terra per circuito trifase.


White T connector for L N input guide rails + ground cable for three-phase circuit.



LED-RAIL-T-DX1-DA-NER
8031414926497

Connettore nero destro a T per binari guida entrata L N + cavo di terra per circuito trifase.


Right black T connector for L N input guide rails + ground cable for trhree-phase system.



LED-RAIL-T-SX1-DA-NER
8031414926473

Connettore nero sinistro a T per binari guida entrata L N + cavo di terra per circuito trifase.


Left black T connector for L N input guide rails + ground cable for trhree-phase system.



LED-RAIL-T-DX2-DA-NER
8031414926510

Connettore nero destro a T per binari guida entrata L N + cavo di terra per circuito trifase.


Right black T connector for L N input guide rails + ground cable for trhree-phase system.



LED-RAIL-T-SX2-DA-NER
8031414926459


Connettore nero a T per binari guida entrata L N + cavo di terra per circuito trifase.

Black T connector for L N input guide rails + ground cable for three-phase circuit.



TRACK

Binari ed accessori.
Track rail and components.



LED-TRACK-1M-INC
8031440361804

Binario trifase ad incasso in alluminio bianco 1 m.

Recessed track light in white aluminum 1 m.

LED-TRACK-2M-INC
8031440361811

Binario trifase ad incasso in alluminio bianco 2 m.

Recessed track light in white aluminum 2 m.



INC-TRACK-STAFFE
8031414879700

Kit 2pz staffe zincate per binario incasso

Kit 2pcs metal bracket for recessed track rail



INC-TRACK-NEST
8031414871193

Innesto sinistro per binario ad incasso trifase bianco.

White recess power connector left side for three-phase track rail.

INC-TRACK-NEST-R
8031414871179

Innesto destro per binario ad incasso trifase bianco.

White recess power connector right side for three-phase track rail in back version.



INC-TRACK-I
8031414871254

Connettore bianco lineare ad incasso per binari trifase.

White recess straight connection for three-phase track rail system.



INC-TRACK-L-R
8031414871216

Connettore bianco ad incasso destro a L per binari trifase.

White recess L connector right side for three-phase track rail system.

INC-TRACK-L
8031414871230

Connettore bianco ad incasso sinistro a L per binari trifase.


White recess L connector left side for three-phase track rail system.



LED-TRACK-1M-INC NERO
8031414864836

Binario trifase ad incasso in alluminio nero 1 m.

Recessed track light in black aluminum 1 m.



LED-TRACK-2M-INC NERO
8031414864058

Binario trifase ad incasso nero in alluminio 2 m.

Recessed track light in black aluminum 2 m.



INC-TRACK-STAFFE
8031414879700

Kit 2pz staffe zincate per binario incasso

Kit 2pcs metal bracket for recessed track rail






INC-TRACK-NEST NERO
8031414871209

Innesto sinistro per binario ad incasso trifase nero.

Black recess power connector left side for three-phase track rail.



INC-TRACK-NEST-R NERO
8031414871186

Innesto destro per binario ad incasso trifase nero.


Black recess power connector right side for three-phase track rail in back version.



INC-TRACK-I NERO
8031414871261

Connettore nero lineare ad incasso per binari trifase.

Black recess straight connection for three-phase track rail system.






INC-TRACK-L-R NERO
8031414871223

Connettore nero ad incasso destro a L per binari trifase.

Black recess L connector right side for three-phase track rail system.



INC-TRACK-L NERO
8031414871247

Connettore nero ad incasso sinistro a L per binari trifase.


Black recess L connector left side for three-phase track rail system.


BUSBAR
TRUNKING SYSTEM





Schema di montaggio sistema binari.
Assembling technical sheet track rail system.


BUSBAR TRUNKING SYSTEM

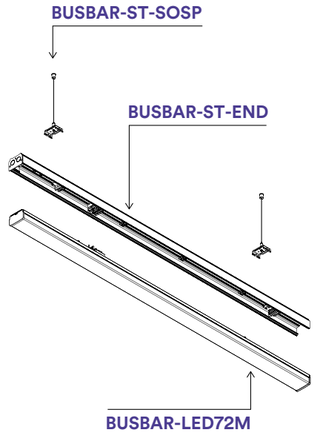










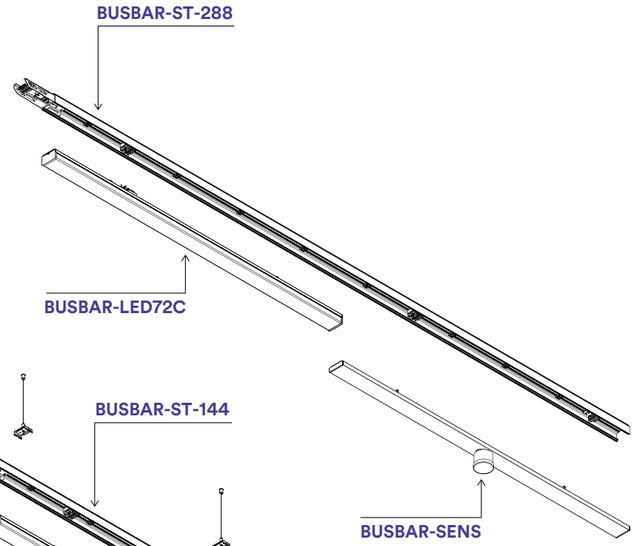





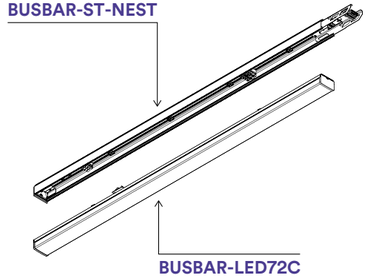

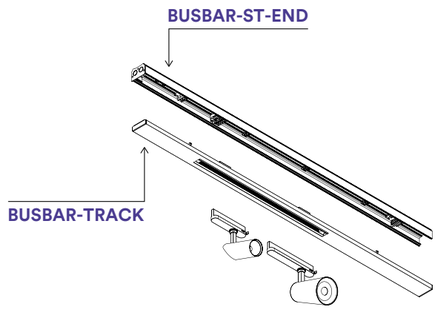

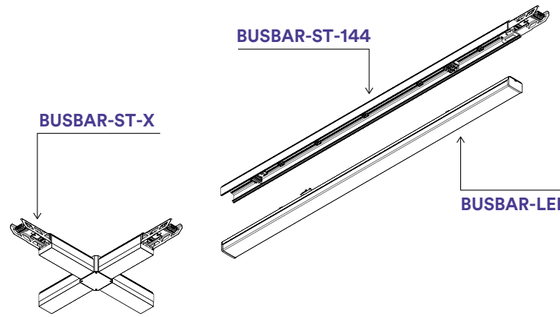

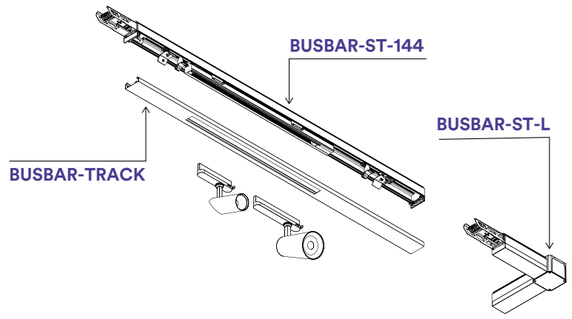

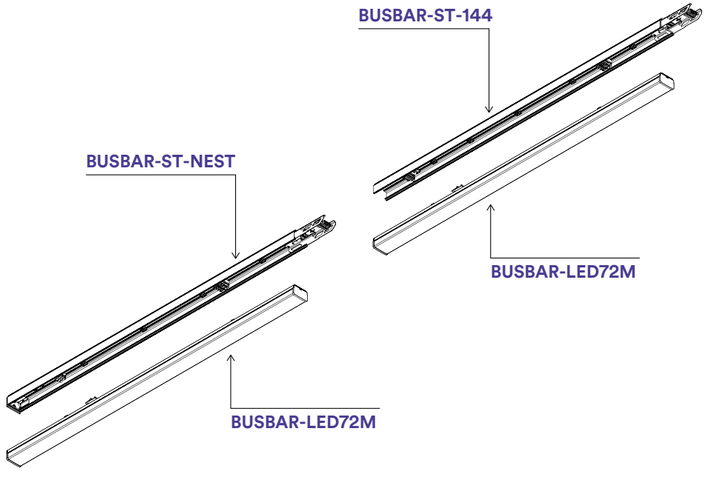

BUSBAR

Sistema trunking lineare.
Trunking linear system.

accommodation areas use
office use
commercial areas use

Materiale
alluminio

Colore
bianco

Temperatura colore
3000K / 4000K

Driver
integrato

Durata e on/off
50.000h
>25.000 on/off


Material
aluminum

Colour
white

Colour temperature
3000K / 4000K

Driver
built-in

Life time and on/off
50.000h
>25.000 on/off

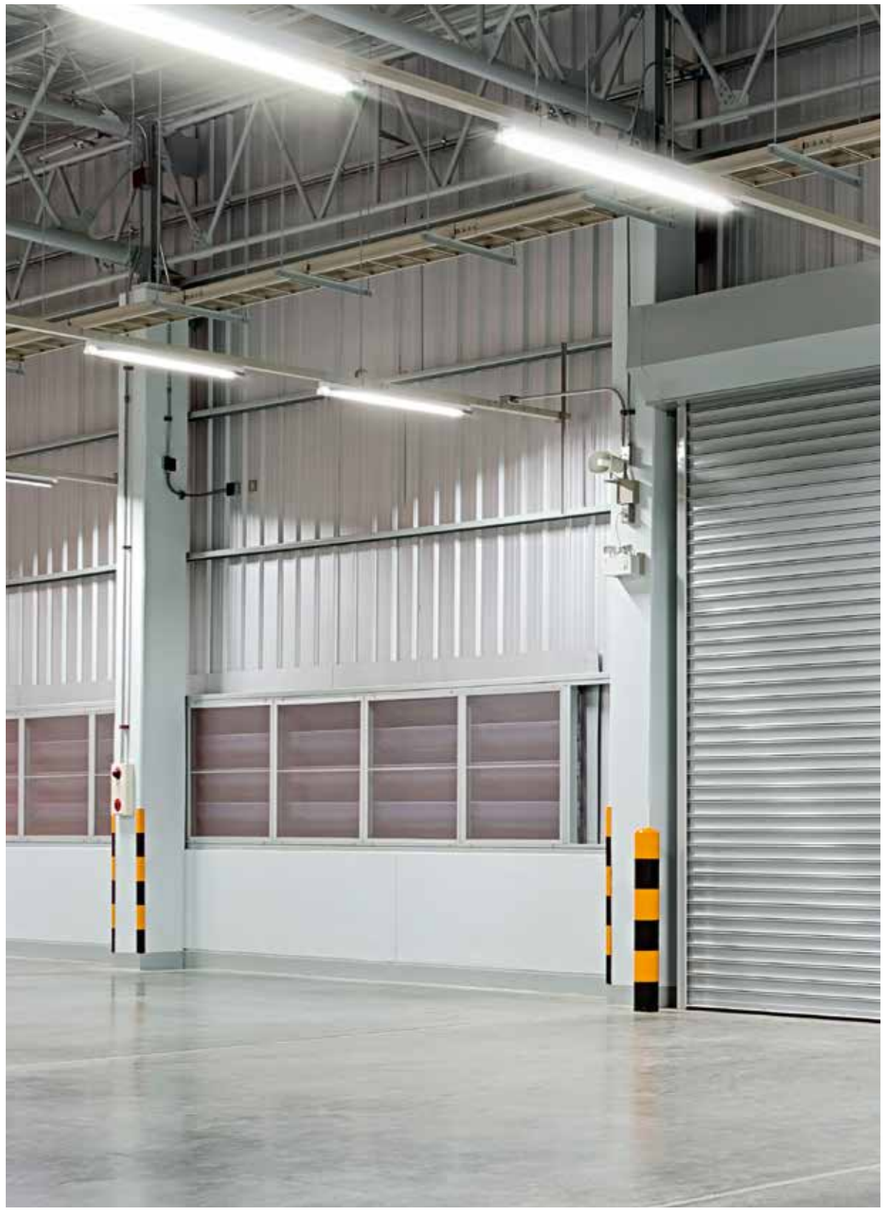

+10-100%- IP54 degree IK08 CRI >82 LED SMD



Antipolvere e antispruzzo /
Dustprood and splashproof

Led rivestiti contro le influenze esterne /
Coated LEDs against external influences

Montaggio senza attrezzi /
Toolless mounting



Sistema di fissaggio a soffitto o a sospensione
/
Ceiling mount or pendant fixing system



Estensibile grazie ai moduli in 2 misure
/
Extendable thanks to the extruded aluminum modules



Sistema easy di aggancio binari
/
Track rail easy connection system




7 cavi L1 L2 L3 N E D+ D- trifase più dimmer
/
7 wire connection system L1 L2 L3 N E D+ D- three-phase + dimmer




Sistema easy di fissaggio della lampada
/
Lamp easy installation system

Lenti per diversi fasci di luce / Different beam angles optional lens



Lente inclusa /
Included lens



Lente opzionale
doppio fascio luminoso 25°/
Optional lens double lens 25°



Lente opzionale
fascio di luce asimmetrico 25° sx-dx /
Optional lens asymmetric lens 25° sx-dx

BUSBAR

Lampada lineare per sistema trunking.
Linear lamp for trunking system.

commercial areas use

industrial areas use

Materiale
alluminio

Colore
bianco

Temperatura colore
3000K / 4000K

Driver
integrato

Durata e on/off
50.000h
>25.000 on/off

Material
aluminum

Colour
white


Colour temperature
3000K / 4000K

Driver
built-in


Life time and on/off
50.000h
>25.000 on/off



+10-100% IP54 degree IK08 CRI >82 LED SMD

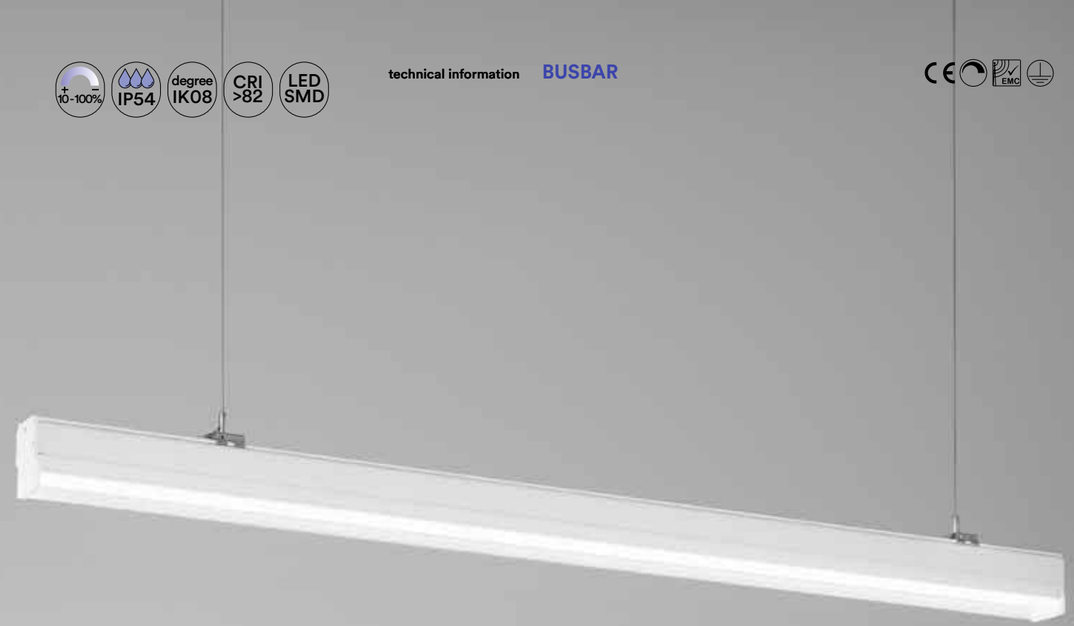

	colour temp.	colour
BUSBAR-LED72C 8031414883936		
lumen	9340 lm	
BUSBAR-LED72M 8031414883929		
lumen	9340 lm	
watt	72W	
beam angle	90°	



	colour temp.	colour
BUSBAR-LED72M-HELP 8031414898367		
lumen	9340 lm	
watt	72W	
emergency light	3 h - 600 lm	
watt	4W	
beam angle	90°	

Funzione MAINTAIN sempre accesa / MAINTAIN function always on

ON LIGHT


Funzione NON-MAINTAIN emergenza / NON-MAINTAIN function only emergency

BLACK OUT EMERGENGY LIGHT

Compatibile con altri sistemi trunking in commercio / Compatible with other trunking systems




Fotometria del prodotto / Photometric curve



BUSBAR-LED72

Accessori non inclusi / Not included accessories

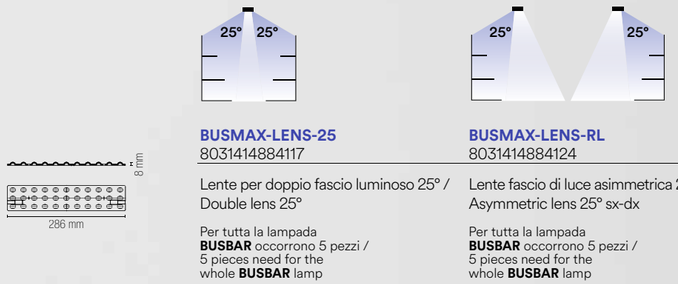

BUSMAX-LENS-25
8031414884117

Lente per doppio fascio luminoso 25° / Double lens 25°

Per tutta la lampada **BUSBAR** occorrono 5 pezzi / 5 pieces need for the whole **BUSBAR** lamp

BUSMAX-LENS-RL
8031414884124

Lente fascio di luce asimmetrica 25° sx-dx / Asymmetric lens 25° sx-dx

Per tutta la lampada **BUSBAR** occorrono 5 pezzi / 5 pieces need for the whole **BUSBAR** lamp

BUSBAR


Sistema blindosbarra lineare per installazione a sospensione e plafoniera.
Busways linear system bar for suspended installation and ceiling light.



BUSBAR-ST-NEST
8031414883943

Binario innesto 7 cavi per alimentazione.

Feed trunking with 7 input wire.





BUSBAR-ST-END
8031414883950

Binario terminale 7 cavi con sistema di connessione multipla.

Terminal track rail 7 cables with multiple connection system.






BUSBAR-ST-144
8031414883967

Binario intermedio 7 cavi da 145 cm.

Intermediate trunking with 7 wire of 145 cm.






BUSBAR-ST-288
8031414883974

Binario intermedio 7 cavi da 290 cm.

Intermediate trunking with 7 wire of 290 cm.






BUSBAR-ST-L
8031414884087

Connettore a L 7 cavi.

L connector with 7 wires.






BUSBAR-ST-T
8031414884100

Connettore a T 7 cavi.

T connector with 7 wires.






BUSBAR-ST-X
8031414884094

Connettore a X 7 cavi.

X connector with 7 wires.







BUSBAR-ST-COVER
8031414883981

Cover di alluminio bianco.

White aluminum cover.



BUSBAR-SENS
1 / function




In un ambiente sufficientemente luminoso la lampada non si accende anche se viene rilevato movimento.

With sufficient ambient light, the light will not be switched on even if with motion signal.



In un ambiente poco luminoso il sensore accende la lampada non appena viene rilevato un movimento.

With insufficient ambient light, the sensor switches on the light when motion is detected.



Trascorso il tempo di attesa, il sensore spegne la lampada quando non viene rilevato movimento.

After elapse of hold time, the sensor switches off the light when no motion is detected.

BUSBAR-SENS
2 / function



Se non viene rilevato movimento la lampada rimane ad un basso livello di luminosità.

If there is motion detected, the light will be remained at a low light level all the time.



Quando viene rilevato movimento, il sensore porta la lampada al 100% di luminosità.


When motion is detected, the sensor will switch on the light to 100% brightness.



Trascorso il tempo di attesa, il sensore attenua la luce all'attuale livello di luminosità se non è rilevato movimento.

After elapse of hold time, the sensor dims the light at present low light level if no motion is detected.

BUSBAR-SENS
3 / function



In un ambiente sufficientemente luminoso la lampada non si accende anche se viene rilevato movimento.

With sufficient ambient light, the light will not be switched on even if with motion signal.



In un ambiente poco luminoso il sensore accende la lampada non appena viene rilevato un movimento.

With insufficient ambient light, the sensor switches on the light when motion is detected.



Trascorso il tempo di attesa, il sensore attenua la luce all'attuale livello di luminosità se non è rilevato movimento.

After elapse of hold time, the sensor dims the light at present low light level if no motion is detected.



Trascorso il tempo di standby il sensore spegne la lampada se non è rilevato movimento.


After elapse of standby period, the sensor switches off the light if no motion is detected.



BUSBAR-SENS
8031414884131

Cover elettrificata con sensore di movimento e crepuscolare da 3 funzioni incluso.

Electrified cover with montion and crepuscolar 3 functions sensor.

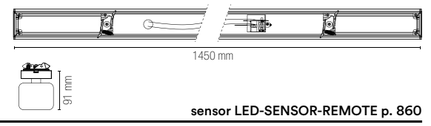


sensor LED-SENSOR-REMOTE p. 860



BUSBAR-TRACK
8031414884148

Cover elettrificata con binario trifase.

Electrified cover with three phase track system.





BUSBAR-FIX
8031414884155

Kit 2 pz staffe per fissaggio a plafoniera.

Bracket kit 2 pcs for ceiling mounting.




BUSBAR-ST-SOSP
8031414883998

Kit 2 pz cavi per binario a sospensione con cavo da 5 m.

Kit 2 pcs cables for suspension track with 5 m cable.

INDOOR

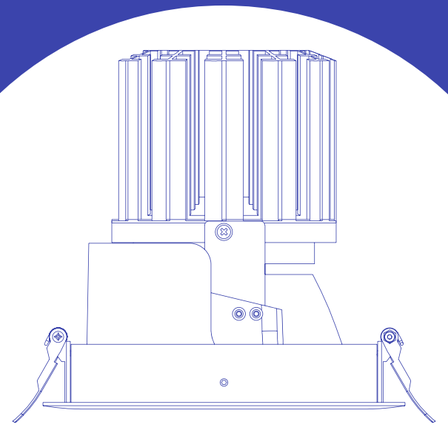

INCASSI
RECESSED LAMPS

APOLLO

Faretto ad incasso antiriflesso con struttura in alluminio e finitura con bordo bianco ed interno nero satinato. Luci spot con doppia orientabilità.
Anti-glare recessed spotlight with aluminum structure and finish with white border and satin black interior. Spot lights with double orientability.

indoor use · accommodation areas use · office use · commercial areas use

Materiale
alluminio

Colore
bordo bianco
e interno
nero satinato

Temperatura colore
3000K / 4000K

Driver
incluso

Material
aluminum

Colour
body with white
edge and
satin black internal


Colour temperature
3000K / 4000K

Driver
included



45°




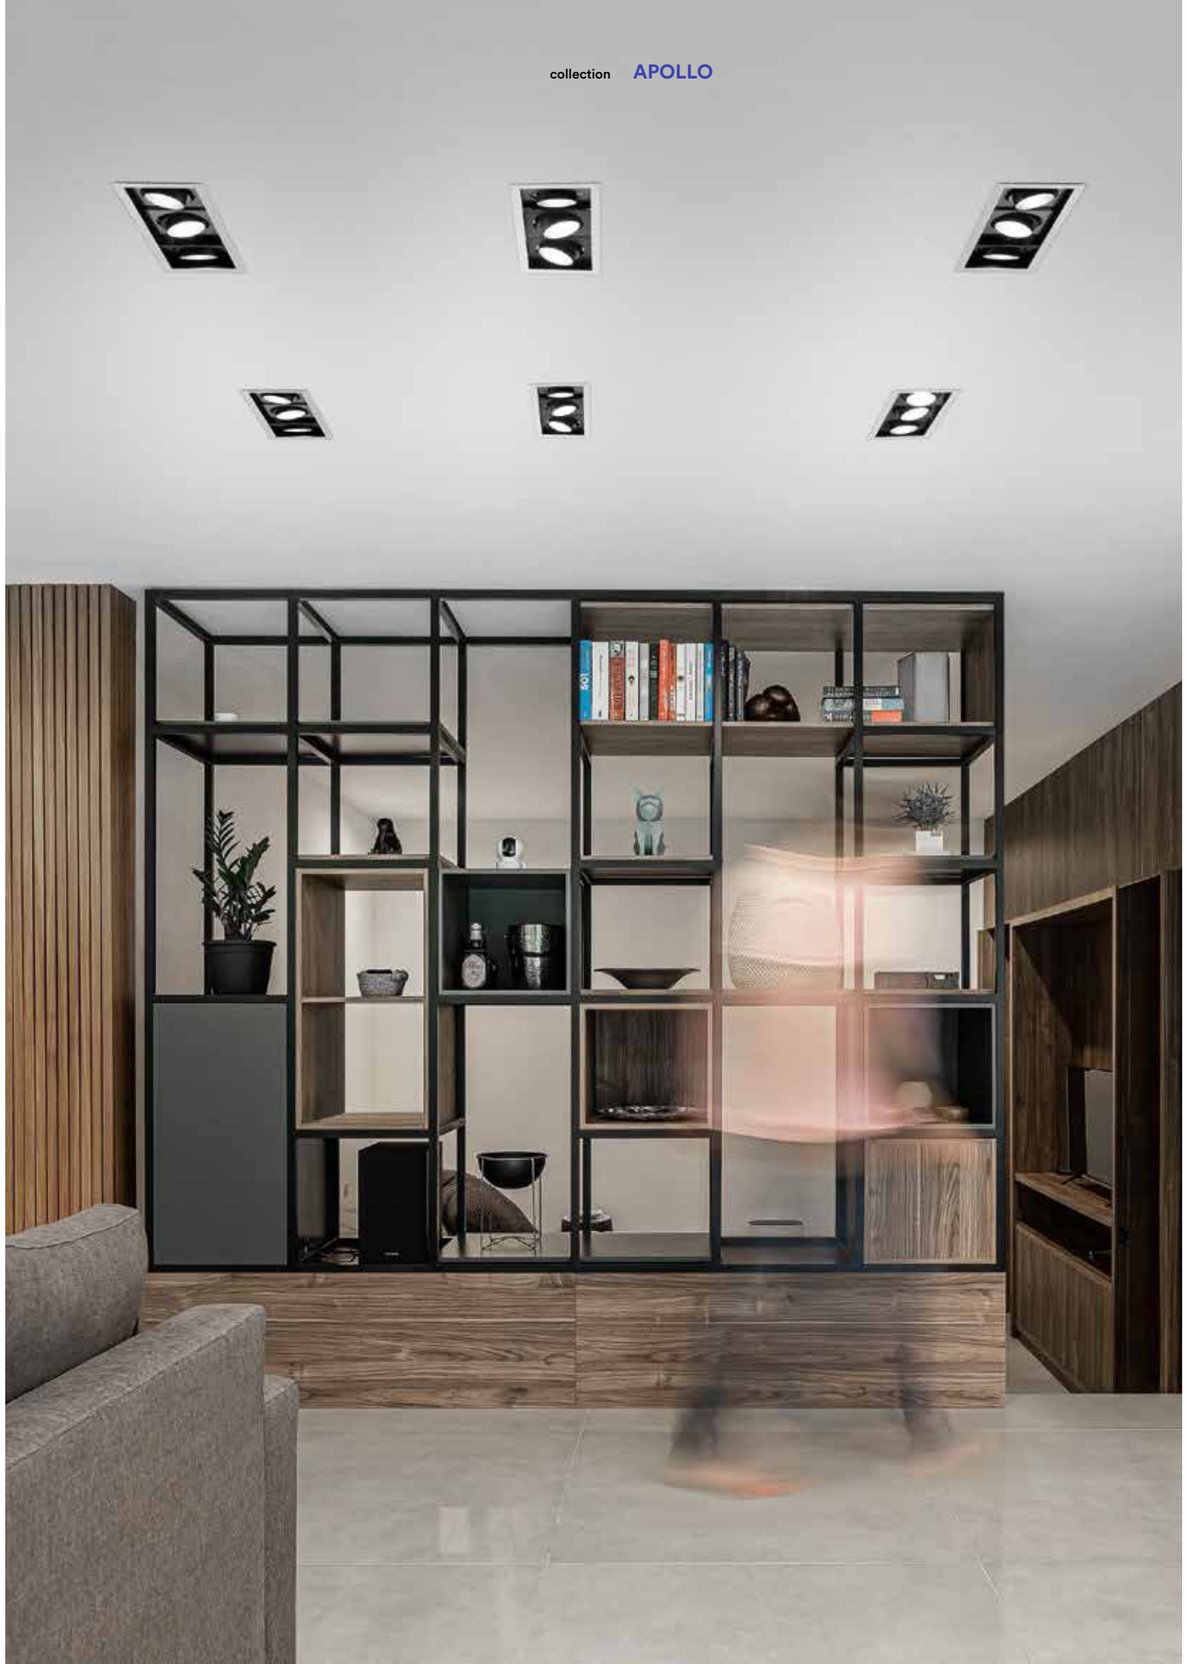


APOLLO




	colour temp.	colour
INC-APOLLO-1X10C		
8031440360623		
lumen	1000 lm	
INC-APOLLO-1X10M		
8031440360630		
lumen	1000 lm	
watt	1 × 10W	
beam angle	40°	
pf	-	
	100 × 100 mm	




	colour temp.	colour
INC-APOLLO-1X20C		
8031440360692		
lumen	2000 lm	
INC-APOLLO-1X20M		
8031440360708		
lumen	2000 lm	
watt	1 × 20W	
beam angle	40°	
pf	-	
	125 × 125 mm	




	colour temp.	colour
INC-APOLLO-1X30C		
8031440360753		
lumen	2900 lm	
INC-APOLLO-1X30M		
8031440360760		
lumen	2900 lm	
watt	1 × 30W	
beam angle	40°	
pf	0.90	
	175 × 175 mm	





	colour temp.	colour
INC-APOLLO-1X45C		
8031440360777		
lumen	4500 lm	
INC-APOLLO-1X45M		
8031440360784		
lumen	4500 lm	
watt	1 × 45W	
beam angle	40°	
pf	0.90	
	175 × 175 mm	




Fotometria del prodotto / Photometric curve


INC-APOLLO-1X10


INC-APOLLO-1X20


INC-APOLLO-1X30


INC-APOLLO-1X45



	colour temp.	colour
INC-APOLLO-2X10C		
8031440360647		
lumen	2000 lm	
INC-APOLLO-2X10M		
8031440360654		
lumen	2000 lm	
watt	2 × 10W	
beam angle	40°	
pf	-	
	190 × 100 mm	



	colour temp.	colour
INC-APOLLO-2X20C		
8031440360715		
lumen	4000 lm	
INC-APOLLO-2X20M		
8031440360722		
lumen	4000 lm	
watt	2 × 20W	
beam angle	40°	
pf	-	
	245 × 125 mm	





	colour temp.	colour
INC-APOLLO-2X30C		
8031440360791		
lumen	5800 lm	
INC-APOLLO-2X30M		
8031440360807		
lumen	5800 lm	
watt	2 × 30W	
beam angle	40°	
pf	0.90	
	320 × 175 mm	





	colour temp.	colour
INC-APOLLO-2X45C		
8031440360814		
lumen	9000 lm	
INC-APOLLO-2X45M		
8031440360821		
lumen	9000 lm	
watt	2 × 45W	
beam angle	40°	
pf	0.90	
	320 × 175 mm	




INC-APOLLO-2X10*



INC-APOLLO-2X20*


INC-APOLLO-2X30*



INC-APOLLO-2X45*




	colour temp.	colour
INC-APOLLO-3X10C		
8031440360661		
lumen	3000 lm	
INC-APOLLO-3X10M		
8031440360678		
lumen	3000 lm	
watt	3 × 10W	
beam angle	40°	
pf	-	
	290 × 100 mm	




	colour temp.	colour
INC-APOLLO-3X20C		
8031440360746		
lumen	6000 lm	
INC-APOLLO-3X20M		
8031440360739		
lumen	6000 lm	
watt	3 × 20W	
beam angle	40°	
pf	-	
	355 × 125 mm	





	colour temp.	colour
INC-APOLLO-3X30C		
8031440360845		
lumen	8700 lm	
INC-APOLLO-3X30M		
8031440360838		
lumen	8700 lm	
watt	3 × 30W	
beam angle	40°	
pf	0.90	
	475 × 175 mm	





	colour temp.	colour
INC-APOLLO-3X45C		
8031440360852		
lumen	13500 lm	
INC-APOLLO-3X45M		
8031440360869		
lumen	13500 lm	
watt	3 × 45W	
beam angle	40°	
pf	0.90	
	475 × 175 mm	




INC-APOLLO-3X10*


INC-APOLLO-3X20*


INC-APOLLO-3X30*


INC-APOLLO-3X45*

Le curve fotometriche rappresentano il singolo modulo LED per ogni elemento / Above photometric curve represent the single module of each element

OUTSIDER

Faretto ad incasso antiriflesso con struttura in alluminio, finitura bianco opaco e bordatura interna nera. Luci spot con testa estraibile e orientabile a 350°.
Anti-glare recessed spotlight with aluminum structure, matt white finish and black inner border. Spot lights with pull-out head and adjustable to 350.

indoor use
accommodation areas use
office use
commercial areas use





Materiale
alluminio

Colore
bianco opaco con bordatura interna nera

Temperatura colore
3000K / 4000K

Driver
incluso

Material
aluminum

Colour
matt white color and black internal ring

Colour temperature
3000K / 4000K

Driver
included




OUTSIDER


CRI >80 · LED COB



	colour temp.	colour
INC-OUTSIDER-1X15C		
8031414864225		
lumen	1375 lm	
INC-OUTSIDER-1X15M		
8031414864119		
lumen	1375 lm	
watt	1 × 15W	
beam angle	24°	
pf	-	
	90 × 90 x pr. 96 mm	




	colour temp.	colour
INC-OUTSIDER-1X30C		
8031414864256		
lumen	3100 lm	
INC-OUTSIDER-1X30M		
8031414864133		
lumen	3100 lm	
watt	1 × 30W	
beam angle	24°	
pf	0.90	
	116 × 116 x pr. 110 mm	






	colour temp.	colour
INC-OUTSIDER-2X15C		
8031414864232		
lumen	2750 lm	
INC-OUTSIDER-2X15M		
8031414864126		
lumen	2750 lm	
watt	2 × 15W	
beam angle	24°	
pf	-	
	174 × 90 x pr. 96 mm	




	colour temp.	colour
INC-OUTSIDER-2X30C		
8031414864263		
lumen	6200 lm	
INC-OUTSIDER-2X30M		
8031414864140		
lumen	6200 lm	
watt	2 × 30W	
beam angle	24°	
pf	0.90	
	230 × 116 x pr. 110 mm	







	colour temp.	colour
INC-OUTSIDER-3X15C		
8031414864249		
lumen	4125 lm	
INC-OUTSIDER-3X15M		
8031414864102		
lumen	4125 lm	
watt	3 × 15W	
beam angle	24°	
pf	-	
	260 × 90 x pr. 96 mm	




	colour temp.	colour
INC-OUTSIDER-3X30C		
8031414864270		
lumen	9300 lm	
INC-OUTSIDER-3X30M		
8031414864157		
lumen	9300 lm	
watt	3 × 30W	
beam angle	24°	
pf	0.90	
	335 × 116 x pr. 110 mm	

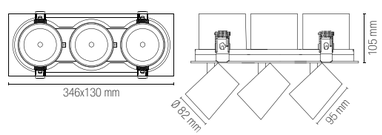


Fotometria del prodotto / Photometric curve




INC-OUTSIDER-1X15




INC-OUTSIDER-1X30




INC-OUTSIDER-2X15



INC-OUTSIDER-2X30




INC-OUTSIDER-3X15



INC-OUTSIDER-3X30

Le curve fotometriche rappresentano il singolo modulo LED per ogni elemento / Above photometric curve represent the single module of each element

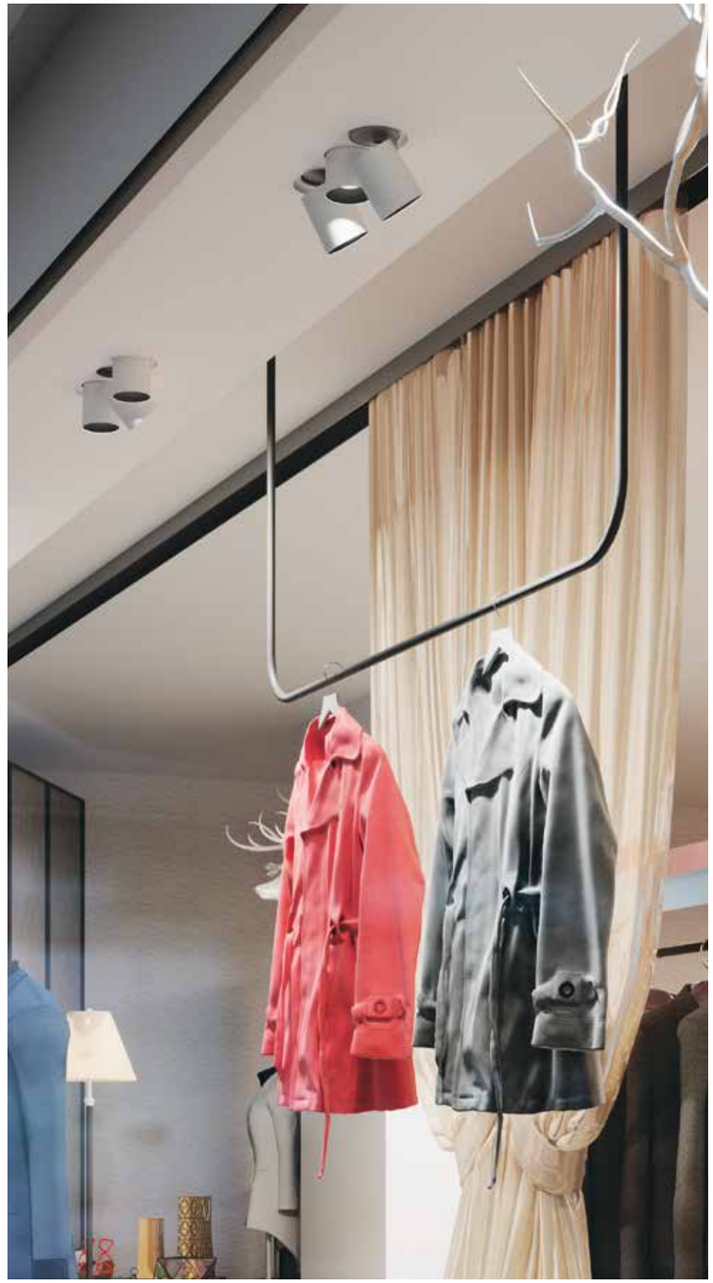

DELTA INC

Faretto ad incasso antiriflesso con struttura in alluminio, finitura bianco satinato e riflettore silver. Luci spot con testa estraibile e orientabile. Disponibile anche nella colorazione per la linea food.
Anti-glare recessed spotlight with aluminum structure, satin white finish and silver reflector. Spot lights with removable and adjustable head. Also available for lighting food line.

Materiale
alluminio

Colore
bianco satinato
e riflettore silver

Temperatura colore selezionabile
3000K / 4000K / 6500K

Driver
incluso

Material
aluminum

Colour
satin white and
silver reflector

Selectable color temperature
3000K / 4000K / 6500K

Driver
included









DALI

	colour temp.	colour
INC-DELTA-38DA		
8031414923786		
lumen	6080 lm	
watt	38W	
beam angle	60°	
pf	0.90	
	Ø 160 mm	

	colour temp.	colour
INC-DELTA-38 INC		
8031414893546		
lumen	4300 lm	
watt	38W	
beam angle	60°	
pf	0.90	
	Ø 160 mm	



Fotometria del prodotto / Photometric curve



INC-DELTA-38

Illuminazione per generi alimentari / Food lighting

CRI >80











	colour temp.	colour
INC-DELTA-38BR		
8031414924226		
lumen	6080 lm	
K	2500 K	
CRI	>90	
INC-DELTA-38RM		
8031414924233		
lumen	6080 lm	
K	3100 K	
CRI	>70	
INC-DELTA-38FM		
8031414924240		
lumen	6080 lm	
K	3000 K	
CRI	>63	
INC-DELTA-38FR		
8031414924257		
lumen	6080 lm	
K	3000 K	
CRI	>93	
watt	30W	
beam angle	24°	
pf	0.90	
	Ø 150 mm	

LYBRA

Faretto ad incasso rettangolare con struttura in alluminio e finitura in bianco satinato. Diffusore con orientabilità verticale.
Rectangular recessed spotlight with aluminum structure and satin white finish. Diffuser with vertical orientability.

accommodation areas use · office use · commercial areas use

Materiale
alluminio + PC

Colore
bianco satinato

Temperatura colore selezionabile
3000K / 4000K / 6500K

Driver
incluso

Material
aluminum + PC


Colour
satin white

Selectable color temperature
3000K / 4000K / 6500K

Driver
included




Fotometria del prodotto / Photometric curve



INC-LYBRA-38



	colour temp.	colour
INC-LYBRA-38		
8031414893553		
lumen	4400 lm	
watt	38W	
beam angle	120°	
pf	0.90	
	220 × 140 mm	



DAMA

Faretto da incasso con struttura in policarbonato e doppia ghiera intercambiabile rotonda e quadrata. Disponibile in bianco o nero.
Recessed light with polycarbonate structure and double interchangeable ring round or square. Available in black or white colors.

indoor use · accommodation areas use · office use · commercial areas use

Materiale
PC

Colore
bianco
nero

Temperatura colore
4000K

Driver
incluso

Material
PC


Colour
white
black

Colour temperature
4000K

Driver
included



Fotometria del prodotto / Photometric curve



INC-DAMA-QR44



	colour temp.	colour
INC-DAMA-QR44-BCO		
8031414881581		
lumen	300 lm	
INC-DAMA-QR44-NER		
8031414881598		
lumen	300 lm	
watt	LED 3W	
beam angle	100°	
	Ø 35 mm	



FIBRA OTTICA

indoor use · accommodation areas use · office use · commercial areas use



Kit fibra ottica.
Fiber optic kit.



Materiale
fibra ottica traslucente

Temperatura colore
RGB + 4000K


Material
translucent optical fiber

Colour temperature
RGB + 4000K



LED-OPTICAL-200
8031414925131


200 fiber of Ø 1mm
Starry sky





LED-OPTICAL-500
8031414925148


500 fiber of Ø 0,75mm
Side glow





LED-OPTICAL-ENG
8031414925155


	colour temp.
change color	RGBW
DC12V + Adaptor 220V	16W





LED-OPTICAL-ENG-TW
8031414925162

	colour temp.
Change color twinkle effect	RGBW
DC12V + Adaptor 220V	16W



STARLIGHT
STARLIGHT30

indoor use

accommodation areas use

STARLIGHT

Materiale
alluminio

Colore
bianco, argento

Temperatura colore
4000K / BLU

Driver
non incluso

Material
aluminum

Colour
white, silver

Colour temperature
4000K / BLU

Driver
not included

STARLIGHT 30

Materiale
alluminio

Colore
bianco, argento

Temperatura colore
4000K


Driver
12V DC 100mA 6W

Material
aluminum

Colour
white, silver

Colour temperature
4000K

Driver
12V DC 100mA 6W

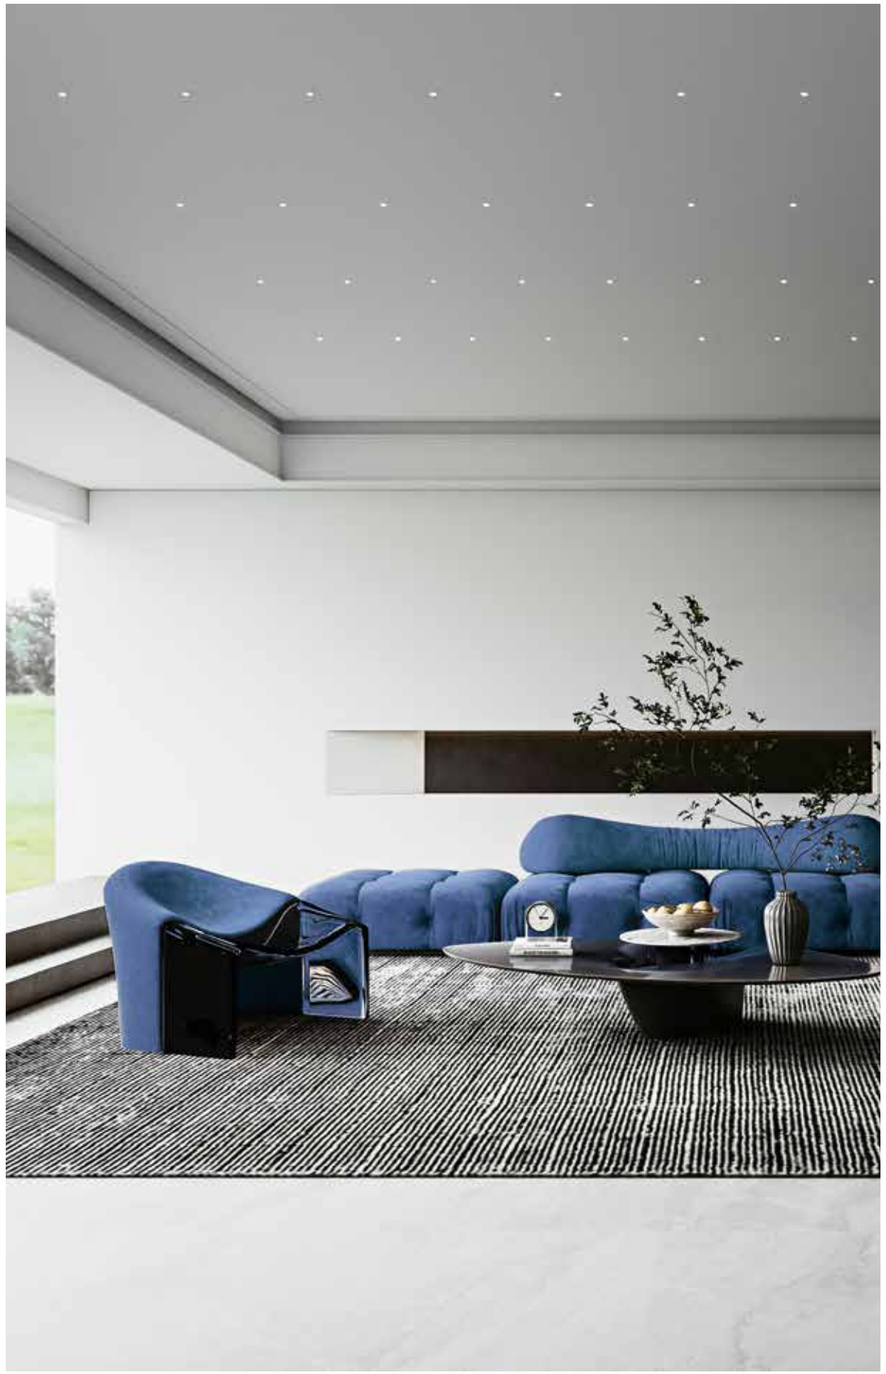

CRI >80



STARLIGHT
Connessione in parallelo / Parallel connection



Mini faretto a incasso cielo stellato con struttura in alluminio e doppia ghiera di colore bianco o silver intercambiabile.
Downlight for decorative starlight with aluminum structure and double interchangeable ring color white or silver.

	colour temp.	colour
LED-STARLIGHT-W 8031440361682		
lumen	11 lm	
LED-STARLIGHT-BLU 8031440361699		
	blu	
with 1 m. cable		
watt	LED 0,2W	
	Ø 14 mm	



Accessori inclusi / Included accessories



Ghiera bianca intercambiabile / White changeable ring



Ghiera silver intercambiabile / Silver changeable ring

Accessori non inclusi / Not included accessories



LED-STARLIGHT-NEX
8031440364430
Scatola connessione per 10 teste 12V DC 1A incl. Cavo 1m. / Box connection for 10 pcs 12V DC 1A with 1m. cable




LED-STARLIGHT-CONN
8031440364843
Connettore con singola entrata 3 uscite per kit cielo stellato 12V DC 1A incl. Cavo 1m. / Connector one input three output for starlight 12V DC 1A with 1m. cable



LED-STARLIGHT-DR
8031440364447
Driver 12V DC 100mA 6W incl. Cavo 1m. / Driver 12V DC 100mA 6W incl. 1m. cable

Fotometria del prodotto / Photometric curve



LED-STARLIGHT 0,2W

STARLIGHT 30



Kit 30 mini faretti a incasso cielo stellato con struttura in alluminio e doppia ghiera di colore bianco o silver intercambiabile.
Kit 30 downlight for decorative starlight with aluminum structure and double interchangeable ring color white or silver.

	colour temp.	colour
LED-STARLIGHT-30-W 8031440357692		
lumen	11 lm x 30	
with 1 m. cable		
watt	LED 30 × 0,2W	
	Ø 14 mm	



Accessori inclusi / Included accessories



Ghiera bianca intercambiabile / White changeable ring



Ghiera silver intercambiabile / Silver changeable ring



3 Scatole connessione per 10 teste 12V DC 1A incl. cavo 1m. / 3 Boxes connection for 10 pcs 12V DC 1A with 1m. cable




1 Connettore con singola entrata 3 uscite per kit cielo stellato 12V DC 1A incl. cavo 1m. / 1 Connector one input three output for starlight 12V DC 1A with 1m. cable



1 Driver 12V DC 100mA 6W incl. Cavo 1m. / 1 Driver 12V DC 100mA 6W incl. 1m. cable

Fotometria del prodotto / Photometric curve



LED-STARLIGHT 0,2W

ASSO KIT 3

Kit 3 faretti da incasso con struttura in alluminio disponibile nella versione silver quadrata o rotonda.
Kit 3 recessed spotlights with aluminum structure available in silver square or round.

Materiale
alluminio

Colore
argento

Temperatura colore
4000K

Driver
230V incluso

Material
aluminum

Colour
silver

Colour temperature
4000K

Driver
230V included



indoor use · accommodation areas use · office use · commercial areas use

CRI >80

CE · EMC

Kit 3 pz / Kit 3 pcs



colour temp. | colour

INC-ASSO-Q3
8031414881628
lumen 3×100 lm

watt LED 1,2 W
beam angle 30°
Ø 25 mm





Kit 3 pz / Kit 3 pcs



colour temp. | colour


INC-ASSO-R3
8031414881611
lumen 3×100 lm

watt LED 1,2 W
beam angle 30°
Ø 25 mm






Fotometria del prodotto / Photometric curve




INC-ASSO

Accessori inclusi / Included accessories









ASSO

Faretto da incasso con struttura in alluminio disponibile in bianco nero nella forma quadrata o rotonda.
Recessed spotlight with aluminum structure available in black white in square or round shape.

indoor use | accommodation areas use | office use | commercial areas use

Materiale
alluminio

Colore
bianco
nero

Temperatura colore
3000K / 4000K / BLU

Driver
DC 24V
tensione costante
non incluso

Material
aluminum

Colour
white
black

Colour temperature
3000K / 4000K

Driver
DC 24V
costant voltage
not included



CRI >80

EASY DOMOTICA

1 pz / 1 pcs



	colour temp.	colour
INC-ASSO-Q30C 8031414881642		
lumen	100 lm	
INC-ASSO-Q30M 8031414881659		
lumen	100 lm	
watt	LED 1,2 W	
beam angle	30°	
	Ø 25 mm	



1 pz / 1 pcs



	colour temp.	colour
INC-ASSO-Q30C-NER 8031414881666		
lumen	100 lm	
INC-ASSO-Q30M-NER 8031414881673		
lumen	100 lm	
watt	LED 1,2 W	
beam angle	30°	
	Ø 25 mm	



1 pz / 1 pcs



	colour temp.	colour
INC-ASSO-R30C 8031414877829		
lumen	100 lm	
INC-ASSO-R30M 8031414877928		
lumen	100 lm	
INC-ASSO-R30-BLU 8031414877935		
	blu	
watt	LED 1,2 W	
beam angle	30°	
	Ø 25 mm	






1 pz / 1 pcs



	colour temp.	colour
INC-ASSO-R30C-NER 8031414881635		
lumen	100 lm	
INC-ASSO-R30M-NER 8031414881680		
lumen	100 lm	
watt	LED 1,2 W	
beam angle	30°	
	Ø 25 mm	




Fotometria del prodotto / Photometric curve



INC-ASSO

Accessori inclusi / Included accessories





Connessione in parallelo / Parallel connection system

Driver p. 843-852
Controller pag. 854-857

DOT

Faretto da incasso con struttura in alluminio disponibile in bianco nero.
Recessed spotlight with aluminum structure available in black or white.



Materiale
alluminio + PC

Colore
bianco satinato
nero satinato

Temperatura colore selezionabile
3000K / 4000K / 6500K

Driver
incluso

Material
aluminum + PC

Colour
satin white
satin black

Selectable color temperature
3000K / 4000K / 6500K

Driver
included




	colour temp.	colour
INC-DOT-R5DA-BCO		
8031414923793		
lumen	600 lm	
INC-DOT-R5DA-NER		
8031414923809		
lumen	600 lm	


watt	5W
beam angle	24°
	Ø 37 mm

	colour temp.	colour
INC-DOT-R5-BCO		
8031414893584		
lumen	480 lm	
INC-DOT-R5-NER		
8031414893614		
lumen	480 lm	

watt	5W
beam angle	24°
	Ø 37 mm



Fotometria del prodotto / Photometric curve



INC-DOT-R5

HYDE

Faretto da incasso con struttura in alluminio disponibile in bianco nero.
Recessed spotlight with aluminum structure available in black or white.

indoor use · accommodation areas use · office use · commercial areas use

Materiale
alluminio + PC

Colore
bianco satinato
nero satinato

Temperatura colore selezionabile
2700K / 3000K / 4000K / 6500K

Driver
incluso

Material
aluminum + PC

Colour
satin white
satin black

Selectable color temperature
2700K / 3000K / 4000K / 6500K


Driver
included





INC-HYDE-BCO
8031414893560


	colour temp.	colour
lumen	750 lm	
watt	8W	
beam angle	60°	
	Ø 70 mm	






INC-HYDE-NER
8031414893577

	colour temp.	colour
lumen	750 lm	
watt	8W	
beam angle	60°	
	Ø 70 mm	



Fotometria del prodotto / Photometric curve



INC-HYDE

SINKRO

Faretto da incasso lineare antiriflesso con struttura in alluminio pressofuso, finitura con bordo bianco e interno nero lucido.
Anti-glare linear recessed spotlight with die-cast aluminum structure, finish with white border and glossy black interior.

indoor use · accommodation areas use · office use · commercial areas use

Materiale
alluminio pressofuso

Colore
bordo bianco e interno nero lucido

Temperatura colore
4000K


Driver
incluso

Material
die cast aluminum

Colour
white and glossy black inside

Colour temperature
4000K

Driver
included

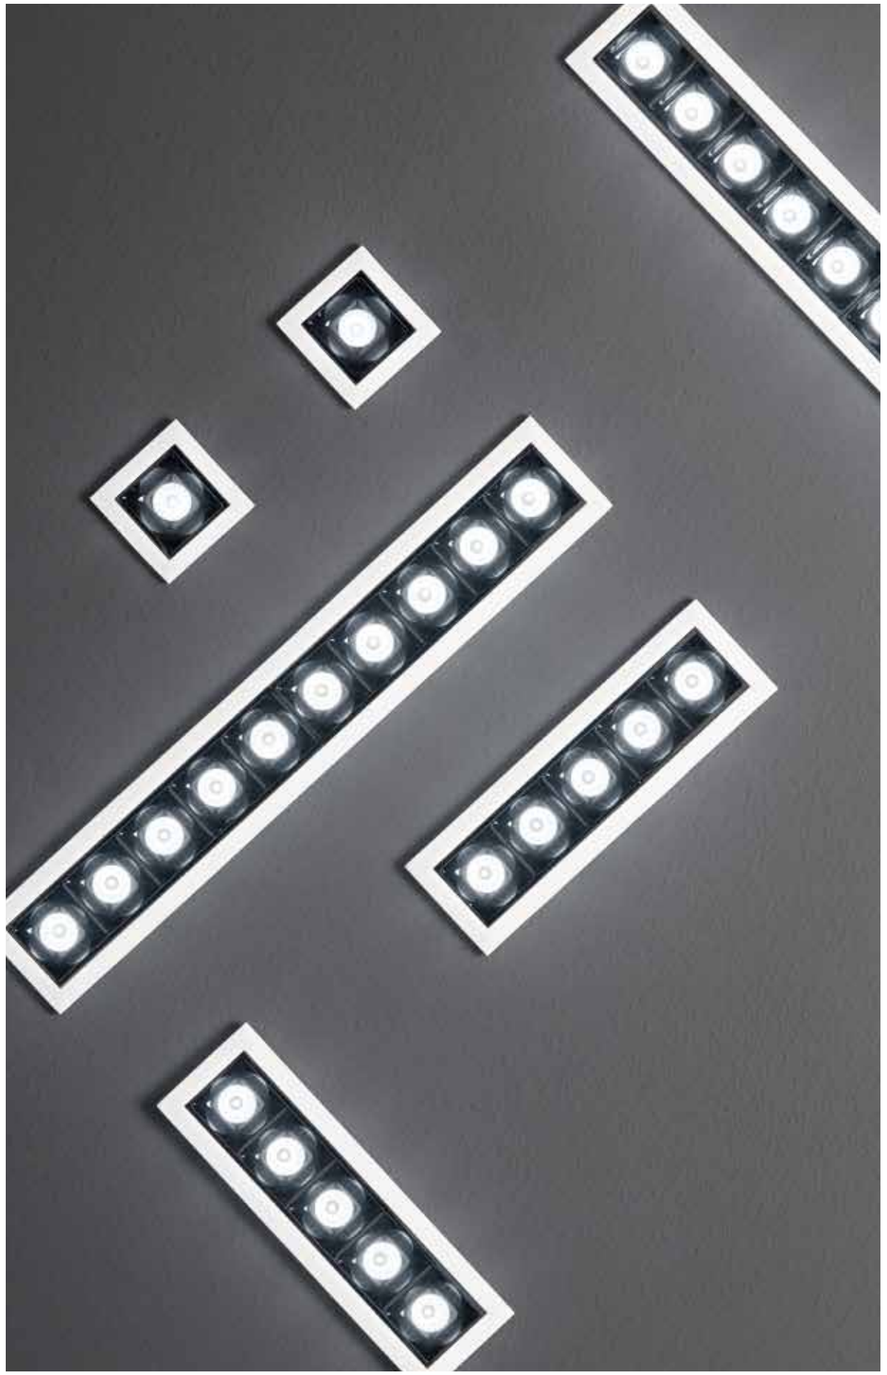


CRI 90 · LED COB



colour temp. | colour

INC-SINKRO-2M
8031440360876

lumen	230 lm
watt	2W
beam angle	45°
	34 × 34 mm






colour temp. | colour

INC-SINKRO-10M
8031440360890

lumen	1130 lm
watt	5 × 2W
beam angle	45°
	136 × 34 mm







colour temp. | colour

INC-SINKRO-20M
8031440360906


lumen	2260 lm
watt	10 × 2W
beam angle	45°
	269 × 34 mm




Fotometria del prodotto / Photometric curve



INC-SINKRO-2M



INC-SINKRO-10M



INC-SINKRO-20M

ELITE

Faretto da incasso antiriflesso con struttura in alluminio e finitura in bianco goffrato. Luce spot orientabile.
Anti-glare recessed spotlight with aluminum frame and embossed white finish. Adjustable spot light.

indoor use | accommodation areas use | office use | commercial areas use

Materiale
alluminio

Colore
bianco goffrato

Temperatura colore
3000K / 4000K

Driver
incluso

Material
aluminum

Colour
Embossed white

Colour temperature
3000K / 4000K

Driver
included






CRI >80 | LED COB



	colour temp.	colour
INC-ELITE-1X10C		
8031440363396		
lumen	1000 lm	
INC-ELITE-1X10M		
8031440363365		
lumen	1000 lm	
watt	10W	
beam angle	40°	
pf	-	
	Ø 95 mm	






	colour temp.	colour
INC-ELITE-1X20C		
8031440363372		
lumen	2000 lm	
INC-ELITE-1X20M		
8031440363341		
lumen	2000 lm	
watt	20W	
beam angle	40°	
pf	-	
	Ø 107 mm	






	colour temp.	colour
INC-ELITE-1X30C		
8031440363358		
lumen	2900 lm	
INC-ELITE-1X30M		
8031440363327		
lumen	2900 lm	
watt	30W	
beam angle	40°	
pf	0.90	
	Ø 150 mm	







	colour temp.	colour
INC-ELITE-1X45C		
8031440363334		
lumen	4500 lm	
INC-ELITE-1X45M		
8031440363303		
lumen	4500 lm	
watt	45W	
beam angle	40°	
pf	0.90	
	Ø 150 mm	




Fotometria del prodotto / Photometric curve




INC-ELITE-1X10



INC-ELITE-1X20



INC-ELITE-1X30



INC-ELITE-1X45

QUARK

Faretto da incasso con struttura in alluminio antiriflesso e finitura in bianco o nero satinato.
Recessed spotlight with anti-reflective aluminum structure and satin black or white finish.

indoor use · accommodation areas use · office use · commercial areas use

Materiale
alluminio + PC

Colore
bianco satinato
nero satinato

Temperatura colore selezionabile
3000K / 4000K / 6500K

Driver
incluso

Material
aluminum + PC

Colour
satin white
satin black

Selectable color temperature
3000K / 4000K / 6500K

Driver
included

CRI 90 · LED COB



DALI

	colour temp.	colour
INC-QUARK-R8DA-BCO 8031414923816		
lumen	1040 lm	
INC-QUARK-R8DA-NER 8031414923847		
lumen	1040 lm	

watt	8W
beam angle	38°
	Ø 50 mm

	colour temp.	colour
INC-QUARK-R8-BCO 8031414893621		
lumen	830 lm	
INC-QUARK-R8-NER 8031414893652		
lumen	830 lm	

watt	8W
beam angle	38°
	Ø 50 mm





DALI

	colour temp.	colour
INC-QUARK-R12DA-BCO 8031414923823		
lumen	1480 lm	
INC-QUARK-R12DA-NER 8031414923854		
lumen	1480 lm	

watt	12W
beam angle	38°
	Ø 75 mm

	colour temp.	colour
INC-QUARK-R12-BCO 8031414893638		
lumen	1300 lm	
INC-QUARK-R12-NER 8031414893669		
lumen	1300 lm	

watt	12W
beam angle	38°
	Ø 75 mm






DALI

	colour temp.	colour
INC-QUARK-R18DA-BCO 8031414923830		
lumen	2350 lm	
INC-QUARK-R18DA-NER 8031414923861		
lumen	2350 lm	


watt	18W
beam angle	38°
	Ø 80 mm

	colour temp.	colour
INC-QUARK-R18-BCO 8031414893645		
lumen	2000 lm	
INC-QUARK-R18-NER 8031414893676		
lumen	2000 lm	


watt	18W
beam angle	38°
	Ø 80 mm




Fotometria del prodotto / Photometric curve



INC-QUARK-R8




INC-QUARK-R12



INC-QUARK-R18

XANTO

Faretto da incasso con struttura in alluminio pressofuso antiriflesso con finitura in bianco satinato. Disponibile dalla forma quadrata o rotonda in diverse misure.
Recessed spotlight with anti-glare die-cast aluminum structure with satin white finish. Available in square or round shape different sizes.



Materiale
alluminio pressofuso

Colore
bianco satinato

Temperatura colore
3000K / 4000K / 5000K

Driver
incluso

Material
die cast aluminum

Colour
satin white

Colour temperature
3000K / 4000K / 5000K

Driver
included






XANTO

CRI >80 · LED SMD




	colour temp.	colour
INC-XANTO-C-R120		
8031414861101		
lumen	1120 lm	
INC-XANTO-M-R120		
8031414861224		
lumen	1120 lm	
INC-XANTO-F-R120		
8031414861163		
lumen	1120 lm	
watt	12W	
beam angle	98°	
pf	-	
	Ø 110 mm	






	colour temp.	colour
INC-XANTO-C-R154		
8031414861118		
lumen	1700 lm	
INC-XANTO-M-R154		
8031414861231		
lumen	1700 lm	
INC-XANTO-F-R154		
8031414861170		
lumen	1700 lm	
watt	18W	
beam angle	98°	
pf	-	
	Ø 145 mm	








	colour temp.	colour
INC-XANTO-C-R220		
8031414861125		
lumen	3000 lm	
INC-XANTO-M-R220		
8031414861248		
lumen	3000 lm	
INC-XANTO-F-R220		
8031414861187		
lumen	3000 lm	
watt	30W	
beam angle	98°	
pf	0.90	
	Ø 200 mm	




Fotometria del prodotto / Photometric curve



INC-XANTO-F-R120


INC-XANTO-F-R154


INC-XANTO-F-R220

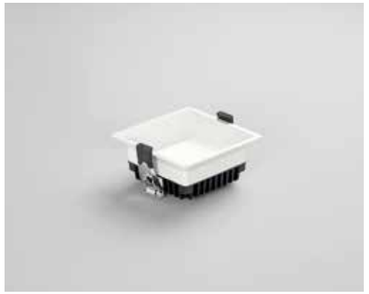


	colour temp.	colour
INC-XANTO-C-Q110		
8031414861071		
lumen	1120 lm	
INC-XANTO-M-Q110		
8031414861194		
lumen	1120 lm	
INC-XANTO-F-Q110		
8031414861132		
lumen	1120 lm	
watt	12W	
beam angle	98°	
pf	-	
	100 × 100 mm	






	colour temp.	colour
INC-XANTO-C-Q145		
8031414861088		
lumen	1700 lm	
INC-XANTO-M-Q145		
8031414861200		
lumen	1700 lm	
INC-XANTO-F-Q145		
8031414861149		
lumen	1700 lm	
watt	18W	
beam angle	98°	
pf	-	
	136 × 136 mm	








	colour temp.	colour
INC-XANTO-C-Q220		
8031414861095		
lumen	3000 lm	
INC-XANTO-M-Q220		
8031414861217		
lumen	3000 lm	
INC-XANTO-F-Q220		
8031414861156		
lumen	3000 lm	
watt	30W	
beam angle	98°	
pf	0.90	
	200 × 200 mm	



Fotometria del prodotto / Photometric curve


INC-XANTO-F-Q120


INC-XANTO-F-Q145


INC-XANTO-F-Q220

MACK

Faretto da incasso in policarbonato anti abbagliamento con diffusore bianco e riflettore cromato.
Recessed spotlight in anti-glare polycarbonate with white diffuser and chromed reflector.



Materiale
PC

Colore
bianco con riflettore cromato

Temperatura colore
3000K / 4000K

Driver
integrato

Material
PC

Colour
white with chrome reflector

Colour temperature
3000K / 4000K


Driver
built-in

UGR <19 · CRI >80 · LED SMD

technical information **MACK**




	colour temp.	colour
INC-MACK-15C 8031414873913		
lumen	1650 lm	
INC-MACK-15 8031414867974		
lumen	1650 lm	
watt	15W	
beam angle	75°	
	Ø 125 mm	






	colour temp.	colour
INC-MACK-20C 8031414873906		
lumen	2500 lm	
INC-MACK-20 8031414867981		
lumen	2500 lm	
watt	20W	
beam angle	75°	
	Ø 160 mm	







	colour temp.	colour
INC-MACK-25C 8031414873890		
lumen	3050 lm	
INC-MACK-25 8031414867998		
lumen	3050 lm	
watt	25W	
beam angle	75°	
	Ø 200 mm	




Fotometria del prodotto / Photometric curve



INC-MACK 15W



INC-MACK 20W



INC-MACK 25W

TRON

Faretto da incasso con struttura in alluminio e diffusore in acrilico bianco opaco con interruttore per regolazione temperatura colore.
Recessed spotlight with aluminum structure and matt white acrylic diffuser with switch for color temperature regulation.

indoor use · accommodation areas use · office use · commercial areas use

Materiale
struttura in alluminio, diffusore in acrilico

Colore
bianco opaco

Temperatura colore selezionabile
3000K / 4000K / 6000K

Driver
incluso

Material
aluminum structure, acrylic diffuser

Colour
matt white

Selectable color temperature
3000K / 4000K / 6000K

Driver
included


IP44 · UGR <19 · CRI >85 · LED SMD

technical information **TRON**



INC-TRON-7
8031414876198


	colour temp.	colour
lumen	720 lm	
watt	7W	
beam angle	120°	
pf	-	
	Ø 75 mm	





INC-TRON-20
8031414876204


	colour temp.	colour
lumen	2480 lm	
watt	20W	
beam angle	120°	
pf	0.90	
	Ø 175 mm	






INC-TRON-30
8031414876211


	colour temp.	colour
lumen	3300 lm	
watt	30W	
beam angle	120°	
pf	0.90	
	Ø 210 mm	




Fotometria del prodotto / Photometric curve



INC-TRON-7



INC-TRON-20



INC-TRON-30

SLIM CCT

Faretto da incasso con struttura rotonda in alluminio pressofuso ultrasottile con interruttore per regolazione temperatura colore.
Recessed spotlight with round structure in ultra-thin die-cast aluminum with switch for color temperature regulation.

indoor use · accommodation areas use · office use · commercial areas use

Materiale
alluminio pressofuso

Colore
bianco

Temperatura colore selezionabile
3000K / 4000K / 6500K

Driver
incluso

Material
die cast aluminum

Colour
white

Selectable color temperature
3000K / 4000K / 6500K

Driver
included


CRI >80 · LED SMD


technical information **SLIM CCT**



INC-SLIM-8CCT
8031414892310
lumen 780 lm
watt 8W
beam angle 120°
Ø 110 mm


colour temp. · colour



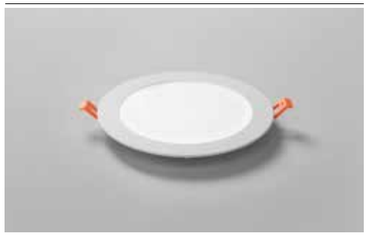

INC-SLIM-12CCT
8031414892280
lumen 1260 lm
watt 12W
beam angle 120°
Ø 160 mm


colour temp. · colour





INC-SLIM-18CCT
8031414892297
lumen 1980 lm
watt 18W
beam angle 120°
Ø 205 mm


colour temp. · colour







INC-SLIM-24CCT
8031414892303
lumen 2700 lm
watt 24W
beam angle 120°
Ø 220 mm


colour temp. · colour




Fotometria del prodotto / Photometric curve


INC-SLIM-8CCT


INC-SLIM-12CCT


INC-SLIM-18CCT


INC-SLIM-24CCT

FLAP CCT

Faretto da incasso con struttura quadrata in alluminio pressofuso ultrasottile con interruttore per regolazione temperatura colore.
Recessed spotlight with square structure in ultra-thin die-cast aluminum with switch for color temperature regulation.

Materiale
alluminio pressofuso

Colore
bianco

Temperatura colore selezionabile
3000K / 4000K / 6500K


Driver
incluso

Material
die cast aluminum


Colour
white

Selectable color temperature
3000K / 4000K / 6500K

Driver
included

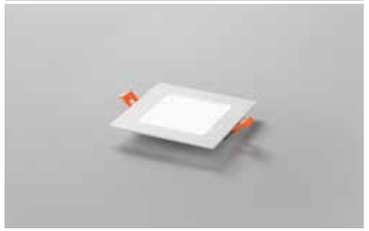


INC-FLAP-8CCT
8031414892273
lumen 780 lm
watt 8W
beam angle 120°
110 × 110 mm






INC-FLAP-12CCT
8031414892242
lumen 1260 lm
watt 12W
beam angle 120°
160 × 160 mm






INC-FLAP-18CCT
8031414892259
lumen 1980 lm
watt 18W
beam angle 120°
205 × 205 mm








INC-FLAP-24CCT
8031414892266
lumen 2700 lm
watt 24W
beam angle 120°
220 × 220 mm




Fotometria del prodotto / Photometric curve


INC-FLAP-8CCT


INC-FLAP-12CCT


INC-FLAP-18CCT


INC-FLAP-24CCT

TOTAL

Incasso in alluminio con diffusore in policarbonato effetto plafoniera con bordi illumunati.
Built-in aluminum with polycarbonate diffuser with illuminated edges.

Materiale
alluminio + PC

Colore
bianco

Temperatura colore selezionabile
3000K / 4000K / 6500K

Driver
incluso

Material
aluminum + PC

Colour
white


Selectable color temperature
3000K / 4000K / 6500K

Driver
included



INC-TOTAL-R15
8031414893744


	colour temp.	colour
lumen	1600 lm	
watt	15W	
beam angle	120°	
	Ø 70 - 115 mm	





INC-TOTAL-R24
8031414893751


	colour temp.	colour
lumen	2680 lm	
watt	24W	
beam angle	120°	
	Ø 110 - 160 mm	






INC-TOTAL-R30
8031414893768


	colour temp.	colour
lumen	3300 lm	
watt	30W	
beam angle	120°	
	Ø 130 - 200 mm	




Fotometria del prodotto / Photometric curve



INC-TOTAL-R15



INC-TOTAL-R24



INC-TOTAL-R30

PLUS

Faretto da incasso con struttura in alluminio e diffusore in acrilico bianco opaco.
Recessed spotlight with aluminum frame and matt white acrylic diffuser.

Materiale
struttura in alluminio diffusore in acrilico

Colore
bianco opaco

Temperatura colore selezionabile
3000K / 4000K / 6000K

Driver
incluso

Material
aluminum structure, acrylic diffuser

Colour
satin white

Selectable color temperature
3000K / 4000K / 6000K

Driver
included



indoor use | accommodation areas use | office use | commercial areas use

IP44 | CRI >85 | LED SMD

CE EMC



INC-PLUS-R8M
8031414876105

	colour temp.	colour
lumen	780 lm	
watt	8W	
beam angle	120°	
pf	-	
	Ø 75 mm	





INC-PLUS-R20M
8031414876136

	colour temp.	colour
lumen	2200 lm	
watt	20W	
beam angle	120°	
pf	-	
	Ø 155 mm	






INC-PLUS-R30M
8031414876167


	colour temp.	colour
lumen	3500 lm	
watt	30W	
beam angle	120°	
pf	0.90	
	Ø 205 mm	




Fotometria del prodotto / Photometric curve



INC-PLUS-R8M



INC-PLUS-R20M



INC-PLUS-R30M

SNIPER

Faretto da incasso con struttura in fibre di plastica e punto luce orientabile.
Recessed spotlight with plastic fibre structure and adjustable light point.

indoor use · accommodation areas use · office use · commercial areas use

Materiale
PC

Colore
bianco

Temperatura colore selezionabile
3000K / 4000K / 6500K

Driver
integrato

Material
PC

Colour
white

Selectable color temperature
3000K / 4000K / 6500K

Driver
built-in




CRI >80 · LED SMD



INC-SNIPER-QR90
8031414888719


colour temp.	colour
lumen 660 lm	
watt 7W	
beam angle 38°	
Ø 70 mm	



Accessori inclusi / Included accessories



due ghiere intercambiabili 1 rotonda 1 quadrata / interchangeable ring




INC-SNIPER-QR90



INC-SNIPER-QR120
8031414888726


colour temp.	colour
lumen 1165 lm	
watt 12W	
beam angle 38°	
Ø 90 mm	



Accessori inclusi / Included accessories



due ghiere intercambiabili 1 rotonda 1 quadrata / interchangeable ring



INC-SNIPER-QR120

GLOW

Faretto da incasso BBC in PC.
BBC recessed spotlight in PC.

indoor use · accommodation areas use · office use · commercial areas use

Materiale
PC

Colore
bianco

Temperatura colore selezionabile
2700K / 3000K / 4000K

Driver
integrato

Material
PC

Colour
white

Selectable color temperature
2700K / 3000K / 4000K

Driver
built-in





TRIAC 0-100% · IP65 · CRI >80 · LED SMD



INC-GLOW-R90
8031414925933

colour temp.	colour
lumen 600 lm	
watt 6W	
beam angle 68°	
Ø 68 mm	





INC-GLOW-R90

POLARIS

Faretto da incasso con struttura in alluminio e punto luce orientabile.
Recessed spotlight with aluminum structure and adjustable light point.

indoor use · accommodation areas use · office use · commercial areas use

Materiale
alluminio

Colore
bianco goffrato
silver goffrato

Temperatura colore
4000K

Driver
incluso

Durata e on/off
25.000 h
>10.000 on/off

Material
aluminum

Colour
embossed white
embossed silver


Colour temperature
4000K

Driver
included

Life time and on/off
25.000 h
>10.000 on/off




CRI 90 · LED COB · 25°

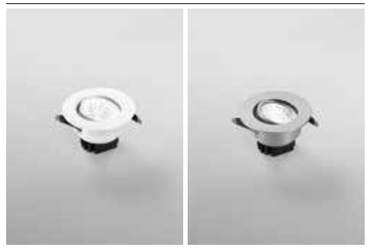


INC-POLARIS-R3 BCO
8031429681169
lumen 300 lm

INC-POLARIS-R3
8031432041196
lumen 300 lm


colour temp. · colour





INC-POLARIS R3


watt 3W
beam angle 24°
Ø 55 mm

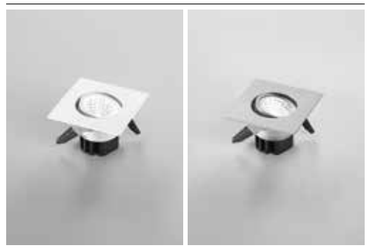


INC-POLARIS-Q3 BCO
8031429761168
lumen 300 lm

INC-POLARIS-Q3
8031432051195
lumen 300 lm

colour temp. · colour





INC-POLARIS Q3

watt 3W
beam angle 24°
Ø 55 mm

ORIONE

Faretto da incasso in alluminio nei colori bianco o silver goffrato.
Recessed aluminum spotlight in white or embossed silver.

indoor use · accommodation areas use · office use · commercial areas use

Materiale
alluminio

Colore
bianco goffrato
silver goffrato

Temperatura colore
4000K

Driver
incluso

Material
aluminum


Colour
embossed white
embossed silver

Colour temperature
4000K

Driver
included




CRI >80 · LED COB · 25°

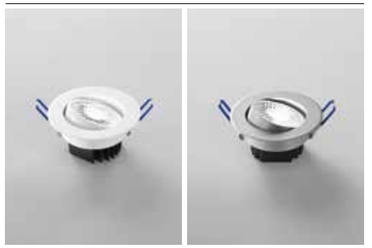


INC-ORIONE-R6 BCO
8031429771167
lumen 650 lm

INC-ORIONE-R6
8031432021198
lumen 650 lm

colour temp. · colour





INC-ORIONE R6


watt 7W
beam angle 87°
Ø 75 mm




INC-ORIONE-Q6 BCO
8031434361216
lumen 650 lm

INC-ORIONE-Q6
8031432031197
lumen 650 lm

colour temp. · colour





INC-ORIONE Q6

watt 7W
beam angle 87°
Ø 75 mm

FUSION

Faretto da incasso in alluminio con finitura in nikel, bianco satinato o oro.
Recessed aluminum spotlight with nikel, satin white or gold finish.

indoor use · accommodation areas use · office use · commercial areas use

Materiale
alluminio

Colore
bianco satinato
nikel
oro

Temperatura colore
4000K

Driver
integrato

Material
aluminum

Colour
white
nikel
gold

Colour temperature
4000K

Driver
built-in




CRI >80 · LED SMD

1 pz / 1 pcs




	colour temp.	colour
INC-FUSION-5W BCO 8031440361736		
lumen	400 lm	
INC-FUSION-5W NIK 8031440361705		
lumen	400 lm	
INC-FUSION-5W ORO 8031440361712		
lumen	400 lm	
watt	5W	
beam angle	120°	
	Ø 60 mm	




Kit 3 pz / Kit 3 pcs



	colour temp.	colour
INC-FUSION-3X5W BCO 8031440353335		
lumen	3 × 400 lm	
INC-FUSION-3X5W NIK 8031440353342		
lumen	3 × 400 lm	
INC-FUSION-3X5W ORO 8031440353359		
lumen	3 × 400 lm	
watt	3 × 5W	
beam angle	120°	
	Ø 60 mm	



Fotometria del prodotto / Photometric curve



INC-FUSION 5W

Le curve fotometriche rappresentano il singolo modulo LED per ogni elemento / Above photometric curve represent the single module of each element

BLITZ

Lampada sottopensile kit 3pz con struttura in alluminio in policarbonato bianco opaco.
Cabinet ceiling lamp kit 3pz with aluminum structure in opal white polycarbonate.

indoor use · accommodation areas use

Materiale
struttura in alluminio diffusore in pc

Colore
bianco opaco

Temperatura colore
4000K

Driver
incluso

Material
aluminum structure with PC diffuser

Colour
satin white and silver reflector

Colour temperature
4000K

Driver
included



LED-BLITZ-R3*

Le curve fotometriche rappresentano il singolo modulo LED per ogni elemento /
Above photometric curve represent the single module of each element

Accessori inclusi / Included accessories



x3
Driver + morsettiera con cavo 1,5m /
Driver + connector with 1,5m cable included



CRI >80 · LED SMD

Kit 3 pz / Kit 3 pcs



	colour temp.	colour
LED-BLITZ-R3		
8031440353274		
lumen	350 lm	
watt	3 × 5W	
beam angle	105°	



NEMO

Lampada sottopensile da incasso con struttura in termoplastica con finitura in bianco o silver.
Recessed cabinet lamp with thermoplastic structure with white or silver finish.

indoor use · outdoor use · accommodation areas use · bathroom use

Materiale
struttura in termoplastica

Colore
bianco
silver

Temperatura colore
4000K


Driver
integrato

Material
thermoplastic structure


Colour
white
silver

Colour temperature
4000K

Driver
built-in



INC-NEMO 3,5W

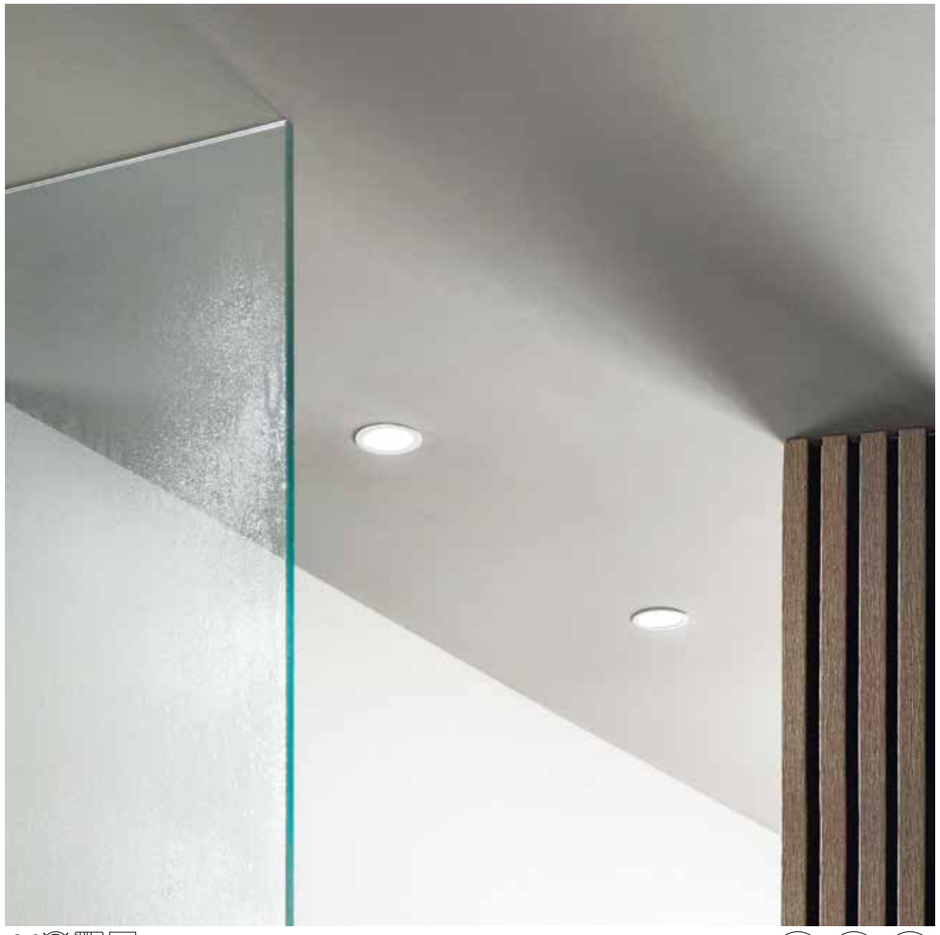


IP44 · CRI >80 · LED SMD





	colour temp.	colour
INC-NEMO-65 BCO		
8031414877065		
lumen	277 lm	
INC-NEMO-65 SIL		
8031414877072		
lumen	277 lm	
watt	3,5W	
beam angle	120°	
	Ø 55 mm	



RAINBOW

Faretto da incasso in alluminio in bianco o cromato.
Recessed aluminum spotlight in white or chromed.

indoor use · outdoor use · accommodation areas use · office use · commercial areas use · bathroom use

Materiale
alluminio

Colore
bianco
cromo

Temperatura colore
RGB + 4000K

Driver
DC 12V
tensione costante
non incluso

Material
aluminum

Colour
white
chrome

Colour temperature
RGB + 4000K

Driver
DC 12V
costant voltage
not included


IP65 · CRI >80 · LED SMD · RGB

EASY DOMOTICA






	colour temp.	colour
INC-RAINBOW-M BCO		
8031414862627		
lumen	110 lm	
INC-RAINBOW-M		
8031414862603		
lumen	110 lm	
watt	5W	
beam angle	120°	
	Ø 90 mm	



Sistema di connessione / Connection system

Driver pag. 843-852
Controller pag. 854-857





INC-RAINBOW 4000K

ZENIT

Faretto da incasso orientabile con struttura in policarbonato e finitura in nikel, bianco satinato, cromo o oro.
Adjustable recessed spotlight with polycarbonate structure and nikel, satin white, chrome or gold finish.

indoor use · accommodation areas use · office use · commercial areas use · bathroom use

Materiale
policarbonato

Colore
bianco satinato
nikel
cromo
oro

Temperatura colore
3000K

Driver
integrato

Material
polycarbonate

Colour
satin white
nikel
chrome
gold finish

Colour temperature
3000K

Driver
built-in



IP44 · CRI >80 · LED COB · 25°











	colour temp.	colour
INC-ZENIT-5W BCO		
8031439881276		
lumen	390 lm	
INC-ZENIT-5W NIK		
8031439901271		
lumen	390 lm	
INC-ZENIT-5W CR		
8031439891275		
lumen	390 lm	
INC-ZENIT-5W ORO		
8031439911270		
lumen	390 lm	





INC-ZENIT 5W

watt	5W
beam angle	120°
	Ø 65 mm

QUANTUM

Faretto da incasso con struttura in alluminio nelle versioni bianco e nero satinato.
Recessed spotlight with aluminum structure in white and satin black versions.

indoor use · accommodation areas use · office use · commercial areas use

Materiale
alluminio + PC

Colore
bianco satinato
nero satinato

Temperatura colore selezionabile
3000K / 4000K / 6500K

Driver
integrato

Material
aluminum + PC

Colour
satin white
satin black

Selectable color temperature
3000K / 4000K / 6500K

Driver
built-in





DALI

	colour temp.	colour
INC-QUANTUM-R18DA-BCO 8031414923878		
lumen	2350 lm	
INC-QUANTUM-R18-NER 8031414923908		
lumen	2350 lm	
watt	18W	
beam angle	60°	
pf	-	
	Ø 120 mm	

	colour temp.	colour
INC-QUANTUM-R18-BCO 8031414893683		
lumen	2000 lm	
INC-QUANTUM-R18-NER 8031414893713		
lumen	2000 lm	
watt	18W	
beam angle	60°	
pf	-	
	Ø 120 mm	






DALI

	colour temp.	colour
INC-QUANTUM-R30DA-BCO 8031414923885		
lumen	4200 lm	
INC-QUANTUM-R30DA-NER 8031414923915		
lumen	4200 lm	
watt	30W	
beam angle	60°	
pf	0.90	
	Ø 140 mm	

	colour temp.	colour
INC-QUANTUM-R30-BCO 8031414893690		
lumen	3300 lm	
INC-QUANTUM-R30-NER 8031414893720		
lumen	3300 lm	
watt	30W	
beam angle	60°	
pf	0.90	
	Ø 140 mm	







DALI

	colour temp.	colour
INC-QUANTUM-R40DA-BCO 8031414923892		
lumen	5500 lm	
INC-QUANTUM-R40DA-NER 8031414923922		
lumen	5500 lm	
watt	40W	
beam angle	60°	
pf	0.90	
	Ø 165 mm	


	colour temp.	colour
INC-QUANTUM-R40-BCO 8031414893706		
lumen	4300 lm	
INC-QUANTUM-R40-NER 8031414893737		
lumen	4300 lm	
watt	40W	
beam angle	60°	
pf	0.90	
	Ø 165 mm	




Fotometria del prodotto / Photometric curve



INC-QUANTUM-R18



INC-QUANTUM-R30



INC-QUANTUM-R40

HORUS

Faretto da incasso dimmerabile con struttura in policarbonato bianco opaco.
Dimmable recessed spotlight with matt white polycarbonate structure.

indoor use · accommodation areas use · office use · commercial areas use

Materiale
policarbonato

Colore
bianco opaco

Temperatura colore
4000K

Dimmer
dimmer 1-10

Driver
integrato

Material
polycarbonate

Colour
matt white

Colour temperature
4000K

Dimmer
dimmable 1-10

Driver
built-in




+ 10-100% − · IP40 · CRI >80 · LED SMD · CE · EMC



INC-HORUS-10W
8031440363501


	colour temp.	colour
lumen	1050 lm	
watt	10W	
beam angle	100°	
pf	-	
	Ø 90 mm	





INC-HORUS-15W
8031440363518


	colour temp.	colour
lumen	1900 lm	
watt	15W	
beam angle	100°	
pf	-	
	Ø 120 mm	





INC-HORUS-20W
8031440363464


	colour temp.	colour
lumen	2600 lm	
watt	20W	
beam angle	100°	
pf	-	
	Ø 170 mm	







INC-HORUS-25W
8031440363495


	colour temp.	colour
lumen	3250 lm	
watt	25W	
beam angle	100°	
pf	0.90	
	Ø 200 mm	




Fotometria del prodotto / Photometric curve


INC-HORUS-10W


INC-HORUS-15W


INC-HORUS-20W


INC-HORUS-25W

MATRIX

Faretto da incasso in metallo con lampadina GU10 inclusa disponibile nei colori bianco, nikel, oro e cromo.
Recessed metal spotlight with GU10 bulb included available in white, nikel, gold and chrome.

indoor use | accommodation areas use | office use | commercial areas use



Materiale
metallo

Colore
bianco
nikel
cromo
oro

Temperatura colore
3000K

Material
metal

Colour
white
nikel
chrome
gold


Colour temperature
3000K



Kit 3 pz / Kit 3 pcs



Ø 80 mm



	colour
INC-MATRIX-LEDF3 BCO 8031440359320	
INC-MATRIX-LEDF3 NIK 8031440359337	

3 x GU10 — 5W LED

Ø 60 mm

Accessori inclusi / Included accessories

3 lampadine LED SMD / 3 LED SMD light bulbs

watt	5W
beam angle	100°
cri	80
on/off	>10.000
3000K	
lumen	3 x 413 lm

Staffa con connettore / Bracket with connector

3 pz inclusi / 3 pcs included


GU10 230V~50Hz Portalampada / Lampholder

3 pz inclusi / 3 pcs included

Kit 3 pz / Kit 3 pcs



Ø 100 mm
orientabile / adjustable



15°

	colour
INC-MATRIX-LEDM3 BCO 8031429651162	
INC-MATRIX-LEDM3 NIK 8031431571182	
INC-MATRIX-LEDM3 CR 8031440313032	
INC-MATRIX-LEDM3 ORO 8031440313025	

3 x GU10 — 5W LED

Ø 80 mm

Accessori inclusi / Included accessories

3 lampadine LED SMD / 3 LED SMD light bulbs

watt	5W
beam angle	100°
cri	80
on/off	>10.000
3000K	
lumen	3 x 413 lm

Staffa con connettore / Bracket with connector

3 pz inclusi / 3 pcs included


Portalampada / Lampholder GU10 230V~50Hz

3 pz inclusi / 3 pcs included

1 pz / 1 pcs



Ø 100 mm
orientabile / adjustable



15°

	colour
INC-MATRIX-LEDM1 BCO 8031440313063	
INC-MATRIX-LEDM1 NIK 8031440313049	
INC-MATRIX-LEDM1 CR 8031440313056	
INC-MATRIX-LEDM1 ORO 8031440313070	

1 x GU10 — 5W LED

Ø 80 mm

Accessori inclusi / Included accessories

Lampadina LED SMD / LED SMD light bulb

watt	5W
beam angle	100°
cri	80
on/off	>10.000
3000K	
lumen	413 lm

Staffa con connettore / Bracket with connector

3 pz inclusi / 3 pcs included

Portalampada / Lampholder GU10 230V~50Hz

3 pz inclusi / 3 pcs included

TUBEX

Incasso in gesso componibile da integrare nel cartongesso per dare omogeneità tra parete e corpo illuminante. Punto luce regolabile e orientabile con finitura in bianco o nero goffrato.
Recessed paintable gypsum downlight to be integrated into the plasterboard to give homogeneity between the ceiling and the lighting body. Adjustable light point with embossed black or white finish.

indoor use · accommodation areas use · office use · commercial areas use



Materiale
gesso e alluminio

Colore
bianco goffrato
nero goffrato

Temperatura colore
3000K / 4000K

Driver
incluso

Material
gypsum and aluminum

Colour
embossed white
embossed black

Colour temperature
3000K / 4000K

Driver
included



CRI >80 · LED COB

technical information **TUBEX**


CE · EMC









	colour temp.	colour
INC-TUBEX-2C-BCO 8031414883752 lumen	190 lm	
INC-TUBEX-2M-BCO 8031414883769 lumen	190 lm	
INC-TUBEX-2C-NER 8031414883776 lumen	190 lm	
INC-TUBEX-2M-NER 8031414883783 lumen	190 lm	




INC-TUBEX-BASE
8031414883745

watt	2,5W
beam angle	30°
	165 × 165 mm





Modular system:
INC-TUBEX-BASE
+ INC-TUBEX-2





Staffa regolabile /
Adjustable bracket

STARRY

Incasso in gesso componibile da integrare nel cartongesso per dare omogeneità tra parte e corpo illuminante.
Recessed paintable gypsum downlight to be integrated into the plasterboard to give homogeneity between the ceiling and the lighting body.

indoor use · accommodation areas use · office use · commercial areas use

Materiale
gesso
alluminio

Colore
bianco

Temperatura colore
3000K / 4000K

Driver
incluso

Material
gypsun
aluminum

Colour
white

Colour temperature
3000K / 4000K

Driver
included



CRI >80 · LED COB



LED-STARRY-C
8031414884476
lumen 160 lm


LED-STARRY-M
8031414884483
lumen 160 lm

watt 2,5W
beam angle 45°






INC-STARRY-R1
8031414884452
Ø 75 mm







INC-STARRY-Q1
8031414884469
75 × 75 mm



Modular system:
LED-STARRY +
INC-STARRY-R1




Modular system:
LED-STARRY +
INC-STARRY-Q1



GHOST

Incasso in gesso verniciabile da integrare nel cartongesso per dare omogeneità tra parete e corpo illuminante.
Recessed paintable gypsum downlight to be integrated into the plasterboard to give homogeneity between the ceiling and the lighting body.


indoor use · accommodation areas use · office use · commercial areas use

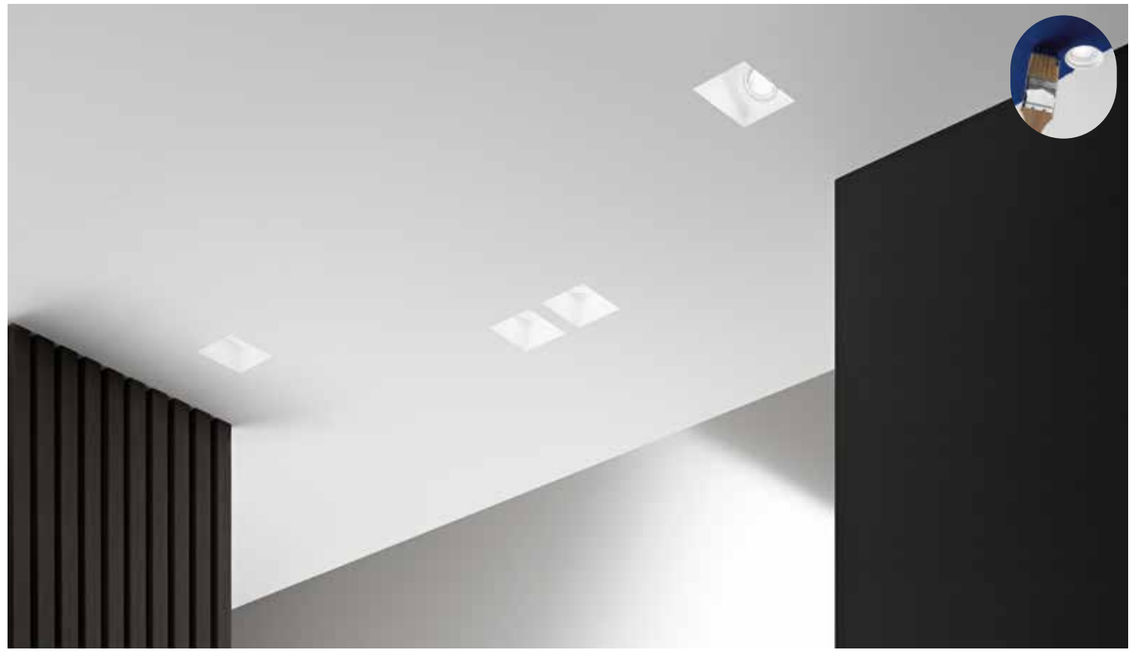

GU10





INC-GHOST-Q1D
8031434241211
1 x GU10 MAX 35W
125 × 125 mm






INC-GHOST-Q1
8031434261219
1 x GU10 MAX 35W
125 × 125 mm





INC-GHOST-Q2
8031434301212
2 x GU10 MAX 35W
219 × 123 × 8-15 mm







Staffa regolabile /
Adjustable bracket



Portalampada incluso /
Lampholder included



Lampadina non inclusa /
Light bulb not included

VULKAN

Incasso in gesso verniciabili con cilindri intercambiabili e finiture bianco, nero e oro satinato.
Gypsum down light paintable with interchangeable cylinders and in white, black and satin gold finishes.

indoor use | accommodation areas use | office use | commercial areas use



GU10






colour


INC-VULKAN-BASE
8031414883707

1 x GU10 MAX 35W


170 × 170 mm



INC-VULKAN-BCO
8031414883714
INC-VULKAN-NER
8031414883721
INC-VULKAN-ORO
8031414883738
1 x GU10 MAX 35W



Modular system:
INC-VULKAN-BASE
+ INC-VULKAN



8/15mm — Staffa regolabile / Adjustable bracket

Portalampada incluso / Lampholder included

Lampadina non inclusa / Light bulb not included

ENTITY

Incasso in gesso verniciabile con ghiere intercambiabili in finiture bianco, oro e cromo.
Gypsum down light paintable with interchangeable cylinders white, black and satin gold finishes.

indoor use | accommodation areas use | office use | commercial areas use



GU10






colour

INC-ENTITY-Q
8031414883790


1 x GU10 MAX 10W

125 × 125 mm



ENTITY-RING-CR
8031414883813
ENTITY-RING-NER
8031414883820
ENTITY-RING-ORO
8031414883806
1 x GU10 MAX 35W

Modular system:
INC-ENTITY-Q
+ ENTITY-RING



8/15mm — Staffa regolabile / Adjustable bracket

Portalampada incluso / Lampholder included

Lampadina non inclusa / Light bulb not included

GOBLET

Incasso con struttura sporgente in gesso verniciabile e portalampade incluso.
Gypsum prominent down light paintable and lamp holder included.

indoor use | accommodation areas use | office use | commercial areas use



GU10




INC-GOBLET-R
8031414882960


1 x GU10 MAX 35W
Ø 75 mm



INC-GOBLET-Q
8031414882977

1 x GU10 MAX 35W
Ø 75 mm





Portalampada incluso / Lampholder included

Lampadina non inclusa / Light bulb not included

SHADOW

Incasso con struttura in gesso verniciabile e portalampade incluso.
Gypsum downlight paintable and lamp holder included.

indoor use | accommodation areas use | office use | commercial areas use



GU10




INC-SHADOW-R
8031414882984


1 x GU10 MAX 35W
Ø 90 mm



INC-SHADOW-Q
8031414882991

1 x GU10 MAX 35W
Ø 100 mm





Portalampada incluso / Lampholder included

Lampadina non inclusa / Light bulb not included

PHANTOM

Incasso con struttura in gesso verniciabile e portalampade incluso.
Gypsum downlight paintable and lamp holder included.

indoor use · accommodation areas use · office use · commercial areas use



GU10




INC-PHANTOM-R1
8031431551184


1 x GU10 MAX 35W
Ø 83 mm



INC-PHANTOM-Q1
8031431561183

1 x GU10 MAX 35W
82 × 82 mm





Portalampada incluso / Lampholder included

Lampadina non inclusa / Light bulb not included

SPETTRO

Incasso con struttura in gesso verniciabile e portalampade incluso.
Gypsum downlight paintable and lamp holder included.

indoor use · accommodation areas use · office use · commercial areas use



GU10




INC-SPETTRO-R1
8031431531186


1 x GU10 MAX 35W
Ø 85 mm



INC-SPETTRO-Q1
8031431541185

1 x GU10 MAX 35W
Ø 95 × 95 mm





Portalampada incluso / Lampholder included

Lampadina non inclusa / Light bulb not included

MINI

Incasso in gesso da integrare nel cartongesso per dare omogeneità tra parete e corpo illuminante.
Recessed gypsum downlight to be integrated into te plasterboard to give homogeneity between the ceiling and the lighting body.

indoor use · accommodation areas use · office use · commercial areas use





GU10 · Ø34 · H49



INC-MINI-R1
8031414873623


1 x MINI GU10 MAX 35W
bulb size Ø 34 mm
Ø 73 mm





INC-MINI-Q1
8031414873616

1 x MINI GU10 MAX 35W
bulb size Ø 34 mm
73 x 73 mm





Portalampada incluso / Lampholder included

Lampadina non inclusa / Light bulb not included


HIVE

Incasso in gesso verniciabile con 4 punti luce da integrare nel cartongesso per dare omogeneità tra soffitto e corpo illuminante.
Recessed gypsum paintable downlight with 4 light to be integrated into the plasterboard to give homogeneity between ceiling and lighting body.

indoor use · accommodation areas use · office use · commercial areas use





GU10 · Ø34 · H49



INC-HIVE-RT4
8031414884278

4 x MINI GU10 MAX 35W
bulb size Ø 34 mm
275 x 125 mm





8/15mm — Staffa regolabile / Adjustable bracket

Portalampada incluso / Lampholder included

Lampadina non inclusa / Light bulb not included

SPIRIT

Incasso in gesso verniciabile da integrare nel cartongesso per dare omogeneità tra parete e corpo illuminante.
Recessed gypsum downlight to be integrated into te plasterboard to give homogeneity between the ceiling and the lighting body.

indoor use · accommodation areas use · office use · commercial areas use




GU10




INC-SPIRIT-R1
8031440362177


1 x GU10 MAX 35W
Ø 103 mm



INC-SPIRIT-Q1
8031440362160

1 x GU10 MAX 35W
103 × 103 mm








Portalampada incluso / Lampholder included

Lampadina non inclusa / Light bulb not included

SNOW

Incasso in gesso verniciabile con diffusore in vetro satinato da integrare nel cartongesso per dare omogeneità tra soffitto e corpo illuminato.
Recessed paintable gypsum downlight with satin glass diffuser to be integrated into the plasterboard to give homogeneity between the ceiling and the lighting body.

indoor use · accommodation areas use · office use · commercial areas use

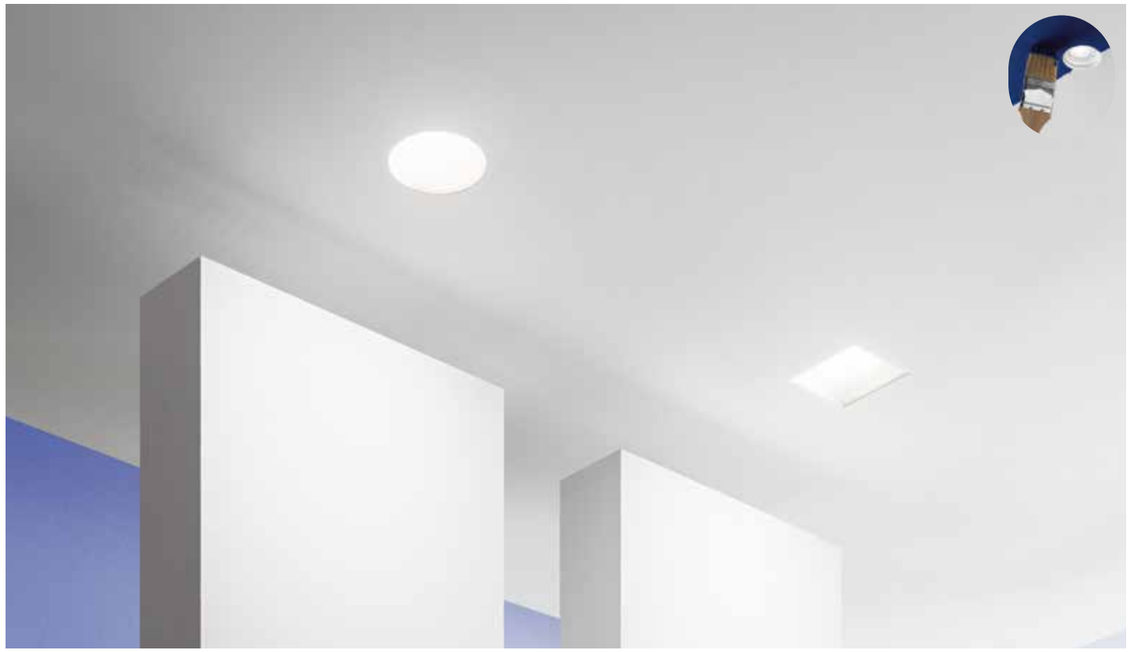

GU10




INC-SNOW-R
8031440351607


1 x GU10 MAX 10W
Ø 125 mm



INC-SNOW-Q
8031440351577

1 x GU10 MAX 10W
125 × 125 mm









Staffa regolabile / Adjustable bracket

Portalampada incluso / Lampholder included

Lampadina non inclusa / Light bulb not included

MORGANA

Incasso orientabile in gesso verniciabile da integrare nel cartongesso per dare omogeneità tra soffitto e corpo illuminante.
Adjustable and paintable recessed gypsum downlight to be integrated into the plasterboard to give homogeneity between ceiling and the lighting body.

indoor use · accommodation areas use · office use · commercial areas use




GU10 · 15°



INC-MORGANA-R1
8031434211214


1 x GU10 MAX 35W
Ø 155 mm





INC-MORGANA-Q1
8031434231212


1 x GU10 MAX 35W
160 × 160 mm





INC-MORGANA-Q2
8031434201215

2 x GU10 MAX 35W
260 × 160 mm





8/15mm — Staffa regolabile / Adjustable bracket

Portalampada incluso / Lampholder included

Lampadina non inclusa / Light bulb not included

SENSO

Incasso in gesso verniciabile da integrare nel cartongesso per dare omogeneità tra soffitto e corpo illuminante.
Recessed gypsum paintable downlight to be integrated into the plasterboard to give homogeneity between ceiling and the lighting body.

indoor use · accommodation areas use · office use · commercial areas use




GU10



INC-SENSO-MINI
8031414892723


1 x MINI GU10 MAX 10W
85 × 85 mm






INC-SENSO-1
8031434221213


1 x GU10 MAX 35W
125 × 125 mm





INC-SENSO-2
8031414873593

2 x GU10 MAX 35W
243 × 123 mm





8/15mm — Staffa regolabile / Adjustable bracket

Portalampada incluso / Lampholder included

Lampadina non inclusa / Light bulb not included

BRICK

Incasso in gesso verniciabile da integrare nel cartongesso per dare omogeneità tra soffitto e corpo illuminante con steli dalle forme modulari che sporgono dalla parete.
Recessed gypsum paintable downlight to be integrated into the plasterboard to give homogeneity between ceiling and the lighting body with modular stems protruding from the wall.

indoor use · accommodation areas use · office use · commercial areas use




GU10



INC-BRICK-Q1
8031414873586

1 x GU10 MAX 35W
123 × 123 mm





8/15mm — Staffa regolabile / Adjustable bracket

Portalampada incluso / Lampholder included

Lampadina non inclusa / Light bulb not included

EVA

Struttura ad incasso a scomparsa in gesso verniciabile da integrare nel cartongesso per dare omogeneità tra soffitto e corpo illuminante.
Recessed structure in paintable gypsum to be integrated into the plasterboard to give homogeneity between the ceiling and lighting body.

indoor use · accommodation areas use · office use · commercial areas use




E27



INC-EVA-R1
8031414873609

1 x E27 MAX 35W
Ø 185 mm





Portalampada incluso / Lampholder included

Lampadina non inclusa / Light bulb not included

SKILIFT

Sistema componibile da incasso in gesso verniciabile da integrare nel cartongesso per dare omogeneità tra soffitto e corpo illuminante.
Modular recessed system in paintable gypsum to be integrated into the plasterboard to give homogeneity between the ceiling and the lighting body.

indoor use · accommodation areas use · office use · commercial areas use







GU10 · Ø34 H49

technical information **SKILIFT**

CE




INC-SKILIFT-40CM
8031414884346
405 × 115 mm






INC-SKILIFT-20CM
8031414884322
205 × 115 mm







INC-SKILIFT-L16CM
8031414884360
165 × 165 mm






INC-SKILIFT-CAP
8031414886869
55 × 115 mm





INC-SKILIFT-6
8031414884339


6 x MINI GU10 MAX 35W
bulb size Ø 34 mm
405 × 115 mm





INC-SKILIFT-3
8031414884315


3 x MINI GU10 MAX 35W
bulb size Ø 34 mm
205 × 115 mm






INC-SKILIFT-L3
8031414884353

3 x MINI GU10 MAX 35W
bulb size Ø 34 mm
165 × 165 mm








Portalampada incluso /
Lampholder included



Lampadina non inclusa /
Light bulb not included

ARIEL

Segnapasso in gesso verniciabile da integrare nel cartongesso per dare omogeneità tra parete e corpo illuminante.
Paintable gypsum wall-light to be integrated into the plasterboard to give homogeneity between the wall and lighting body.










technical information **ARIEL**



I-ARIEL-QL1
8031434151213


1 x MINI GU10 MAX 35W
bulb size Ø 34 mm
115 × 250 × 12 mm





I-ARIEL-RM1
8031434121216


1 x MINI GU10 MAX 35W
bulb size Ø 34 mm
125 × 185 × 12 mm






I-ARIEL-RS1
8031434131215

1 x MINI GU10 MAX 35W
bulb size Ø 34 mm
105 × 105 × 12 mm








Staffa regolabile /
Adjustable bracket



Portalampada incluso /
Lampholder included





Lampadina non inclusa /
Light bulb not included



I-ARIEL-QL1-BOX
8031414868360


Cassa di derivazione opzionale
per fissaggio a parete in muratura
materiale alluminio /
Aluminum optional recess box
for brickwork recess installation





I-ARIEL-RM1-BOX
8031414868384


Cassa di derivazione opzionale
per fissaggio a parete in muratura
materiale alluminio /
Aluminum optional recess box
for brickwork recess installation





I-ARIEL-RS1-BOX
8031414868377

Cassa di derivazione opzionale
per fissaggio a parete in muratura
materiale alluminio /
Aluminum optional recess box
for brickwork recess installation



ANIMA

Applique in gesso verniciabile con leggera sporgenza da integrare nel cartongesso per dare omogeneità tra parte e corpo illuminante.
Wall lamp in paintable gypsum with slight protrusion to be integrated into the plasterboard to give homogenity between the part and the illuminating body.










I-ANIMA-AP2
8031414861323

2 x E14 MAX 14W
320 × 260 × 90 mm








I-ANIMA-AP2-BOX
8031414868391

Cassa di derivazione opzionale per fissaggio a parete in muratura materiale alluminio /
Aluminum optional recess box for brickwork recess installation





Staffa regolabile /
Adjustable bracket




Portalampada incluso /
Lampholder included



Lampadina non inclusa /
Light bulb not included

STENOS

Faretto da incasso con struttura in termoplastica orientabile ed antiriflesso.
Recessed spotlight with adjustable and anti-reflective thermoplastic structure.







INC-STENOS-R-OV
8031414875818





INC-STENOS-Q-OV
8031414875856

INC-STENOS-R-QU
8031414875832





INC-STENOS-Q-QU
8031414875870

INC-STENOS-R-RO
8031414875801





INC-STENOS-Q-RO
8031414875849

INC-STENOS-R-ML
8031414875825






INC-STENOS-Q-ML
8031414875863

Ø 75 mm



Ø 75 mm





Lampadina non inclusa / Light bulb not included



Portalampada GU10 o MR16 non inclusi/ GU10 or MR16 lamp holder not included



Lampadina non inclusa / Light bulb not included



Portalampada GU10 o MR16 non inclusi/ GU10 or MR16 lamp holder not included

VIPER



IP65

indoor use · outdoor use · accommodation areas use · office use · commercial areas use · bathroom use

Faretto con struttura in metallo e diffusore in vetro satinato.
Spotlight with metal structure and satin glass diffuser.

Portalampada GU10 o MR16 non inclusi / GU10 or MR16 lamp holder not included

Lampadina non inclusa / Light bulb not included







colour

INC-VIPER-R-BCO
8031414861590

INC-VIPER-R-NIK
8031414861576

Ø 74 mm

Portalampada GU10 o MR16 non inclusi / GU10 or MR16 lamp holder not included

Lampadina non inclusa / Light bulb not included







colour

INC-VIPER-Q-BCO
8031414861866

INC-VIPER-Q-NIK
8031414861873

Ø 74 mm

AYRIS



GU10

Faretto ad incasso antiriflesso in alluminio nero o bianco goffrato.
Recessed spotlight with anti-reflective in black or white embossed aluminum.

Portalampada incluso / Lampholder included

Lampadina non inclusa / Light bulb not included






colour

INC-AYRIS-R BCO
8031414868216

INC-AYRIS-R NER
8031414868193

1 x GU10 MAX 35W

Ø 75 mm



Portalampada incluso / Lampholder included

Lampadina non inclusa / Light bulb not included






colour

INC-AYRIS-Q BCO
8031414868223

INC-AYRIS-Q NER
8031414868186

1 x GU10 MAX 35W

72 × 72 mm




REFLEX



Incasso in metallo
Metal down light

INC-REFLEX-SF1 BCO
8031439321260





INC-REFLEX-SF1 NER
8031414861552



INC-REFLEX-SF1 CR
8031439301262



INC-REFLEX-SF1 ORO
8031439341268



INC-REFLEX-SF1 NIK
8031439311261




INC-REFLEX-SF1 BR
8031439331269



INC-REFLEX-Q-SF1 BCO
8031414861538





INC-REFLEX-Q-SF1 NER
8031414885053



INC-REFLEX-Q-SF1 NIK
8031414861545




Lampadina non inclusa / Light bulb not included



Portalampada GU10 o MR16 non inclusi/ GU10 or MR16 lamp holder not included

Incasso in metallo orientabile
Metal down light adjustable



INC-REFLEX-SM1 BCO
8031439251260





INC-REFLEX-SM1 NER
8031414861569



INC-REFLEX-SM1 CR
8031439281267



INC-REFLEX-SM1 ORO
8031439271268



INC-REFLEX-SM1 NIK
8031439261269



INC-REFLEX-SM1 BR
8031439291266



INC-REFLEX-Q-SM1 BCO
8031440363310





INC-REFLEX-Q-SM1 NER
8031414885060




INC-REFLEX-Q-SM1 NIK
8031440363280




Lampadina non inclusa / Light bulb not included


Portalampada GU10 o MR16 non inclusi/ GU10 or MR16 lamp holder not included

INDOOR

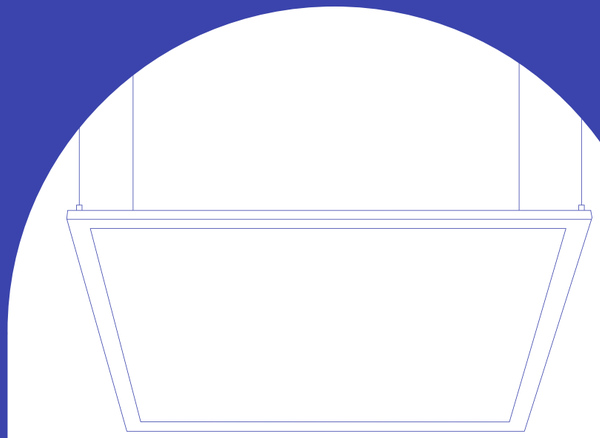

SISTEMI D’ILLUMINAZIONE MULTIFUNZIONE
MULTI-FUNCTION LIGHTING SYSTEM

SHAPE

Barre in PC con connettori per composizioni personalizzate.
PC bars with connectors for customized compositions.

Materiale
PC

Colore
bianco

Temperatura colore
4000K / 6500K

Driver
integrato

Material
PC


Colour
white


Colour temperature
4000K / 6500K

Driver
built-in





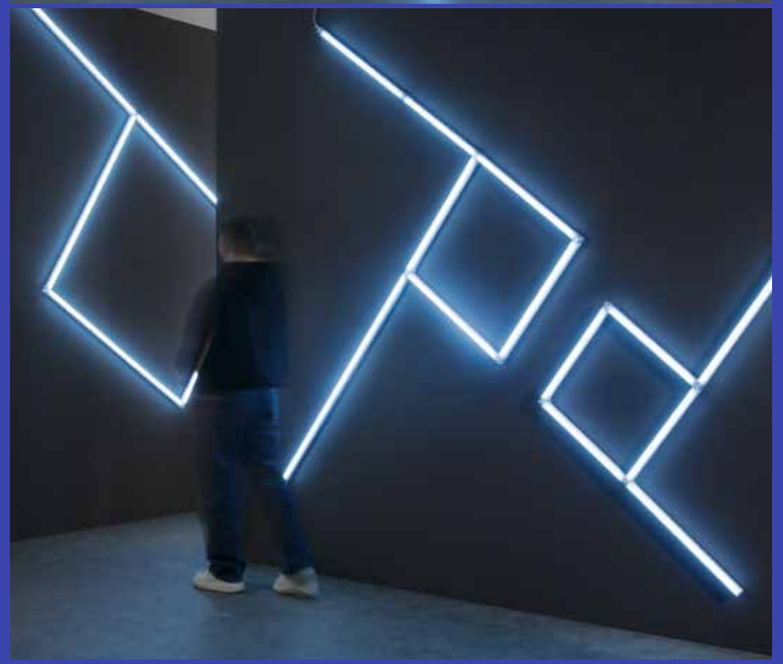

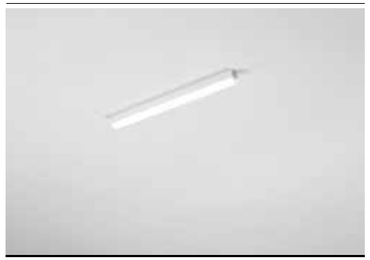


	colour temp.	colour
LEDBAR-SHAPE-44M		
8031414925384		
lumen	700 lm	
LEDBAR-SHAPE-44F		
8031414925391		
lumen	700 lm	
watt	7W	
beam angle	120°	







	colour temp.	colour
LEDBAR-SHAPE-56M		
8031414925407		
lumen	900 lm	
LEDBAR-SHAPE-56F		
8031414925414		
lumen	900 lm	
watt	9W	
beam angle	120°	





	colour temp.	colour
LEDBAR-SHAPE-117M		
8031414925421		
lumen	1800 lm	
LEDBAR-SHAPE-117F		
8031414925438		
lumen	1800 lm	
watt	18W	
beam angle	120°	



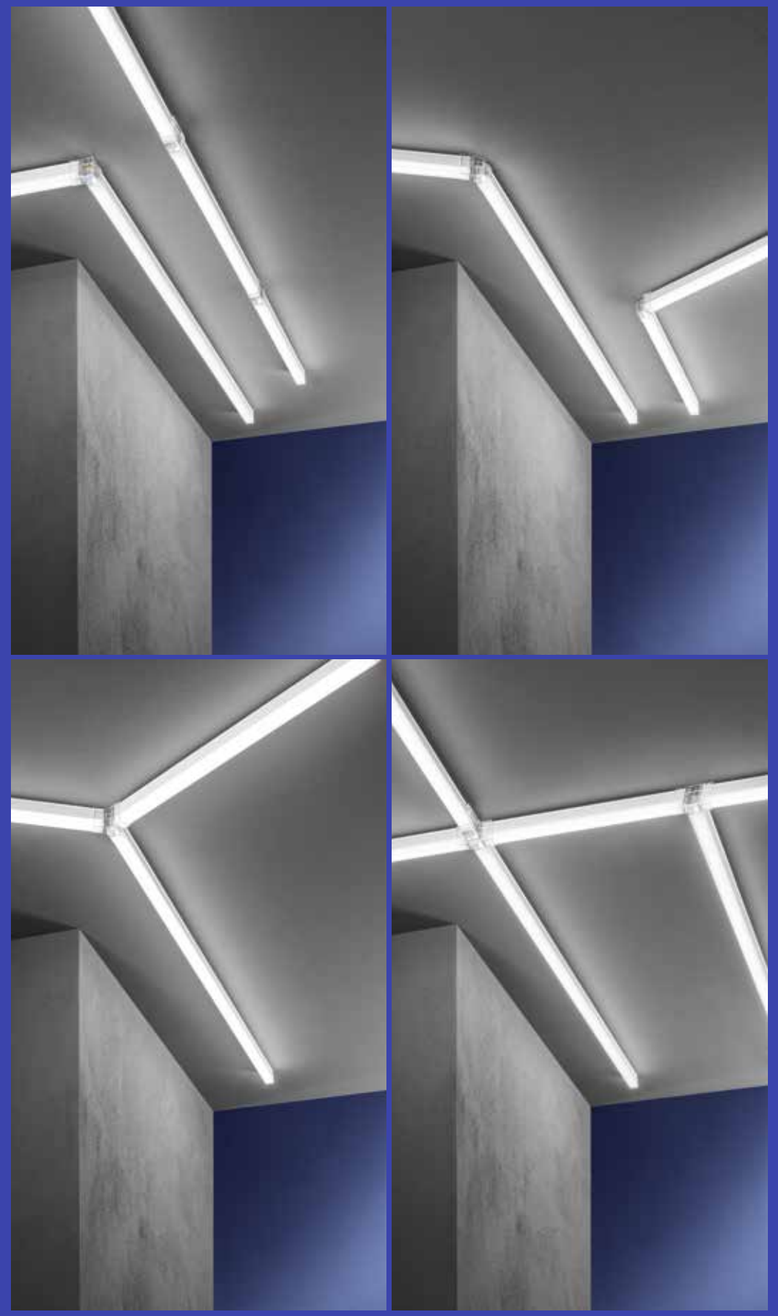



LEDBAR-SHAPE-I
8031414925445
Connettore lineare — Linear connector



LEDBAR-SHAPE-L
8031414925469
Connettore a L — L connector



LEDBAR-SHAPE-ANG
8031414925452
Connettore angolo 120° — 120° edge connector



LEDBAR-SHAPE-T
8031414925483
Connettore a T — T connector



LEDBAR-SHAPE-T120
8031414925476
Connettore a 3 angoli 120° — 3 120° edge connector



LEDBAR-SHAPE-X
8031414925490
Connettore a X — X connector



LEDBAR-SHAPE-NEST
8031414925506
Innesto elettrico — Electrical nest

NEXT

Barra a LED in metallo bianco o nero satinato con diffusore anti abbagliamento.
Metal LED bar satin white or black finish with antiglare diffuser.

indoor use
accommodation areas use
office use
commercial areas use

Materiale
metallo

Colore
bianco satinato
nero satinato

Temperatura colore
3000K / 4000K

Driver
incluso

Material
metal

Colour
satin white
satin black

Colour temperature
3000K / 4000K

Driver
included









NEXT

Barra a LED in metallo bianco o nero satinato con diffusore anti abbagliamento.
Metal LED bar satin white or black finish with antiglare diffuser.

Materiale
metallo

Colore
bianco satinato
nero satinato

Temperatura colore
3000K / 4000K


Driver
incluso


Material
metal

Colour
satin white
satin black


Colour temperature
3000K / 4000K

Driver
included







	colour temp.	colour
LED-NEXT-W-L		
8031414921782		
lumen	640 lm	
watt	8W	
beam angle	100°	
pf	-	




	colour temp.	colour
LED-NEXT-B-L		
8031414921775		
lumen	640 lm	







	colour temp.	colour
LED-NEXT-W-T		
8031414921768		
lumen	800 lm	
watt	10W	
beam angle	100°	
pf	-	




	colour temp.	colour
LED-NEXT-B-T		
8031414921751		
lumen	800 lm	






	colour temp.	colour
LED-NEXT-W-X		
8031414921744		
lumen	960 lm	
watt	12W	
beam angle	100°	
pf	-	



	colour temp.	colour
LED-NEXT-B-X		
8031414921737		
lumen	960 lm	

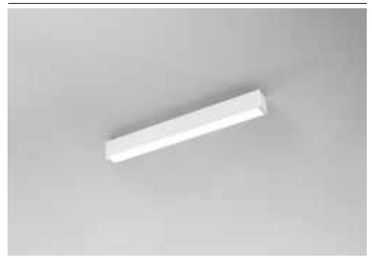



	colour temp.	colour
LED-NEXT-W-60		
8031414921645		
lumen	1920 lm	
watt	24W	
beam angle	100°	
pf	0.90	



	colour temp.	colour
LED-NEXT-B-60		
8031414921638		
lumen	1920 lm	





	colour temp.	colour
LED-NEXT-W-90		
8031414921669		
lumen	2880 lm	
watt	36W	
beam angle	100°	
pf	0.90	




	colour temp.	colour
LED-NEXT-B-90		
8031414921652		
lumen	2880 lm	





	colour temp.	colour
LED-NEXT-W-200		
8031414921683		
lumen	6400 lm	
watt	80W	
beam angle	100°	
pf	0.90	



	colour temp.	colour
LED-NEXT-B-200		
8031414921676		
lumen	6400 lm	

Accessori inclusi / Included accessories



Connettore /
Connector



Staffa per montaggio a plafoniera /
Ceiling mounting brackets

Accessori inclusi / Included accessories



Connettore /
Connector



Staffa per montaggio a plafoniera /
Ceiling mounting brackets

Accessori inclusi / Included accessories




Connettore /
Connector



Staffa per montaggio a plafoniera /
Ceiling mounting brackets

NEXT


Barra a LED in metallo bianco o nero satinato con diffusore anti abbagliamento.
Metal LED bar satin white or black finish with antiglare diffuser.

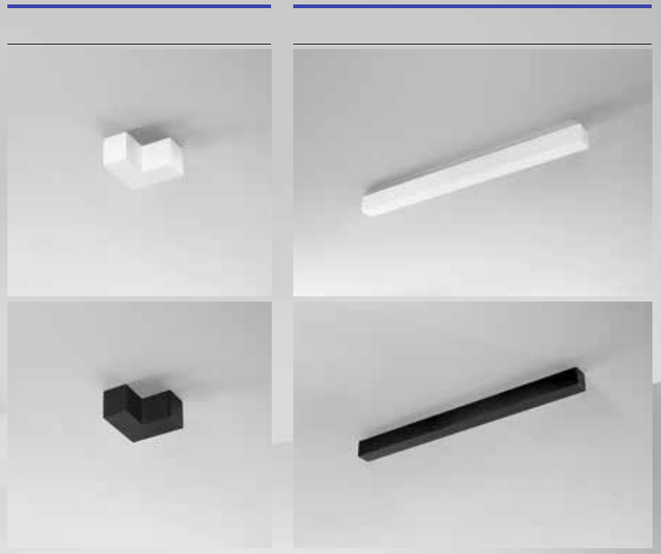

Barre NEXT senza sorgente luminosa per creare “tratti bui” /
NEXT bar without light source to create “dark lines”.

	colour
LED-NEXT-W-ST-L 8031414921720	○
LED-NEXT-B-ST-L 8031414921713	●

	colour
LED-NEXT-W-ST60 8031414921706	○
LED-NEXT-B-ST60 8031414921690	●





Accessori inclusi / Included accessories



Connettore /
Connector



Staffa per montaggio a plafoniera /
Ceiling mounting brackets



LED-NEXT-W-FIX
8031414921850
Staffa per fissaggio bianca — White fixing bracket



LED-NEXT-B-FIX
8031414921799
Staffa per fissaggio nera — Black fixing bracket



LED-NEXT-W-S
8031414921812
Kit sospensione bianco — Suspension kit white color



LED-NEXT-B-S
8031414921805
Kit sospensione nera — Suspension kit black color



LED-NEXT-PL-FIX
8031414921843
Kit per fissaggio a plafoniera — Ceiling mounting kit



SEGMENTO


Supporto lineare modulabile in acciaio rivestito in silicone nero.
Modular linear support in steel and coated in black silicone.

indoor use
accommodation areas use
office use
commercial areas use







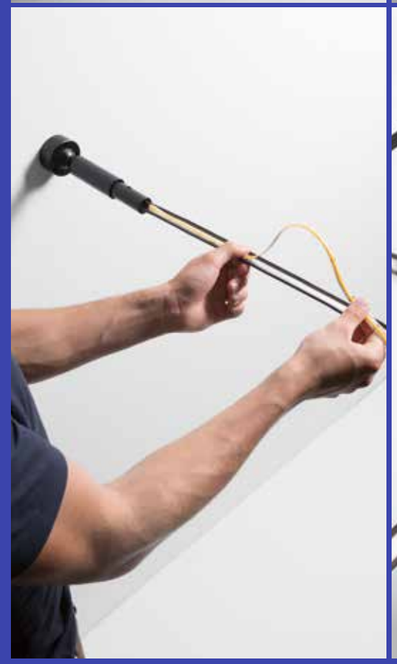



Supporto lineare modulabile in acciaio rivestito in silicone nero.
Modular linear support in steel and coated in black silicone.




Strip LED non inclusa /
Strip LED not included

Kit completo / Complete kit



I-SEGMENTO-6M
8031414882458

Kit base 6 m con nastro tagliabile, arnesi, set di 2 basette ed accessori /
6 m basic kit with cuttable ribbon, tool kit, set of 2 bases and accessories




Elementi singoli per comporre il kit /
Single elements to compose the kit

Servizio customizzato taglio su misura /
Customized cut service



I-SEGMENTO-1M
8031414882441

TAGLIO 1 M NASTRO Indicare la misura desiderata nelle note del B2B (multipli di 1 metro) /
1 M TAPE CUT Indicate the desired size in the B2B notes (multiples of 1 meter)





I-SEGMENTO-BASE
8031414894307


Base per piantana SEGMENTO /
Base for SEGMENTO floor lamp





I-SEGMENTO-FIX
8031414882465

Set di 2 basette ed accessori /
Set of 2 bases and accessories





I-SEGMENTO-TOOL
8031414882472

Kit arnese /
Tool kit

METRO

Sistema cavi tesi con finitura cromo.
Wire system chrome system.

indoor use
accommodation areas use
office use
commercial areas use



LED-METRO-5
8031414862139

5 x MR16 MAX 9W
Driver 50W included

5 m cable included

I-WIRE-10M
8031414870387

Cavo 10 m / 10 m cable

Lampadina non inclusa /
Light bulb not included



PANEL PRO

Pannello a LED con struttura in alluminio e diffusore in acrilico bianco.
LED panel with aluminum structure and white acrylic diffuser.



indoor use · accommodation areas use · office use · commercial areas use

UGR <19 · IP40 · CRI 90 · LED SMD · CCT

Materiale
alluminio,
diffusore in PMMA

Colore
bianco

Temperatura colore
3000K / 4000K / 6500K

Driver
incluso

Material
aluminum,
PMMA diffuser

Colour
white


Colour temperature
3000K / 4000K / 6500K

Driver
included




LED-PANEL-60X60-PRO
8031414904822


	colour temp.	colour
lumen	4600 lm	
watt	40W	
beam angle	120°	
pf	0.90	
	590 × 590 mm	



Fotometria del prodotto / Photometric curve





LED-PANEL-60X60-PRO

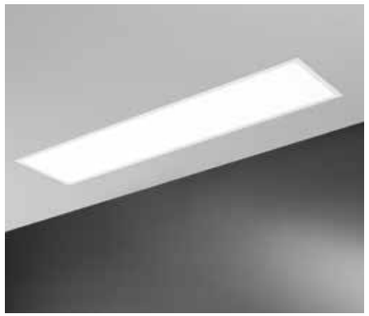

LED-PANEL-30X120-PRO
8031414904839


	colour temp.	colour
lumen	4600 lm	
watt	40W	
beam angle	120°	
pf	0.90	
	290 × 1190 mm	





LED-PANEL-30X120-PRO


Accessorio incluso / Included accessory

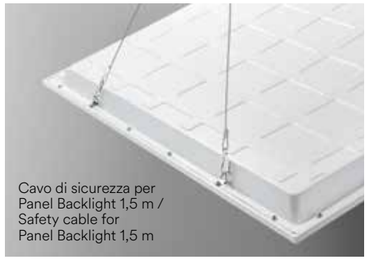

Cavo di sicurezza per Panel Backlight 1,5 m / Safety cable for Panel Backlight 1,5 m

LOOP-IN & LOOP-OUT linkable connection





PANEL BK CCT

indoor use · accommodation areas use · office use · commercial areas use

Materiale
alluminio,
diffusore in acrilico

Colore
bianco

Temperatura colore
3000K / 4000K / 6500K

Driver
incluso

Material
aluminum,
acrylic diffuser

Colour
white

Colour temperature
3000K / 4000K / 6500K

Driver
included


Pannello a LED con struttura in alluminio e diffusore in acrilico bianco.
LED panel with aluminum structure and white acrylic diffuser.

CE · EMC


CRI >80 · LED SMD · CCT




	colour temp.	colour
LED-PANEL-60X120BK-CCT		
8031414918201		
lumen	6000 lm	
watt	60W	
beam angle	120°	
pf	0.90	
	590 × 1190 mm	



Fotometria del prodotto / Photometric curve



LED-PANEL-60X120BK

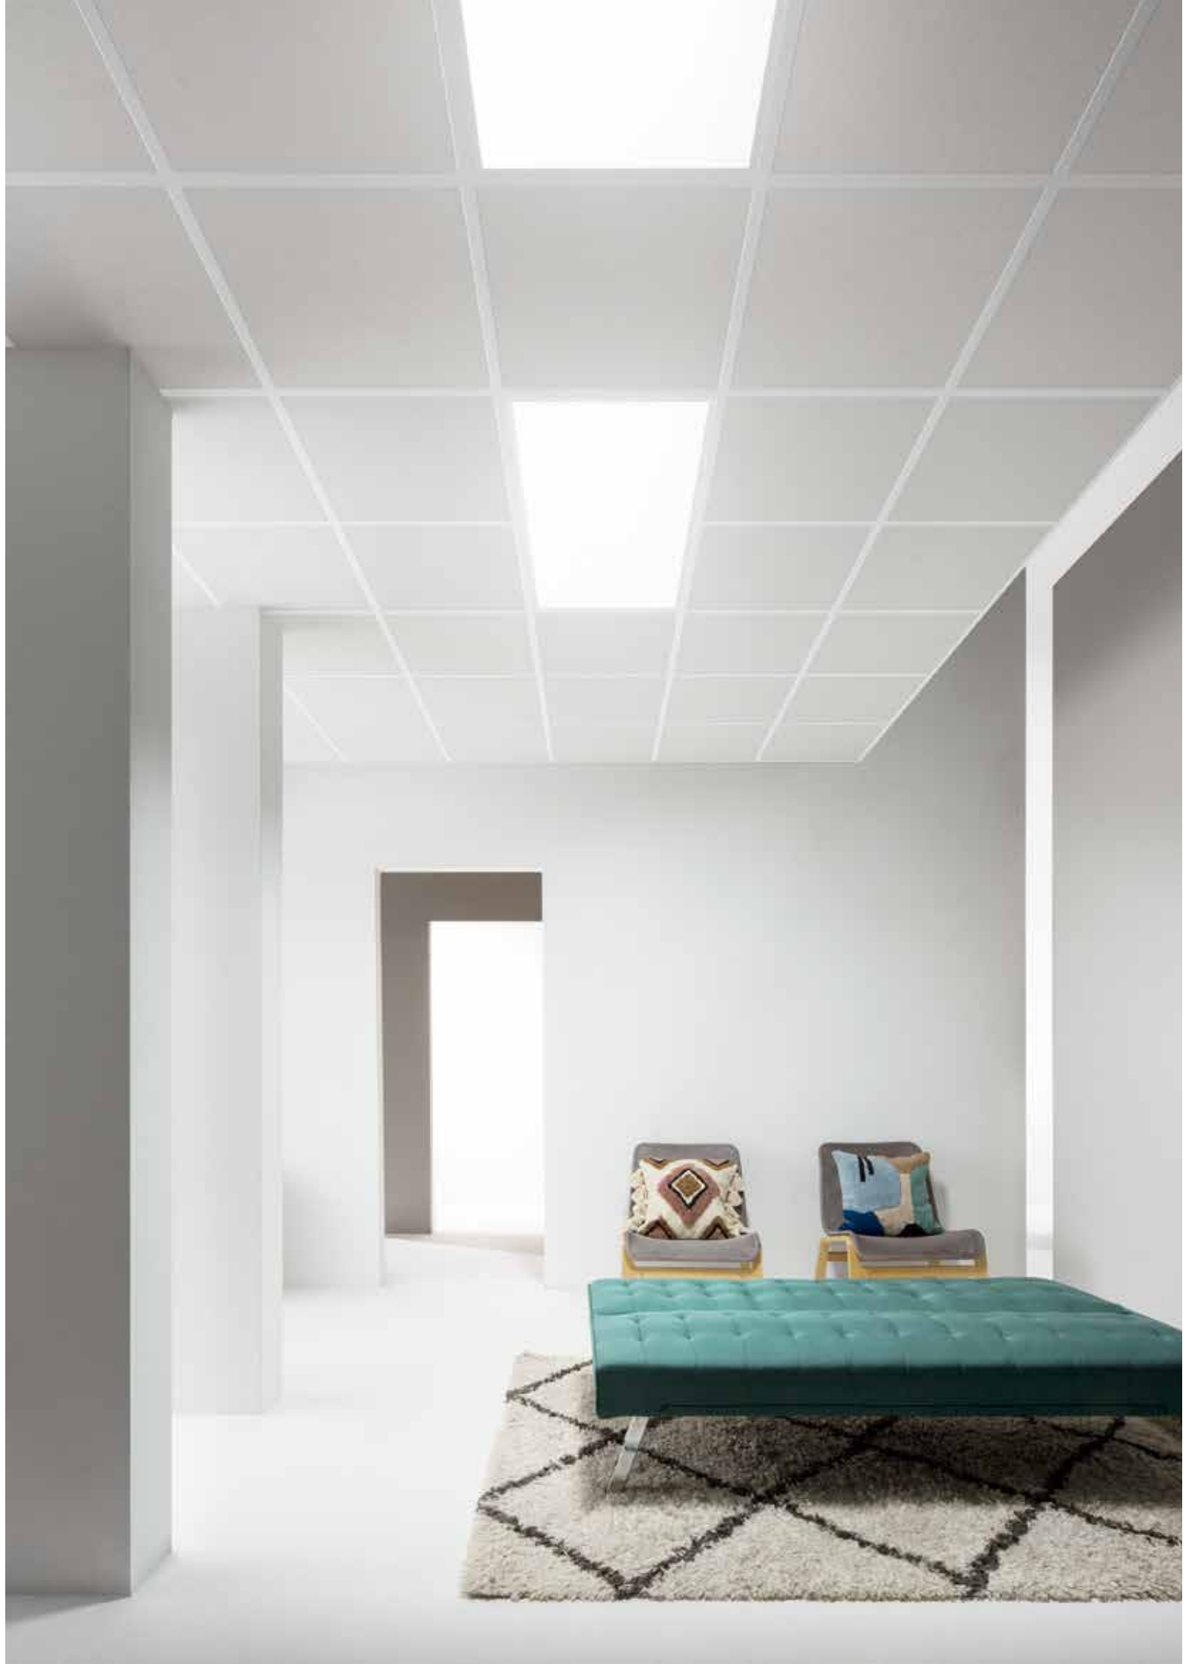

PANEL BK

Pannello a LED con struttura in alluminio e diffusore in acrilico bianco.
LED panel with aluminum structure and white acrylic diffuser.

Materiale
alluminio,
diffusore in acrilico

Colore
bianco

Temperatura colore
3000K / 4000K / 6000K

Driver
incluso

Material
aluminum,
acrylic diffuser

Colour
white

Colour temperature
3000K / 4000K / 6000K

Driver
included




indoor use | accommodation areas use | office use | commercial areas use

CRI >80 | LED SMD



	colour temp.	colour
LED-PANEL-C-60X60BK		
8031414885046		
lumen	4800 lm	
LED-PANEL-60X60BK		
8031414874323		
lumen	4800 lm	
LED-PANEL-F-60X60BK		
8031414874347		
lumen	4800 lm	

watt	40W
beam angle	120°
pf	0.90
	590 × 590 mm






	colour temp.	colour
LED-PANEL-C-30X120BK		
8031414916177		
lumen	4800 lm	
LED-PANEL-30X120BK		
8031414874316		
lumen	4800 lm	
LED-PANEL-F-30X120BK		
8031414874330		
lumen	4800 lm	


watt	40W
beam angle	120°
pf	0.90
	290 × 1190 mm



Fotometria del prodotto / Photometric curve



LED-PANEL-60X60 BK



LED-PANEL-30X120 BK

PANEL RGB
PANEL IP65

indoor use | accommodation areas use | office use | commercial areas use



Materiale
alluminio,
diffusore in acrilico

Colore
bianco

Driver
incluso

Dimmer
dimmerabile
con radiocomando
incluso

Material
aluminum,
acrylic diffuser

Colour
white


Driver
included

Dimmer
dimmable with radio
frequency remote control
included

PANEL RGB


Pannello a LED con struttura in alluminio, diffusore in acrilico e finitura in bianco. Sistema di variazione colorazione luce RGB e luce bianca, con radiocomando incluso.
LED panel with aluminum structure, acrylic diffuser and white finish.
RGB and natural white light adjustable with adio frequency remote control included.

+ 10-100% – | CRI >80 | LED SMD | RGB

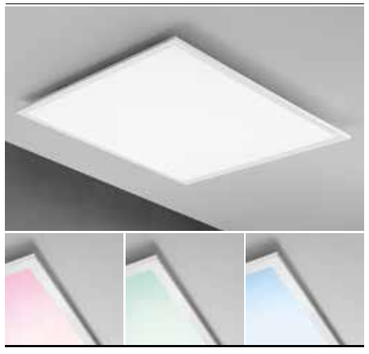

LED-PANEL-60×60-RGBW
8031414861064

	colour temp.	colour
	RGB + 4000K	
lumen	4150 lm	
watt	40W	
beam angle	120°	
pf	0.90	
	590 × 590 mm	



Materiale
alluminio,
diffusore in PMMA

Colore
bianco

Temperatura colore
4000K

Driver
incluso

Material
aluminum,
PMMA diffuser

Colour
white

Colour temperature
4000K

Driver
included

PANEL IP65


Pannello LED UGR<19 e IP65.
LED panel UGR<19 and IP65.

UGR <19 | CRI >80 | LED SMD



LED-PANEL-60X60-IP65
8031414876303


	colour temp.	colour
lumen	3240 Lm	
watt	36W	
beam angle	120°	
pf	0.90	
	590 × 590 mm	



Accessorio incluso / Included accessory


Telecomando incluso /
Remote control included

Fotometria del prodotto / Photometric curve



LED-PANEL-60×60-RGBW

Fotometria del prodotto / Photometric curve



LED-PANEL-60X60 IP65 UGR

PANEL FR / EDG

Pannello LED a cornice luminosa.
LED panel with light frame.

indoor use · accommodation areas use · office use · commercial areas use

Materiale
alluminio,
diffusore in PMMA

Colore
bianco

Temperatura colore
CCT

Driver
incluso

Material
aluminum,
PMMA diffuser


Colour
white

Colour temperature
CCT

Driver
included




CRI >80 · LED SMD · CCT

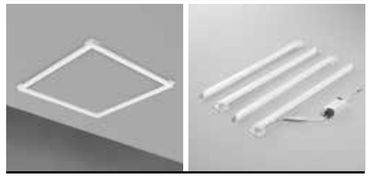


colour temp. | colour

LED-PANEL-60X60-FR
8031414897643

	CCT
lumen	5000 lm
watt	40W
beam angle	120°
pf	0.90
	590 × 590 mm




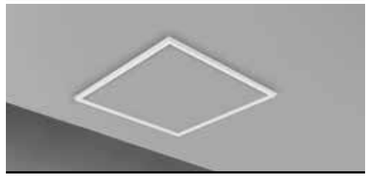


colour temp. | colour

LED-PANEL-60X60-EDG
8031414897650


	CCT
lumen	4200 lm
watt	42W
beam angle	120°
pf	0.90
	590 × 590 mm



Fotometria del prodotto / Photometric curve



LED-PANEL-60X60-FR



LED-PANEL-60X60-EDG

PANEL SM

Pannello a LED, fissaggio easy a soffitto.
LED panel, easy ceiling fixing.

indoor use · accommodation areas use · office use · commercial areas use

Materiale
alluminio,
diffusore in PMMA

Colore
bianco

Temperatura colore
4000K

Driver
incluso

Material
aluminum,
PMMA diffuser

Colour
white

Colour temperature
4000K

Driver
included




CRI >80 · LED SMD




colour temp. | colour

LED-PANEL-60X60-SM
8031414897599

lumen	4000 lm
watt	24W
beam angle	120°
pf	0.90
	590 × 590 mm




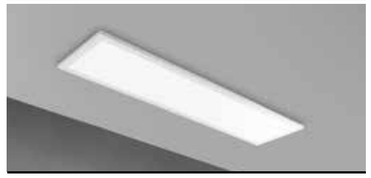


colour temp. | colour

LED-PANEL-30X120-SM
8031414897605


lumen	4000 lm
watt	24W
beam angle	120°
pf	0.90
	290 × 1190 mm



Fotometria del prodotto / Photometric curve



LED-PANEL-60X60-SM



LED-PANEL-30X120-SM

PANEL BIS

Pannello a LED con struttura in alluminio e diffusore in acrilico bianco.
LED panel with aluminum structure, acrylic diffuser and white finish.

Materiale
alluminio,
diffusore in acrilico

Colore
bianco

Temperatura colore
4000K

Driver
incluso

Material
aluminum,
acrylic diffuser

Colour
white


Colour temperature
4000K

Driver
included



LED-PANEL-60X60-BIS
8031414865383


	colour temp.	colour
lumen	5400 lm (↓ 2800 lm+2800 lm ↑)	
watt	40W	
beam angle	↓ 120° + 120° ↑	
pf	0.90	






LED-PANEL-30X120-BIS
8031414865376


	colour temp.	colour
lumen	5600 lm (↓ 2700 lm+2700 lm ↑)	
watt	40W	
beam angle	↓ 120° + 120° ↑	
pf	0.90	



**Fotometria del prodotto /
Photometric curve**




LED-PANEL-60X60-BIS



LED-PANEL-30X120-BIS

**Accessorio incluso /
Included accessory**

Kit cavi acciaio ed elettrico 1,5 m /
steel hanging cable and electric cable 1,5 m






Accessori
Accessories



LED-PANEL-KIT
8031440352451

Kit 6 cavi 150 cm in acciaio per sospensione.

Steel cable kit 150 cm for sospension.






LED-PANEL-GANCI
8031440361903

Kit molle 4pz.

Metal spring kit 4pcs.





LED-PANEL-STAFFE
8031414866175

Kit 6 staffe in acciaio per pannello LED.

Steel fixing bars for LED panel.






LED-PANEL-BASE
8031414866236

Base a soffitto per driver pannello LED misura: 160 × 110 × 35 mm

Metal canopy base for LED panel size: 160 × 110 × 35 mm





LED-PANEL-SOSP
8031440361781

Kit sospensione pannello cavo 1,5 m + scatola di connessione elettrica a soffitto misura: 120 × 120 × 60 mm

Kit for sospension with 1,5 m cable + metal canopy with electric connection size: 120 × 120 × 60 mm



LED-PANEL-DR
8031414889082

PANEL-DR
Output 45W
1000mA 45VDC
Input 230VAC
misura: 141 × 38 × 28 mm

PANEL-DR
Output 45W
1000mA 45VDC
Input 230VAC
size: 141 × 38 × 28 mm



LED-PANEL-DR-SLIM
8031414888412

PANEL-DR-SLIM
Output 45W
1050mA 27-42V
Input 220~240VAC
misura: 265 × 23 × 20,5 mm

PANEL-DR-SLIM
Output 45W
1050mA 27-42V
Input 220~240VAC
size: 265 × 23 × 20,5 mm



LED-PANEL-DR-SLIM-DIM
8031414888429

PANEL-DR-SLIM-DIM
Output 45W
1050mA 27-42V
Input 220~240VAC
0-10V DIMM
misura: 265 × 23 × 22,3 mm

PANEL-DR-SLIM-DIM
Output 45W
1050mA 27-42V
Input 220~240VAC
0-10V DIMM
size: 265 × 23 × 22,3 mm



LED-PANEL-SAFETY
8031414904860

Cavo di sicurezza per Panel Backlight 1,5 m /

Safety cable for Panel Backlight 1,5 m

Strutture in alluminio per montaggio a plafoniera per pannello LED.
Aluminum structures for panel light surface mount.
















LED-PANEL-60X60-MT
8031414866212

Struttura per pannello LED, finitura bianco goffrato

Aluminum frame for LED panel, embossed white

colour

Misure dimensioni mm / Size mm





LED-PANEL-60X60-MT GR
8031414871452

Struttura per pannello LED, finitura grigio goffrato

Aluminum frame for LED panel, embossed grey

colour



LED-PANEL-60X60-MT NER
8031414871469

Struttura per pannello LED, finitura nero goffrato

Aluminum frame for LED panel, embossed black


colour

LED-PANEL-60X120-MT
8031414869176

Struttura per pannello LED, finitura bianco goffrato

Aluminum frame for LED panel, embossed white

colour






LED-PANEL-30X120-MT
8031414866199

Struttura per pannello LED, finitura bianco goffrato

Aluminum frame for LED panel, embossed white

colour





LED-PANEL-30X120-MT GR
8031414871506

Struttura per pannello LED, finitura grigio goffrato

Aluminum frame for LED panel, embossed grey

colour



LED-PANEL-30X120-MT NER
8031414871476

Struttura per pannello LED, finitura nero goffrato

Aluminum frame for LED panel, embossed black

colour

PANEL-DJ

Pannello a LED con struttura in alluminio e diffusore in acrilico. Sistema di variazione gradi Kelvin e di intensità regolabili con radiocomando incluso e speaker bluetooth.
LED panel with aluminum structure, acrylic diffuser and white finish. Adjustable Kelvin and luminous flux with radio frequency remote control included abd speaker bluetooth.



Materiale
alluminio,
diffusore in acrilico

Colore
bianco

Temperatura colore
CCT

Driver
incluso

Dimmer
dimmerabile
con radiocomando
incluso

Material
aluminum,
acrylic diffuser

Colour
white

Colour temperature
CCT


Driver
included

Dimmer
dimmable with radio
frequency remote control
included



colour temp. | colour

LED-PANEL-60X60-DJ
8031414876242
lumen — CCT 1840 lm
watt — 42W
beam angle — 120°




SPEAKER
2×5W connessione bluetooth 4.2 max 10 m / 2×5W bluetooth 4.2 connection max 10 m




colour temp. | colour

LED-PANEL-30X60-DJ
8031414876259
lumen — CCT 3360 lm
watt — 23W
beam angle — 120°




SPEAKER
2×5W connessione bluetooth 4.2 max 10 m / 2×5W bluetooth 4.2 connection max 10 m

Fotometria del prodotto / Photometric curve



LED-PANEL-60X60-DJ




LED-PANEL-30X60-DJ

Accessorio incluso / Included accessory



Radiocomando / Remote control
Dimmerabile con radiocomando / Dimmable with radio frequency remote control

INDOOR

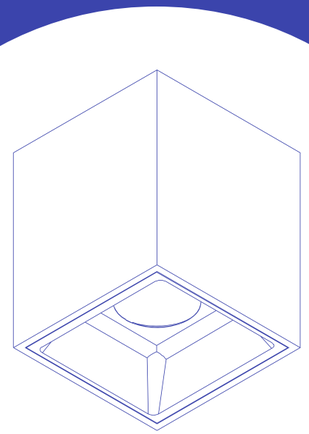

APPLIQUE E PLAFONIERE
WALL LAMPS AND CEILING LAMPS

KLIO CCT

Plafoniera a LED con struttura in alluminio pressofuso e diffusore in acrilico.
LED ceiling lamp with die-cast aluminum structure and acrylic diffuser.

indoor use · accommodation areas use · office use · commercial areas use

Materiale
alluminio,
diffusore in acrilico

Material
aluminum,
acrilic diffuser

Colore
bianco goffrato

Colour
embossed white

Temperatura colore
3000K / 4000K


Colour temperature
3000K / 4000K

Driver
incluso

Driver
included



Fotometria del prodotto / Photometric curve

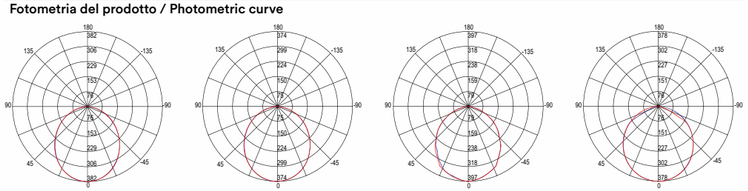


LED-KLIO-R11
LED-KLIO-Q11

LED-KLIO-R17
LED-KLIO-Q17


LED-KLIO-R21
LED-KLIO-Q21


LED-KLIO-R40
LED-KLIO-Q40

CRI >80 · LED SMD





	colour temp.	colour
LED-KLIO-R11		
8031440358675		
lumen	2000 lm	
watt	16W	
beam angle	120°	
pf	-	







	colour temp.	colour
LED-KLIO-R17		
8031440363587		
lumen	3000 lm	
watt	22W	
beam angle	120°	
pf	-	






	colour temp.	colour
LED-KLIO-R21		
8031440363594		
lumen	4600 lm	
watt	36W	
beam angle	120°	
pf	0.90	






	colour temp.	colour
LED-KLIO-R40C		
8031414875740		
lumen	7800 lm	
LED-KLIO-R40		
8031414868087		
lumen	7800 lm	
watt	64,8W	
beam angle	120°	
pf	0.90	




APPLIQUE E PLAFONIERE / WALL LAMPS AND CEILING LAMPS


In.tec light

CRI >80 · LED SMD





	colour temp.	colour
LED-KLIO-Q11		
8031440363563		
lumen	2000 lm	
watt	16W	
beam angle	120°	
pf	-	







	colour temp.	colour
LED-KLIO-Q17		
8031440363570		
lumen	3000 lm	
watt	22W	
beam angle	120°	
pf	-	






	colour temp.	colour
LED-KLIO-Q21		
8031440363549		
lumen	4600 lm	
watt	36W	
beam angle	120°	
pf	0.90	






	colour temp.	colour
LED-KLIO-Q40C		
8031414875702		
lumen	7800 lm	
LED-KLIO-Q40		
8031414868070		
lumen	7800 lm	
watt	64,8W	
beam angle	120°	
pf	0.90	



MIG

Plafoniera a LED anti-abbagliamento con struttura in alluminio.
Anti-glare LED ceiling lamp with aluminum structure.



Materiale
struttura in alluminio
riflettore in acrilico

Colore
bianco goffrato con riflettore bianco lucido,
nero goffrato con riflettore nero lucido

Temperatura colore selezionabile
3000K / 4000K

Driver
incluso

Durata e on/off
50.000 h >25.000 on/off

Material
aluminum structure with acrylic reflector

Colour
embossed white with glossy white reflector,
embossed black with glossy black reflector

Selectable color temperature
3000K / 4000K

Driver
included

Lifetime and on/off
50.000 h >25.000 on/off





	colour temp.	colour
LED-MIG-R-BCO		
8031414924288		
lumen	2800 lm	
LED-MIG-R-NER		
8031414924295		
lumen	2800 lm	
watt		20W
beam angle		45°
pf		0.90







	colour temp.	colour
LED-MIG-Q-BCO		
8031414924264		
lumen	2800 lm	
LED-MIG-Q-NER		
8031414924271		
lumen	2800 lm	
watt		20W
beam angle		45°
pf		0.90



Fotometria del prodotto / Photometric curve



LED-MIG R 20W



LED-MIG Q 20W

GENESIS

Plafoniera orientabile con struttura in alluminio bianco o nero opaco.
Adjustable ceiling lamp with aluminum structure in matt white and black.

indoor use | accommodation areas use | office use | commercial areas use



GU10

CE EMC





colour

I-GENESIS-R6-BCO
8031414883202

1 x GU10 MAX 35W



colour

I-GENESIS-R6-NER
8031414883219

1 x GU10 MAX 35W







Lampadina non inclusa /
Light bulb not included

TOWN

Plafoniera con struttura in alluminio bianco o nero opaco.
Ceiling lamp with aluminum structure in matt white and black.

indoor use | accommodation areas use | office use | commercial areas use



GU10



colour

I-TOWN-R BCO
8031414868179
I-TOWN-R NER
8031414868162

1 x GU10 MAX 35W



Lampadina non inclusa / Light bulb not included



colour

I-TOWN-Q BCO
8031414868155
I-TOWN-Q NER
8031414868148

1 x GU10 MAX 35W




Lampadina non inclusa / Light bulb not included



colour

I-TOWN-R2 BCO
8031414883189
I-TOWN-R2 NER
8031414883196

2 x GU10 MAX 35W




Lampadina non inclusa / Light bulb not included



colour

I-TOWN-Q2 BCO
8031414883165
I-TOWN-Q2 NER
8031414883172

2 x GU10 MAX 35W



Lampadina non inclusa / Light bulb not included

DOMO

Plafoniera in alluminio con diffusore in acrilico.
Aluminum ceiling lamp with acrylic diffuser.

indoor use · accommodation areas use · office use · commercial areas use · bathroom use

Materiale
alluminio,
diffusore in acrilico

Colore
bianco
nero
cromo

Temperatura colore
4000K

Driver
incluso

Material
aluminum,
acrilic diffuser

Colour
white
black
chrome

Colour temperature
4000K


Driver
included



IP44 · CRI >80 · LED SMD




	colour temp.	colour
LED-DOMO-R24-BCO		
8031414882779		
lumen	2700 lm	
LED-DOMO-R24-NER		
8031414893836		
lumen	2700 lm	
LED-DOMO-R24		
8031414876228		
lumen	2700 lm	
watt	24W	
beam angle	120°	





	colour temp.	colour
LED-DOMO-Q24-BCO		
8031414882762		
lumen	2700 lm	
LED-DOMO-Q24 NER		
8031414893843		
lumen	2700 lm	
LED-DOMO-Q24		
8031414876235		
lumen	2700 lm	
watt	24W	
beam angle	120°	



BLASTER

Applique a LED con struttura cromata e diffusore in policarbonato.
LED wall lamp with chromed structure and polycarbonate diffuser.

indoor use · accommodation areas use · bathroom use



Materiale
alluminio, diffusore in PC

Colore
struttura cromata diffusore bianco

Temperatura colore
4000K

Driver
integrato

Material
aluminum, PC diffuser

Colour
chrome structure white diffuser

Colour temperature
4000K

Driver
built-in driver

IP44 · UGR <19 · CRI >80 · LED SMD

	colour temp.
LED-BLASTER-60	
8031414866526	
lumen	1720 lm
watt	15W
beam angle	133°

	colour temp.
LED-BLASTER-PLUG	
8031414866519	
lumen	1000 lm
watt	8W
beam angle	133°
	plug max 2000W

CRUISE

Applique a LED con struttura in termoplastica e diffusore in acrilico con fissaggio su cornice o su specchio.
LED wall lamp with thermoplastic structure and acrylic diffuser with frame and mirror fixing.

indoor use · accommodation areas use · bathroom use









Temperatura colore
4000K


Driver
integrato

Colour temperature
4000K

Driver
built-in driver

IP44 · CRI >80 · LED SMD

	colour temp.	colour
SPOT-B-CRUISE-BCO		
8031414897636		
lumen	550 lm	
SPOT-B-CRUISE-NER		
8031414897674		
lumen	550 lm	
SPOT-B-CRUISE		
8031440363426		
lumen	550 lm	
watt	5,2W	
beam angle	120°	




Fissaggio su cornice / Frame fixing


Fissaggio su specchio / Mirror fixing

YACHT

Applique a LED con struttura in termoplastica e diffusore in acrilico con fissaggio su cornice o su specchio.
LED wall lamp with thermoplastic frame and acrylic diffuser with frame or mirror mounting.

indoor use · accommodation areas use · office use · commercial areas use



Materiale
termoplastica

Colore
cromo
diffusore in acrilico

Temperatura colore
3000K / 4000K

Driver
integrato

Material
thermoplastic

Colour
chrome
acrylic diffuser


Colour temperature
3000K / 4000K


Driver
built-in driver

IP44 · CRI >80 · LED SMD

	colour temp.	colour
SPOT-B-YACHT-5C 8031414915736		
lumen	600 lm	
SPOT-B-YACHT-5M 8031414915743		
lumen	600 lm	
watt	5W	
beam angle	120°	









Fissaggio su cornice / Frame fixing



Fissaggio su specchio / Mirror fixing

NOIR

Applique a LED nero con struttura in termoplastica e diffusore in acrilico con fissaggio su cornice o su specchio.
Black LED wall lamp with thermoplastic frame and acrylic diffuser with frame or mirror mounting.

indoor use · accommodation areas use · office use · commercial areas use



Materiale
termoplastica

Colore
nero opaco
diffusore in acrilico

Temperatura colore
3000K / 4000K

Driver
integrato

Material
thermoplastic


Colour
satin black
acrylic diffuser


Colour temperature
3000K / 4000K

Driver
built-in driver

IP44 · CRI >80 · LED SMD

	colour temp.	colour
SPOT-B-NOIR-5C 8031414917570		
lumen	600 lm	
SPOT-B-NOIR-5M 8031414917587		
lumen	600 lm	
watt	5W	
beam angle	120°	







Fissaggio su cornice / Frame fixing



Fissaggio su specchio / Mirror fixing

LANCER

Applique a LED in alluminio bianco, nero, cromato ed oro spazzolato.
LED wall light in white, black, chrome and brushed gold aluminum.

indoor use · accommodation areas use · bathroom use

Materiale
alluminio,
diffusore in PC

Colore
bianco goffrato
nero goffrato
cromo
oro spazzolato

Temperatura colore
3000K / 4000K

Driver
integrato

Material
aluminum,
PC diffuser

Colour
embossed white
embossed black
chrome
brushed gold


Colour temperature
3000K / 4000K

Driver
built-in driver

IP54 · CRI >80 · LED SMD




	colour temp.	colour
LED-W-LANCER-C BCO 8031414876679		
lumen	1000 lm	
LED-W-LANCER BCO 8031440361200		
lumen	1000 lm	
watt	13W	
beam angle	120°	






	colour temp.	colour
LED-W-LANCER NERO 8031440361217		
lumen	1000 lm	
watt	13W	
beam angle	120°	






	colour temp.	colour
LED-W-LANCER CR 8031414882564		
lumen	1000 lm	
watt	13W	
beam angle	120°	





	colour temp.	colour
LED-W-LANCER ORO 8031414882571		
lumen	1000 lm	
watt	13W	
beam angle	120°	



SACS

Applique a LED con struttura in termoplastica e diffusore in acrilico con fissaggio su cornice o su specchio.
LED wall lamp with thermoplastic structure and acrylic diffuser with frame and mirror fixing.

indoor use | accommodation areas use | bathroom use



Temperatura colore
4000K

Driver
integrato

Colour temperature
4000K

Driver
built-in driver

IP44 | CRI >80 | LED SMD

	colour temp.	colour
SPOT-B-SACS-XL		
8031414877010		
lumen	540 lm	
watt	4W	
beam angle	120°	







RIVA

Applique a LED con struttura in termoplastica e diffusore in acrilico con fissaggio su cornice o su specchio.
LED wall lamp with thermoplastic structure and acrylic diffuser with frame and mirror fixing.

indoor use | accommodation areas use | bathroom use

Temperatura colore
4000K


Driver
integrato

Colour temperature
4000K

Driver
built-in driver

IP44 | CRI >80 | LED SMD

	colour temp.	colour
SPOT-B-RIVA		
8031440363457		
lumen	575 lm	
watt	8W	
beam angle	120°	




Fissaggio su cornice / Frame fixing


Fissaggio su specchio / Mirror fixing



AQA

Applique a LED con struttura in alluminio e diffusore in acrilico con fissaggio su cornice o su specchio.
LED wall lamp with aluminum structure and acrylic diffuser with frame and mirror fixing.

indoor use · accommodation areas use · bathroom use



Materiale
alluminio, diffusore in PC

Material
aluminum, PC diffuser

Colore
struttura cromata diffusore bianco

Colour
chrome structure white diffuser

Temperatura colore
4000K

Colour temperature
4000K

Driver
integrato

Driver
built-in driver


CE · EMC

IP44 · UGR <19 · CRI >80 · LED SMD





	colour temp.	colour
SPOT-B-AQA		
8031414877027		
lumen	819 lm	
watt	8W	
beam angle	120°	




Fissaggio su cornice / Frame fixing


Fissaggio su specchio / Mirror fixing

WALLY

Applique a LED con struttura in alluminio e diffusore in acrilico con fissaggio su cornice o su specchio.
LED wall lamp with aluminum structure and acrylic diffuser with frame and mirror fixing.

indoor use · accommodation areas use · bathroom use



Temperatura colore
4000K

Driver
integrato


Colour temperature
4000K

Driver
built-in driver

CE · EMC

IP44 · CRI >80 · LED SMD

	colour temp.	colour
SPOT-B-WALLY		
8031440363471		
lumen	910 lm	
watt	8W	
beam angle	120°	




Fissaggio su cornice / Frame fixing


Fissaggio su specchio / Mirror fixing

DIVA



indoor use · accommodation areas use · office use · commercial areas use

Materiale
termoplastica

Colore
struttura cromata
diffusore bianco

Temperatura colore
3000K / 4000K

Driver
integrato

Material
thermoplastic

Colour
chrome structure
white diffuser


Colour temperature
3000K / 4000K


Driver
built-in driver

Applique a LED con struttura in termoplastica e diffusore in acrilico con fissaggio su cornice o su specchio. Disponibile in forma circolare con diametro di 75 mm o in forma quadrata di 45 mm.
LED wall lamp with thermoplastic frame and acrylic diffuser with frame or mirror mounting. Available in circular form with a diameter of 75 mm or in square form with a diameter of 45 mm.



	colour temp.	colour
SPOT-B-DIVA-R4C		
8031414915750		
lumen	460 lm	
SPOT-B-DIVA-R4M		
8031414915767		
lumen	460 lm	
watt	4W	
beam angle	100°	







Fissaggio su cornice / Frame fixing

Fissaggio su specchio / Mirror fixing



	colour temp.	colour
SPOT-B-DIVA-Q4C		
8031414915774		
lumen	460 lm	
SPOT-B-DIVA-Q4M		
8031414915781		
lumen	460 lm	
watt	4W	
beam angle	100°	





Fissaggio su cornice / Frame fixing

Fissaggio su specchio / Mirror fixing

F1

Applique metallo flessibile cromo con diffusore in vetro bianco satinato.
Flexible chrome metal wall lamp with satin white glass diffuser.

indoor use · accommodation areas use · office use · commercial areas use



colour

SPOT-F1
8031414076956

1 x G9 MAX 28W



Lampadina non inclusa /
Light bulb not included

ROBY


Applique da specchio in metallo cromato con diffusore in vetro bianco cromato.
Mirror wall lamp in chromed metal with white chromed glass diffuser.



colour

SPOT-B-ROBY-CP
8031440312349

2 x E14 MAX 28W




Fissaggio su cornice /
Frame fixing

Lampadina non inclusa /
Light bulb not included

colour

SPOT-B-ROBY
8031440312356

2 x E14 MAX 28W



Lampadina non inclusa /
Light bulb not included

Q1

Applique metallo cromo con diffusore in vetro satinato.
Chrome metal wall lamp with satin glass diffuser.


indoor use · accommodation areas use · office use · commercial areas use




colour

SPOT-Q1
8031414076932

2 x G9 MAX 28W



Lampadina non inclusa /
Light bulb not included

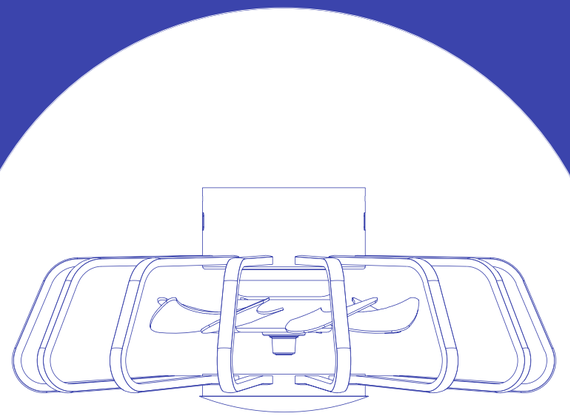

VENTILATORI
FANS

HERON

Plafoniera con ventilatore bladeless dalla forma circolare e con LED integrato.
Bladeless fan ceiling lamp with a circular shape and integrated LED.

indoor use · accommodation areas use · office use · commercial areas use



Materiale
alluminio e acrilico

Temperatura colore
CCT

Materiale ventilatore
ventilatore interno ultrasilenzioso con sistema roteante per una maggiore diffusione dell'aria

Driver
incluso

Material
aluminum and acrylic

Colour temperature
CCT

Fan material
ultra silent bladeless fan with rotating system for greater air diffusion

Driver
included




RF 2.4G CONTROL SYSTEM included · 3STEP MEMORY FUNCTION · CRI >80 · LED SMD · CCT

technical information **HERON**

CE EMC



	colour temp.	colour
LED-HERON-BCO 8031414919796	CCT	
lumen	5280 lm	
led	48W 220-240V - 50/60Hz	
fan	20W 220-240V - 50/60Hz	
beam angle	120°	
potenza ventilatore / fan power	DC20W 6 velocità / speed	
volume aria / air volume	25 m³ min.	
livello sonoro / sound level	48 dB	





Control system easy installation

Regolazione velocità ventole /
Fan speed adjustment

Impostazione timer /
Timer setting

Regolazione intensità di luce (dimmer) /
Light intensity (dimmer)

Regolazione gradi kelvin /
Adjustable white

BLYTH

Plafoniera con ventilatore bladeless dalla forma quadrata e con LED integrato.
Bladeless fan ceiling lamp with a square shape and integrated LED.

indoor use · accommodation areas use · office use · commercial areas use





Materiale
alluminio e acrilico

Temperatura colore
CCT

Materiale ventilatore
ventilatore interno ultrasilenzioso con sistema roteante per una maggiore diffusione dell'aria

Driver
incluso

Material
aluminum and acrylic

Colour temperature
CCT

Fan material
ultra silent bladeless fan with rotating system for greater air diffusion


Driver
included

RF 2.4G CONTROL SYSTEM included · 3STEP MEMORY FUNCTION · CRI >80 · LED SMD · CCT

CE EMC



	colour temp.	colour
LED-BLYTH-BCO 8031414919789	CCT	
lumen	5280 lm	
led	48W 220-240V - 50/60Hz	
fan	20W 220-240V - 50/60Hz	
beam angle	120°	
potenza ventilatore / fan power	DC20W 6 velocità / speed	
volume aria / air volume	25 m³ min.	
livello sonoro / sound level	48 dB	





Control system easy installation

Regolazione velocità ventole /
Fan speed adjustment

Impostazione timer /
Timer setting

Regolazione intensità di luce (dimmer) /
Light intensity (dimmer)

Regolazione gradi kelvin /
Adjustable white

ALBATROS

Plafoniera con ventilatore.
Ceiling lamp with fan.

indoor use · accommodation areas use · office use · commercial areas use



Materiale
alluminio, acrilico

Colore
bianco
nero

Temperatura colore
CCT

Materiale ventilatore
3 lame in termoplastica retrattili

Caratteristiche ventilatore
3 lame ultra silenziose con rotazione bilaterale

Driver
incluso

Material
aluminum, acrylic

Colour
white
black

Colour temperature
CCT

Fan material
3 thermoplastic retractable blades

Fan characteristics
3 ultra-silent blades

Driver
included

RF 2.4G CONTROL SYSTEM included · 3STEP MEMORY FUNCTION · CRI >80 · LED SMD · CCT


technical information **ALBATROS**

CE EMC






	colour temp.	colour
LED-ALBATROS-BCO		
8031414919765	CCT	
lumen	4668 lm	
led	36W 220-240V - 50/60Hz	
fan	30W 220-240V - 50/60Hz	
beam angle	120°	
potenza ventilatore / fan power	DC22W 6 velocità / speed	
volume aria / air volume	25 m³ min.	
livello sonoro / sound level	48 dB	








	colour temp.	colour
LED-ALBATROS-NER		
8031414919635	CCT	
lumen	4668 lm	
led	36W 220-240V - 50/60Hz	
fan	30W 220-240V - 50/60Hz	
beam angle	120°	
potenza ventilatore / fan power	DC22W 6 velocità / speed	
volume aria / air volume	25 m³ min.	
livello sonoro / sound level	48 dB	



Reverse system - DC motor



Control system easy installation

- Regolazione velocità ventole / Fan speed adjustment
- Impostazione timer / Timer setting
- Regolazione intensità di luce (dimmer) / Light intensity (dimmer)
- Regolazione gradi kelvin / Adjustable white

MAGNUS

Plafoniera con ventilatore.
Ceiling lamp with fan.

indoor use · accommodation areas use · office use · commercial areas use





Materiale
alluminio, acrilico

Colore
bianco
nero

Temperatura colore
CCT

Materiale ventilatore
3 lame
in termoplastica

Caratteristiche ventilatore
3 lame ultra silenziose
con rotazione bilaterale

Driver
incluso

Material
aluminum, acrylic

Colour
white
black

Colour temperature
CCT

Fan material
3 thermoplastic
blades

Fan characteristics
3 ultra-silent
blades


Driver
included

RF 2.4G CONTROL SYSTEM included · 3STEP MEMORY FUNCTION · CRI >80 · LED SMD · CCT



LED-MAGNUS-BCO
8031414919727


	colour temp.	colour
	CCT	
lumen	9400 lm	
led	80W 220-240V - 50/60Hz	
fan	32W 220-240V - 50/60Hz	
beam angle	120°	
potenza ventilatore / fan power	DC40W 6 velocità / speed	
volume aria / air volume	50 m³ min.	
livello sonoro / sound level	48 dB	






LED-MAGNUS-NER
8031414919734

	colour temp.	colour
	CCT	
lumen	9400 lm	
led	80W 220-240V - 50/60Hz	
fan	32W 220-240V - 50/60Hz	
beam angle	120°	
potenza ventilatore / fan power	DC40W 6 velocità / speed	
volume aria / air volume	50 m³ min.	
livello sonoro / sound level	48 dB	



Reverse system - DC motor

SUMMER



WINTER



Control system easy installation

Regolazione velocità ventole /
Fan speed adjustment

Impostazione timer /
Timer setting

Regolazione intensità di luce (dimmer) /
Light intensity (dimmer)

Regolazione gradi kelvin /
Adjustable white

HADLEY

Plafoniera con ventilatore.
Ceiling lamp with fan.

indoor use · accommodation areas use · office use · commercial areas use



Materiale
alluminio, acrilico

Colore
bianco
nero
antracite

Temperatura colore
CCT

Materiale ventilatore
3 lame
in termoplastica

Caratteristiche ventilatore
3 lame ultra silenziose
con rotazione bilaterale

Driver
incluso

Material
aluminum, acrylic

Colour
white
black
anthracite

Colour temperature
CCT

Fan material
3 thermoplastic
blades

Fan characteristics
3 ultra-silent
blades

Driver
included


RF 2.4G CONTROL SYSTEM included · 3STEP MEMORY FUNCTION · CRI >80 · LED SMD · CCT

technical information HADLEY



LED-HADLEY-BCO
8031414919697


	colour temp.	colour
	CCT	
lumen	5250 lm	
led	40W 220-240V - 50/60Hz	
fan	11W 220-240V - 50/60Hz	
beam angle	120°	
potenza ventilatore / fan power	DC30W 6 velocità / speed	
volume aria / air volume	25 m³ min.	
livello sonoro / sound level	48 dB	





LED-HADLEY-NER
8031414919710


	colour temp.	colour
	CCT	
lumen	5250 lm	
led	40W 220-240V - 50/60Hz	
fan	11W 220-240V - 50/60Hz	
beam angle	120°	
potenza ventilatore / fan power	DC30W 6 velocità / speed	
volume aria / air volume	25 m³ min.	
livello sonoro / sound level	48 dB	





LED-HADLEY-GR
8031414919703

	colour temp.	colour
	CCT	
lumen	5250 lm	
led	40W 220-240V - 50/60Hz	
fan	11W 220-240V - 50/60Hz	
beam angle	120°	
potenza ventilatore / fan power	DC30W 6 velocità / speed	
volume aria / air volume	25 m³ min.	
livello sonoro / sound level	48 dB	




Reverse system - DC motor

SUMMER



WINTER



Control system easy installation

Regolazione velocità ventole /
Fan speed adjustment

Impostazione timer /
Timer setting

Regolazione intensità di luce (dimmer) /
Light intensity (dimmer)

Regolazione gradi kelvin /
Adjustable white

AUSTER

Plafoniera con ventilatore.
Ceiling lamp with fan.

indoor use · accommodation areas use · office use · commercial areas use



Materiale
alluminio, acrilico

Colore
bianco

Temperatura colore
RAINBOW + CCT

Materiale ventilatore
3 lame
in termoplastica

Caratteristiche ventilatore
3 lame ultra silenziose
con rotazione bilaterale

Driver
incluso

Material
aluminum, acrylic

Colour
white

Colour temperature
RAINBOW + CCT

Fan material
3 thermoplastic
blades

Fan characteristics
3 ultra-silent
blades


Driver
included

RF 2.4G CONTROL SYSTEM included · 3STEP MEMORY FUNCTION · CRI >80 · LED SMD · CCT · RAINBOW LIGHT

technical information AUSTER




	colour temp.	colour
LED-AUSTER-COLOR 8031414919758	RAINBOW CCT	
lumen	7650 lm	
led	60W 220-240V - 50/60Hz	
fan	28W 220-240V - 50/60Hz	
beam angle	120°	
potenza ventilatore / fan power	DC40W 6 velocità / speed	
volume aria / air volume	50 m³ min.	
livello sonoro / sound level	48 dB	




Reverse system - DC motor

SUMMER



WINTER



Control system easy installation

Regolazione velocità ventole /
Fan speed adjustment

Impostazione timer /
Timer setting

Regolazione intensità di luce (dimmer) /
Light intensity (dimmer)

Regolazione gradi kelvin /
Adjustable white

STORM

Plafoniera con ventilatore.
Ceiling lamp with fan.

indoor use · accommodation areas use · office use · commercial areas use



Materiale
alluminio, acrilico

Colore
bianco
nero

Temperatura colore
CCT

Materiale ventilatore
3 lame
in termoplastica

Caratteristiche ventilatore
3 lame ultra silenziose
con rotazione bilaterale

Driver
incluso

Material
aluminum, acrylic

Colour
white
black

Colour temperature
CCT

Fan material
3 thermoplastic
blades

Fan characteristics
3 ultra-silent
blades

Driver
included



CONTROL SYSTEM included · MEMORY FUNCTION · CRI >80 · LED SMD · CCT


technical information **STORM**

CE EMC



LED-STORM-BCO
8031414919741


	colour temp.	colour
	CCT	
lumen	7450 lm	
led	60W 220-240V - 50/60Hz	
fan	28W 220-240V - 50/60Hz	
beam angle	120°	
potenza ventilatore / fan power	DC40W 6 velocità / speed	
volume aria / air volume	50 m³ min.	
livello sonoro / sound level	48 dB	






LED-STORM-NER
8031414919758

	colour temp.	colour
	CCT	
lumen	7450 lm	
led	60W 220-240V - 50/60Hz	
fan	28W 220-240V - 50/60Hz	
beam angle	120°	
potenza ventilatore / fan power	DC40W 6 velocità / speed	
volume aria / air volume	50 m³ min.	
livello sonoro / sound level	48 dB	




Reverse system - DC motor

SUMMER



WINTER



Control system easy installation

Regolazione velocità ventole /
Fan speed adjustment

Impostazione timer /
Timer setting

Regolazione intensità di luce (dimmer) /
Light intensity (dimmer)

Regolazione gradi kelvin /
Adjustable white

Plafoniere con ventilatore in bianco effetto cielo stellato.
Ceiling fan lamps with white starry sky effect.



Materiale
acrilico PMMA
bianco effetto cielo stellato

Temperatura colore
CCT

Materiale ventilatore
7 lame bianche
in termoplastica

Caratteristiche ventilatore
7 lame ultra silenziose
con rotazione unilaterale.
Ghiera esterna roteante per
una maggiore diffusione dell'aria.

Driver
incluso

Material
PMMA acrylic white colour
with starry sky effect

Colour temperature
CCT

Fan material
7 white
thermoplastic blades

Fan characteristics
7 ultra-silent blades
unidirectional rotation
rotating outer ring for
greater air diffusion

Driver
included

RF 2.4G CONTROL SYSTEM included
3STEP MEMORY FUNCTION
CRI >80
LED SMD
CCT

technical information

WI-FI SMART INTEC


CE EMC

BOREA



LED-BOREA-INT
8031414873692

	colour temp.	colour
	CCT	
lumen	4450 lm	
led	40W 220-240V - 50/60Hz	
fan	34W 220-240V - 50/60Hz	
beam angle	120°	
potenza ventilatore / fan power	AC 34W 900rpm 1050rpm 1200rpm	
volume aria / air volume	25 m³ min.	
livello sonoro / sound level	48 dB	




SKYRON



LED-SKYRON-INT
8031414873678

	colour temp.	colour
	CCT	
lumen	4450 lm	
led	40W 220-240V - 50/60Hz	
fan	34W 220-240V - 50/60Hz	
beam angle	120°	
potenza ventilatore / fan power	AC 34W 900rpm 1050rpm 1200rpm	
volume aria / air volume	25 m³ min.	
livello sonoro / sound level	48 dB	



Control system easy installation

On-off ghiera esterna /
On-off outer ring

Regolazione velocità ventole /
Fan speed adjustment

Impostazione timer /
Timer setting

Regolazione intensità di luce (dimmer) /
Light intensity (dimmer)

Regolazione gradi kelvin /
Adjustable white

Smart Intec WIFI

RF 2.4G control system

ALEXA e GOOGLE HOME voice control

SMART INTEC
SMART LIFE
Powered by tuya Intelligence Inside

Plafoniere con ventilatore in acrilico PMMA.
Ceiling fan lamps with PMMA acrylic fan.



indoor use · accommodation areas use · office use · commercial areas use

Materiale
acrilico PMMA

Temperatura colore
CCT

Materiale ventilatore
7 lame trasparenti
in termoplastica

Caratteristiche ventilatore
7 lame ultra
silenziose con
rotazione unilaterale

Driver
incluso

Material
PMMA acrylic

Colour temperature
CCT

Fan material
7 trasparent
thermoplastic blades

Fan characteristics
7 ultra-silent
blades unidirectional
rotation

Driver
included


RF 2.4G CONTROL SYSTEM included · 3STEP MEMORY FUNCTION · CRI >80 · LED SMD · CCT · WI-FI SMART INTEC · CE EMC

ALISEO



LED-ALISEO-INT
8031414873661

	colour temp.	colour
	CCT	
lumen	4450 lm	
led	40W 220-240V - 50/60Hz	
fan	34W 220-240V - 50/60Hz	
beam angle	120°	
potenza ventilatore / fan power	AC 34W 900rpm 1050rpm 1200rpm	
volume aria / air volume	25 m³ min.	
livello sonoro / sound level	48 dB	




FOEHN



LED-FOEHN-INT
8031414873685

	colour temp.	colour
	CCT	
lumen	4450 lm	
led	40W 220-240V - 50/60Hz	
fan	34W 220-240V - 50/60Hz	
beam angle	120°	
potenza ventilatore / fan power	AC 34W 900rpm 1050rpm 1200rpm	
volume aria / air volume	25 m³ min.	
livello sonoro / sound level	48 dB	



Control system easy installation

- On-off ghiera esterna / On-off outer ring
- Regolazione velocità ventole / Fan speed adjustment
- Impostazione timer / Timer setting
- Regolazione intensità di luce (dimmer) / Light intensity (dimmer)
- Regolazione gradi kelvin / Adjustable white

Smart Intec WIFI · **RF 2.4G control system** · **ALEXA e GOOGLE HOME voice control**

SMART INTEC · SMART LIFE · Powered by tuya Intelligence Inside

GRECALE

Plafoniera con ventilatore.
Ceiling lamp with fan.

indoor use · accommodation areas use · office use · commercial areas use

Materiale
alluminio, acrilico

Colore
bianco
nero

Temperatura colore
CCT

Materiale ventilatore
7 lame
in termoplastica

Caratteristiche ventilatore
7 lame ultra silenziose
con rotazione bilaterale

Driver
incluso

Material
aluminum, acrylic

Colour
white
black

Colour temperature
CCT


Fan material
7 thermoplastic blades

Fan characteristics
7 ultra-silent blades

Driver
included




CONTROL SYSTEM included · MEMORY FUNCTION · CRI >80 · LED SMD · CCT · WI-FI SMART INTEC · CE EMC

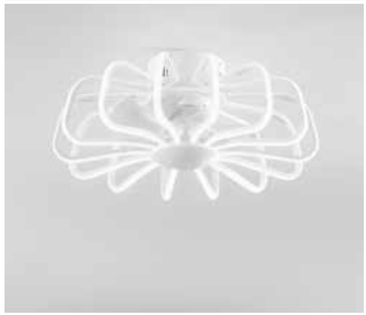

LED-GRECALE-W-INT
8031414885947


	colour temp.	colour
	CCT	
lumen	8470 lm	
led	80W 220-240V - 50/60Hz	
fan	22W 220-240V - 50/60Hz	
beam angle	120°	
potenza ventilatore / fan power	DC22W 6 velocità / speed	
volume aria / air volume	25 m³ min.	
livello sonoro / sound level	48 dB	





LED-GRECALE-B-INT
8031414885954

	colour temp.	colour
	CCT	
lumen	8470 lm	
led	80W 220-240V - 50/60Hz	
fan	22W 220-240V - 50/60Hz	
beam angle	120°	
potenza ventilatore / fan power	DC22W 6 velocità / speed	
volume aria / air volume	25 m³ min.	
livello sonoro / sound level	48 dB	




Reverse system - DC motor

SUMMER



WINTER



Control system easy installation

- Regolazione velocità ventole / Fan speed adjustment
- Impostazione timer / Timer setting
- Regolazione intensità di luce (dimmer) / Light intensity (dimmer)
- Regolazione gradi kelvin / Adjustable white



SMART INTEC · SMART LIFE · Powered by tuya Intelligence Inside

Plafoniere con ventilatore in bianco effetto cielo stellato.
Ceiling fan lamps with white starry sky effect.



Materiale
acrilico PMMA
bianco effetto cielo stellato

Temperatura colore
CCT

Materiale ventilatore
7 lame bianche
in termoplastica

Caratteristiche ventilatore
7 lame ultra silenziose
con rotazione bilaterale,
ghiera esterna roteante per
una maggiore diffusione dell'aria

Driver
incluso

Material
PMMA acrylic white colour
with starry sky effect

Colour temperature
CCT

Fan material
7 white
thermoplastic blades

Fan characteristics
7 ultra-silent blades
bidirectional rotation
rotating outer ring for
greater air diffusion

Driver
included

RF 2.4G CONTROL SYSTEM included
3STEP MEMORY FUNCTION
CRI >80
LED SMD
CCT

technical information

WI-FI SMART INTEC


CE EMC

LEVANTE



LED-LEVANTE-INT
8031414885930

	colour temp.	colour
	CCT	
lumen	4450 lm	
led	40W 220-240V - 50/60Hz	
fan	22W 220-240V - 50/60Hz	
beam angle	120°	
potenza ventilatore / fan power	DC22W 6 velocità / speed	
volume aria / air volume	25 m³ min.	
livello sonoro / sound level	48 dB	




SCIROCCO




LED-SCIROCCO-INT
8031414885923

	colour temp.	colour
	CCT	
lumen	4450 lm	
led	40W 220-240V - 50/60Hz	
fan	22W 220-240V - 50/60Hz	
beam angle	120°	
potenza ventilatore / fan power	DC22W 6 velocità / speed	
volume aria / air volume	25 m³ min.	
livello sonoro / sound level	48 dB	



Reverse system - DC motor

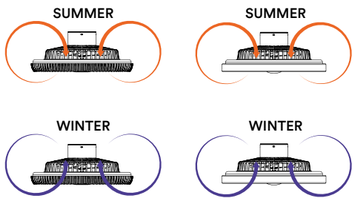

Control system easy installation

- On-off ghiera esterna / On-off outer ring
- Regolazione velocità ventole / Fan speed adjustment
- Impostazione timer / Timer setting
- Regolazione intensità di luce (dimmer) / Light intensity (dimmer)
- Regolazione gradi kelvin / Adjustable white

Smart Intec WIFI

RF 2.4G control system

ALEXA e GOOGLE HOME voice control

SMART INTEC
SMART LIFE
Powered by tuya Intelligence Inside

ETESIA

indoor use · accommodation areas use · office use · commercial areas use

Materiale
alluminio, acrilico

Colore
bianco
nero

Temperatura colore
CCT

Materiale ventilatore
7 lame
in termoplastica

Caratteristiche ventilatore
7 lame ultra silenziose
con rotazione bilaterale

Driver
incluso

Material
aluminum, acrylic

Colour
white
black

Colour temperature
CCT

Fan material
7 thermoplastic
blades

Fan characteristics
7 ultra-silent
blades


Driver
included

CE EMC

RF 2.4G · 3STEP · CRI >80 · LED SMD · CCT
CONTROL MEMORY SYSTEM FUNCTION included

Plafoniera con ventilatore.
Ceiling lamp with fan.








	colour temp.	colour
LED-ETESIA-W-FAN 8031414899005		
LED-ETESIA-B-FAN 8031414899012		
	CCT	
lumen	4800 lm	
led	30W 220-240V - 50/60Hz	
fan	22W 220-240V - 50/60Hz	
beam angle	120°	
potenza ventilatore / fan power	DC22W 6 velocità / speed	
volume aria / air volume	25 m³ min.	
livello sonoro / sound level	48 dB	

Reverse system - DC motor

SUMMER



WINTER



Control system easy installation

Regolazione velocità ventole /
Fan speed adjustment

Impostazione timer /
Timer setting

Regolazione intensità di luce (dimmer) /
Light intensity (dimmer)

Regolazione gradi kelvin /
Adjustable white

PONENTE

indoor use · accommodation areas use · office use · commercial areas use

Materiale
alluminio, acrilico

Temperatura colore
CCT

Materiale ventilatore
7 lame trasparenti
in termoplastica

Caratteristiche ventilatore
7 lame ultra
silenziose
rotazione bilaterale

Driver
incluso

Material
aluminum, acrylic

Colour temperature
3000K / 4000K / 6500K

Fan material
7 trasparent
thermoplastic blades

Fan characteristics
7 ultra-silent
blades
bidirectional rotation


Driver
included

CE EMC

RF 2.4G · 3STEP · CRI >80 · LED SMD · CCT
CONTROL MEMORY SYSTEM FUNCTION included

Plafoniera con ventilatore.
Ceiling lamp with fan.








	colour temp.	colour
LED-PONENTE-FAN 8031414886586		
	CCT	
lumen	4450 lm	
led	40W 220-240V - 50/60Hz	
fan	22W 220-240V - 50/60Hz	
beam angle	120°	
potenza ventilatore / fan power	DC 22W 6 velocità / speed	
volume aria / air volume	25 m³ min.	
livello sonoro / sound level	48 dB	

Reverse system - DC motor

SUMMER



WINTER



Control system easy installation

Regolazione velocità ventole /
Fan speed adjustment

Impostazione timer /
Timer setting

Regolazione intensità di luce (dimmer) /
Light intensity (dimmer)

Regolazione gradi kelvin /
Adjustable white

Plafoniera con ventilatore.
Ceiling lamp with fan.



indoor use
accommodation areas use
office use
commercial areas use

Materiale
alluminio, acrilico

Temperatura colore
CCT

Materiale ventilatore
3 lame trasparenti
in termoplastica

Caratteristiche ventilatore
3 lame ultra
silenziose
rotazione bilaterale

Driver
incluso

Material
aluminum, acrylic

Colour temperature
3000K / 4000K / 6500K

Fan material
3 trasparent
thermoplastic blades

Fan characteristics
3 ultra-silent
blades
bidirectional rotation

Driver
included

RF 2.4G CONTROL SYSTEM included
3STEP MEMORY FUNCTION
CRI >80
LED SMD
CCT

technical information


CE EMC

ESPERO



LED-ESPERO-FAN
8031414898992

	colour temp.	colour
	CCT	
lumen	4800 lm	
led	30W 220-240V - 50/60Hz	
fan	22W 220-240V - 50/60Hz	
beam angle	120°	
potenza ventilatore / fan power	DC22W 6 velocità / speed	
volume aria / air volume	20 m³ min.	
livello sonoro / sound level	48 dB	




NASHI




LED-NASHI-FAN
8031414899029

	colour temp.	colour
	CCT	
lumen	4800 lm	
led	30W 220-240V - 50/60Hz	
fan	22W 220-240V - 50/60Hz	
beam angle	120°	
potenza ventilatore / fan power	DC22W 6 velocità / speed	
volume aria / air volume	20 m³ min.	
livello sonoro / sound level	48 dB	



Reverse system - DC motor

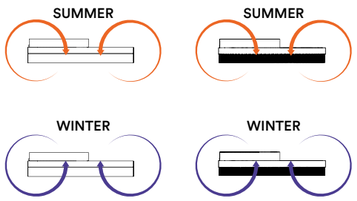

Control system easy installation

- Regolazione velocità ventole / Fan speed adjustment
- Impostazione timer / Timer setting
- Regolazione intensità di luce (dimmer) / Light intensity (dimmer)
- Regolazione gradi kelvin / Adjustable white



SOTTOPENSILI E BARRE LED
CABINETS AND LEDBARS

UNIX

indoor use

accommodation areas use

Materiale
struttura in alluminio, diffusore in PC riflettente

Colore
nikel

Temperatura colore
4000K


Driver
incluso

Material
aluminum body with PC reflective diffuser

Colour
nikel

Colour temperature
4000K

Driver
included

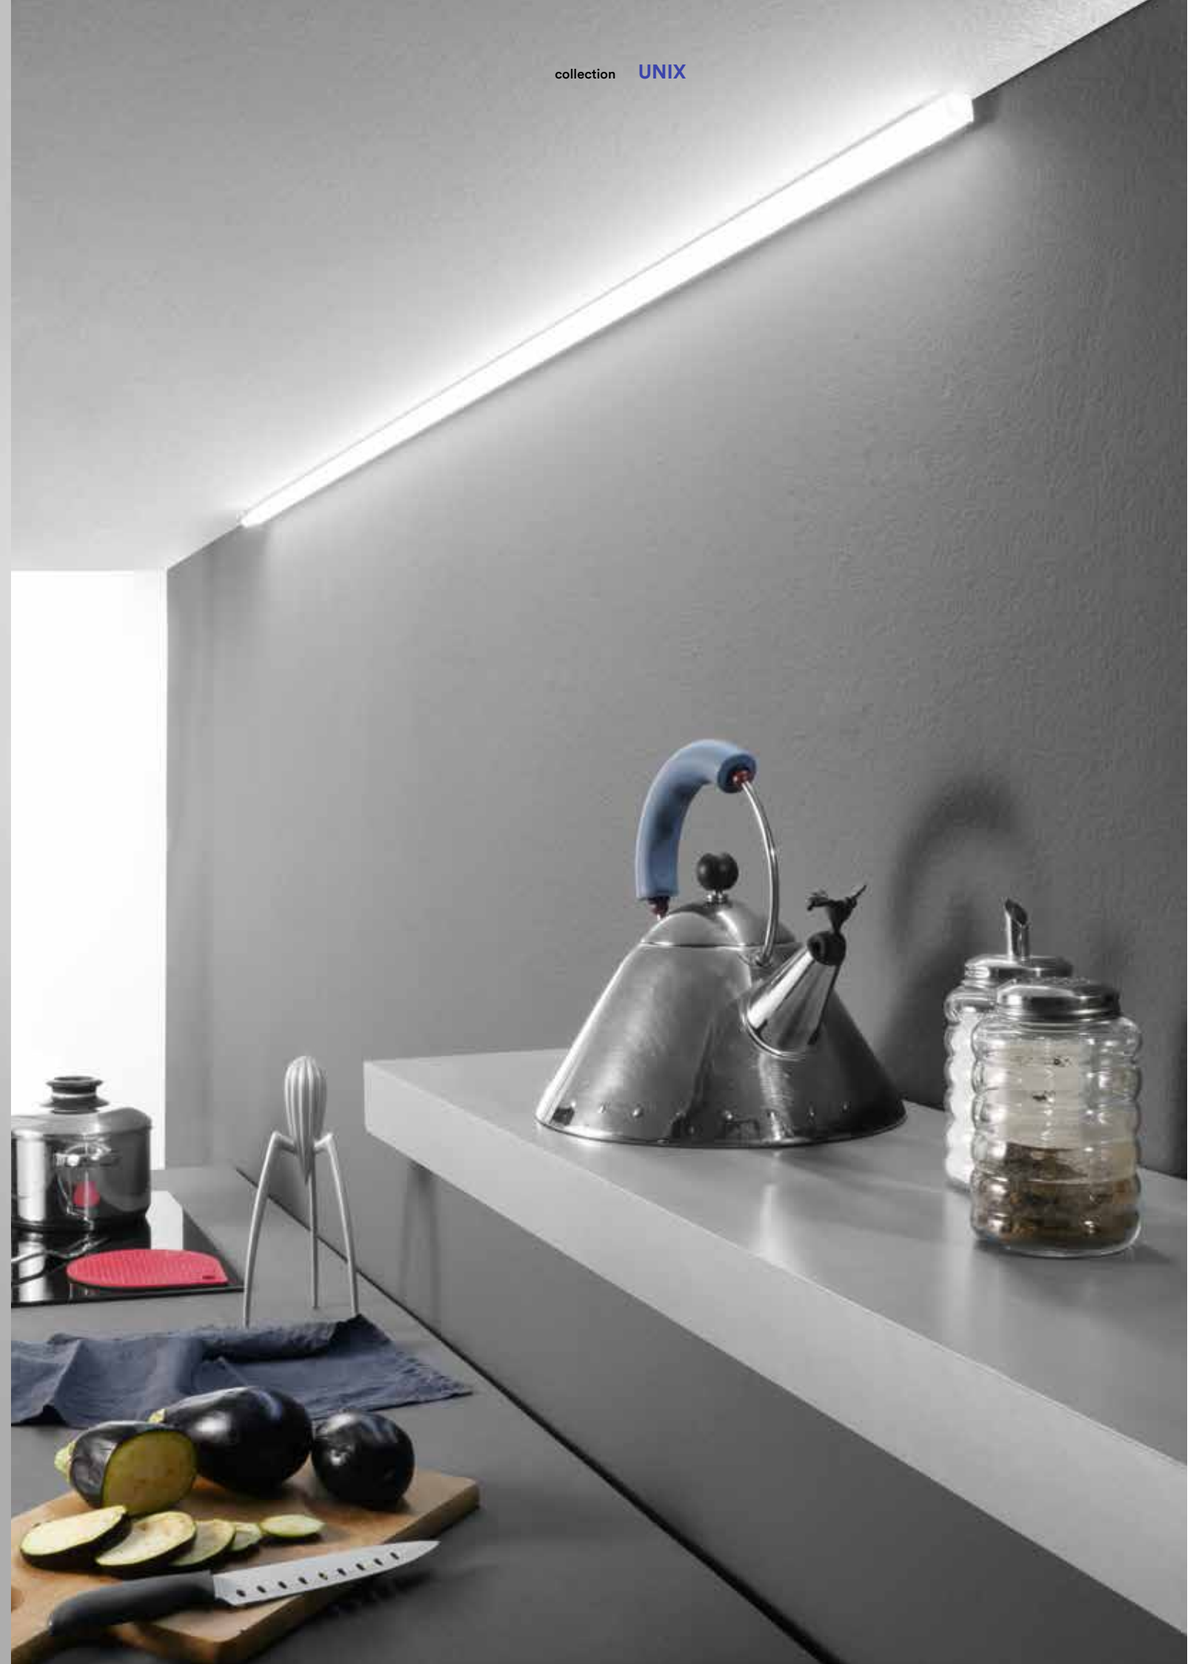

Barra sottopensile in alluminio con diffusore in PC riflettente.
Cabinet bar with aluminum structure under wall unit with reflective PC diffuser.



Accessori inclusi / Included accessories



Staffe / Brackets

	colour temp.	colour	Accessori inclusi / Included accessories
LEDBAR-UNIX-30 8031414866403 lumen 658 lm watt 12W beam angle 120°			12W 1500 mm 25x100x40mm 1000 mm
LEDBAR-UNIX-45 8031414864614 lumen 978 lm watt 12W beam angle 120°			12W 1500 mm 25x100x40mm 1000 mm
LEDBAR-UNIX-60 8031414864621 lumen 1315 lm watt 12W beam angle 120°			12W 1500 mm 25x100x40mm 1000 mm
LEDBAR-UNIX-90 8031414864492 lumen 1974 lm watt 20W beam angle 120°			20W 1500 mm 30x115x45mm 1000 mm
LEDBAR-UNIX-120 8031414864508 lumen 2632 lm watt 30W beam angle 120°			30W 1500 mm 30x160x40mm 1000 mm
LEDBAR-UNIX-150 8031414865185 lumen 3290 lm watt 30W beam angle 120°			30W 1500 mm 30x160x40mm 1000 mm
LEDBAR-UNIX-180 8031414865154 lumen 3940 lm watt 60W beam angle 120°			60W 1500 mm 30x185x45mm 1000 mm
LEDBAR-UNIX-210 8031414865161 lumen 4600 lm watt 60W beam angle 120°			60W 1500 mm 30x185x45mm 1000 mm
LEDBAR-UNIX-270 8031414865178 lumen 5922 lm watt 60W beam angle 120°			60W 1500 mm 30x185x45mm 1000 mm
LEDBAR-UNIX-300 8031414870738 lumen 6580 lm watt 60W beam angle 120°			60W 1500 mm 30x185x45mm 1000 mm

Barra sottopensile angolare in alluminio con diffusore in PC riflettente.
Angular cabinet bar with aluminum structure under wall unit with reflective PC diffuser.



Accessori inclusi / Included accessories



Staffe / Brackets

	colour temp.	colour	Accessori inclusi / Included accessories
LEDBAR-UNIX-45 ANG 8031414864607 lumen 978 lm watt 12W beam angle 120°			12W 1500 mm 25x100x40 mm 1000 mm
LEDBAR-UNIX-60 ANG 8031414864478 lumen 1315 lm watt 12W beam angle 120°			12W 1500 mm 25x100x40mm 1000 mm
LEDBAR-UNIX-90 ANG 8031414864485 lumen 1974 lm watt 17,28W beam angle 120°			20W 1500 mm 30x115x45mm 1000 mm
LEDBAR-UNIX-120 ANG 8031414864577 lumen 2632 lm watt 30W beam angle 120°			30W 1500 mm 30x160x40mm 1000 mm
LEDBAR-UNIX-150 ANG 8031414866373 lumen 3290 lm watt 30W beam angle 120°			30W 1500 mm 30x160x40mm 1000 mm
LEDBAR-UNIX-180 ANG 8031414866380 lumen 3940 lm watt 60W beam angle 120°			60W 1500 mm 30x185x45mm 1000 mm
LEDBAR-UNIX-210 ANG 8031414866359 lumen 4600 lm watt 60W beam angle 120°			60W 1500 mm 30x185x45mm 1000 mm
LEDBAR-UNIX-240 ANG 8031414866366 lumen 5264 lm watt 60W beam angle 120°			60W 1500 mm 30x185x45mm 1000 mm
LEDBAR-UNIX-300 ANG 8031414866342 lumen 6580 lm watt 60W beam angle 120°			60W 1500 mm 30x185x45mm 1000 mm

T8

Barra sottopensile con struttura in alluminio a LED integrato con diffusore in PC.
Cabinet bar with integrated LED aluminum structure for under cabinet with PC diffuser.

indoor use

accommodation areas use

Materiale
struttura in alluminio, diffusore in PC

Colore
bianco

Temperatura colore
4000K


Driver
integrato

Material
aluminum body with PC diffuser

Colour
white

Colour temperature
4000K

Driver
built-in

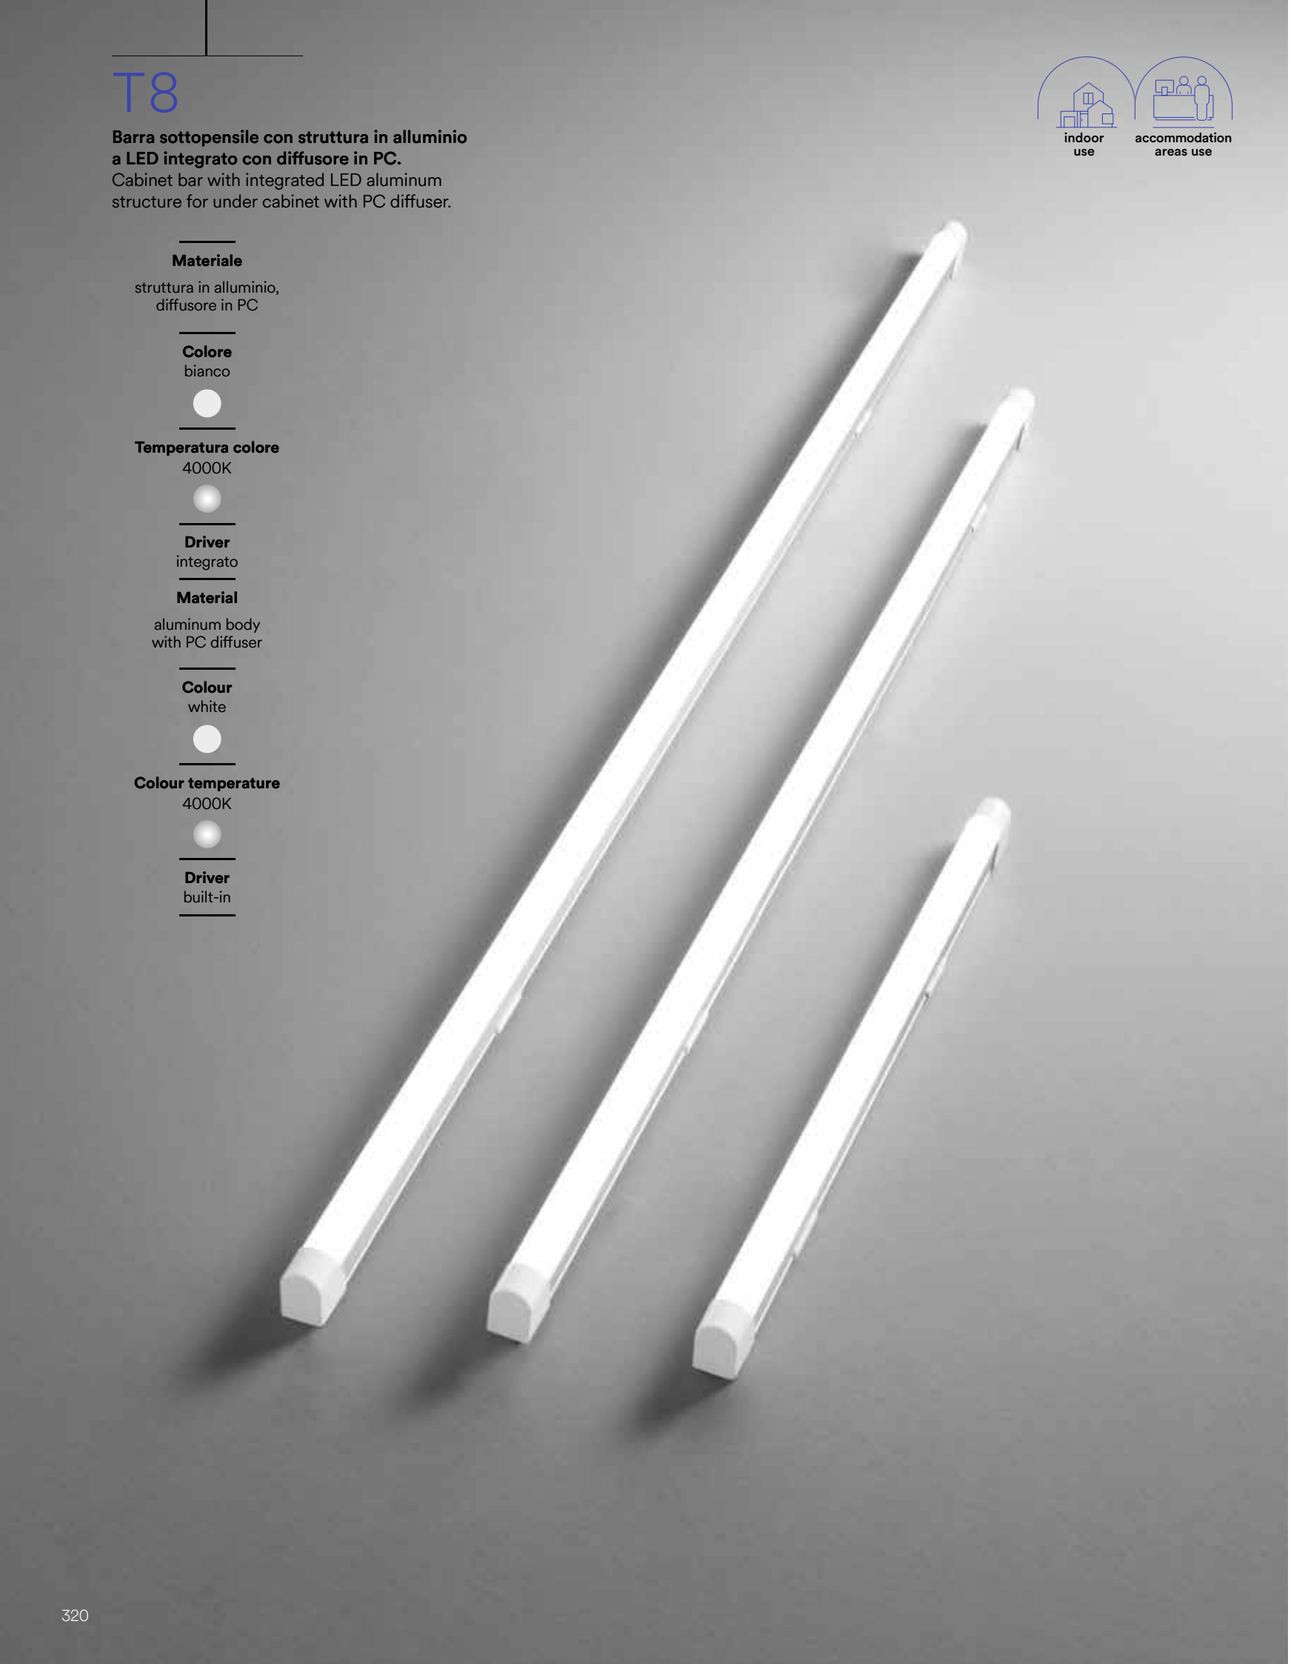




colour temp. | colour

LEDBAR-T8-60
8031414875382

lumen	850 lm
watt	9W
beam angle	120°


LEDBAR-T8-120
8031414875399

lumen	1700 lm
watt	18W
beam angle	120°



LEDBAR-T8-150
8031414875405

lumen	2300 lm
watt	24W
beam angle	120°



Accessori inclusi / Included accessories



BATTEN

Barra ultra sottile a LED integrato.
Ultra slim cabinet built-in LED bar.

indoor use

accommodation areas use

Materiale
struttura in PC bianco, diffusore in PC bianco

Colore
bianco

Temperatura colore
4000K

Driver
integrato

Material
PC white body with PC white diffuser

Colour
white

Colour temperature
4000K

Driver
built-in




CRI >80


LED SMD




	colour temp.	colour
LED-BATTEN-30		
8031440357722		
lumen	1077 lm	
watt	9W	
beam angle	120°	




LED-BATTEN-60		
8031440357739		
lumen	2166 lm	
watt	18W	
beam angle	120°	



LED-BATTEN-120		
8031440357746		
lumen	4252 lm	
watt	36W	
beam angle	120°	



LED-BATTEN-150		
8031440357753		
lumen	5677 lm	
watt	48W	
beam angle	120°	



Accessori inclusi / Included accessories



Staffe / Brackets

HABILIS

Barra sottopensile angolare in alluminio a LED integrato con diffusore in PC.
Angular cabinet bar with integrated LED aluminum structure with PC diffuser.





Materiale
struttura in alluminio diffusore in PC

Material
aluminum body with PC diffuser

Colore
bianco

Colour
white

Temperatura colore
4000K

Colour temperature
4000K

Interruttore
incluso


Swicth
included

Driver
integrato

Driver
built-in



	colour temp.	colour
LED-HABILIS-AP 8031414881604 lumen	1750 lm	
watt	15W	
beam angle	105°	
2 plug max 16A		
2 USB 2.4A		



T5

Barra sottopensile con struttura e diffusore in PC.
Cabinet bar with PC structure and diffuser.

Materiale
struttura in PC
diffusore in PC

Colore
bianco

Temperatura colore
4000K

Interruttore
incluso

Driver
integrato

Material
PC white body with PC white diffuser

Colour
white


Colour temperature
4000K

Swicth
included

Driver
built-in

indoor use

accommodation areas use

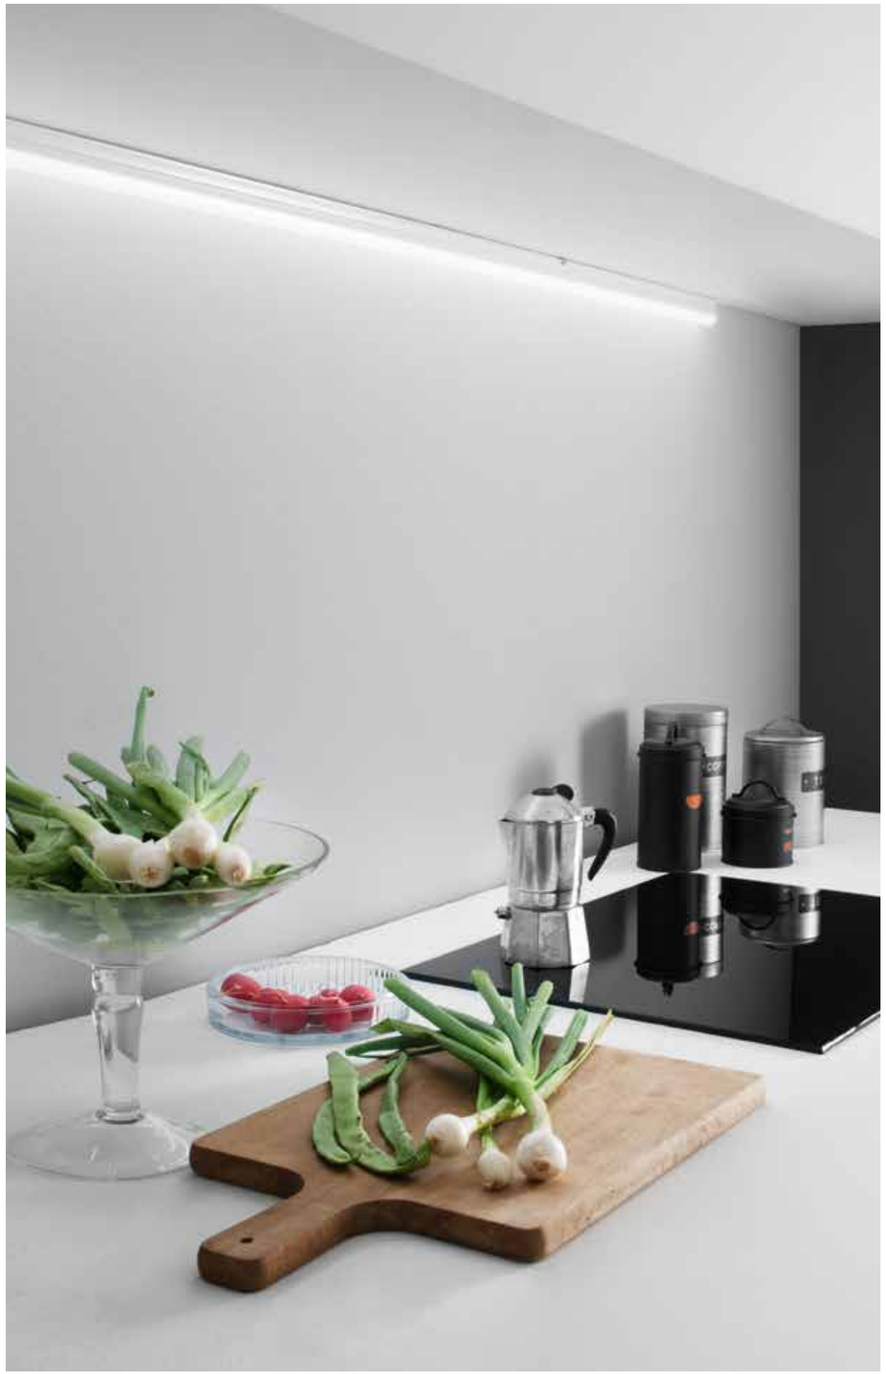




CRI >80

LED SMD







	colour temp.	colour
LEDBAR-T5-30		
8031440354691		
lumen	436 lm	
watt		5W
beam angle		135°




LEDBAR-T5-60		
8031440354707		
lumen	784 lm	
watt		8W
beam angle		135°




LEDBAR-T5-90		
8031440354677		
lumen	1249 lm	
watt		12W
beam angle		135°



LEDBAR-T5-120		
8031440354684		
lumen	1565 lm	
watt		15W
beam angle		135°



LEDBAR-T5-150		
8031414871742		
lumen	1926 lm	
watt		18W
beam angle		135°



Accessori inclusi / Included accessories



MOVIE

Barra sottopensile orientabile con struttura e diffusore in PC.
Adjustable cabinet bar with PC structure and diffuser.

Materiale
struttura in PC
diffusore in PC

Colore
bianco

Temperatura colore
4000K

Temperatura colore selezionabile
2700K / 4000K / 6500K

Interruttore
incluso

Driver
integrato

Material
PC body with PC diffuser

Colour
white

Colour temperature
4000K

Selectable color temperature
2700K / 4000K / 6500K

Swicth
included

Driver
built-in






indoor use

accommodation areas use


CRI >80

LED SMD

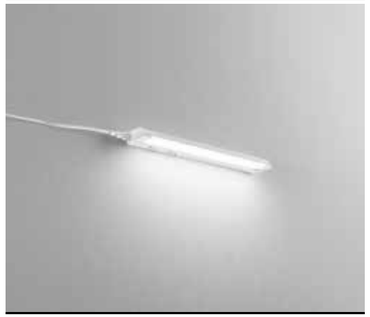

colour temp. | colour


LEDBAR-MOVIE-S
8031414866427
lumen 500 lm
watt 6W
beam angle 120°





colour temp. | colour


LEDBAR-MOVIE
8031440355100
lumen 800 lm
watt 8W
beam angle 120°






colour temp. | colour


LEDBAR-MOVIE-L
8031414866441
lumen 1200 lm
watt 11W
beam angle 120°



Accessori inclusi / Included accessories



Connettore / Connector

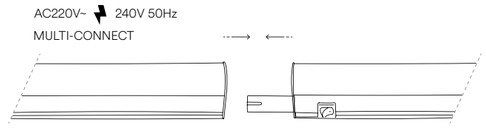

ZAK

Lampada LED con sensore IR.
IR sensor LED lamp.

indoor use

accommodation areas use

Materiale
struttura in alluminio, diffusore in PC riflettente

Colore
silver

Temperatura colore
3000K

Driver
non incluso DC12V

Material
aluminum body with PC reflective diffuser

Colour
silver


Colour temperature
3000K

Driver
not included DC12V



CRI >80


LED SMD

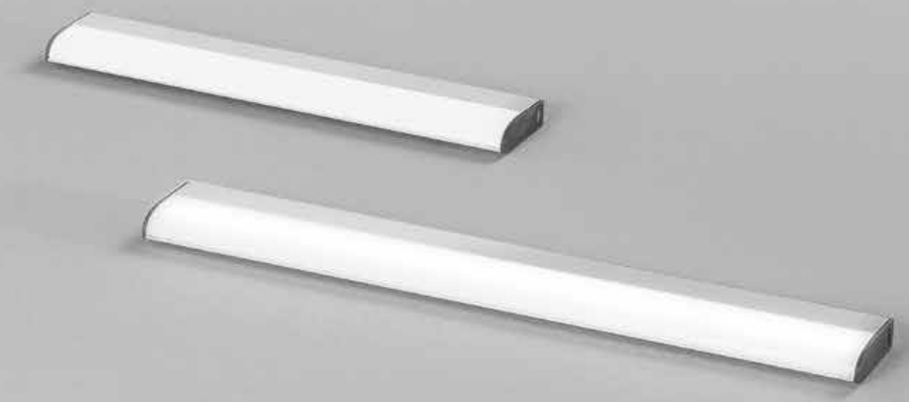

	colour temp.	colour


LEDBAT-ZAK-IR26
8031414882281

lumen	100 lm
watt	1,20W
beam angle	110°



LEDBAT-ZAK-IR35
8031414882298

lumen	150 lm
watt	1,70W
beam angle	110°



Accessori inclusi / Included accessories

IR
Sensore 2 funzioni /
2 function sensor





3.7V 1600mAh
Batteria ricaricabile inclusa /
Included rechargeable battery



DC5V 0,4A Micro USB
Cavo / Cable

GTO

Materiale
policarbonato

Colore
bianco

Temperatura colore
3000K

Material
polycarbonate

Colour
white

Colour temperature
3000K

LED SMD

indoor use


accommodation areas use

Lampada con sensore di movimento ricaricabile.
Rechargeable lamp with motion sensor.





	colour temp.	colour
LEDBAT-GTO 8031414882274		
lumen	105 lm	
watt	1W	



Accessori inclusi / Included accessories

Sensore di movimento / Motion sensor
2m in side
4m in front
120°
25"

DC 3.7V 1A
Batteria ricaricabile / Rechargeable battery
2 hours

DC5V 0,4A Micro USB
Cavo / Cable

AURIKA

Materiale
policarbonato

Colore
bianco

Temperatura colore
3000K

Material
polycarbonate

Colour
white

Colour temperature
3000K


LED SMD

Lampada LED con sensore IR.
IR sensor LED lamp.





	colour temp.	colour
LEDBAT-AURIKA 8031414882250		
lumen	100 lm	
watt	1,25W	



Accessori inclusi / Included accessories

IR
Sensore / sensor
ON/OFF

DC 3.7V 2.2A
Batteria ricaricabile / Rechargeable battery
2 hours

DC5V 0,4A Micro USB
Cavo / Cable

BLAM

Materiale
alluminio

Colore
struttura silver
diffusore bianco

Temperatura colore
3000K

Material
aluminum

Colour
silver structure
white diffuser

Colour temperature
3000K

LED SMD


indoor use

accommodation areas use

Lampada LED con sensore IR.
IR sensor LED lamp.



	colour temp.	colour
LEDBAT-BLAM-IR38 8031414882267		
lumen	150 lm	
watt	1,7W	



Accessori inclusi / Included accessories

IR
Sensore / Sensor
ON/OFF

DC 3.7V 2.2A
Batteria ricaricabile / Rechargeable battery
2 hours

DC5V 0,4A Micro USB
Cavo / Cable



CLOSET

indoor use

accommodation areas use

Materiale
policarbonato

Colore
silver

Temperatura colore
4000K

Material
polycarbonate

Colour
silver

Colour temperature
4000K


LED SMD

Lampada con sensore di movimento.
Lamp with motion sensor.





	colour temp.	colour
LED-CLOSET-10 8031414873012		
lumen	105 lm	
watt	1W	



Accessori inclusi /
Included accessories

Sensore di movimento /
Motion sensor

3m 110° 15"

DC 5V 1A
Batteria ricaricabile /
Rechargeable battery

2 hours

Micro USB charging wires DC 5V
Cavo non incluso / Not included cable

TRIGGER

Materiale
policarbonato

Colore
silver

Temperatura colore
4000K

Material
polycarbonate

Colour
silver

Colour temperature
4000K

LED SMD

Kit 2pz. copri cerniera.
Kit 2pz. hinge cover.





	colour temp.	colour
LED-TRIGGER 8031414873005		
watt	0,2W DC12V	



Accessorio non incluso /
Not included accessory

2x23A
Batteria / Battery



Compatibile per cerniera a scatto collo "0" /
Compatibe with "0" neck snap hinge

SHELF

indoor use

accommodation areas use

Materiale
policarbonato

Colore

struttura silver
diffusore bianco

Temperatura colore
4000K

Material
polycarbonate

Colour

silver structure
white diffuser


Colour temperature
4000K

LED SMD

Lampada con sensore di movimento.
Lamp with motion sensor.



	colour temp.	colour
LED-SHELF-R7 8031414873029		
lumen	110 lm	
watt	1W	



Accessori inclusi /
Included accessories

Sensore di movimento /
Motion sensor


3m 110° 15"

DC 5V 1A
Batteria ricaricabile /
Rechargeable battery

2 hours

Micro USB charging wires DC 5V
Cavo non incluso / Not included cable





PROFILI E STRIP LED
PROFILES AND STRIP LED

Profiles for recessed and surface installation


I profili per installazione a incasso o a parete sono realizzati con materiali di alta qualità e si distinguono per la loro facilità d'installazione. Garantiscono una distribuzione uniforme della luce e consentono configurazioni personalizzate. Proteggono le strisce LED durante il montaggio e si integrano perfettamente nell'ambiente circostante.
Profiles for recessed or wall installation are made of high-quality materials and are distinguished by their ease of installation. They ensure even light distribution and allow custom configurations. They protect LED strips during installation and blend seamlessly into their surroundings.





GORIZIA
PROFILE


Strip LED non inclusa
vedi p. 398 a p. 435 /
see p. 398 to p. 435


Profilo a rapido fissaggio nel cartongesso. Diffusore opale e tappi inclusi / Quick fixing profile in plasteboard with opal diffuser and caps included.

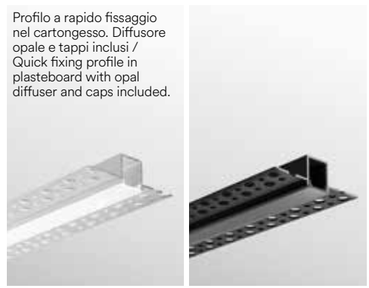


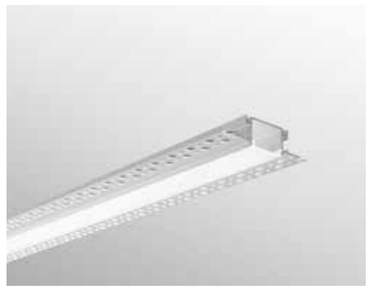

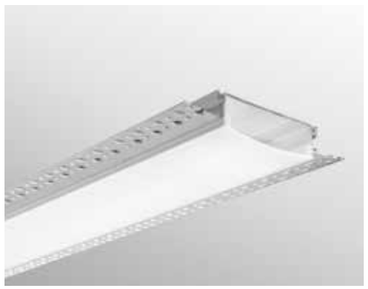

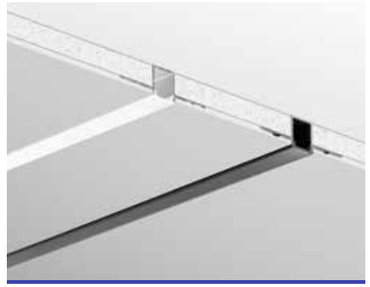

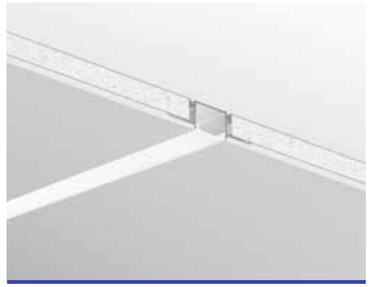


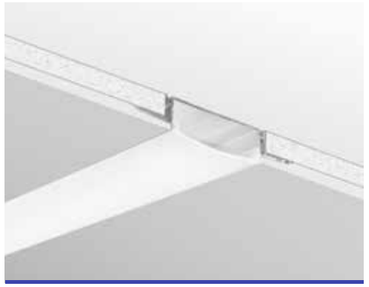



	length	colour
I-PROFILO-GORIZIA-S 8031414876587	2 m	aluminum
I-PROFILO-GORIZIA-S NER 8031414876624	2 m	black

	length	colour
I-PROFILO-GORIZIA 8031414871124	2 m	aluminum

	length	colour
I-PROFILO-GORIZIA-XL 8031414871094	2 m	aluminum








Accessori / Accessories	colour
2 pcs kit caps	
I-PROFILO-GORIZIA-S-CAP 8031414890491	transparent
I-PROFILO-GORIZIA-S-NER-CAP 8031414890507	black



	colour
I-PROFILO-GORIZIA-CAP 8031414890484	silver



	colour
I-PROFILO-GORIZIA-XL-CAP 8031414890514	silver

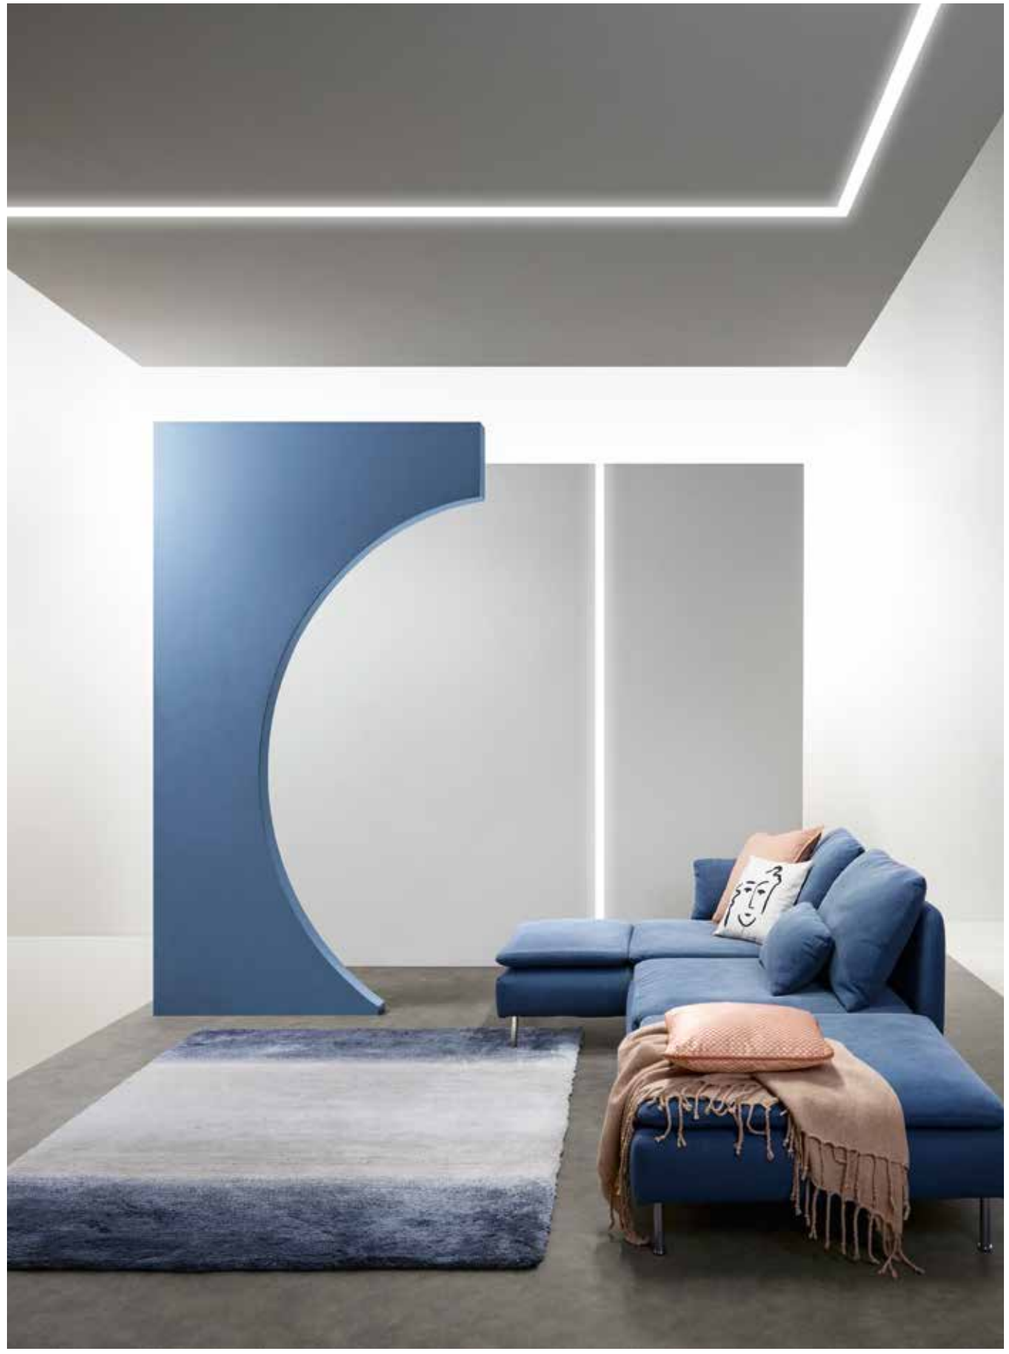


Installazione ad incasso /
Recessed installation


BEND
PROFILE

Strip LED non inclusa
vedi p. 398 a p. 435 /
see p. 398 to p. 435

Profilo snodabile a rapido fissaggio nel cartongesso.
Diffusore opale e tappi inclusi /
Articulated quick fixing profile in plasteboard
with opal diffuser and caps included.

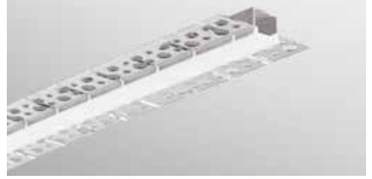




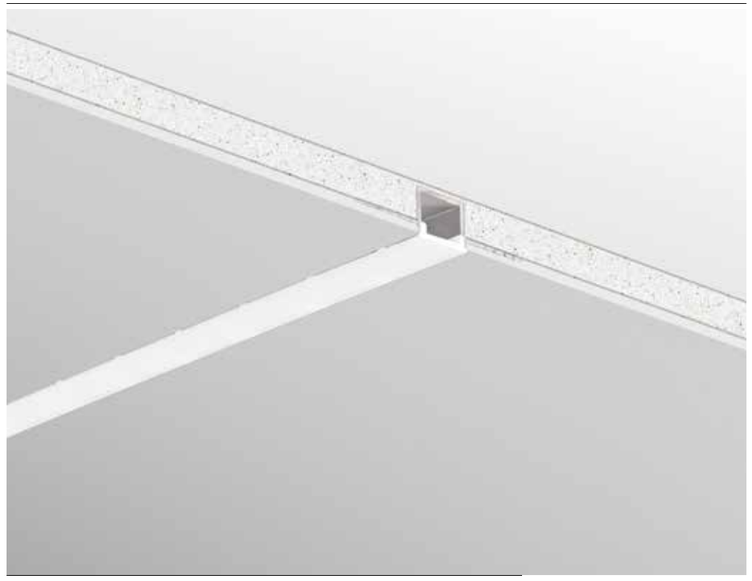


	length	colour
I-PROFILO-BEND 8031414915811	2 m	aluminum

Accessori / Accessories	colour
2 pcs kit caps	
I-PROFILO-BEND-CAP 8031414923557	silver




Installazione ad incasso /
Recessed installation

EDGE
PROFILE

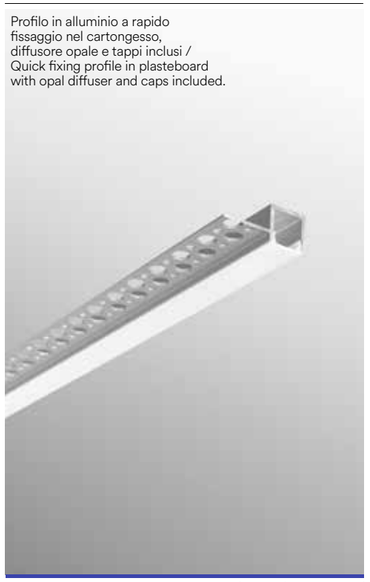

Profilo in alluminio a rapido fissaggio nel cartongesso, diffusore opale e tappi inclusi /
Quick fixing profile in plasteboard with opal diffuser and caps included.

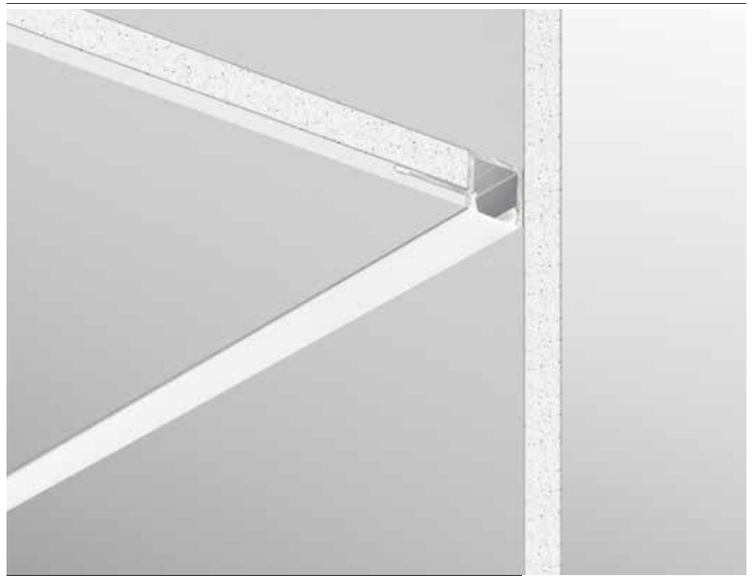



Strip LED non inclusa
vedi p. 398 a p. 435 /
see p. 398 to p. 435


	length	colour
I-PROFILO-EDGE 8031414897575	2 m	aluminum



Accessori / Accessories	colour
2 pcs kit caps **I-PROFILO-EDGE-CAP** 8031414897582	silver





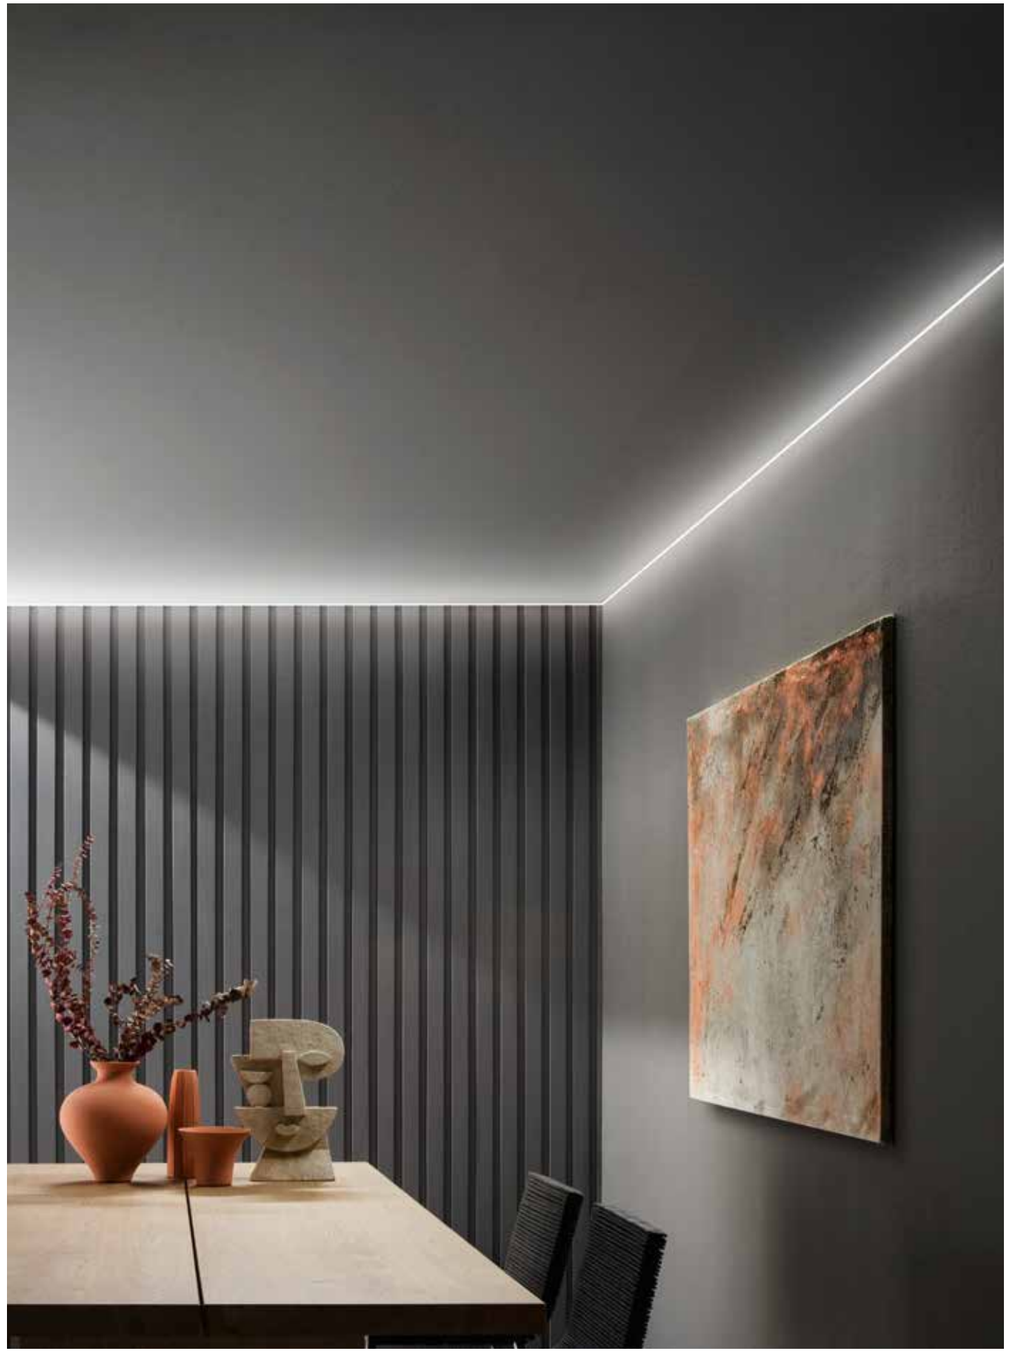



Installazione angolare ad incasso /
Recessed angular installation

RIDGE
PROFILE

Strip LED non inclusa
vedi p. 398 a p. 435 /
see p. 398 to p. 435

Profilo angolare in alluminio a rapido fissaggio nel cartongesso, diffusore opale e tappi inclusi /
Quick fixing angular profile in plasteboard with opal diffuser and caps included.

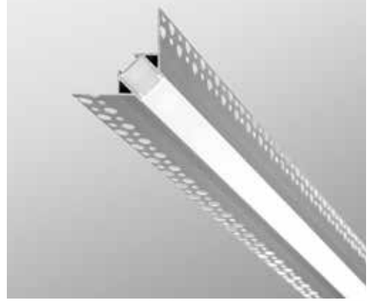

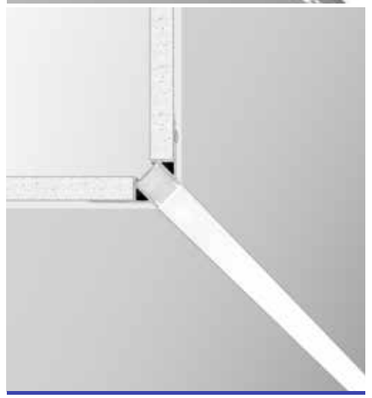




	length	colour
I-PROFILO-RIDGE-2 8031414876570	2 m	aluminum


Accessori / Accessories



2 pcs kit caps

	colour
I-PROFILO-RIDGE-CAP 8031414890552	aluminum







Installazione angolare ad incasso /
Recessed angular installation

ANGLE
PROFILE

Strip LED non inclusa
vedi p. 398 a p. 435 /
see p. 398 to p. 435

Profilo angolare in alluminio a rapido fissaggio nel cartongesso, diffusore opale e tappi inclusi /
Quick fixing angular profile in plasteboard with opal diffuser and caps included.

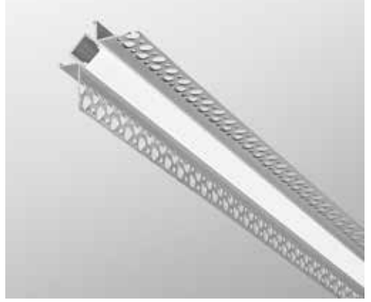

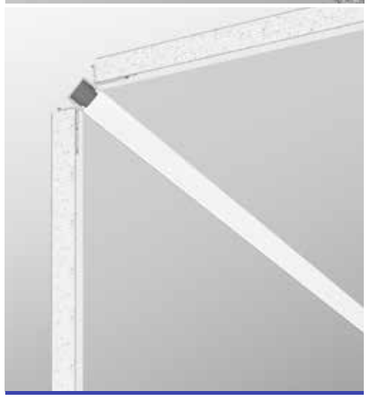





	length	colour
I-PROFILO-ANGLE 8031414915798	2 m	aluminum

Accessori / Accessories

2 pcs kit caps

	colour
I-PROFILO-ANGLE-CAP 8031414923540	aluminum





Installazione ad incasso /
Recessed installation

BERLINO
PROFILE


Strip LED non inclusa
vedi p. 398 a p. 435 /
LED strip not included
see p. 398 to p. 435

Profilo a rapido fissaggio nel cartongesso o superfici esterne, diffusore disponibile in due varianti, tappi e staffe incluse /
Quick-fixing profile in plasterboard or exterior surfaces, diffuser available in two variants, caps and brackets included.








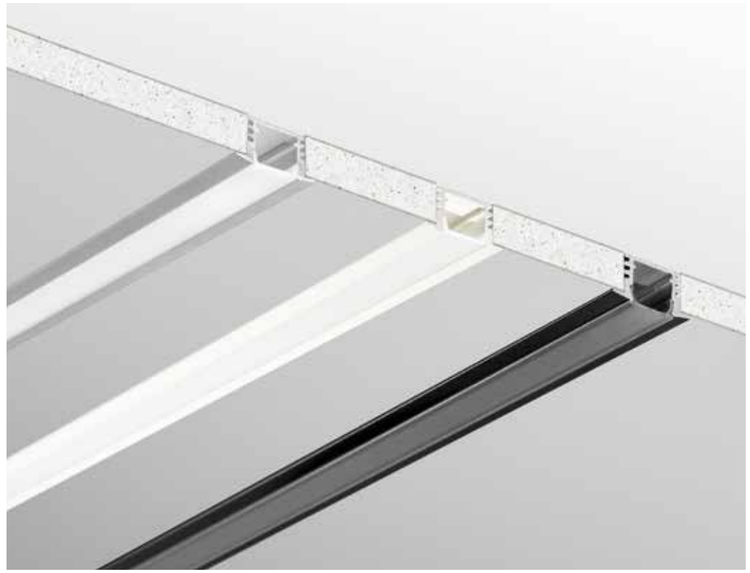

	length	colour
I-PROFILO-BERLINO 8031434611212	1 m	aluminum
I-PROFILO-BERLINO-2 8031440359405	2 m	aluminum
I-PROFILO-BERLINO-2 BCO 8031414871070	2 m	white
I-PROFILO-BERLINO-2 NER 8031414876617	2 m	black





Accessori / Accessories		colour
	2 m PC trasparent diffuser **I-PROF-BERLINO2-DIFF** 8031440357647	transparent
	2 pcs kit caps **I-PROFILO-BERLINO-CAP** 8031414890446	silver
	**I-PROFILO-BERLINO-BCO-CAP** 8031414890453	white
	**I-PROFILO-BERLINO-NER-CAP** 8031414890460	black



Installazione ad incasso o a superficie /
Recessed or surface installation


ROMA
PROFILE

Strip LED non inclusa
vedi p. 398 a p. 435 /
see p. 398 to p. 435


Profilo a rapido fissaggio nel cartongesso o superfici esterne, diffusore disponibile in due varianti, tappi e staffe incluse /
Quick-fixing profile in plasterboard or exterior surfaces, diffuser available in two variants, caps and brackets included.





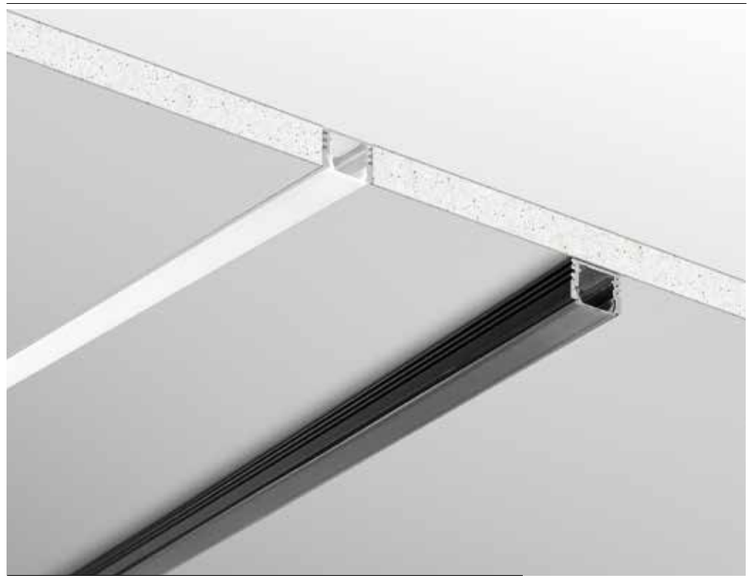

	length	colour
I-PROFILO-ROMA 8031434601213	1 m	aluminum
I-PROFILO-ROMA-2 8031440359399	2 m	aluminum
I-PROFILO-ROMA-2 NER 8031414876600	2 m	black



Accessori / Accessories	colour
 2 m PC trasparent diffuser **I-PROF-ROMA2-DIFF** 8031440357630	transparent
 2 pcs kit caps **I-PROFILO-ROMA-CAP** 8031414890569	silver
 **I-PROFILO-ROMA-NER-CAP** 8031414890576	black



Installazione ad incasso o a superficie /
Recessed or surface installation

MICRO
PROFILE

Strip LED non inclusa
vedi p. 398 a p. 435 /
LED strip not included
see p. 398 to p. 435

Profilo a rapido fissaggio nel cartongesso o superfici esterne, diffusore opale, tappi e staffe inclusi /
Quick-fixing profile in plasterboard or exterior surfaces, opal diffuser, caps and brackets included.







	length	colour
I-PROFILO-MICRO 8031414888740	2 m	aluminum





Accessori / Accessories		colour
	2 pcs kit caps **I-PROFILO-MICRO-CAP** 8031414888757	silver



Installazione ad incasso /
Recessed installation

INCRO
PROFILE

Strip LED non inclusa
vedi p. 398 a p. 435 /
LED strip not included
see p. 398 to p. 435

Profilo a rapido fissaggio nel cartongesso o superfici esterne, diffusore opale, tappi e staffe inclusi /
Quick-fixing profile in plasterboard or exterior surfaces, opal diffuser, caps and brackets included.







	length	colour
I-PROFILO-INCRO 8031414888764	2 m	aluminum





Accessori / Accessories		colour
	2 pcs kit caps **I-PROFILO-INCRO-CAP** 8031414888771	silver



Profiles for surface installation

I profili per installazione a superficie (lineari, flessibili e angolari) sono progettati per cartongesso e muratura. Offrono un supporto resistente per l'illuminazione a LED, proteggendo le strisce durante l'installazione. Il design moderno consente configurazioni personalizzate per adattarsi a diverse esigenze architettoniche.
Surface installation profiles (linear, flexible, and angular profiles) are designed for drywall and masonry. They offer durable support for LED lighting, protecting the strips during installation. The modern design allows custom configurations to suit different architectural needs.



Installazione a superficie /
Surface installation

LOOP
PROFILE


Strip LED non inclusa
vedi p. 398 a p. 435 /
LED strip not included
see p. 398 to p. 435


Profilo li in alluminio per installazione a muro/soffitto o sospensione, diffusore a emissione a 180°, tappi e staffe inclusi / Aluminum profile for wall/ceiling installation or suspension, 180° emission diffuser, caps and brackets included.



length | colour

I-PROFILO-LOOP-2
8031414881840
2 m aluminum





Accessori / Accessories | colour




2 pcs kit caps

I-PROFILO-LOOP-CAP
8031414881857
silver



LINEA
PROFILE

Strip LED non inclusa
vedi p. 398 a p. 435 /
see p. 398 to p. 435

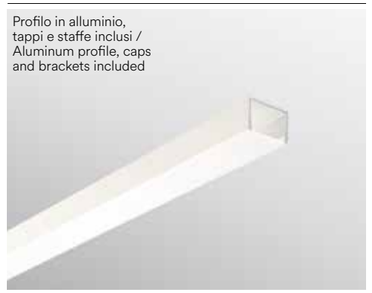


Profilo in alluminio,
tappi e staffe inclusi /
Aluminum profile, caps
and brackets included





	length	colour
I-PROFILO-LINEA-2-BCO 8031414881963	2 m	white
I-PROFILO-LINEA-2-NER 8031414881987	2 m	black






Accessori / Accessories		colour
	2 pcs kit caps **I-PROFILO-LINEA-BCO-CAP** 8031414881970	white
	**I-PROFILO-LINEA-NER-CAP** 8031414882199	black



MILANO
PROFILE

Strip LED non inclusa
vedi p. 398 a p. 435 /
see p. 398 to p. 435


Profilo con diffusore opale, tappi e staffette inclusi /
Profile with opal diffuser caps and brackets included.

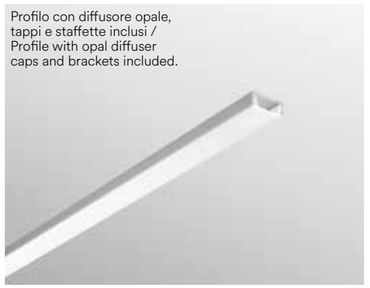





	length	colour
I-PROFILO-MILANO 8031434611854	1 m	aluminum
I-PROFILO-MILANO-2 8031440359412	2 m	aluminum
I-PROFILO-MILANO-2 BCO 8031414871100	2 m	white



Accessori / Accessories	colour
2 m PC trasparent diffuser **I-PROF-MILANO2-DIFF** 8031440357654	transparent
 2 pcs kit caps **I-PROFILO-MILANO-CAP** 8031414890538	silver
 **I-PROFILO-MILANO-BCO-CAP** 8031414890521	white

ULTRA
PROFILE

Strip LED non inclusa
vedi p. 398 a p. 435 /
see p. 398 to p. 435

Profilo con diffusore opale, tappi e staffette inclusi /
Profile with opal diffuser, caps and brackets included.






	length	colour
I-PROFILO-ULTRA 8031414888788	2 m	aluminum





Accessori / Accessories	colour
 2 pcs kit caps **I-PROFILO-ULTRA-CAP** 8031414890255	silver

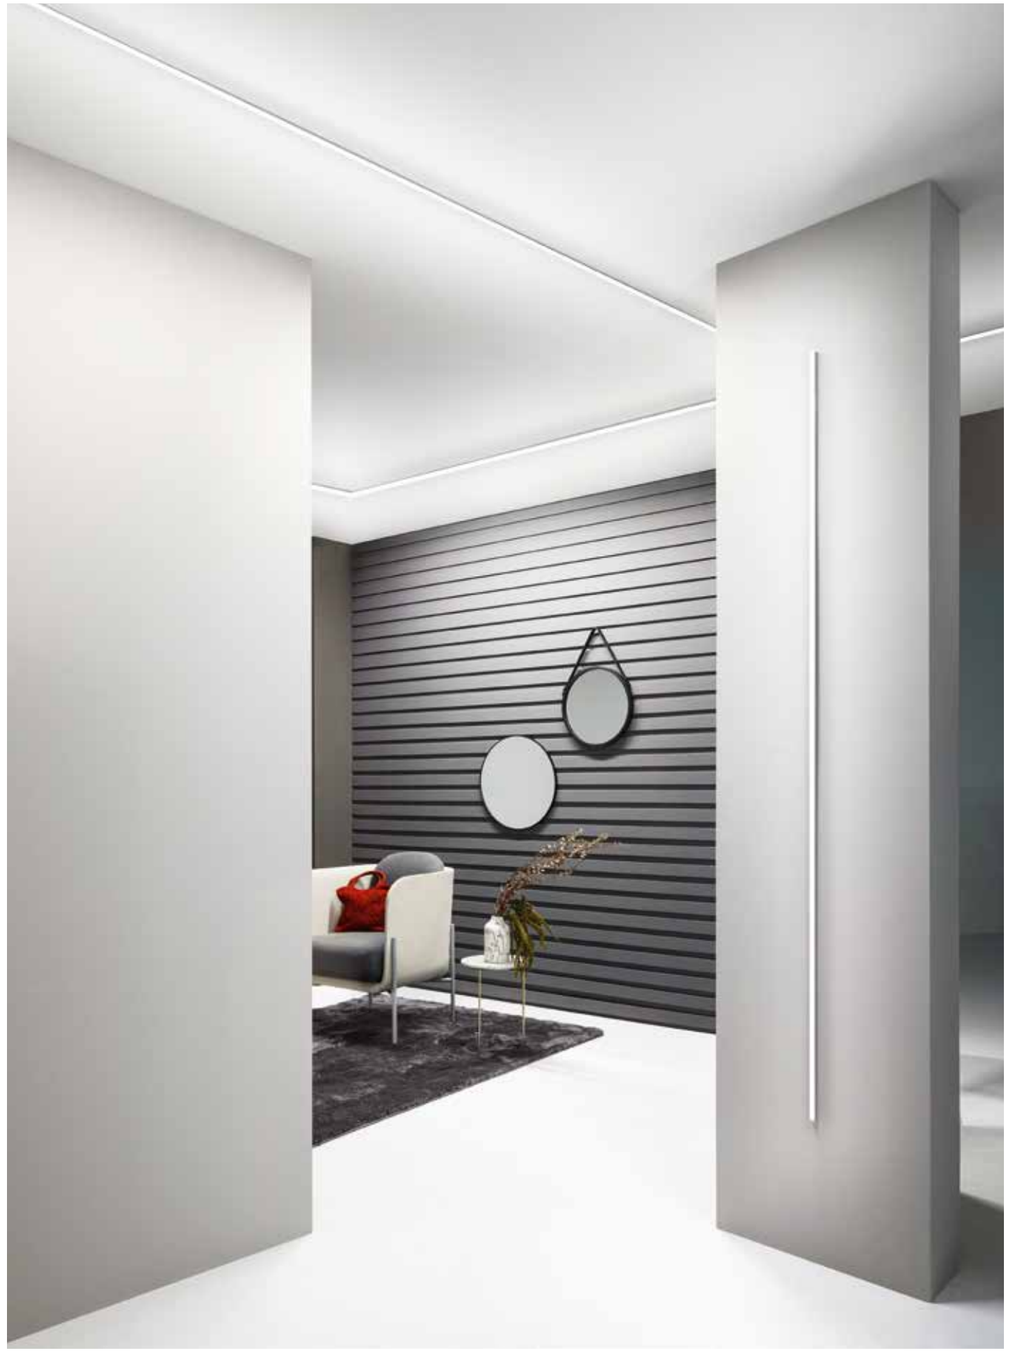


Installazione a superficie /
Surface installation

CAMELOT
PROFILE

Strip LED non inclusa
vedi p. 398 a p. 435 /
see p. 398 to p. 435


Profilo flessibile con diffusore opale, tappi e staffette inclusi /
Flexible profile with opal diffuser, caps and brackets included.

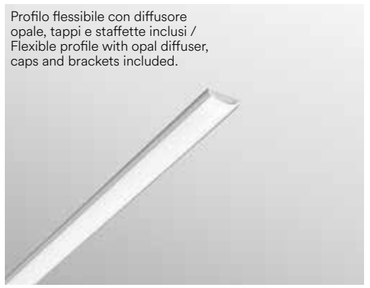





	length	colour
I-PROFILO-CAMELOT 8031414871087	2 m	aluminum





Accessori / Accessories	colour
 2 pcs kit caps **I-PROFILO-CAMELOT-CAP** 8031414890477	silver

Installazione a superficie /
Surface installation

TUBE
PROFILE

Strip LED non inclusa
vedi p. 398 a p. 435 /
LED strip not included
see p. 398 to p. 435

Profilo in alluminio per installazione
a muro/soffitto o sospensione, diffusore
a emissione a 180°, tappi e staffe inclusi /
Aluminum profile for installation wall/ceiling
or suspension, 180° emission diffuser,
caps and brackets included.



Installazione a plafoniera /
Ceiling installation

Installazione a sospensione /
Suspended installation



	length	colour
I-PROFILO-TUBE-2 8031414881925	2 m	aluminum

Accessori / Accessories — colour




2 pcs kit caps


I-PROFILO-TUBE-CAP
8031414881932 — white



Kit suspension mountig system 2,5 m

I-PROFILO-TUBE-SOSP
8031414882243 — silver








Installazione angolare a superficie /
Angular surface installation

NEWYORK
PROFILE



Profilo angolare a rapido fissaggio
nel cartongesso, diffusore opale,
tappi e staffe inclusi /
Quick-fixing angle profile in plasterboard,
opal diffuser, caps and brackets included.

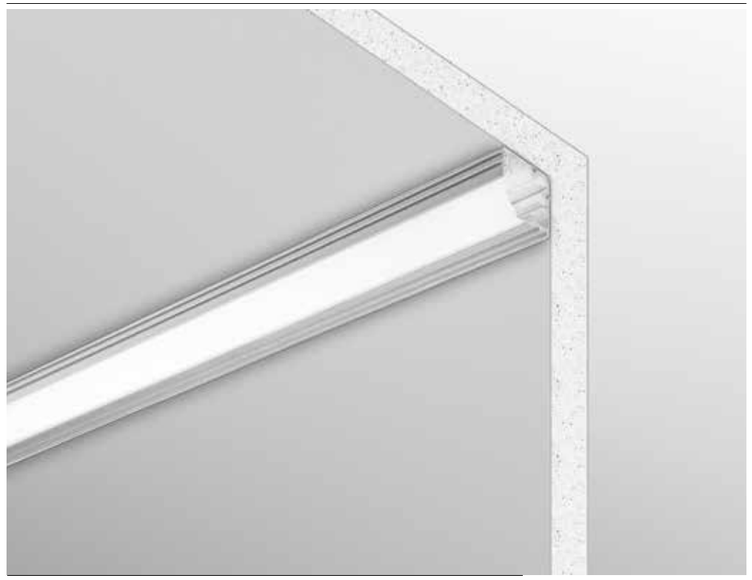


Strip LED non inclusa
vedi p. 398 a p. 435 /
see p. 398 to p. 435

	length	colour
I-PROFILO-NEWYORK 8031434581218	1 m	aluminum
I-PROFILO-NEWYORK-2 8031440359382	2 m	aluminum

Accessori / Accessories

		colour
	2 m PC trasparent diffuser **I-PROF-NEWYORK2-DIFF** 8031440357623	trasparente
	2 pcs kit caps **I-PROFILO-NEWYORK-CAP** 8031414890545	silver







Installazione angolare a superficie /
Angular surface installation

DORIK
PROFILE

Strip LED non inclusa
vedi p. 398 a p. 435 /
LED strip not included
see p. 398 to p. 435

Profilo angolare in alluminio con fissaggio a parete, diffusore opale, tappi e staffe inclusi / Angular aluminium profile with wall mounting, opal diffuser, caps and brackets included.












	length	colour
I-PROFILO-DORIK-16-2 8031414882205	2 m	aluminum





	length	colour
I-PROFILO-DORIK-2 8031414876556	2 m	aluminum





Accessori / Accessories	colour
2 pcs kit caps for DORIK 16×16 mm **I-PROFILO-DORIK-16-CAP** 8031414882212	silver
2 pcs kit caps for DORIK 29,7×29,7 mm **I-PROFILO-DORIK-CAP** 8031414877768	silver

Installazione angolare a superficie /
Angular surface installation

IONIK
PROFILE

Strip LED non inclusa
vedi p. 398 a p. 435 /
LED strip not included
see p. 398 to p. 435

Profilo angolare in alluminio con fissaggio a parete, diffusore opale, tappi e staffe inclusi / Angular aluminium profile with wall mounting, opal diffuser, caps and brackets included.













	length	colour
I-PROFILO-IONIK-16-2 8031414882229	2 m	aluminum





	length	colour
I-PROFILO-IONIK-2 8031414876549	2 m	aluminum





Accessori / Accessories	colour
2 pcs kit caps for IONIK 16×16 mm **I-PROFILO-IONIK-16-CAP** 8031414882236	silver
2 pcs kit caps for IONIK 29,7×29,7 mm **I-PROFILO-IONIK-CAP** 8031414877775	silver

STEPWAY
PROFILE


Strip LED non inclusa
vedi p. 398 a p. 435 /
see p. 398 to p. 435


Profilo per gradini,
diffusore opale e tappi inclusi /
Step profile, opal diffuser
and caps included.





	length	colour
I-PROFILO-STEPWAY 8031414876594	2 m	aluminum





Accessori / Accessories	colour
 2 pcs kit caps **I-PROFILO-STEPWAY-CAP** 8031414877782	silver



Installazione calpestabile ad incasso /
Walkable recessed installation


DRIVEWAY
PROFILE

Strip LED non inclusa
vedi p. 398 a p. 435 /
LED strip not included
see p. 398 to p. 435


IP44

Profilo in alluminio a incasso carrabile, tappi e staffe inclusi /
Driveway recessed aluminum profile, caps and brackets included.



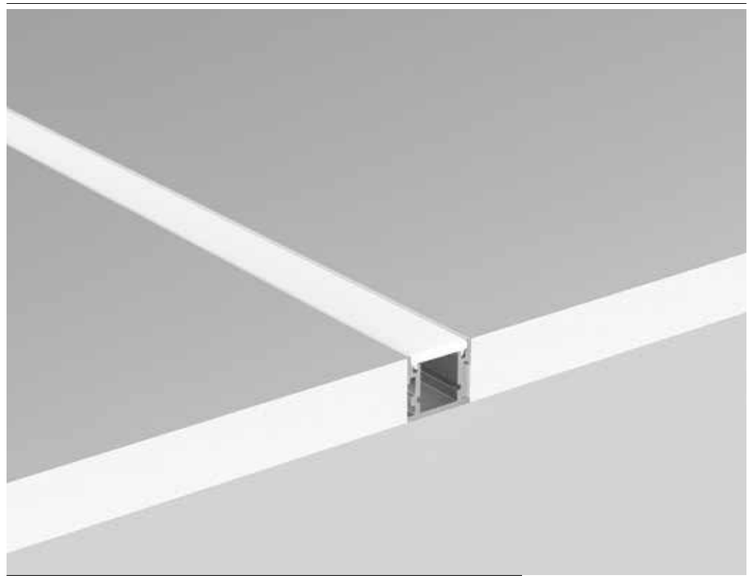

	length	colour
I-PROFILO-DRIVEWAY-2 8031414881949	2 m	aluminum
pressure loads		max 2000 kg





Accessori / Accessories	colour
2 pcs kit caps **I-PROFILO-DRIVEWAY-CAP** 8031414881956	silver





Profiles for veil installation

I profili per installazione a veletta sono progettati per consentire l'integrazione dell'illuminazione a LED nei soffitti e per distribuire uniformemente la luce nei vari ambienti, creando un'illuminazione diffusa. Questi profili permettono inoltre di nascondere le sorgenti luminose e i cablaggi, contribuendo a un aspetto estetico più pulito e moderno.
Veil installation profiles are designed to allow LED lighting to be integrated into ceilings and to evenly distribute light in different rooms, creating diffuse lighting. These profiles also allow light sources and wiring to be hidden, contributing to a cleaner, more modern aesthetic appearance.



GASH
PROFILE

Strip LED non inclusa
vedi p. 398 a p. 435 /
LED strip not included
see p. 398 to p. 435

Profilo a veletta bianco, diffusore opale e tappi inclusi / White veil profile, opal diffuser and caps included.




Applicazione con staffe I-PROFILO-GASH-STL / Installation by brackets I-PROFILO-GASH-STL




Applicazione con staffe I-PROFILO-GASH-STZ / Installation by brackets I-PROFILO-GASH-STZ




	length	colour
I-PROFILO-GASH 8031414890262	2 m	aluminum



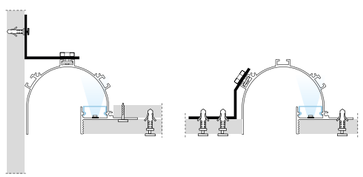

Accessori / Accessories

		colour
	2 pcs kit caps **I-PROFILO-GASH-CAP** 8031414890279	white
	2 pcs kit brackets with included screws **I-PROFILO-GASH-STL** 8031414889990	aluminum
	**I-PROFILO-GASH-STZ** 8031414890286	aluminum

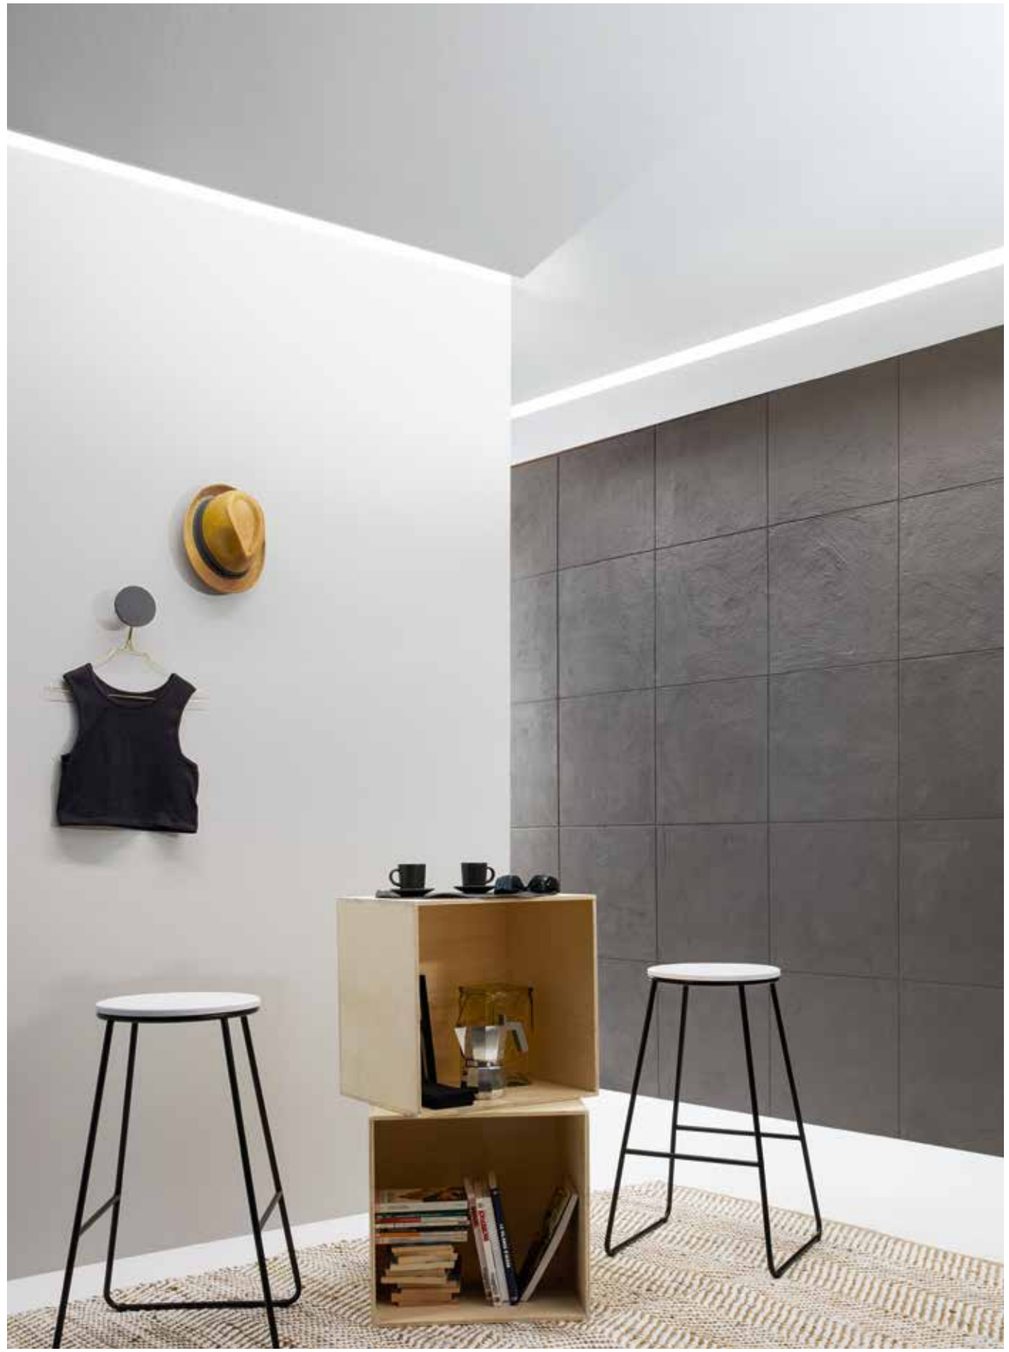


Installazione a veletta /
Veil installation

TRIM
PROFILE

Strip LED non inclusa
vedi p. 398 a p. 435 /
see p. 398 to p. 435

Profilo a veletta, diffusore opale e tappi inclusi /
Veil profile, opal diffuser and caps included.

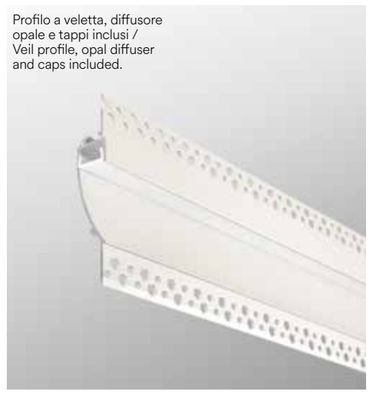






	length	colour
I-PROFILO-TRIM-2 8031414876563	2 m	white

Accessori / Accessories



	colour
2 pcs kit caps **I-PROFILO-TRIM-CAP** 8031414890583	white



Installazione a veletta /
Veil installation

MOP
PROFILE

Strip LED non inclusa
vedi p. 398 a p. 435 /
see p. 398 to p. 435

Profilo a veletta, diffusore opale e tappi inclusi /
Veil profile, opal diffuser and caps included.








	length	colour
I-PROFILO-MOP 8031414890019	2 m	white

Accessori / Accessories

	colour
2 pcs kit caps **I-PROFILO-MOP-CAP** 8031414888733	white



Installazione a veletta /
Veil installation

VEIL
PROFILE

Strip LED non inclusa
vedi p. 398 a p. 435 /
LED strip not included
see p. 398 to p. 435









	length	colour
I-PROFILO-VEIL-2 8031414881901	2 m	white

Accessori / Accessories



	colour
2 pcs kit caps **I-PROFILO-VEIL-CAP** 8031414881918	white





Installazione a veletta /
Veil installation

WING
PROFILE

Strip LED non inclusa
vedi p. 398 a p. 435 /
LED strip not included
see p. 398 to p. 435








	length	colour
I-PROFILO-WING 8031414915804	2 m	white

Accessori / Accessories



	colour
2 pcs kit caps **I-PROFILO-WING-CAP** 8031414923564	white





DUAL
PROFILE

Strip LED non inclusa
vedi p. 398 a p. 435 /
see p. 398 to p. 435

Profilo in alluminio a doppia emissione, tappi e staffe inclusi /
Double-emitting aluminum profile, caps and brackets included.








	length	colour
I-PROFILO-DUAL-2-BCO 8031414881864	2 m	white
I-PROFILO-DUAL-2-NER 8031414881888	2 m	black

Accessori / Accessories		colour
	2 pcs kit caps **I-PROFILO-DUAL-BCO-CAP** 8031414881871	white
	**I-PROFILO-DUAL-NER-CAP** 8031414881895	black





Paintable gypsum profile, recessed and surface installation


I profili in gesso verniciabile, progettati per un'installazione a incasso e/o superficie, sono disponibili in varianti lineari e decorative. Adatti all'utilizzo su cartongesso e muratura, offrono una solida versatilità e garantiscono un risultato tecnico ed estetico di alto livello per una vasta gamma di progetti illuminotecnici.
Paintable gypsum profiles, designed for recessed and/or surface installation, are available in linear and decorative variants. Suitable for use on plasterboard and masonry, they offer solid versatility and ensure a high level of technical and aesthetic result for a wide range of lighting projects.



INVISILINE
PROFILE

Strip LED non inclusa
vedi p. 398 a p. 435 /
see p. 398 to p. 435

Lastra in cartongesso con profilo in alluminio integrato /
Plasterboard slab with integrated aluminum profile

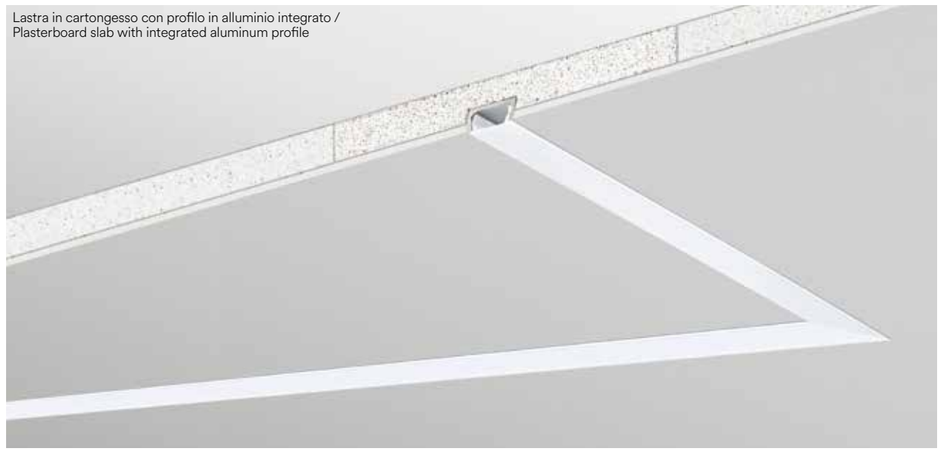




Kit 3 pz / Kit 3 pcs

length




length

I-INVISILINE-2
8031414916221
2 m

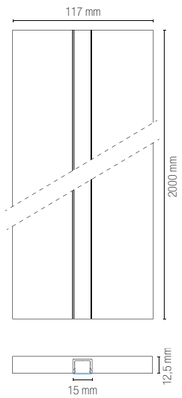

I-INVISILINE-L
8031414916238
2 m

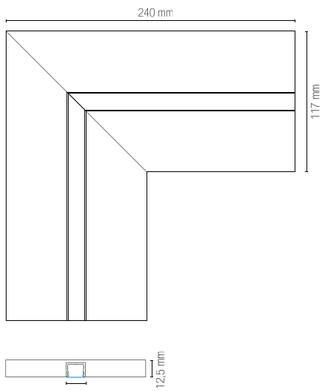



PROFY BIS
PROFILE

PROFY MONO
PROFILE

Strip LED non inclusa
vedi p. 398 a p. 435 /
LED strip not included
see p. 398 to p. 435

Profilo a veletta,
diffusore opale e
tappi inclusi /
Veil profile, opal diffuser
and caps included.



Profilo a veletta,
diffusore opale e
tappi inclusi /
Veil profile, opal diffuser
and caps included.












I-PROFY-BIS
8031414882359

Profilo in gesso per led
biemissione, incluso anima
alluminio e diffusori in PC /
Gypsum profile for led
double emission including
PC cover and aluminum


Diffusori in PC / PC-diffuser
1000 × 61 × 41 mm





I-PROFY-BIS-L
8031414882380


Angolo L per profilo in gesso per
led biemissione incluso anima
in alluminio e diffusori in PC /
Gypsum corner profile including
PC cover and aluminum




I-PROFY-MONO
8031414882366

Profilo in gesso per led singola
emissione, angolo 90° anima
alluminio e diffusore in PC /
Gypsum profile for LED single emission
including PC cover and aluminum


Diffusori in PC / PC-diffuser
1000 × 61 × 41 mm





I-PROFY-MONO-L
8031414882397

Angolo L per profilo in gesso per
led singola emissione, angolo 90°,
anima alluminio e diffusore in PC /
Gypsum corner profile including
PC cover and aluminum





PROFY GIMEL
PROFILE

Profilo a veletta, diffusore opale e tappi inclusi / Veil profile, opal diffuser and caps included.






I-PROFY-GIMEL
8031414882410

Profilo in gesso per led singola emissione, anima allumimio e diffusore in PC / Gypsum profile for led single emission including PC cover and aluminum


Diffusori in PC / PC-diffuser
1000 × 61 × 41 mm






I-PROFY-GIMEL-L
8031414882427

Angolo L per profilo in gesso per led, singola emissione, anima alluminio e diffusore in PC / Gypsum corner profile including PC cover and aluminum





PROFY VELA
PROFILE

Profilo a veletta, diffusore opale e tappi inclusi / Veil profile, opal diffuser and caps included.







I-PROFY-VELA
8031414882373

Profilo in gesso per led singola emissione, anima allumimio e diffusore in PC / Gypsum profile for led single emission including PC cover and aluminum

Diffusori in PC / PC-diffuser
1000 × 61 × 41 mm







I-PROFY-VELA-L
8031414882403

Angolo L per profilo in gesso per led, singola emissione, anima alluminio e diffusore in PC / Gypsum corner profile including PC cover and aluminum



Strip LED non inclusa
vedi p. 398 a p. 435 /
LED strip not included
see p. 398 to p. 435





Installazione a superficie /
Surface installation

PIANO
PROFILE

Strip LED non inclusa
vedi p. 398 a p. 435 /
LED strip not included
see p. 398 to p. 435


Profilo base per disposizione strip /
Profile dissipation base.

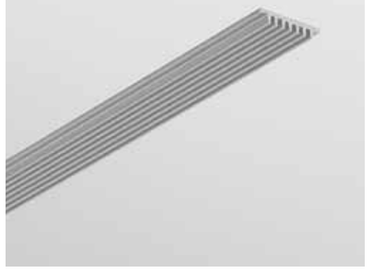


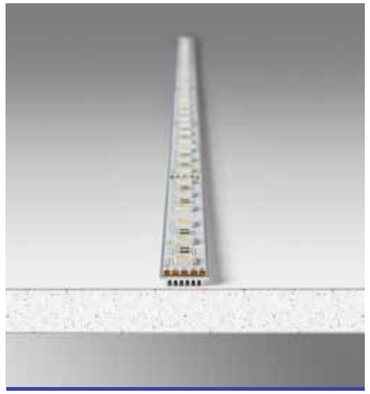


length | colour

I-PROFILO-PIANO-2
8031414878802
2 m aluminum










STRIP-HANDSENSOR-W
8031414879335


Scheda rilevatore movimento mano per strip singolo colore
input DC12V-24V
output DC12V-24V 60/120W 5A max

Hand motion card for single color strip DC12V-24V
output DC12V-24V 60/120W 5A max



Funzioni sensore interruttore
Raggio di rilevamento 5-15 cm

Motion sensor switch
Detection range 5-15 cm






STRIP-PIRSENSOR
8031414879373

Scheda sensore movimento pir per strip Input DC12V-24V
output DC12V-24V 60/120W 5A max

Pir motion sensor card for strip DC12V-24V output
DC12V-24V 60/120W 5A max



Funzioni sensore movimento

Motion sensor function






STRIP-TOUCH-W
8031414879359

Scheda pulsante touch per strip singolo colore input DC12V-24V
output DC12V-24V 60/120W 5A max

Touch botton card for single color strip DC12V-24V
output DC12V-24V 60/120W 5A max



Funzioni sensore touch
Passando sul sensore entro i 0,5 secondi si attiva la funzione ON/OFF

Restando sul sensore oltre i 0,5 secondi si attiva la funzione di regolazione di intensità luminosa (massima - minima - massima)

Touch sensor function
When touching the sensor within 0,5 second the switch status changes ON/OFF

When touching the sensor for over 0,5 second the switch turn to adjustment status (high - low - high)



I-PROFILO-INC-STAFFE
8031414890002

Molla per incasso adatto per profili MILANO/ROMA/BERLINO, kit 2 pz

Metal spring for profile MILANO/ROMA/BERLINO, 2pcs kit

Accessori per barre LED.
LED bar accessories.



STRIP24V-8-CONN
8031414925940

Easy connector lineare luce continua per strip LED da 8mm

Linear easy connector continuous light for strip LED strip 8mm



STRIP24V-8-NEST
8031414925964

Innesto elettrico easy connection luce continua per strip LED da 8mm

Easy connection electrical nest continuous light for LED strip 8mm



STRIP24V-8-FLEX
8031414925988

Easy connector flessibile luce continua per strip LED da 8mm

Flexible easy connector continuous light for strip LED strip 8mm



STRIP24V-10-CONN
8031414925957

Easy connector lineare luce continua per strip LED da 10mm

Linear easy connector continuous light for strip LED strip 10mm



STRIP24V-10-NEST
8031414925971

Innesto elettrico easy connection luce continua per strip LED da 10mm

Easy connection electrical nest continuous light for LED strip 10mm



STRIP24V-10-FLEX
8031414925995

Easy connector flessibile luce continua per strip LED da 10mm

Flexible easy connector continuous light for strip LED strip 10mm



STRIP24V-8-L-CONN
8031414926008

Easy connector angolare luce continua per strip LED da 8mm

Easy connector angular continuous light for LED strip 8mm



STRIP24V-10-L-CONN
8031414926015

Easy connector angolare luce continua per strip LED da 10mm

Easy connector angular continuous light for LED strip 10mm

STRIP24V COB DIGITAL

indoor use · accommodation areas use · office use · commercial areas use



EASY DOMOTICA

Rotolo 5 metri strip led digital.
Protocollo WS2811.
Roll 5 meters digital strip-led. Protocollo WS2811.

CE

Driver p. 843-852
Controller p. 858-859

IP20 · CRI 90 · LED COB

Materiale
kapton
senza silicone

Temperatura colore
3000K / 4000K / 6500K

Driver
DC24V
tensione costante
non incluso

Durata e on/off
50.000h
>25.000 on/off

Material
kapton
without silicone


Colour temperature
3000K / 4000K / 6500K


Driver
DC24V
costant voltage
not included

Life time and on/off
50.000h
>25.000 on/off


	colour temp.
STRIP24V-COB-SPI-C	
8031414925513	
lumen/m	1020 lm
total lumen	5100 lm
STRIP24V-COB-SPI-M	
8031414925520	
lumen/m	1125 lm
total lumen	5625 lm
STRIP24V-COB-SPI-F	
8031414925537	
lumen/m	1095 lm
total lumen	5475 lm
light source	COB
watt/m	15W

Fotometria del prodotto / Photometric curve





Recommended Profiles p. 336 to p. 397

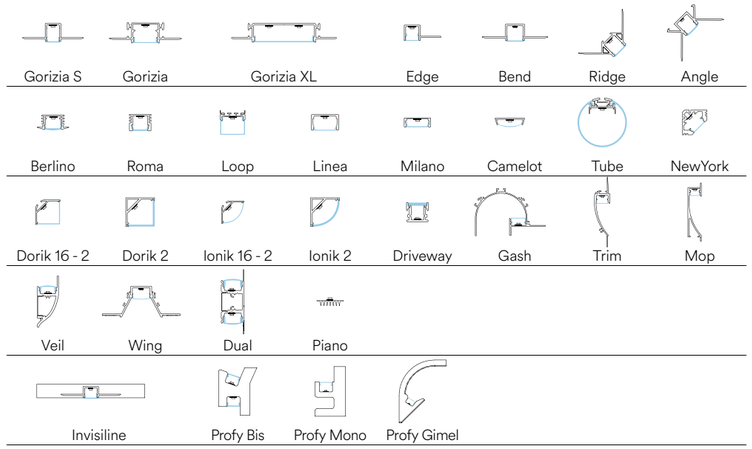

STRIP24V COB RGB DIGITAL

indoor use · accommodation areas use · office use · commercial areas use



EASY DOMOTICA

Rotolo 5 metri strip led digital.
Protocollo WS2811.
Roll 5 meters digital strip-led. Protocollo WS2811.

CE

Driver p. 843-852
Controller p. 858-859

IP20 · LED COB

Materiale
kapton
senza silicone

Temperatura colore
RGB

Driver
DC24V
tensione costante
non incluso

Durata e on/off
50.000h
>25.000 on/off

Material
kapton
without silicone


Colour temperature
RGB


Driver
DC24V
costant voltage
not included

Life time and on/off
50.000h
>25.000 on/off


	colour temp.
STRIP24V-COB-SPI-RGB	
8031414925544	
	RGB
light source	COB 5050
watt/m	15W

Fotometria del prodotto / Photometric curve





Recommended Profiles p. 336 to p. 397

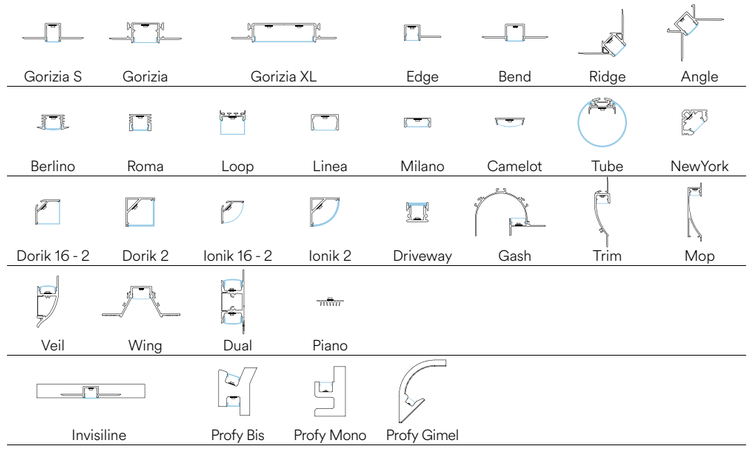

STRIP24V 2835 IP67 120

indoor use · outdoor use · accommodation areas use · office use · commercial areas use



EASY DOMOTICA

Rotolo 5 metri strip led.
Roll 5 meters strip-led.

CE

Driver p. 843-852
Controller p. 854-857

IP67 · CRI 90 · LED SMD

Materiale
kapton con rivestimento in silicone

Temperatura colore
3000K / 4000K / 6500K

Driver
DC24V
tensione costante
non incluso

Durata e on/off
50.000h
>25.000 on/off

Material
kapton with silicone cover


Colour temperature
3000K / 4000K / 6500K


Driver
DC24V
costant voltage
not included

Life time and on/off
50.000h
>25.000 on/off


	colour temp.
STRIP24V-2835IP67-120C	
8031414925551	
lumen/m	1800 lm
total lumen	9000 lm
STRIP24V-2835IP67-120M	
8031414925568	
lumen/m	1980 lm
total lumen	9900 lm
STRIP24V-2835IP67-120F	
8031414925575	
lumen/m	1890 lm
total lumen	9450 lm
light source	SMD 2835
watt/m	18W
led/m	120

Fotometria del prodotto / Photometric curve





Recommended Profiles p. 336 to p. 397

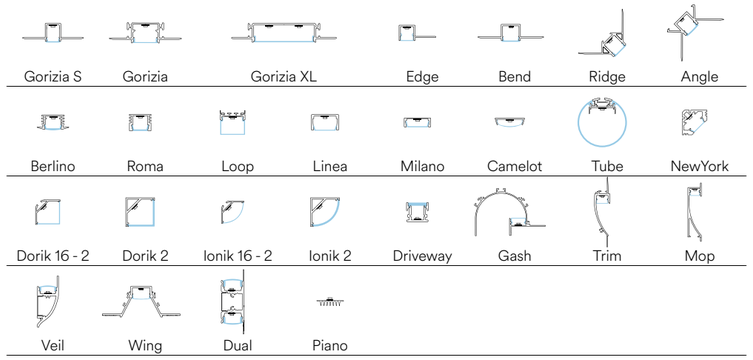

STRIP24V 2835 5W

indoor use · accommodation areas use · office use · commercial areas use



EASY DOMOTICA

Rotolo 5 metri strip led.
Roll 5 meters strip-led.

CE

Driver p. 843-852
Controller p. 854-857

IP20 · CRI 90 · LED SMD

Materiale
kapton senza silicone

Temperatura colore
3000K / 4000K / 6500K

Driver
DC24V
tensione costante
non incluso

Durata e on/off
50.000h
>25.000 on/off

Material
kapton without silicone


Colour temperature
3000K / 4000K / 6500K


Driver
DC24V
costant voltage
not included

Life time and on/off
50.000h
>25.000 on/off


	colour temp.
STRIP24V-2835-5C	
8031414925582	
lumen/m	475 lm
total lumen	2375 lm
STRIP24V-2835-5M	
8031414925599	
lumen/m	500 lm
total lumen	2500 lm
STRIP24V-2835-5F	
8031414925605	
lumen/m	490 lm
total lumen	2450 lm
light source	SMD 2835
watt/m	5W
led/m	60

Fotometria del prodotto / Photometric curve





Recommended Profiles p. 336 to p. 397

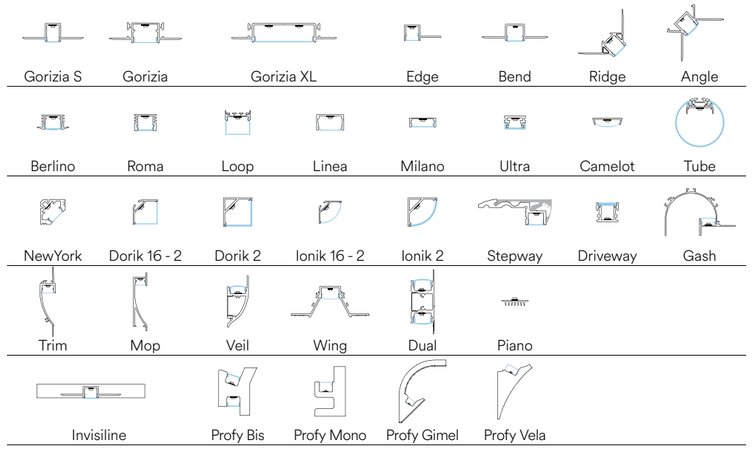

STRIP24V R20 2835 120

indoor use · accommodation areas use · office use · commercial areas use



EASY DOMOTICA

Rotolo 20 metri strip led.
Roll 20 meters strip-led.

Driver p. 843-852
Controller p. 854-857

IP20 · CRI 90 · LED SMD

Materiale
kapton
senza silicone

Temperatura colore
3000K / 4000K

Driver
DC24V
tensione costante
non incluso

Durata e on/off
50.000h
>25.000 on/off

Material
kapton
without silicone


Colour temperature
3000K / 4000K


Driver
DC24V
costant voltage
not included

Life time and on/off
50.000h
>25.000 on/off


	colour temp.
STRIP24V-R20-2835-120C	
8031414925612	
lumen/m	1800 lm
STRIP24V-R20-2835-120M	
8031414925629	
lumen/m	1980 lm
light source	SMD 2835
watt/m	18W
led/m	120

Fotometria del prodotto / Photometric curve





Recommended Profiles p. 336 to p. 397

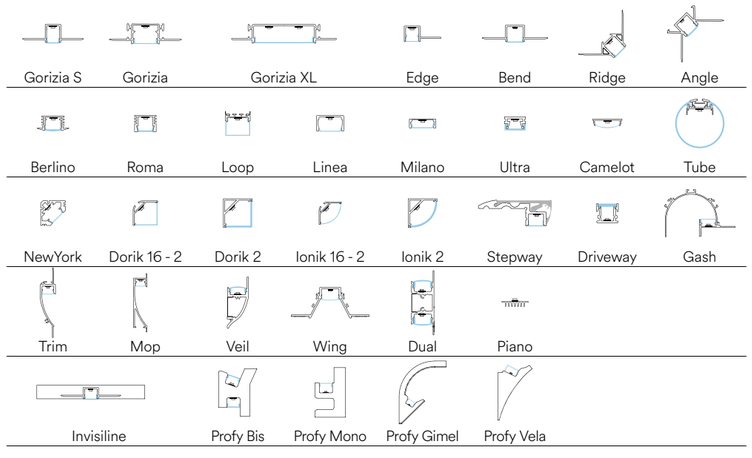

STRIP24V R20 COB 480

indoor use · accommodation areas use · office use · commercial areas use



EASY DOMOTICA

Rotolo 20 metri strip led.
Roll 20 meters strip-led.

Driver p. 843-852
Controller p. 854-857

IP20 · CRI 90 · LED COB

Materiale
kapton
senza silicone

Temperatura colore
3000K / 4000K

Driver
DC24V
tensione costante
non incluso

Durata e on/off
50.000h
>25.000 on/off

Material
kapton
without silicone


Colour temperature
3000K / 4000K


Driver
DC24V
costant voltage
not included

Life time and on/off
50.000h
>25.000 on/off


	colour temp.
STRIP24V-R20-COB-480C	
8031414925636	
lumen/m	1650 lm
STRIP24V-R20-COB-480M	
8031414925643	
lumen/m	1725 lm
light source	COB 480
watt/m	15W
led/m	480

Fotometria del prodotto / Photometric curve





Recommended Profiles p. 336 to p. 397

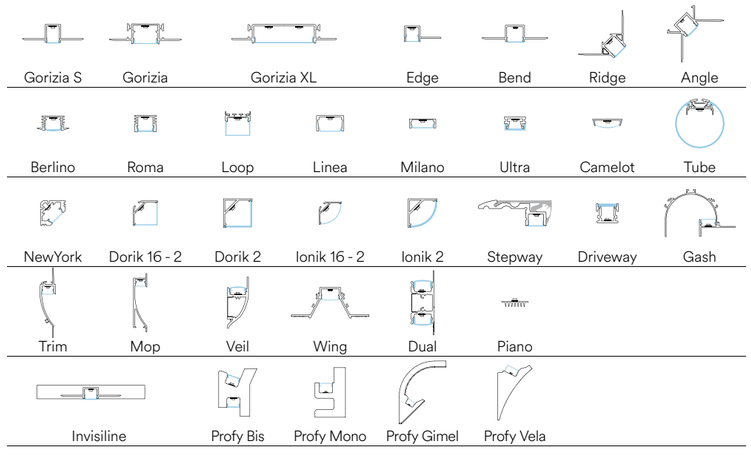

STRIP24V 2835 HL 128

indoor use · accommodation areas use · office use · commercial areas use



EASY DOMOTICA

Rotolo 5 metri strip led.
Roll 5 meters strip-led.

Driver p. 843-852
Controller p. 854-857

IP20 · CRI 90 · LED SMD

Materiale
kapton
senza silicone

Temperatura colore
3000K / 4000K / 6500K

Driver
DC24V
tensione costante
non incluso

Durata e on/off
50.000h
>25.000 on/off

Material
kapton
without silicone


Colour temperature
3000K / 4000K / 6500K


Driver
DC24V
costant voltage
not included

Life time and on/off
50.000h
>25.000 on/off


	colour temp.
STRIP24V-2835-HL-128C	
8031414925650	
lumen/m	2000 lm
total lumen	10000 lm
STRIP24V-2835-HL-128M	
8031414925667	
lumen/m	2100 lm
total lumen	10500 lm
STRIP24V-2835-HL-128F	
8031414925674	
lumen/m	2050 lm
total lumen	10250 lm
light source	SMD 2835
watt/m	10W
led/m	128

Fotometria del prodotto / Photometric curve





Recommended Profiles p. 336 to p. 397

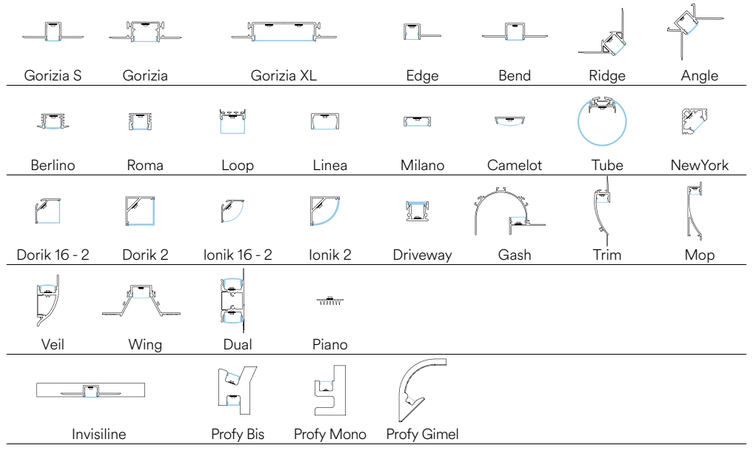

STRIP24V FOOD

indoor use · outdoor use · accommodation areas use · office use · commercial areas use



EASY DOMOTICA

Rotolo 5 metri strip led.
Roll 5 meters strip-led.

Driver p. 843-852
Controller p. 854-857

IP65 · CRI 90 · LED SMD

Materiale
kapton con
rivestimento
in silicone

Temperatura colore
2000K / 2600K / 5400K

Driver
DC24V
tensione costante
non incluso

Durata e on/off
50.000h
>25.000 on/off

Material
kapton
with silicone
cover

Colour temperature
2000K / 2600K / 5400K

Driver
DC24V
costant voltage
not included


Life time and on/off
50.000h
>25.000 on/off


Illuminazione per generi alimentari /
Food lighting




	colour temp.
STRIP24V-2835-120MT	
8031414925681	
lumen/m	1800 lm
total lumen	9000 lm
STRIP24V-2835-120BR	
8031414925704	
lumen/m	1980 lm
total lumen	9450 lm
STRIP24V-2835-120FS	
8031414925698	
lumen/m	1980 lm
total lumen	9900 lm
light source	SMD 2835
watt/m	18W
led/m	120

Fotometria del prodotto / Photometric curve





Recommended Profiles p. 336 to p. 397

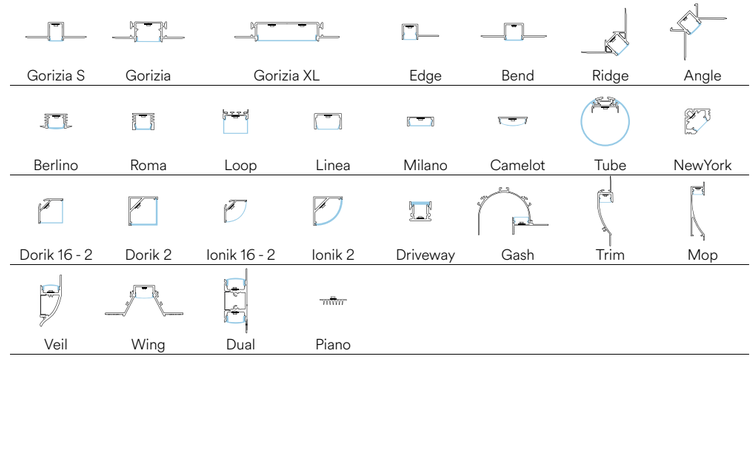

STRIP24V COB



EASY DOMOTICA

Rotolo 5 metri strip led.
Roll 5 meters strip-led.

Driver p. 843-852
Controller p. 854-857

IP20 · CRI 90 · LED COB

Materiale
kapton
senza silicone

Temperatura colore
3000K / 4000K / 6000K

Driver
DC24V
tensione costante
non incluso

Durata e on/off
50.000h
>25.000 on/off

Material
kapton
without silicone


Colour temperature
3000K / 4000K / 6000K


Driver
DC24V
costant voltage
not included

Life time and on/off
50.000h
>25.000 on/off


	colour temp.
STRIP24V-COB-480C	
8031414881697	
lumen/m	1538 lm
total lumen	7690 lm
STRIP24V-COB-480M	
8031414883516	
lumen/m	1700 lm
total lumen	8500 lm
STRIP24V-COB-480F	
8031414881703	
lumen/m	1698 lm
total lumen	8490 lm
light source	LED COB 480
watt/m	16W

Fotometria del prodotto / Photometric curve





Recommended Profiles p. 336 to p. 397

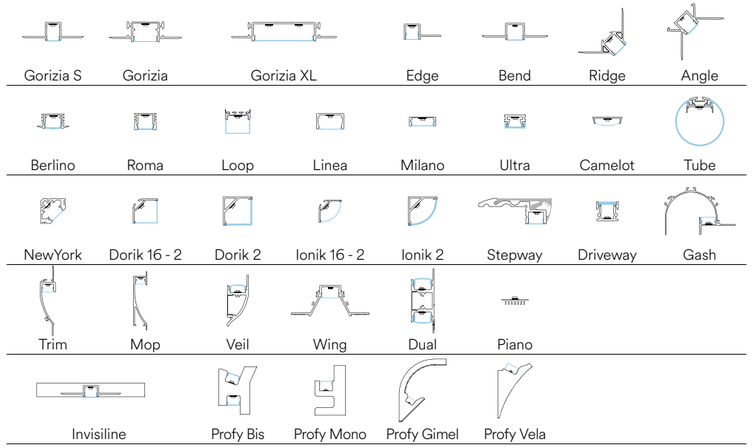

STRIP24V COB IP67



EASY DOMOTICA

Rotolo 5 metri strip led.
Roll 5 meters strip-led.

Driver p. 843-852
Controller p. 854-857

IP67 · CRI 90 · LED COB

Materiale
kapton
con silicone

Temperatura colore
3000K / 4000K / 6000K

Driver
DC24V
tensione costante
non incluso

Durata e on/off
50.000h
>25.000 on/off

Material
kapton
with silicone


Colour temperature
3000K / 4000K / 6000K


Driver
DC24V
costant voltage
not included

Life time and on/off
50.000h
>25.000 on/off


	colour temp.
STRIP24V-COB-IP67-480C	
8031414881710	
lumen/m	1538 lm
total lumen	7690 lm
STRIP24V-COB-IP67-480M	
8031414881727	
lumen/m	1700 lm
total lumen	8500 lm
STRIP24V-COB-IP67-480F	
8031414881734	
lumen/m	1698 lm
total lumen	8490 lm
light source	LED COB 480
watt/m	16W

Fotometria del prodotto / Photometric curve





Recommended Profiles p. 336 to p. 397

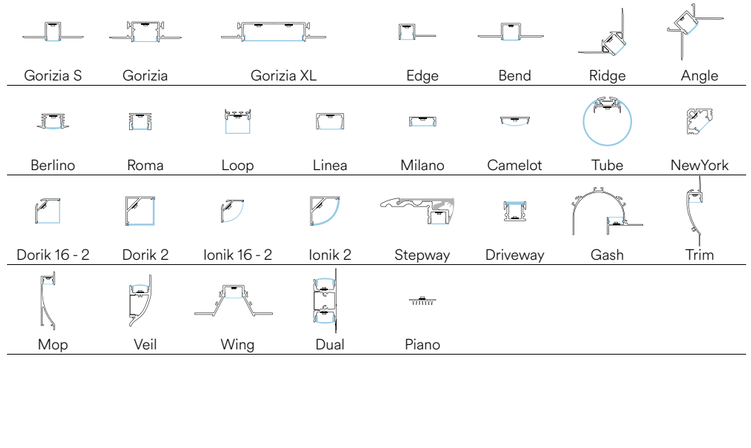

STRIP24V 2835 3D



EASY DOMOTICA

Rotolo 5 metri strip led.
Roll 5 meters strip-led.

Driver p. 843-852
Controller p. 854-857

IP20 · CRI 90 · LED SMD

Materiale
kapton
senza silicone

Temperatura colore
3000K / 4000K / 6000K

Driver
DC24V
tensione costante
non incluso

Durata e on/off
50.000h
>25.000 on/off

Material
kapton
without silicone


Colour temperature
3000K / 4000K / 6000K

Driver
DC24V
costant voltage
not included


Life time and on/off
50.000h
>25.000 on/off

	colour temp.
STRIP24V-2835-3D-60C	
8031414878765	
lumen/m	1542 lm
total lumen	7710 lm
STRIP24V-2835-3D-60M	
8031414878727	
lumen/m	1480 lm
total lumen	7400 lm
STRIP24V-2835-3D-60F	
8031414878628	
lumen/m	1542 lm
total lumen	7710 lm
light source	SMD 2835
watt/m	14W
led/m	60

Fotometria del prodotto / Photometric curve

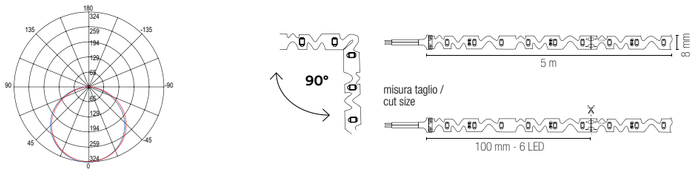

Recommended Profiles p. 336 to p. 397

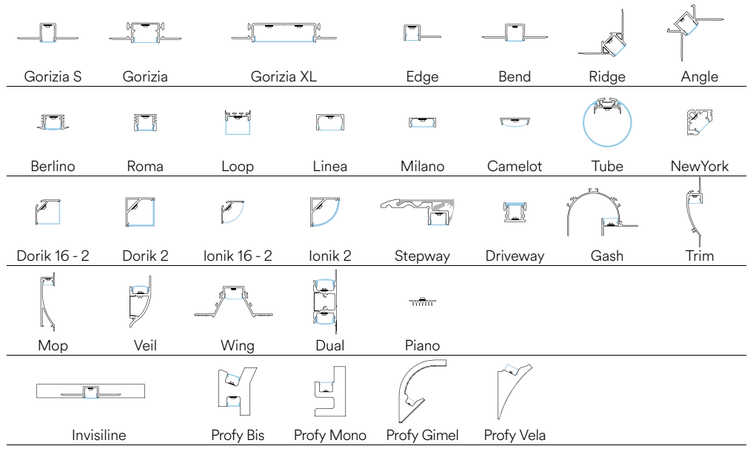

STRIP24V SLIM 120



EASY DOMOTICA


Rotolo 5 metri strip led ultrasottile.
Roll 5 meters ultra-thin strip-led.

Driver p. 843-852
Controller p. 854-857


IP20 · CRI 90 · LED SMD

	colour temp.
STRIP24V-SLIM-120C	
8031414881741	
lumen/m	1896 lm
total lumen	9480 lm
STRIP24V-SLIM-120M	
8031414881758	
lumen/m	1838 lm
total lumen	9190 lm
STRIP24V-SLIM-120F	
8031414881765	
lumen/m	1766 lm
total lumen	8830 lm
light source	SMD 2835
watt/m	16W
led/m	120

Fotometria del prodotto / Photometric curve

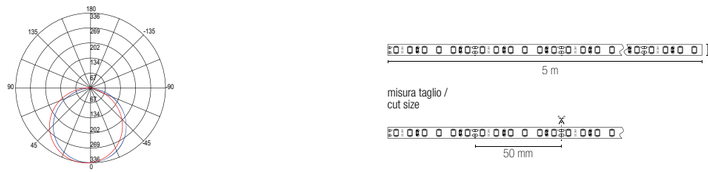

Recommended Profiles p. 336 to p. 397

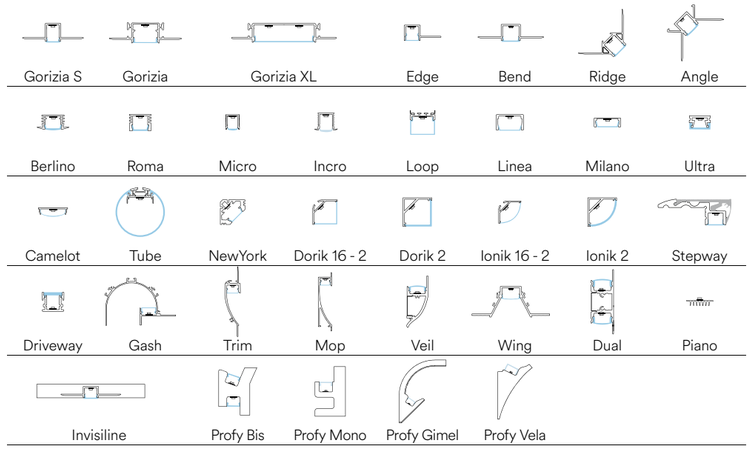

STRIP24V 2835 60

indoor use · accommodation areas use · office use · commercial areas use



EASY DOMOTICA

Rotolo 5 metri strip led.
Roll 5 meters strip-led.

CE

Driver p. 843-852
Controller p. 854-857

IP20 · CRI 90 · LED SMD

Materiale
kapton
senza silicone

Temperatura colore
3000K / 4000K / 6000K

Driver
DC24V
tensione costante
non incluso

Durata e on/off
50.000h
>25.000 on/off

Material
kapton
without silicone


Colour temperature
3000K / 4000K / 6000K


Driver
DC24V
costant voltage
not included

Life time and on/off
50.000h
>25.000 on/off


	colour temp.
STRIP24V-2835-60C	
8031414871278	
lumen/m	1542 lm
total lumen	7710 lm
STRIP24V-2835-60M	
8031414871285	
lumen/m	1480 lm
total lumen	7400 lm
STRIP24V-2835-60F	
8031414871292	
lumen/m	1542 lm
total lumen	7710 lm
light source	SMD 2835
watt/m	14W
led/m	60

Fotometria del prodotto / Photometric curve





Recommended Profiles p. 336 to p. 397

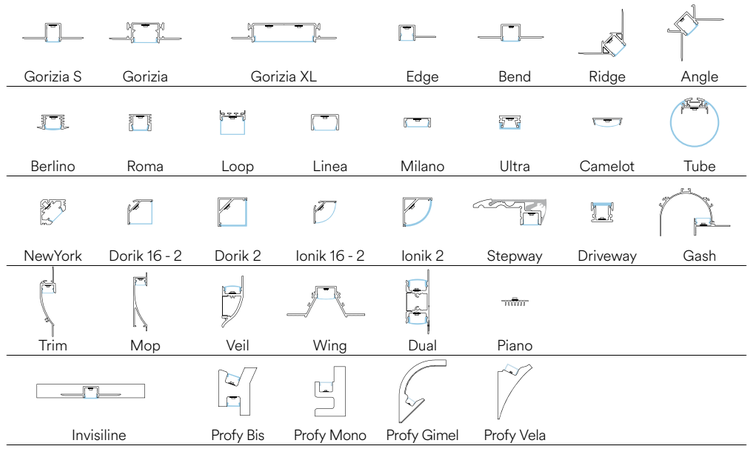

STRIP24V 2835 60 IP67

indoor use · outdoor use · accommodation areas use · office use · commercial areas use



EASY DOMOTICA

Rotolo 5 metri strip led.
Roll 5 meters strip-led.

CE

Driver p. 843-852
Controller p. 854-857

IP67 · CRI 90 · LED SMD

Materiale
kapton con
rivestimento
in silicone

Temperatura colore
3000K / 4000K / 6000K

Driver
DC24V
tensione costante
non incluso

Durata e on/off
50.000h
>25.000 on/off

Material
kapton
with silicone
cover


Colour temperature
3000K / 4000K / 6000K


Driver
DC24V
costant voltage
not included

Life time and on/off
50.000h
>25.000 on/off


	colour temp.
STRIP24V-2835IP67-60C	
8031414871308	
lumen/m	1542 lm
total lumen	7710 lm
STRIP24V-2835IP67-60M	
8031414871315	
lumen/m	1480 lm
total lumen	7400 lm
STRIP24V-2835IP67-60F	
8031414871322	
lumen/m	1542 lm
total lumen	7710 lm
light source	SMD 2835
watt/m	14W
led/m	60

Fotometria del prodotto / Photometric curve





Recommended Profiles p. 336 to p. 397

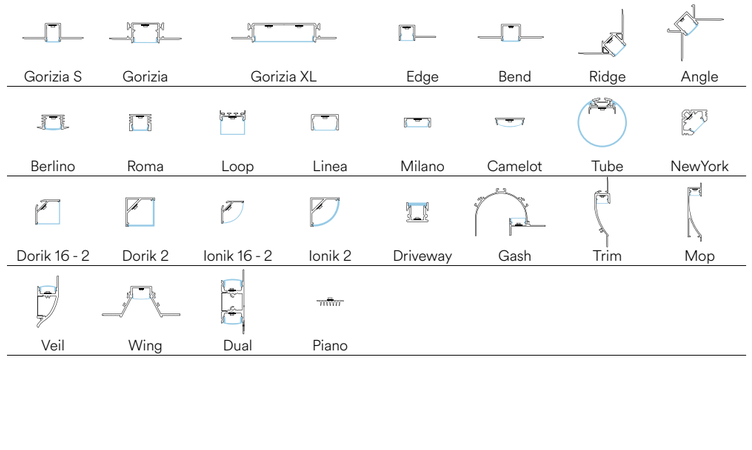

STRIP24V 2835 120

indoor use · accommodation areas use · office use · commercial areas use



Per una corretta dissipazione applicare la strip su un supporto d'alluminio / For correct dissipation fix the strip on aluminium support

EASY DOMOTICA

Rotolo 5 metri strip led.
Roll 5 meters strip-led.

CE

Driver p. 843-852
Controller p. 854-857

IP20 · CRI 90 · LED SMD

Materiale
kapton
senza silicone

Temperatura colore
3000K/4000K/6000K/BLU

Driver
DC24V
tensione costante
non incluso

Durata e on/off
50.000h
>25.000 on/off

Material
kapton
without silicone


Colour temperature
3000K/4000K/6000K/BLU


Driver
DC24V
costant voltage
not included

Life time and on/off
50.000h
>25.000 on/off


	colour temp.
STRIP24V-2835-120C	
8031414871056	
lumen/m	2342 lm
total lumen	11710 lm
STRIP24V-2835-120M	
8031414871063	
lumen/m	2280 lm
total lumen	11400 lm
STRIP24V-2835-120F	
8031414871032	
lumen/m	2258 lm
total lumen	11290 lm
STRIP24V-2835-120BLU	
8031414871049	
lumen	BLU
light source	SMD 2835
watt/m	22W
led/m	120

Fotometria del prodotto / Photometric curve





Recommended Profiles p. 336 to p. 397

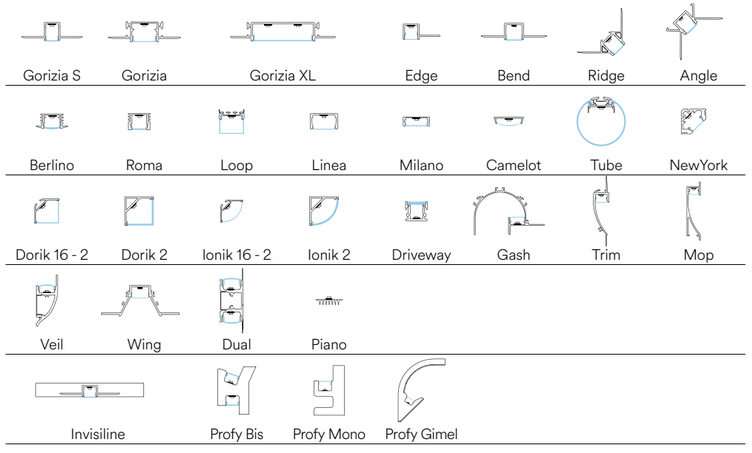

STRIP24V 2835 120 IP68

indoor use · outdoor use · accommodation areas use · office use · commercial areas use



EASY DOMOTICA

Rotolo 5 metri strip led.
Roll 5 meters strip-led.

CE

Driver p. 843-852
Controller p. 854-857

IP68 · CRI 90 · LED COB

Materiale
kapton
con silicone

Temperatura colore
6000K

Driver
DC24V
tensione costante
non incluso

Durata e on/off
50.000h
>25.000 on/off

Material
kapton
with silicone


Colour temperature
6000K


Driver
DC24V
costant voltage
not included

Life time and on/off
50.000h
>25.000 on/off


	colour temp.
STRIP24V-2835IP68-120F	
8031414881772	
lumen/m	2258 lm
total lumen	11290 lm
light source	LED COB 120
watt/m	18W
led/m	120

Fotometria del prodotto / Photometric curve





Recommended Profiles p. 336 to p. 397

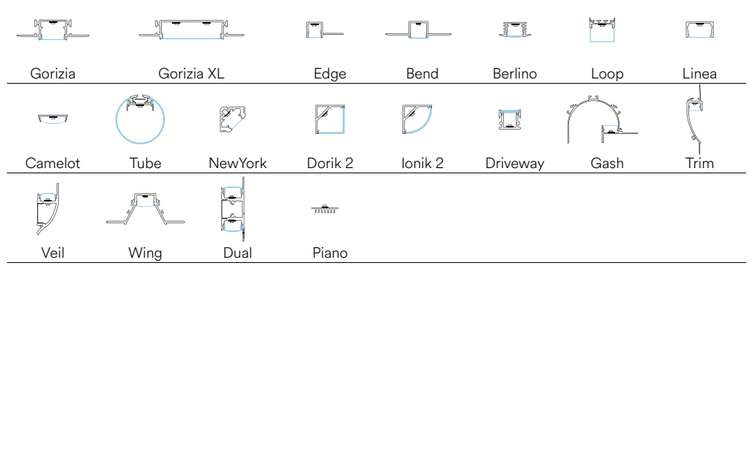

STRIP24V 2835 CCT

indoor use · accommodation areas use · office use · commercial areas use



EASY DOMOTICA

Rotolo 5 metri strip led.
Roll 5 meters strip-led.

CE · IP20 · CRI 90 · LED SMD · CCT

Driver p. 843-852
Controller p. 854-857

Materiale
kapton
senza silicone

Temperatura colore
CCT

Driver
DC24V
tensione costante
non incluso

Durata e on/off
50.000h
>25.000 on/off

Material
kapton
without silicone


Colour temperature
CCT


Driver
DC24V
costant voltage
not included

Life time and on/off
50.000h
>25.000 on/off


	colour temp.
STRIP24V-2835-CCT	
8031414875795	
lumen/m	2652 lm
total lumen	13260 lm
light source	SMD 2835
watt/m	26W
led/m	120

Fotometria del prodotto / Photometric curve





Recommended Profiles p. 336 to p. 397

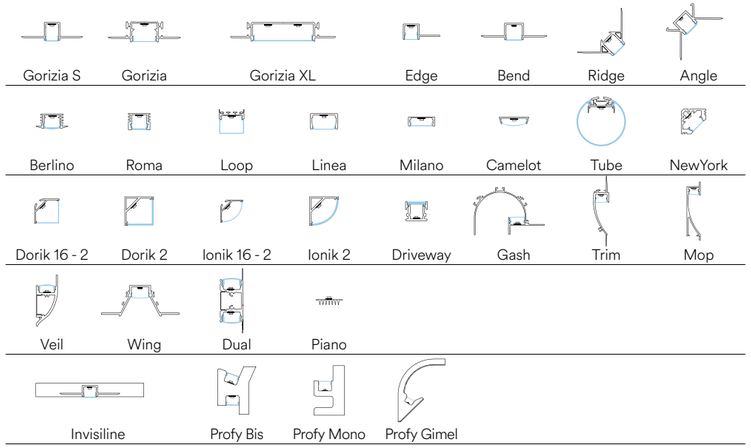

STRIP24V 2835 240

indoor use · accommodation areas use · office use · commercial areas use



Per una corretta dissipazione applicare la strip su un supporto d'alluminio / For correct dissipation fix the strip on aluminium support

EASY DOMOTICA

Rotolo 5 metri strip led.
Roll 5 meters strip-led.

CE · IP20 · CRI 90 · LED SMD

Driver p. 843-852
Controller p. 854-857

Materiale
kapton
senza silicone

Temperatura colore
3000K / 4000K / 6000K

Driver
DC24V
tensione costante
non incluso

Durata e on/off
50.000h
>25.000 on/off

Material
kapton
without silicone


Colour temperature
3000K / 4000K / 6000K


Driver
DC24V
costant voltage
not included

Life time and on/off
50.000h
>25.000 on/off


	colour temp.
STRIP24V-2835-240C	
8031414871018	
lumen/m	2706 lm
total lumen	13530 lm
STRIP24V-2835-240M	
8031414871025	
lumen/m	2640 lm
total lumen	13200 lm
STRIP24V-2835-240F	
8031414871001	
lumen/m	2526 lm
total lumen	12630 lm
light source	SMD 2835
watt/m	26W
led/m	240

Fotometria del prodotto / Photometric curve





Recommended Profiles p. 336 to p. 397

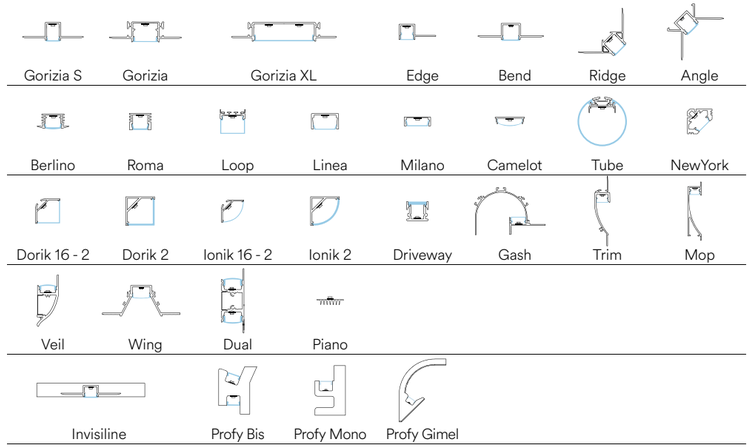

STRIP24V 5050 60



EASY DOMOTICA

Rotolo 5 metri strip led.
Roll 5 meters strip-led.

Driver p. 843-852
Controller p. 854-857

IP20 · CRI 90 · LED SMD

Materiale
kapton
senza silicone

Temperatura colore
3000K / 4000K / 6000K

Driver
DC24V
tensione costante
non incluso

Durata e on/off
50.000h
>25.000 on/off

Material
kapton
without silicone


Colour temperature
3000K / 4000K / 6000K


Driver
DC24V
costant voltage
not included

Life time and on/off
50.000h
>25.000 on/off


	colour temp.
STRIP24V-5050-60C	
8031414878420	
lumen/m	1390 lm
total lumen	6950 lm
STRIP24V-5050-60M	
8031414878741	
lumen/m	1430 lm
total lumen	7150 lm
STRIP24V-5050-60F	
8031414876129	
lumen/m	1314 lm
total lumen	6570 lm
light source	SMD 5050
watt/m	14W
led/m	60

Fotometria del prodotto / Photometric curve






Recommended Profiles p. 336 to p. 397

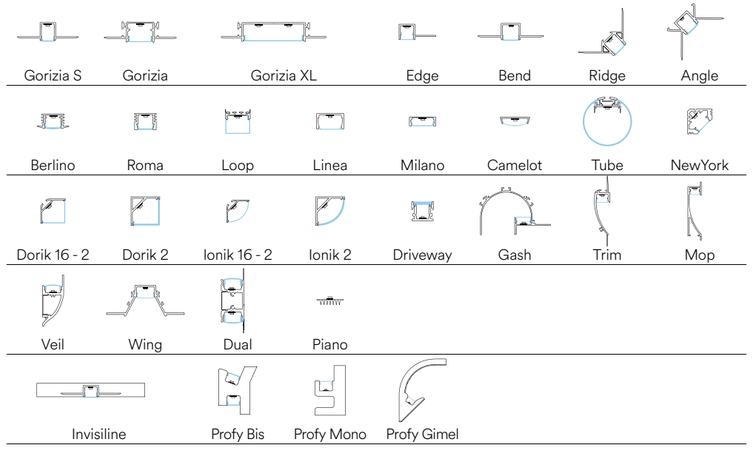

STRIP24V 5050 60 IP67

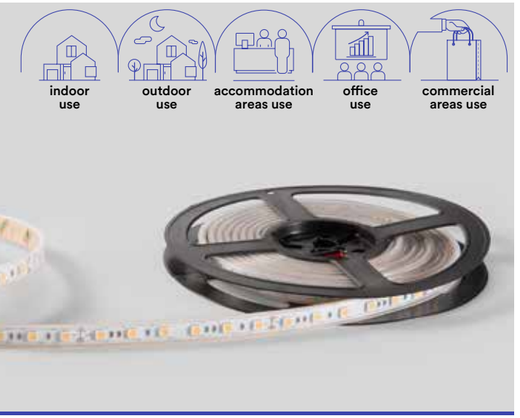

EASY DOMOTICA

Rotolo 5 metri strip led.
Roll 5 meters strip-led.

Driver p. 843-852
Controller p. 854-857

IP67 · CRI 90 · LED SMD

Materiale
kapton con
rivestimento
in silicone

Temperatura colore
3000K / 4000K / 6000K

Driver
DC24V
tensione costante
non incluso

Durata e on/off
50.000h
>25.000 on/off

Material
kapton
with silicone
cover


Colour temperature
3000K / 4000K / 6000K


Driver
DC24V
costant voltage
not included

Life time and on/off
50.000h
>25.000 on/off


	colour temp.
STRIP24V-5050IP67-60C	
8031414876143	
lumen/m	1390 lm
total lumen	6950 lm
STRIP24V-5050IP67-60M	
8031414876150	
lumen/m	1430 lm
total lumen	7150 lm
STRIP24V-5050IP67-60F	
8031414876174	
lumen/m	1314 lm
total lumen	6570 lm
light source	SMD 5050
watt/m	14W
led/m	60

Fotometria del prodotto / Photometric curve





Recommended Profiles p. 336 to p. 397

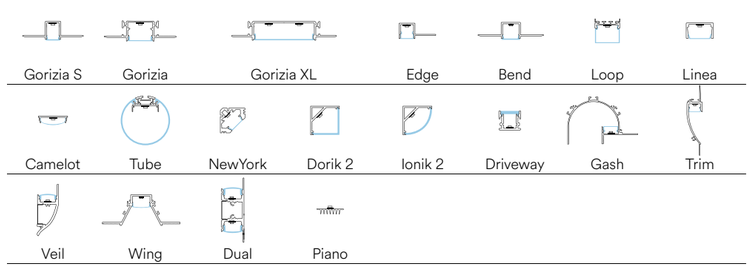

STRIP24V 5050 RGB

indoor use · accommodation areas use · office use · commercial areas use



EASY DOMOTICA

Rotolo 5 metri strip led.
Roll 5 meters strip-led.

CE

Driver p. 843-852
Controller p. 854-857

IP20 · LED SMD

Materiale
kapton
senza silicone

Temperatura colore
RGB

Driver
DC24V
tensione costante
non incluso

Durata e on/off
50.000h
>25.000 on/off

Material
kapton
without silicone


Colour temperature
RGB


Driver
DC24V
costant voltage
not included

Life time and on/off
50.000h
>25.000 on/off


	colour temp.
STRIP24V-5050-RGB 8031414871360	RGB
light source	SMD 5050
watt/m	14,4W
led/m	60

Fotometria del prodotto / Photometric curve





Recommended Profiles p. 336 to p. 397

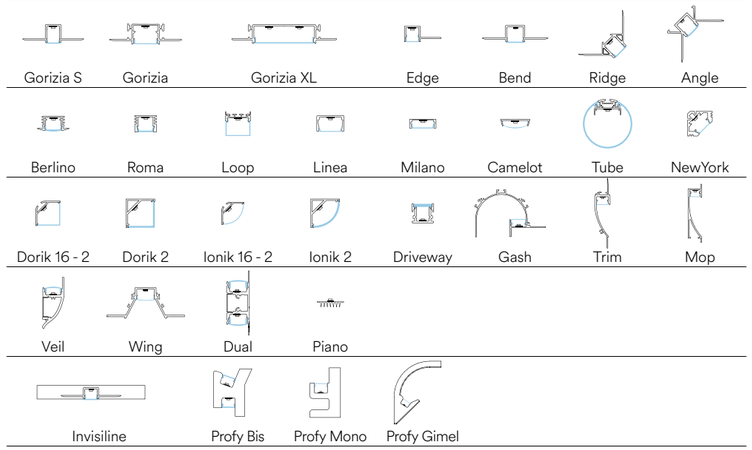

STRIP24V 5050 RGB IP67

indoor use · outdoor use · accommodation areas use · office use · commercial areas use



EASY DOMOTICA

Rotolo 5 metri strip led.
Roll 5 meters strip-led.

CE

Driver p. 843-852
Controller p. 854-857

IP67 · LED SMD

Materiale
kapton con
rivestimento
in silicone

Temperatura colore
RGB

Driver
DC24V
tensione costante
non incluso

Durata e on/off
50.000h
>25.000 on/off

Material
kapton
with silicone
cover


Colour temperature
RGB


Driver
DC24V
costant voltage
not included

Life time and on/off
50.000h
>25.000 on/off


	colour temp.
STRIP24V-5050RGB-IP67 8031414871377	RGB
light source	SMD 5050
watt/m	14,4W
led/m	60

Fotometria del prodotto / Photometric curve





Recommended Profiles p. 336 to p. 397

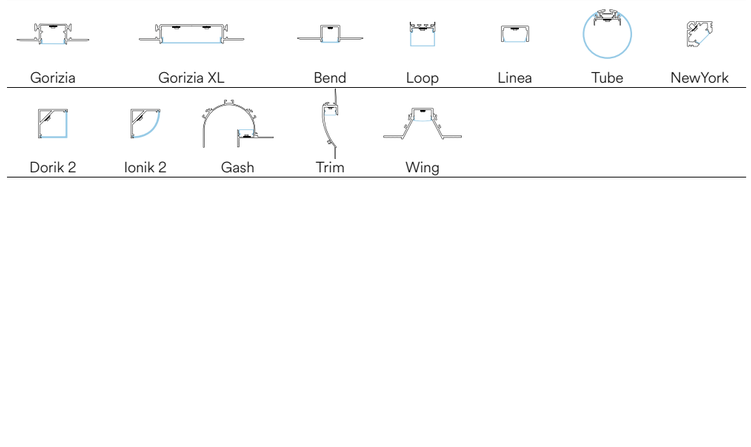

STRIP24V 5050 RGBW

indoor use · accommodation areas use · office use · commercial areas use



EASY DOMOTICA

Rotolo 5 metri strip led.
Roll 5 meters strip-led.

CE

Driver p. 843-852
Controller p. 854-857

IP20 · CRI 90 · LED SMD

Materiale
kapton
senza silicone

Temperatura colore
RGB + 4000K

Driver
DC24V
tensione costante
non incluso

Durata e on/off
50.000h
>25.000 on/off

Material
kapton
without silicone


Colour temperature
RGB + 4000K


Driver
DC24V
costant voltage
not included

Life time and on/off
50.000h
>25.000 on/off


	colour temp.
STRIP24V-5050-RGBW	
8031414871384	
lumen/m	RGB + 1080 lm
total lumen	5400 lm
light source	SMD 5050
watt/m	19,2W
led/m	60

Fotometria del prodotto / Photometric curve





Recommended Profiles p. 336 to p. 397

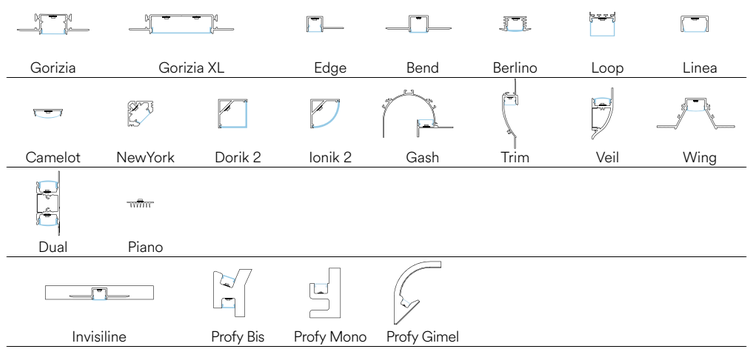

STRIP24V 5050 RGBW IP68

indoor use · outdoor use · accommodation areas use · office use · commercial areas use



EASY DOMOTICA

Rotolo 5 metri strip led.
Roll 5 meters strip-led.

CE

Driver p. 843-852
Controller p. 854-857

IP68 · CRI 90 · LED SMD

Materiale
kapton con
rivestimento
in silicone

Temperatura colore
RGB + 4000K

Driver
DC24V
tensione costante
non incluso

Durata e on/off
50.000h
>25.000 on/off

Material
kapton
with silicone
cover


Colour temperature
RGB + 4000K


Driver
DC24V
costant voltage
not included

Life time and on/off
50.000h
>25.000 on/off


	colour temp.
STRIP24V-5050RGBW-IP68	
8031414871407	
lumen/m	RGB + 1080 lm
total lumen	5400 lm
light source	SMD 5050
watt/m	19,2W
led/m	60

Fotometria del prodotto / Photometric curve





Recommended Profiles p. 336 to p. 397

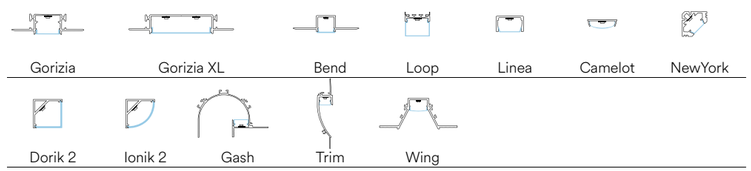

STRIP230V SMD



indoor use · accommodation areas use · office use · commercial areas use

Rotolo 20 metri strip led.
Roll 20 meters strip-led.

Driver p. 843-852
Controller p. 854-857

IP54 · CRI 90 · LED SMD

Materiale
kapton con rivestimento in silicone

Temperatura colore
3000K / 4000K / 6500K

Driver
220V DC incluso

Durata e on/off
50.000h
>25.000 on/off

Material
kapton with silicone cover


Colour temperature
3000K / 4000K / 6500K

Driver
220V DC included

Life time and on/off
50.000h
>25.000 on/off

	colour temp.
STRIP220V-2835-8C 8031414926930	
lumen/m	800 lm
STRIP220V-2835-8M 8031414926947	
lumen/m	800 lm
STRIP220V-2835-8F 8031414926954	
lumen/m	800 lm
light source	LED SMD 2835
watt/m	8W
led/m	120

	colour temp.
STRIP220V-2835-15C 8031414927005	
lumen/m	1700 lm
STRIP220V-2835-15M 8031414927005	
lumen/m	1700 lm
STRIP220V-2835-15F 8031414927029	
lumen/m	1700 lm
light source	LED SMD 2835
watt/m	15W
led/m	120

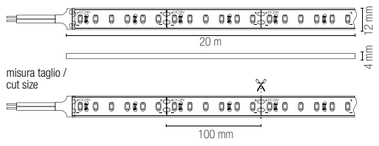

Accessori non inclusi / Not included accessories



STRIP220V-8-L-CONN
8031414926992
Connettore a L / L connector

STRIP220V-10-L-CONN
8031414927067
Connettore a L / L connector



STRIP220V-8-FLEX
8031414926978
Connettore flessibile, cavo 20 cm / Flexible connector, 20 cm cable

STRIP220V-10-FLEX
8031414927043
Connettore flessibile, cavo 20 cm / Flexible connector, 20 cm cable



STRIP220V-8-NEST
8031414926961
Innesto con cavo 20 cm / Nest with 20 cm cable

STRIP220V-10-NEST
8031414927036
Innesto con cavo 20 cm / Nest with 20 cm cable



STRIP220V-8-CAPS
8031414927210
Kit 3 pezzi tappi di chiusura / 3 pcs kit strip light end cap

STRIP220V-10-CAPS
8031414927227
Kit 3 pezzi tappi di chiusura / 3 pcs kit strip light end cap



STRIP220V-8-CONN
8031414926985
Connettori lineari / Linear connector

STRIP220V-10-CONN
8031414927067
Connettori lineari / Linear connector

STRIP230V COB



outdoor use · accommodation areas use · office use · commercial areas use

Rotolo 20 metri strip led.
Roll 20 meters strip-led.

Driver p. 843-852
Controller p. 854-857

IP54 · CRI 90 · LED COB

Materiale
kapton con rivestimento in silicone

Temperatura colore
3000K / 4000K / 6500K

Driver
220V DC incluso

Durata e on/off
50.000h
>25.000 on/off


Material
kapton with silicone cover

Colour temperature
3000K / 4000K / 6500K

Driver
220V DC included

Life time and on/off
50.000h
>25.000 on/off

	colour temp.
STRIP220V-COB-12C 8031414927074	
lumen/m	920 lm
STRIP220V-COB-12M 8031414927081	
lumen/m	920 lm
STRIP220V-COB-12F 8031414927098	
lumen/m	920 lm
light source	LED COB
watt/m	12W
led/m	260

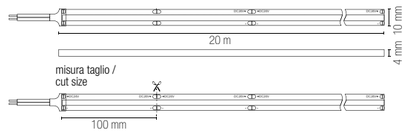

Accessori non inclusi / Not included accessories



STRIP220V-12-L-CONN
8031414927111
Connettore a L / L connector



STRIP220V-12-CONN
8031414927104
Connettore a I / I connector



STRIP220V-12-NEST
8031414927135
Innesto con cavo 20 cm / Nest with 20 cm cable



STRIP220V-12-CAPS
8031414927234
Kit 3 pezzi tappi di chiusura / 3 pcs kit strip light end cap



STRIP220V-12-ST
8031414927128
Kit 10 pcs staffette per fissaggio / Strip 220 10 pcs fixyng bracket

STRIP24V 5050 3D RGBW

indoor use · accommodation areas use · office use · commercial areas use



EASY DOMOTICA

Rotolo 5 metri strip led.
Roll 5 meters strip-led.

Driver p. 843-852
Controller p. 854-857

IP20 · CRI 90 · LED SMD

Materiale
kapton
senza silicone

Temperatura colore
RGB

Driver
DC24V
tensione costante
non incluso

Durata e on/off
50.000h
>25.000 on/off

Material
kapton
without silicone

Colour temperature
RGB


Driver
DC24V
costant voltage
not included

Life time and on/off
50.000h
>25.000 on/off


	colour temp.
STRIP24V-5050-3D-RGBW	RGB + 264 lm
8031414878819	
lumen/m	

light source	SMD 5050
watt/m	10W
led/m	48

Fotometria del prodotto / Photometric curve

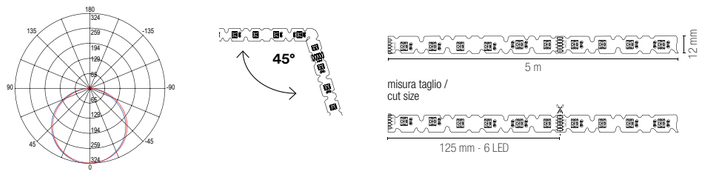

Recommended Profiles p. 336 to p. 397

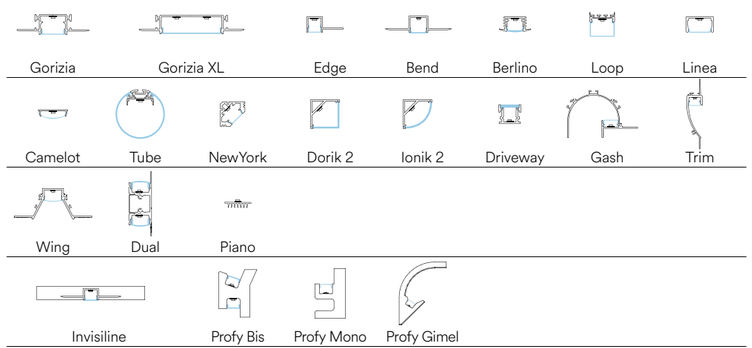

STRIP24V 5050 RGB CCT

indoor use · accommodation areas use · office use · commercial areas use



EASY DOMOTICA

Rotolo 5 metri strip led.
Roll 5 meters strip-led.

Driver p. 843-852
Controller p. 854-857

IP20 · CRI >85 · LED SMD

Materiale
kapton
con silicone

Temperatura colore
RGB + CCT

Driver
DC24V
tensione costante
non incluso

Durata e on/off
50.000h
>25.000 on/off

Material
kapton
with silicone

Colour temperature
RGB + CCT


Driver
DC24V
costant voltage
not included

Life time and on/off
50.000h
>25.000 on/off


	colour temp.
STRIP24V-5050-RGBCCT	
8031414871391	
lumen/m	712 lm
total lumen	3560 lm

light source	SMD 5050
watt/m	19,2W
led/m	60

Fotometria del prodotto / Photometric curve

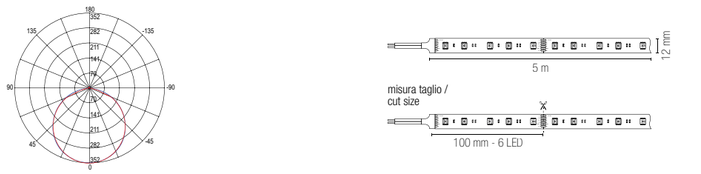

Recommended Profiles p. 336 to p. 397

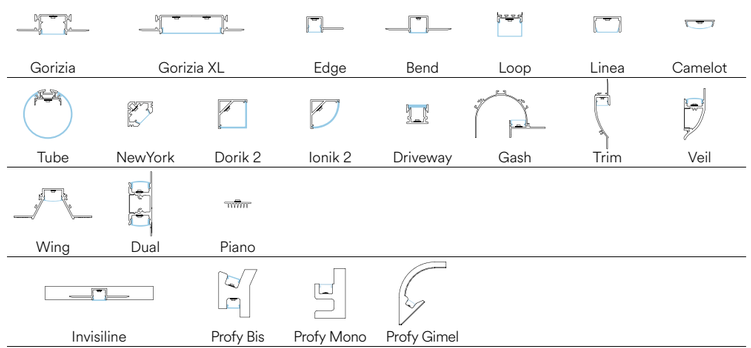

STRIP24V 3838 168 RGB

indoor use | accommodation areas use | office use | commercial areas use



EASY DOMOTICA

Rotolo 5 metri strip led.
Roll 5 meters strip-led.

Driver p. 843-852
Controller p. 854-857

IP20 | CRI >85 | LED SMD

Materiale
kapton
senza silicone

Temperatura colore
RGB

Driver
DC24V
tensione costante
non incluso

Durata e on/off
50.000h
>25.000 on/off

Material
kapton
without silicone

Colour temperature
RGB


Driver
DC24V
costant voltage
not included


Life time and on/off
50.000h
>25.000 on/off

	colour temp.
STRIP24V-3838-168RGB 8031414877898	RGB


light source	SMD 3838
watt/m	24W
led/m	168


Fotometria del prodotto / Photometric curve





Recommended Profiles p. 336 to p. 397

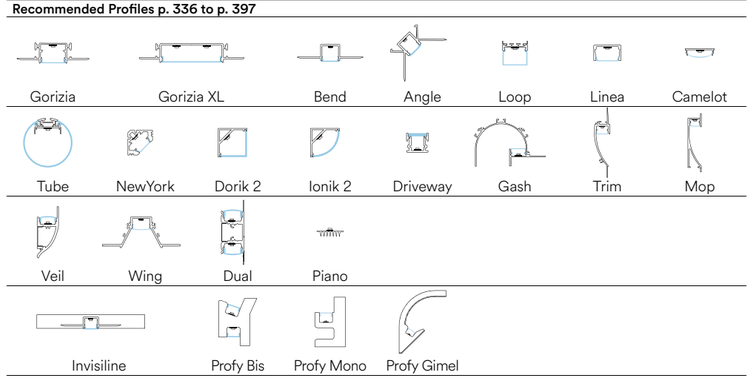

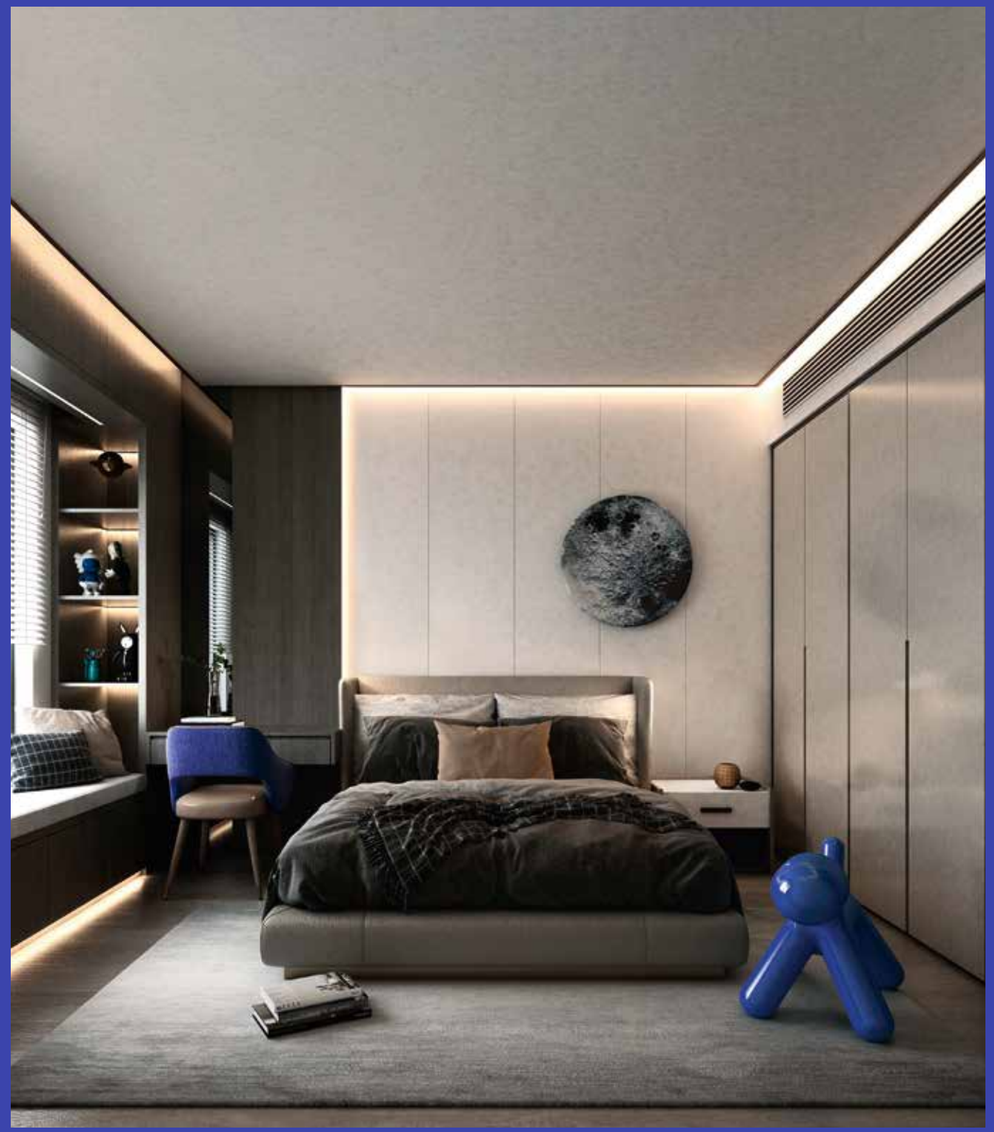

STRIP24V 5050 RGBW INT

indoor use · accommodation areas use · office use · commercial areas use



WI-FI SMART INTEC

Kit strip LED Wi-Fi.
Kit strip LED Wi-Fi.

Driver p. 843-852
Controller p. 854-857

IP20 · CRI >80 · LED SMD

Materiale
kapton
senza silicone

Temperatura colore
RGB + 4000K

Driver
12V DC
incluso

Durata e on/off
25.000h
>12.500 on/off

Material
kapton
without silicone


Colour temperature
RGB + 4000K

Driver
12V DC
included


Life time and on/off
25.000h
>12.500 on/off

	colour temp.
STRIP24V-5050RGBW-INT	
8031414881796	
lumen/m	280 lm
total lumen	540 lm
light source	SMD 5050
watt/m	12W
led/m	60

Accessori inclusi / Included accessories



Driver + Telecomando + accessori Wi-Fi /
Diver + Remote control + Wi-Fi accesories



Control system easy installation

SMART INTEC · SMART LIFE · Powered by tuya Intelligence Inside

Smart Intec WIFI

ALEXA e GOOGLE HOME voice control

STRIP24V 2835 INT

indoor use · accommodation areas use · office use · commercial areas use



WI-FI SMART INTEC

Kit strip LED Wi-Fi.
Kit strip LED Wi-Fi.

Driver p. 843-852
Controller p. 854-857

IP20 · CRI >80 · LED SMD

Materiale
kapton
senza silicone

Temperatura colore
3000K / 4000K

Driver
12V DC
incluso

Durata e on/off
25.000h
>12.500 on/off

Material
kapton
without silicone

Colour temperature
3000K / 4000K

Driver
12V DC
included


Life time and on/off
25.000h
>12.500 on/off

	colour temp.
STRIP24V-2835C-INT	
8031414882182	
lumen/m	380 lm
total lumen	760 lm
STRIP24V-2835M-INT	
8031414881789	
lumen/m	380 lm
total lumen	760 lm
light source	SMD 2835
watt/m	8W
led/m	60

Accessori inclusi / Included accessories



Driver + Telecomando + accessori Wi-Fi /
Diver + Remote control + Wi-Fi accesories



Control system easy installation

SMART INTEC · SMART LIFE · Powered by tuya Intelligence Inside

Smart Intec WIFI

ALEXA e GOOGLE HOME voice control

INSIGN

Kit 20 pz moduli LED.
Kit 20 pcs LED module.



kit 20pz con cavo 10cm / kit 20pcs with cable 10cm

EASY DOMOTICA



Driver p. 843-852
Controller p. 854-857

IP66 | CRI >85 | LED SMD

Materiale
PC

Temperatura colore
6000K

Driver
DC12V
tensione costante
non incluso

Durata e on/off
50.000h
>25.000 on/off

Material
PC

Colour temperature
6000K


Driver
DC12V
costant voltage
not included

Life time and on/off
50.000h
>25.000 on/off


LED-INSIGN-F-LENS
8031414871155

	colour temp.
lumen	120 lm/m

sorgente luminosa / light source	LED SMD 5050
watt/m	20 × 1,2W
beam angle	160°



Kit 20 pz moduli LED.
Kit 20 pcs LED module.

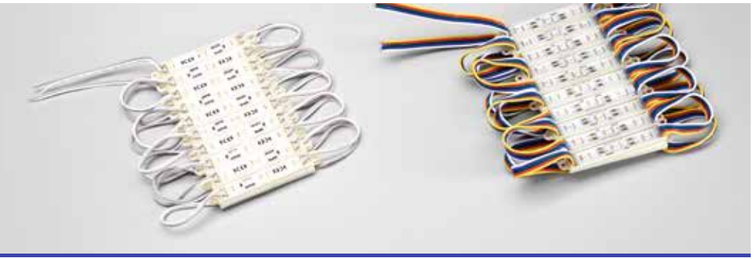

kit 20pz con cavo 10cm / kit 20pcs with cable 10cm

EASY DOMOTICA

Driver p. 843-852
Controller p. 854-857

IP65 | CRI >80 | LED SMD

Materiale
PC

Temperatura colore
RGB + 6000K

Driver
DC12V
tensione costante
non incluso

Durata e on/off
50.000h
>25.000 on/off

Material
PC

Colour temperature
RGB + 6000K


Driver
DC12V
costant voltage
not included

Life time and on/off
50.000h
>25.000 on/off

LED-INSIGN-F
8031414862979

	colour temp.
lumen	72 lm/m


light source	SMD 5050
watt/m	20 × 0,72W
beam angle	120°



LED-INSIGN-RGBW
8031414862955

	colour temp.
lumen	RGB + 72 lm/m

light source	SMD 5050
watt/m	20 × 0,96W
beam angle	120°



STRIP SURROUND

Strip LED comando touch con attacco USB.
LED strip light with switch touch control and USB connection.



CE


TOUCH CONTROL | IP20 | DC 5V Ah USB | IP65 | LED SMD

Materiale
kapton con
rivestimento in silicone

Temperatura colore
RGB

Material
kapton with
silicone cover

Colour temperature
RGB



STRIP-SURROUND
8031440354202

	colour temp.
	RGB

light source	SMD 5050
watt/m	1,5W
led/m	15

Kit strip con telecomando e funzione RGB music color con attacco USB.
Kit strip with remote control and RGB music function with USB connection.



CE


TOUCH CONTROL | IP20 | DC 5V Ah USB | IP65 | LED SMD

Materiale
kapton con
rivestimento in silicone

Temperatura colore
RGB

Material
kapton with
silicone cover

Colour temperature
RGB



STRIP-SURROUND-2M
8031414881802

	colour temp.
	RGB

light source	SMD 5050
watt/m	3W
led/m	60

FLEX24V 10X10



EASY DOMOTICA

Rotolo 5 metri striscia led ultraflessibile in silicone.
5 meters roll extra flexible led line in silicone.

Driver p. 843-852
Controller p. 854-857

IP65 · CRI 90 · LED SMD

Materiale
silicone

Temperatura colore
3000K / 4000K

Driver
DC24V
tensione costante
non incluso

Durata e on/off
50.000h
>25.000 on/off


Material
silicone

Colour temperature
3000K / 4000K

Driver
DC24V
costant voltage
not included

Life time and on/off
50.000h
>25.000 on/off

	colour temp.
FLEX24V-10X10-12C	
8031414925711	
lumen/m	1140 lm
total lumen	5700 lm
FLEX24V-10X10-12M	
8031414925728	
lumen/m	1200 lm
total lumen	6000 lm
light source	SMD 2835
watt/m	12W
led/m	120



Accessori non inclusi / Not included accessories



FLEX24V-10X10-CAP
8031414925827

Kit 2 tappi in silicone /
Kit 2 pcs silicon caps



FLEX24V-10X10-ST
8031414925858

Kit 2 staffe /
Kit 2 pcs brackets

FLEX24V 6X6



EASY DOMOTICA

Rotolo 5 metri striscia led ultraflessibile in silicone.
5 meters roll extra flexible led line in silicone.

Driver p. 843-852
Controller p. 854-857

IP65 · CRI 90 · LED SMD

Materiale
silicone

Temperatura colore
3000K / 4000K

Driver
DC24V
tensione costante
non incluso

Durata e on/off
50.000h
>25.000 on/off


Material
silicone

Colour temperature
3000K / 4000K

Driver
DC24V
costant voltage
not included

Life time and on/off
50.000h
>25.000 on/off

	colour temp.
FLEX24V-6X6-5C	
8031414925735	
lumen/m	456 lm
total lumen	2280 lm
FLEX24V-6X6-5M	
8031414925742	
lumen/m	480 lm
total lumen	2400 lm
light source	SMD 2835
watt/m	4,8W
led/m	120



Accessori non inclusi / Not included accessories



FLEX24V-6X6-CAP
8031414925834


Kit 2 tappi in silicone /
Kit 2 pcs silicon caps



FLEX24V-6X6-ST
8031414925865

Kit 2 staffe /
Kit 2 pcs brackets

FLEX24V 6X13

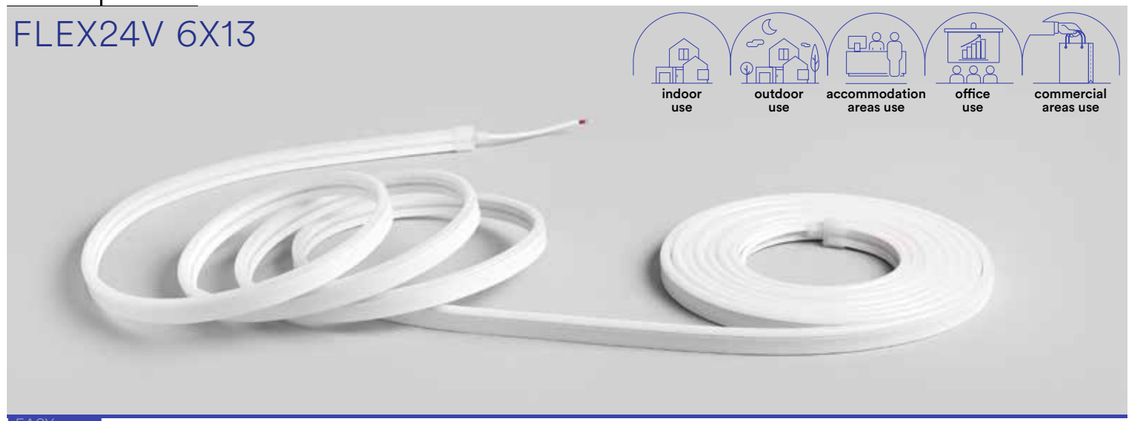

EASY DOMOTICA

Rotolo 5 metri striscia led ultraflessibile in silicone.
5 meters roll extra flexible led line in silicone.

Driver p. 843-852
Controller p. 854-857

IP65 · CRI 90 · LED SMD

Materiale
silicone

Temperatura colore
3000K / 4000K
BLU/ROSSO/VERDE/ROSA/YELLOW

Driver
DC24V (8,3A)
tensione costante
non incluso

Durata e on/off
25.000h
>15.000 on/off

Material
silicone


Colour temperature
3000K / 4000K
BLUE/RED/GREEN/PINK/YELLOW

Driver
DC24V (8,3A)
costant voltage
not included

Durata e on/off
25.000h
>15.000 on/off

	colour temp.
FLEX24V-6X13-12C	
8031414925759	
lumen/m	1140
total lumen	5700
FLEX24V-6X13-12M	
8031414925766	
lumen/m	1200
total lumen	6000
light source	SMD 2835
watt/m	12W
led/m	120

	colour temp.
FLEX24V-6X13-12B	
8031414925773	
lumen	blue
FLEX24V-6X13-12R	
8031414925780	
lumen	red
FLEX24V-6X13-12G	
8031414925797	
lumen	green
FLEX24V-6X13-12P	
8031414925803	
lumen	pink
FLEX24V-6X13-12Y	
8031414925810	
lumen	yellow
light source	SMD 2835
watt/m	12W
led/m	120



Accessori non inclusi / Not included accessories




FLEX24V-6X13-CAP
8031414925841


Kit 2 tappi in silicone /
Kit 2 pcs silicon caps



FLEX24V-6X13-ST
8031414925872

Kit 2 staffe /
Kit 2 pcs brackets

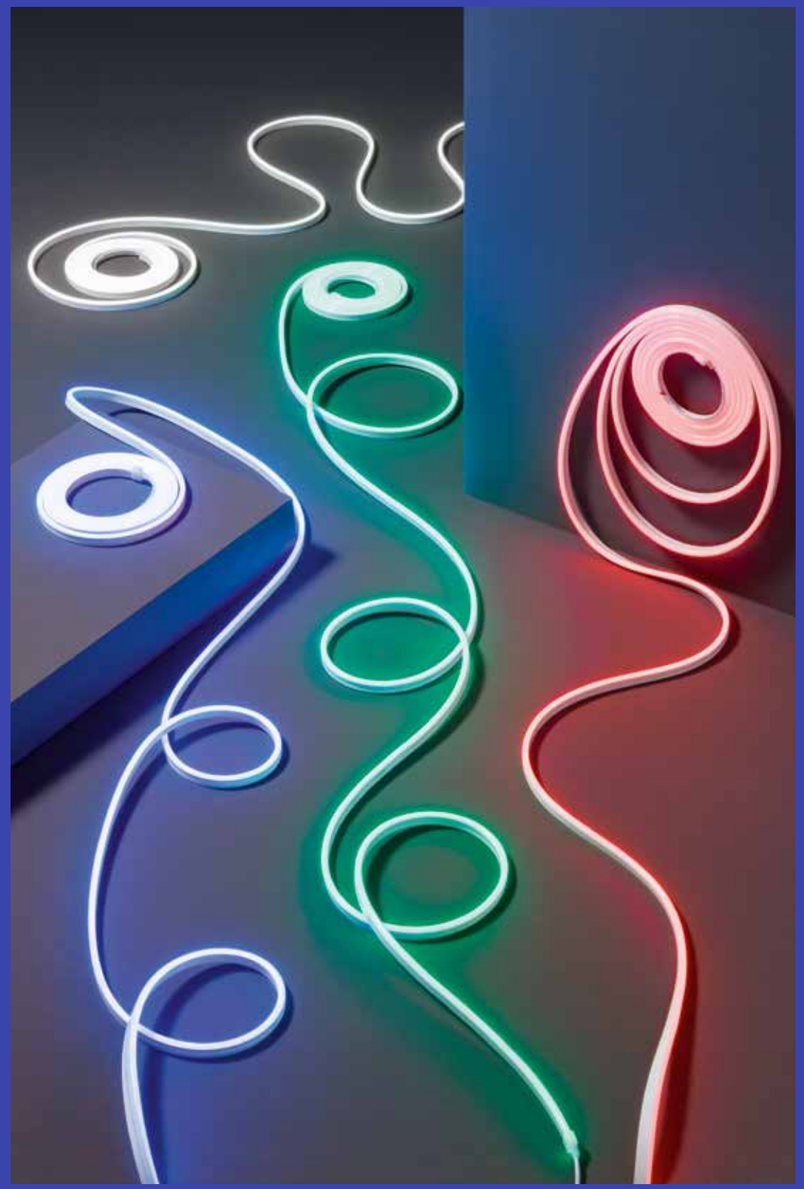

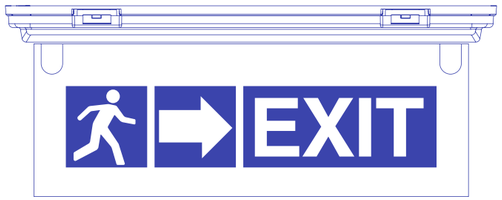

LAMPADE D’EMERGENZA
EMERGENCY LAMPS

HUBLOT HELP

Plafoniera LED in policarbonato bianca con batteria Ni-Cd con durata fino a 12H e funzione d'emergenza combinata e permanente.
White polycarbonate LED ceiling light with Ni-Cd battery with 12H dino duration and emergency function mantain or non-mantain.

indoor use · accommodation areas use · office use · commercial areas use



IP65 · degree IK08 · CRI >80 · LED SMD · CCT

technical information **HUBLOT HELP**

Materiale
PC + PC

Colore
bianco

Temperatura colore
3000K / 4000K / 6500K

Driver
integrato

Material
PC + PC


Colour
white

Colour temperature
3000K / 4000K / 6500K

Driver
built-in




	colour temp.	colour
LED-HUBLOT-HELP		
8031414920488		
lumen	1800 lm	
emergency light	2W - 200 lm	
watt	18W	
beam angle	120°	
pf	0.90	



Ni-Cd 6V 1800 mAh
Batteria per emergenza inclusa /
Included emergency battery


3 hours

Fotometria del prodotto / Photometric curve



LED-HUBLOT-HELP

Funzione MAINTAIN sempre accesa / MAINTAIN function always on



Funzione NON-MAINTAIN emergenza / NON-MAINTAIN function only emergency



HELP INC

Incasso a LED emergenza in policarbonato bianco.
Emergency LED installation in white polycarbonate.

indoor use · accommodation areas use · office use · commercial areas use

Materiale
policarbonato

Colore
bianco

Temperatura colore
4000K

Driver
incluso

Material
polycarbonate

Colour
white

Colour temperature
4000K

Driver
included



CRI >80 · LED SMD



**Angolo di luce per open space /
Open space beam angle**


	colour temp.	colour
INC-HELP-R37		
8031414882786		
lumen	130 lm	
watt	1,2W	
beam angle	140°	
	Ø 32 mm	



LiFePO4 3.2V 1000mAh
Batteria per emergenza inclusa /
Included emergency battery

3 hours

Fotometria del prodotto / Photometric curve



INC-HELP-R37

HELP TRACK

Lampade di emergenza LED per sistema binario trifase nei colori bianco o nero.
LED emergency lamps for three-phase rail system in white or black.

indoor use · accommodation areas use · office use · commercial areas use

Materiale
policarbonato

Colore
bianco
nero

Temperatura colore
4000K

Driver
incluso

Material
polycarbonate

Colour
white
black

Colour temperature
4000K

Driver
included




CRI >80 · LED SMD





	colour temp.	colour
LED-HELP-W-TRACK		
8031414884179		
lumen	250 lm	
LED-HELP-B-TRACK		
8031414884162		
lumen	250 lm	
watt	2W	
beam angle	140°	





LiFePO4 3.2V 3200mAh
Batteria per emergenza inclusa /
Included emergency battery

3 hours

HELP EXIT

Lampada a LED di emergenza multiuso: plafoniera, incasso ed incasso più bandiera.
Multipurpose emergency LED lamp:
ceiling lamps, recessed light and recessed with flag.

indoor use · accommodation areas use · office use · commercial areas use

Materiale
PC

Colore
bianco

Temperatura colore
4000K

Driver
integrato

Material
PC

Colour
white

Colour temperature
4000K

Driver
built-in



CE EMC · IP65 · LED SMD




	colour temp.	colour
LED-HELP-EXIT 8031414876310		
lumen	400 lm	
emergency light	3 h - 400 lm	
watt	4W	

2 x 7.4V 1.8Ah Li-ion
Batteria per emergenza inclusa /
Included emergency battery

3 hours

Incluso adesivi /
With stickers kit


EXIT



Accessori / Accessories



HELP-EXIT-KIT
8031414876327
Kit incasso cornice e molle /
Kit recessed with frame and spring



HELP-EXIT-FLAG
8031414877331
Kit bandiera incluso adesivi /
Emergency flag with stickers kit

EXIT

Funzione MAINTAIN sempre accesa / MAINTAIN function always on



Funzione NON-MAINTAIN emergenza / NON-MAINTAIN function only emergency



HELP 511

Lampada di emergenza LED in policarbonato con batteria Li-on, incasso con cassetta di derivazione 511.
Emergency LED lamp in PC with
Li-on battery; fit with recess box 511.

indoor use · accommodation areas use · office use · commercial areas use

Materiale
policarbonato

Colore
bianco

Temperatura colore
4000K

Driver
integrato

Material
polycarbonate


Colour
white

Colour temperature
4000K

Driver
built-in

CE EMC · IP40 · CRI >80 · LED SMD

	colour temp.	colour
LED-HELP-511 8031414862566		
lumen	80 lm	
emergency light	3 h - 180 lm	
watt	4W	
beam angle	100°	
	275 × 95 × 35 mm	



Li-ion 7.4V 1200mA
Batteria per emergenza inclusa /
Included emergency battery

18 hours

Accessori inclusi / Included accessories

Scatola derivazione /
Recess box hole



Adesivo /
Stickers



HELP 503

indoor use · accommodation areas use · office use · commercial areas use

Materiale
policarbonato

Colore
bianco

Temperatura colore
4000K


Driver
integrato

Material
polycarbonate

Colour
white

Colour temperature
4000K


Driver
built-in

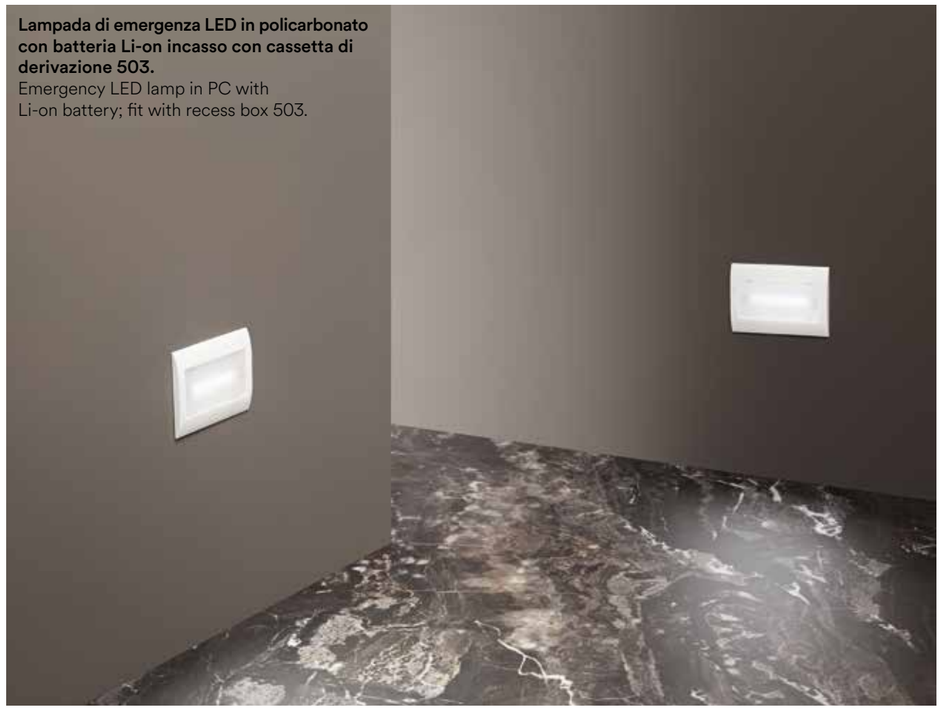

Lampada di emergenza LED in policarbonato con batteria Li-on incasso con cassetta di derivazione 503.
Emergency LED lamp in PC with Li-on battery; fit with recess box 503.

CE EMC · CRI >80 · LED SMD

	colour temp.	colour
LED-HELP-503		
8031414862573		
lumen	80 lm	
emergency light	3 h - 80 lm	
watt	1W	
beam angle	120°	
	90 × 55 × 31 mm	



scatola derivazione 503
503 junction box
non inclusa / not included



Li-ion 3,7V 700 mAh
Batteria per emergenza inclusa /
Included emergency battery

36 hours

BOLT HELP

indoor use · outdoor use · accommodation areas use · office use · commercial areas use

Materiale
policarbonato + acciaio

Colore
bianco
nikel

Temperatura colore
4000K

Driver
integrato

Material
polycarbonate + stainless steel

Colour
white
nikel

Colour temperature
4000K


Driver
built-in




Incasso segnapassi in policarbonato con alloggio in cassetta di derivazione 503 con placchetta intercambiabile bianco o nikel in alluminio per funzione di emergenza combinata e permanente.
Downlight in polycarbonate for recessed box 503 built-in-LED with replaceable in aluminum buckle white or nikel finish and double emergency function mantain or non-mantain.

CE EMC · IP65 · CRI >80 · LED SMD

	colour temp.	colour
INC-BOLT-503HP		
8031414866243		
lumen	200 lm	
emergency light	3 h - 150 lm	
watt	3W	
	Ø 32 mm	



Accessori inclusi / Included accessories



2x placchette / frames
2x staffette / brackets

scatola derivazione 503
503 junction box
non inclusa / not included




Li-ion 3,7V 700 mAh
Batteria per emergenza inclusa /
Included emergency battery


36 hours

Funzione MAINTAIN sempre accesa / MAINTAIN function always on



Funzione NON-MAINTAIN emergenza / NON-MAINTAIN function only emergency



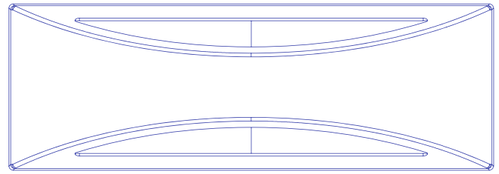


APPLIQUE
WALL LAMPS

COMPACT

Applique a LED in alluminio colore antracite con diffusore in policarbonato.
Anthracite aluminum LED wall lamp and PC diffuser.

outdoor use · accommodation areas use · urban areas use

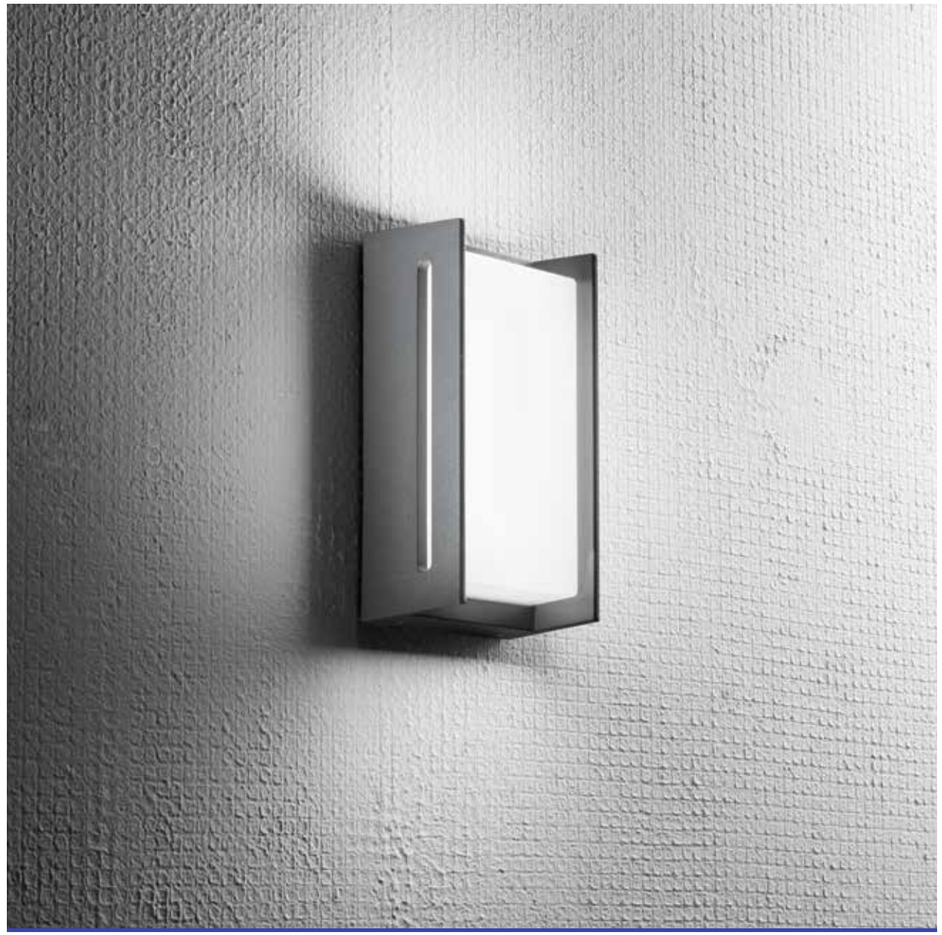

Materiale
alluminio + policarbonato

Colore
antracite

Temperatura colore selezionabile
3000K / 4000K

Driver
incluso

Material
aluminum + polycarbonate


Colour
anthracite

Selectable color temperature
3000K / 4000K

Driver
included

CE · EMC · IN&OUT · IP54 · degree IK08 · CRI >80 · LED SMD

	colour temp.	colour
LED-W-COMPACT 8031414867110		
lumen	2260 lm	
watt	18W	
beam angle	120°	



DETROIT

Applique a LED in alluminio nero diffusore in policarbonato.
Aluminum LED wall lamp black finish with PC shade.

outdoor use · accommodation areas use · urban areas use



Materiale
alluminio + policarbonato

Colore
nero

Temperatura colore selezionabile
3000K / 4000K

Driver
incluso

Material
aluminum + polycarbonate


Colour
black

Selectable color temperature
3000K / 4000K

Driver
included

CE · EMC · IN&OUT · IP54 · degree IK08 · CRI >80 · LED SMD

	colour temp.	colour
LED-W-DETROIT-AP 8031414862290		
lumen	700 lm	
watt	10W	
beam angle	120°	



ZODIAC

Applique a LED in policarbonato nei colori bianco e nero.
LED polycarbonate wall lamp in black and white.

Materiale
PC

Colore
bianco
nero

Temperatura colore selezionabile
3000K / 4000K

Driver
integrato

Material
PC


Colour
white
black

Selectable color temperature
3000K / 4000K

Driver
built-in








	colour temp.	colour
LED-W-ZODIAC-M-BCO		
8031414889846		
lumen	1550 lm	
LED-W-ZODIAC-M-NER		
8031414889853		
lumen	1550 lm	
watt	12W	
beam angle	360°	









	colour temp.	colour
LED-W-ZODIAC-L-BCO		
8031414889860		
lumen	2450 lm	
LED-W-ZODIAC-L-NER		
8031414889877		
lumen	2450 lm	
watt	18W	
beam angle	360°	





STEALTH

Applique a LED in alluminio goffrato bianco o nero.
Aluminum LED wall lamp embossed white or black.



Materiale
alluminio

Colore
goffrato bianco
goffrato nero

Temperatura colore selezionabile
3000K / 4000K

Driver
incluso


Material
aluminum

Colour
embossed white
embossed black

Selectable color temperature
3000K / 4000K


Driver
included


IN&OUT · IP54 · degree IK07 · CRI >80 · LED SMD

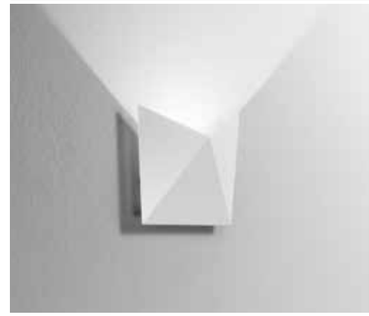

LED-W-STEALTH BCO
8031414866960


	colour temp.	colour
lumen	580 lm	
watt	6W	
beam angle	120°	



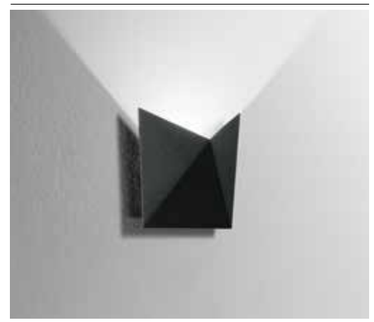

LED-W-STEALTH NER
8031414866953

	colour temp.	colour
lumen	580 lm	
watt	6W	
beam angle	120°	



MIURA

Applique a LED in alluminio bianco goffrato ultrasottile.
Ultra-thin embossed white aluminum LED wall light.

outdoor use · accommodation areas use · urban areas use

Materiale
alluminio

Colore
goffrato bianco

Temperatura colore selezionabile
3000K / 4000K

Driver
incluso

Material
aluminium


Colour
embossed white

Selectable color temperature
3000K / 4000K

Driver
included

IP54 · degree IK07 · CRI >80 · LED SMD · IN&OUT

	colour temp.	colour
LED-W-MIURA/6W		
8031440351447		
lumen	520 lm	
watt	2 × 3W	
beam angle	↓ 110° + 110° ↑	



GAMMA

Applique a LED in alluminio goffrato bianco.
Aluminum LED wall lamp embossed white finish.

outdoor use · accommodation areas use · urban areas use

Materiale
alluminio

Colore
goffrato bianco

Temperatura colore selezionabile
3000K / 4000K

Driver
incluso

Material
aluminum

Colour
embossed white

Selectable color temperature
3000K / 4000K

Driver
included

IP54 · degree IK07 · CRI >80 · LED SMD · IN&OUT

	colour temp.	colour
LED-W-GAMMA/10W		
8031434041217		
lumen	1100 lm	
watt	2 × 5W	
beam angle	↓ 120° + 120° ↑	



VEYRON

Applique a LED in alluminio con doppia emissione bianco o nero goffrato.
LED aluminum wall light with double emission in white or black.

outdoor use | accommodation areas use | urban areas use

IN&OUT | IP54 | degree IK07 | CRI >85 | LED COB

Materiale
alluminio

Colore
goffrato bianco
goffrato nero

Temperatura colore selezionabile
3000K / 4000K

Driver
incluso

Material
aluminum

Colour
embossed white
embossed black

Selectable color temperature
3000K / 4000K


Driver
included





LED-W-VEYRON BCO
8031440361163


	colour temp.	colour
lumen	840 lm	
watt	2 × 3,5W	
beam angle	↓ 120° + 120° ↑	





LED-W-VEYRON NERO
8031440361095

	colour temp.	colour
lumen	840 lm	
watt	2 × 3,5W	
beam angle	↓ 120° + 120° ↑	



BIOME

Applique a LED in alluminio bianco o nero goffrato.
LED aluminum wall lamps in embossed white or black.

outdoor use · accommodation areas use · urban areas use

IN&OUT · IP54 · degree IK07 · CRI >85 · LED COB

Materiale
alluminio

Colore
goffrato bianco
goffrato nero

Temperatura colore selezionabile
3000K / 4000K

Driver
incluso


Material
aluminum

Colour
embossed white
embossed black

Selectable color temperature
3000K / 4000K


Driver
included



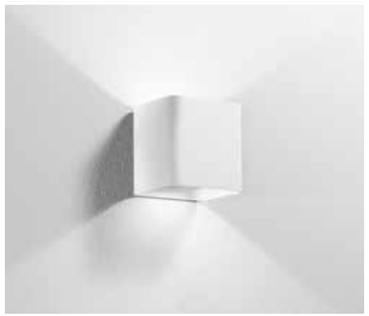

LED-W-BIOME BCO
8031440361125


	colour temp.	colour
lumen	840 lm	
watt	2 × 3,5W	
beam angle	↓ 120° + 120° ↑	





LED-W-BIOME NERO
8031440361132

	colour temp.	colour
lumen	840 lm	
watt	2 × 3,5W	
beam angle	↓ 120° + 120° ↑	



GOLF

Applique a LED in alluminio goffrato bianco o nero.
Aluminum LED wall lamp embossed white or black finish.



Materiale
alluminio

Colore
goffrato bianco
goffrato nero

Temperatura colore selezionabile
3000K / 4000K

Driver
incluso

Material
aluminum

Colour
embossed white
embossed black


Selectable color temperature
3000K / 4000K

Driver
included



LED-W-GOLF BCO
8031440361101


	colour temp.	colour
lumen	840 lm	
watt	2 × 3,5W	
beam angle	↓ 120° + 120° ↑	





LED-W-GOLF NERO
8031440361118

	colour temp.	colour
lumen	840 lm	
watt	2 × 3,5W	
beam angle	↓ 120° + 120° ↑	



POLO

Applique a LED in policarbonato con singola o doppia emissione bianco o nero opaco.
Polycarbonate LED wall light with single or double emission in matt white or black.

outdoor use · accommodation areas use · urban areas use

Materiale
PC

Colore
bianco
nero

Temperatura colore selezionabile
3000K / 4000K

Driver
incluso

Material
PC


Colour
white
black

Selectable color temperature
3000K / 4000K


Driver
included




IP65 · CRI >80 · LED SMD

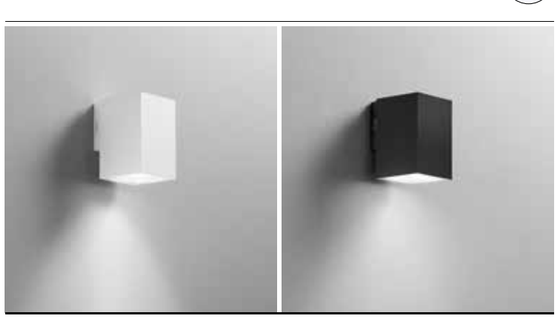



	colour temp.	colour
LED-W-POLO-Q1-BCO 8031414889655 lumen	980 lm	
LED-W-POLO-Q1-NER 8031414889662 lumen	980 lm	
watt	8W	
beam angle	60°	



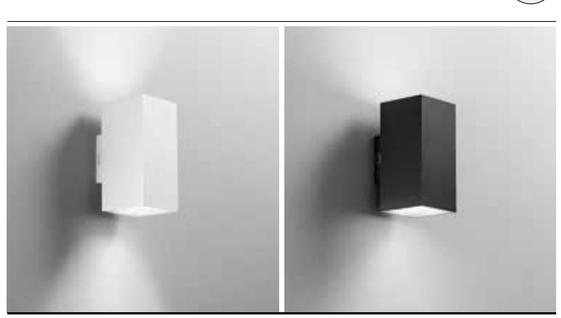



	colour temp.	colour
LED-W-POLO-Q2-BCO 8031414889679 lumen	1960 lm	
LED-W-POLO-Q2-NER 8031414889686 lumen	1960 lm	
watt	2 × 8W	
beam angle	↓ 60° + 60° ↑	



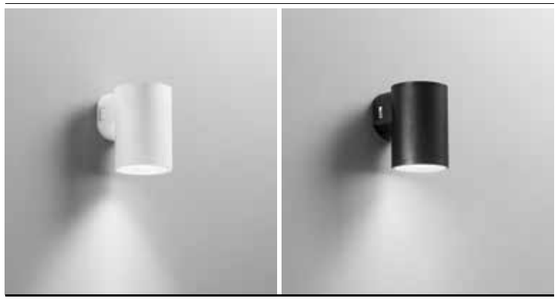


	colour temp.	colour
LED-W-POLO-R1-BCO 8031414889617 lumen	980 lm	
LED-W-POLO-R1-NER 8031414889624 lumen	980 lm	
watt	8W	
beam angle	60°	



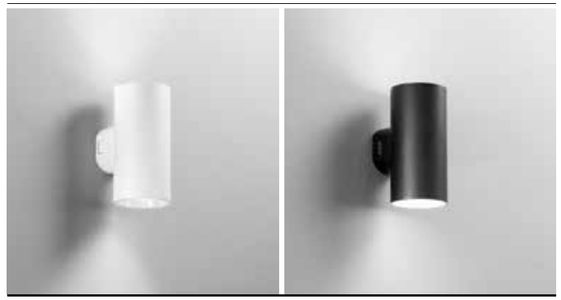

	colour temp.	colour
LED-W-POLO-R2-BCO 8031414889631 lumen	1960 lm	
LED-W-POLO-R2-NER 8031414889648 lumen	1960 lm	
watt	2 × 8W	
beam angle	↓ 60° + 60° ↑	



RAY

Applique a LED in alluminio biemissione più emissione frontale in antracite o corten goffrato.
Aluminum LED wall lamp double emission light and front light stream embossed anthracite or corten finish.

outdoor use · accommodation areas use · urban areas use



Materiale
alluminio

Colore
goffrato antracite
goffrato corten

Temperatura colore selezionabile
3000K / 4000K

Driver
incluso

Material
aluminum

Colour
embossed anthracite
embossed corten

Selectable color temperature
3000K / 4000K

Driver
included


IN&OUT · 50° 120° 50° · IP54 · degree IK10 · UGR <16 · CRI >80 · LED SMD · LED COB

technical information **RAY**



LED-W-RAY ANT
8031414867127


	colour temp.	colour
lumen	1100+390 lm	
watt	14W	
beam angle	↓ 50° + 50° ↑ + 120° →	





LED-W-RAY BRO
8031414870998


	colour temp.	colour
lumen	1100+390 lm	
watt	14W	
beam angle	↓ 50° + 50° ↑ + 120° →	



TWIN

Applique a LED in alluminio finitura bianco, antracite o nikel spazzolato.
Aluminum LED wall lamp in white, anthracite finish or brush nikel.



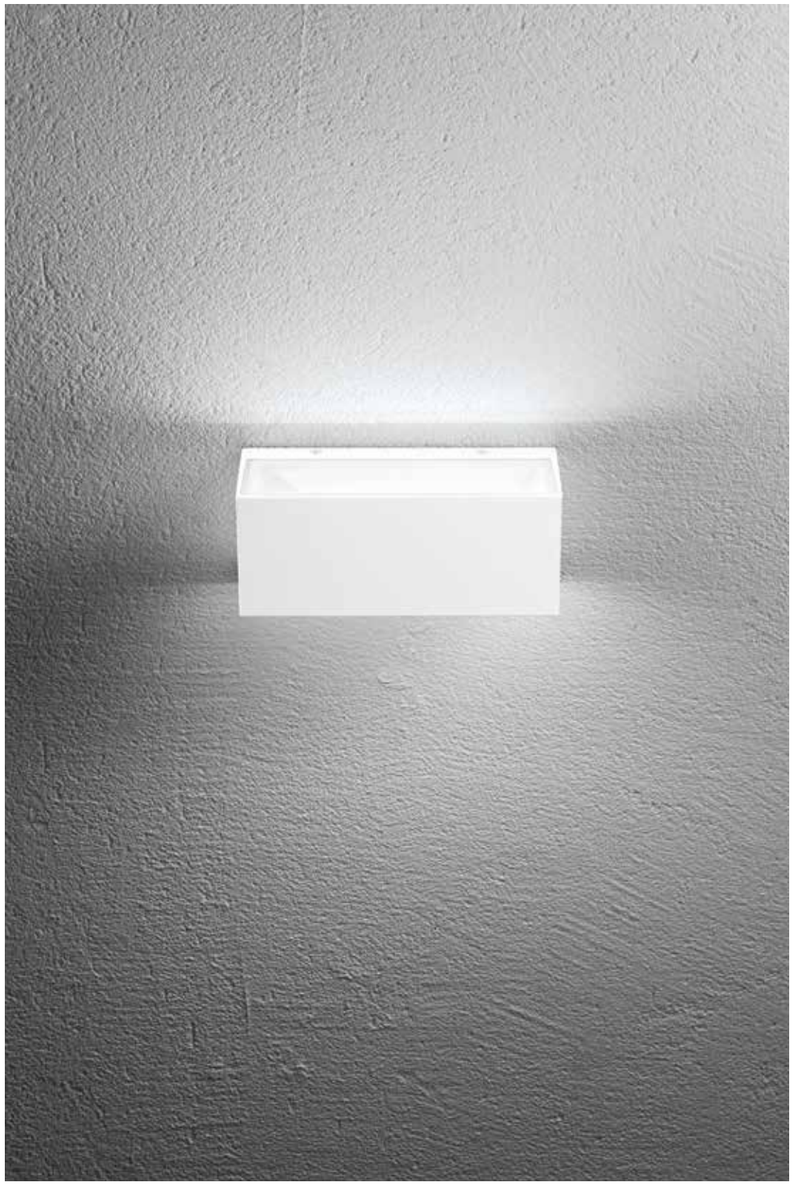



Materiale
alluminio

Colore
bianco
antracite
nikel spazzolato

Temperatura colore
4000K

Temperatura colore selezionabile
3000K / 4000K

Driver
incluso


Material
aluminum

Colour
white
anthracite
brush nikel

Colour temperature
4000K

Selectable color temperature
3000K / 4000K

Driver
included

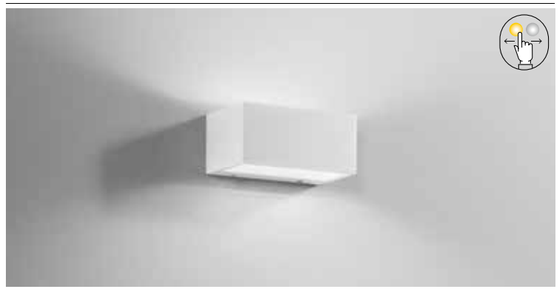



	colour temp.	colour
LED-W-TWIN-S BCO		
8031414863976		
lumen	1500 lm	
LED-W-TWIN-S ANT		
8031414863709		
lumen	1500 lm	
LED-W-TWIN-S NIK		
8031414863983		
lumen	1560 lm	
watt	12W	
beam angle	↓ 90° + 90° ↑	








	colour temp.	colour
LED-W-TWIN-M BCO		
8031414863969		
lumen	2150 lm	
LED-W-TWIN-M ANT		
8031414863693		
lumen	2150 lm	
LED-W-TWIN-M NIK		
8031414863990		
lumen	2150 lm	
watt	18W	
beam angle	↓ 90° + 90° ↑	



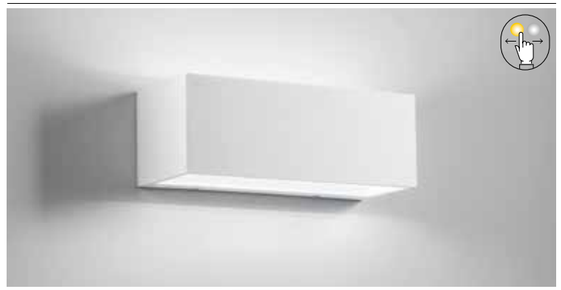



	colour temp.	colour
LED-W-TWIN-XL BCO		
8031414863716		
lumen	4260 lm	
LED-W-TWIN-XL ANT		
8031414863686		
lumen	4260 lm	
LED-W-TWIN-XL NIK		
8031414864362		
lumen	4440 lm	
watt	35W	
beam angle	↓ 90° + 90° ↑	



DESERT

Applique a LED in alluminio con biemissione, emissione frontale con finitura bianco, antracite e bronzo.
LED aluminum wall lamp with double emission, frontal emission with white, anthracite and bronze finish.

outdoor use · accommodation areas use · urban areas use

IN&OUT · IP65 · degree IK08 · CRI >80 · LED SMD · CCT

Materiale
alluminio

Colore
goffrato bianco
goffrato antracite
goffrato corten

Temperatura colore
3000K / 4000K


Driver
incluso

Material
aluminum

Colour
embossed white
embossed anthracite
embossed corten


Colour temperature
3000K / 4000K


Driver
included

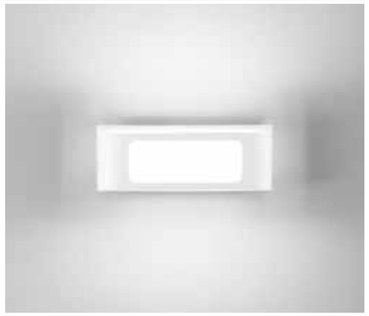

LED-W-DESERT-BCO
8031414922895


	colour temp.	colour
lumen	580 lm	
watt	12W	
beam angle	120°	



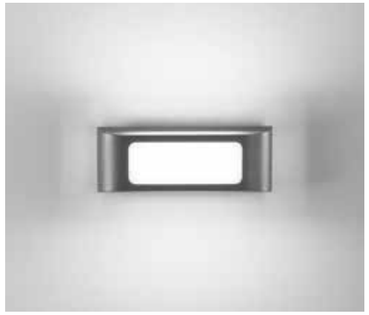

LED-W-DESERT-ANT
8031414922918


	colour temp.	colour
lumen	580 lm	
watt	12W	
beam angle	120°	





LED-W-DESERT-BRO
8031414922901

	colour temp.	colour
lumen	580 lm	
watt	12W	
beam angle	120°	



DUKROT

Applique in alluminio con diffusore in policarbonato.
Disponibile in bianco opaco, antracite e corten.
Aluminum wall lamp with polycarbonate diffuser
Available in matte white, anthracite and corten.



Materiale
alluminio

Colore
bianco opaco
antracite
corten

Temperatura colore selezionabile
3000K / 4000K

Driver
integrato


Material
aluminum

Colour
matt white
anthracite
corten

Selectable color temperature
3000K / 4000K


Driver
built-in


IN&OUT · IP54 · degree IK07 · CRI >80 · LED SMD

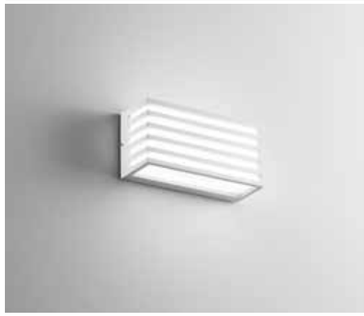

LED-W-DUKROT-BCO
8031414918591


	colour temp.	colour
lumen	1440 lm	
watt	12W	
beam angle	180°	




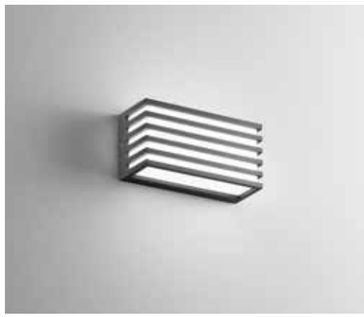

LED-W-DUKROT-ANT
8031414918584


	colour temp.	colour
lumen	1440 lm	
watt	12W	
beam angle	180°	



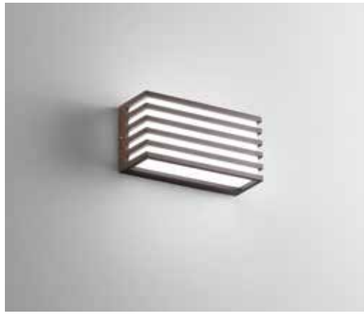

LED-W-DUKROT-BRO
8031414918607

	colour temp.	colour
lumen	1440 lm	
watt	12W	
beam angle	180°	



WEISS

Applique a LED in alluminio con finitura bianco, nero o corten.
Aluminum LED wall light in white, black and corten finish.



outdoor use · accommodation areas use · urban areas use

Materiale
alluminio

Colore
bianco
nero
corten

Temperatura colore selezionabile
3000K / 4000K

Driver
integrato

Material
aluminum

Colour
white
black
corten

Selectable color temperature
3000K / 4000K


Driver
built-in

IN&OUT · IP54 · CRI >80 · LED SMD



LED-W-WEISS-BCO
8031414897193


	colour temp.	colour
lumen	1800 lm	
watt	16W	
beam angle	↓ 120° + 120° ↑	





LED-W-WEISS-NER
8031414897216


	colour temp.	colour
lumen	1800 lm	
watt	16W	
beam angle	↓ 120° + 120° ↑	





LED-W-WEISS-BRO
8031414897209

	colour temp.	colour
lumen	1800 lm	
watt	16W	
beam angle	↓ 120° + 120° ↑	



BORDER

Applique angolare a LED con struttura e diffusore in policarbonato e finitura bianco o nero opaco.
Angular LED wall lamp with structure and diffuser in PC and matt white and black finish.

outdoor use · accommodation areas use · urban areas use

IP65 · degree IK10 · UGR <16 · CRI >80 · LED SMD · CCT

Materiale
PC

Colore
bianco opaco
nero opaco

Temperatura colore
3000K / 4000K

Driver
incluso

Material
PC

Colour
matt white
matt black

Colour temperature
3000K / 4000K


Driver
included





LED-BORDER-30M-BCO
8031414883578


	colour temp.	colour
lumen	3550 lm	
watt	30W	
beam angle	120°	





LED-BORDER-30M-ANT
8031414883561

	colour temp.	colour
lumen	3550 lm	
watt	30W	
beam angle	120°	



LUXON

Applique angolare a LED con struttura e diffusore in alluminio e finitura bianco o nero goffrato.
Angular LED wall lamp with structure and diffuser in aluminum and embossed white and black finish.

outdoor use · accommodation areas use · urban areas use

IP54 · degree IK10 · UGR <16 · CRI >80 · LED SMD

Materiale
alluminio

Colore
goffrato bianco
goffrato nero

Temperatura colore selezionabile
3000K / 4000K

Driver
incluso

Material
aluminum

Colour
embossed white
embossed black

Selectable color temperature
3000K / 4000K


Driver
included





LED-W-LUXON BCO
8031414870677


	colour temp.	colour
lumen	1550 lm	
watt	12W	
beam angle	120°	





LED-W-LUXON ANT
8031414867097

	colour temp.	colour
lumen	1550 lm	
watt	12W	
beam angle	120°	



GRIS

Applique a LED in alluminio con finitura bianco o nera.
LED wall light in aluminum with white or black finish.

outdoor use · accommodation areas use · urban areas use

IN&OUT · IP54 · degree IK07 · UGR <19 · CRI >80 · LED COB

Materiale
alluminio

Colore
bianco
nero

Temperatura colore selezionabile
3000K / 4000K

Driver
integrato

Material
aluminum

Colour
white
black


Selectable color temperature
3000K / 4000K

Driver
built-in



LED-W-GRIS-BCO
8031414897223


	colour temp.	colour
lumen	1390 lm	
watt	12W	
beam angle	180°	





LED-W-GRIS-NER
8031414897230

	colour temp.	colour
lumen	1390 lm	
watt	12W	
beam angle	180°	



AGERA

Applique a LED in alluminio goffrato nero.
Aluminum LED wall lamp embossed black finish.

outdoor use · accommodation areas use · urban areas use

IN&OUT · IP54 · degree IK06 · CRI >80 · LED SMD

Materiale
alluminio

Colore
goffrato nero

Temperatura colore selezionabile
3000K / 4000K

Driver
incluso

Material
aluminum


Colour
embossed black

Selectable color temperature
3000K / 4000K

Driver
included





CE · EMC

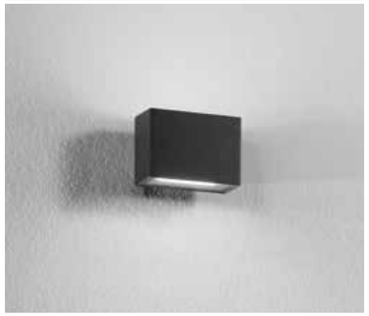

LED-W-AGERA-90
8031440360951


	colour temp.	colour
lumen	680 lm	
watt	2 × 3W	
beam angle	↓ 120° + 120° ↑	



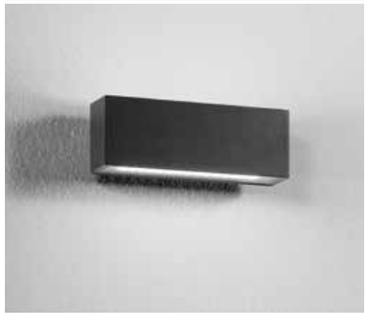

LED-W-AGERA-180
8031440360975

	colour temp.	colour
lumen	1380 lm	
watt	2 × 6W	
beam angle	↓ 120° + 120° ↑	



BOXTER

Applique a LED in alluminio goffrato bianco, silver, nero o corten.
Aluminum LED wall lamp embossed white, silver, black or corten finish.

outdoor use · accommodation areas use · urban areas use

IN&OUT · IP44 · degree IK07 · CRI >80 · LED COB

Materiale
alluminio

Colore
bianco
silver
nero
corten

Temperatura colore
4000K

Temperatura colore selezionabile
3000K / 4000K

Driver
incluso


Material
aluminum

Colour
white
silver
black
corten

Colour temperature
4000K


Selectable color temperature
3000K / 4000K

Driver
included

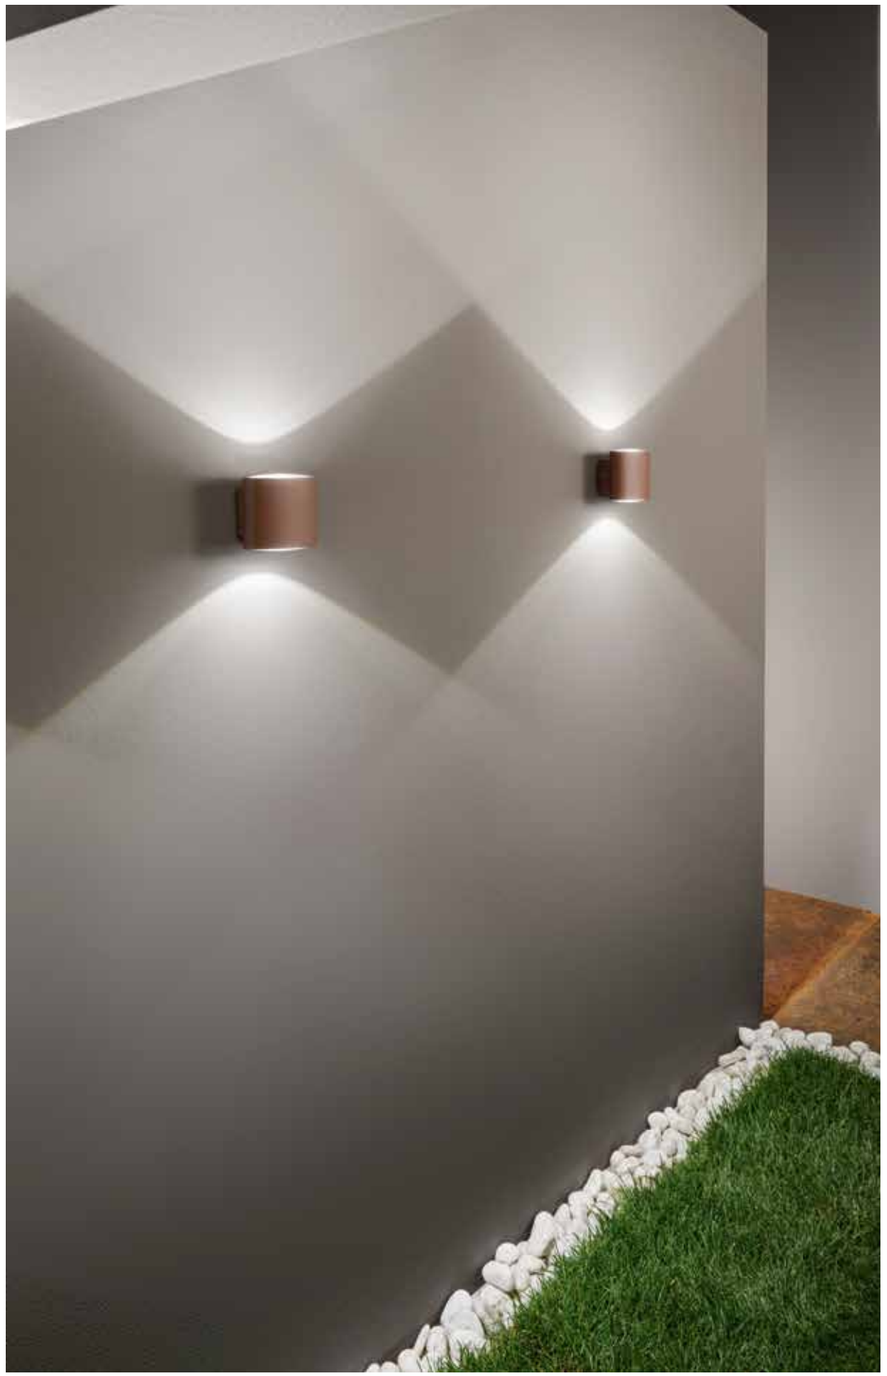




LED-W-BOXTER BCO
8031414873043
lumen 960 lm
colour temp. · colour
watt 2 × 4W
beam angle ↓ 120° + 120° ↑






LED-W-BOXTER SIL
8031414862399
lumen 800 lm
colour temp. · colour
watt 2 × 4W
beam angle ↓ 120° + 120° ↑






LED-W-BOXTER NER
8031414862382
lumen 960 lm
colour temp. · colour
watt 2 × 4W
beam angle ↓ 120° + 120° ↑





LED-W-BOXTER BRO
8031414862405
lumen 960 lm
colour temp. · colour
watt 2 × 4W
beam angle ↓ 120° + 120° ↑



KLEIN

Applique a LED in policarbonato con biemissione nei colori bianco e nero.
Polycarbonate LED wall light with biemissione in matt white or black.

outdoor use · accommodation areas use · urban areas use

Materiale
PC

Colore
bianco opaco
nero opaco

Temperatura colore
3000K / 4000K

Driver
integrato

Material
PC


Colour
matt white
matt black

Colour temperature
3000K / 4000K

Driver
built-in




IP65 · degree IK08 · CRI >80 · LED SMD · CCT






	colour temp.	colour
LED-W-KLEIN-AP2-BCO		
8031414916337		
lumen	200 lm	
LED-W-KLEIN-AP2-NER		
8031414916320		
lumen	200 lm	
watt	2W	
beam angle	60°	







	colour temp.	colour
LED-W-KLEIN-AP6-BCO		
8031414916351		
lumen	600 lm	
LED-W-KLEIN-AP6-NER		
8031414916344		
lumen	600 lm	
watt	6W	
beam angle	60°	



BEETLE

Applique a LED in alluminio bianco o antracite goffrato.
Aluminum LED wall lamp embossed white or anthracite finish.

outdoor use · accommodation areas use · urban areas use

Materiale
alluminio

Colore
goffrato bianco
goffrato antracite

Temperatura colore selezionabile
3000K / 4000K

Driver
incluso

Material
aluminum


Colour
embossed white
embossed anthracite

Selectable color temperature
3000K / 4000K

Driver
included




IP54 · degree IK10 · CRI >80 · LED SMD

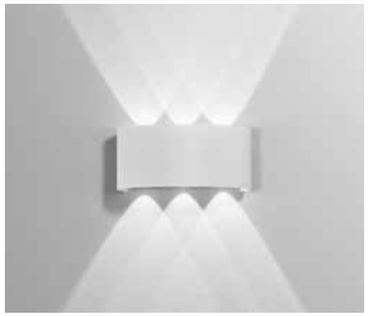

LED-W-BEETLE BCO
8031414876952


	colour temp.	colour
lumen	600 lm	
watt	6W	
beam angle	100°	





LED-W-BEETLE GR
8031414876969

	colour temp.	colour
lumen	600 lm	
watt	6W	
beam angle	100°	



RIBBON



IP65 · degree IK08 · CRI >80 · LED SMD

Materiale
alluminio

Colore
goffrato antracite

Temperatura colore
4000K

Driver
incluso

Material
aluminum

Colour
embossed anthracite


Colour temperature
4000K

Driver
included

Fascia a LED in alluminio in antracite goffrato.
Aluminum LED applique in embossed anthracite finish.




	colour temp.	colour
LED-RIBBON-42		
8031414882335		
lumen	1600 lm	
watt	2 × 6W	
beam angle	120°	





	colour temp.	colour
LED-RIBBON-72		
8031414882342		
lumen	2600 lm	
watt	2 × 10W	
beam angle	120°	



LASER



IP65 · degree IK08 · CRI >80 · LED SMD

Materiale
termoplastica

Colore
antracite

Temperatura colore
4000K

Driver
incluso

Material
thermoplastic

Colour
anthracite

Colour temperature
4000K

Driver
included

Applique a LED in termoplastica antracite.
LED wall lamp in thermoplastic anthracite.



LED-LASER
8031414882328

	colour temp.	colour
lumen	170 lm	
watt	3W	
beam angle	5°	







LED-LASER-BIS
8031414882311

	colour temp.	colour
lumen	40 lm	
watt	5W	
beam angle	2 × 4°	





ALFA

Applique a LED in alluminio con paratie regolabili indipendenti.
Aluminum LED wall lamp with independent adjustable wings.



outdoor use
accommodation areas use
urban areas use

Materiale
alluminio

Colore
goffrato bianco
goffrato silver
goffrato antracite
goffrato corten

Temperatura colore
3000K / 4000K

Driver
incluso

Material
aluminum

Colour
embossed white
embossed silver
embossed anthracite
embossed corten

Colour temperature
3000K / 4000K

Driver
included



ALFA

Materiale
alluminio

Colore
goffrato bianco
goffrato silver

Temperatura colore
3000K / 4000K


Driver
incluso

Material
aluminum


Colour
embossed white
embossed silver

Colour temperature
3000K / 4000K

Driver
included

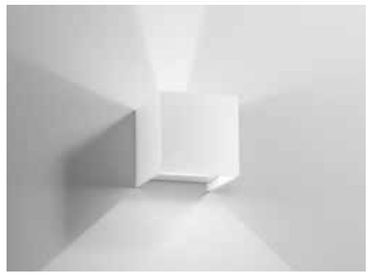


LED-W-ALFA-10-BCO
8031414905843
lumen 1200 lm
watt 2 × 5W
beam angle ↓ 10°/120° + 10°/120° ↑






LED-W-ALFA-10-GR
8031414905850
lumen 1200 lm
watt 2 × 5W
beam angle ↓ 10°/120° + 10°/120° ↑



Luce biemissione con paratie regolabili indipendenti /
Bi-emission light with independent adjustable wings

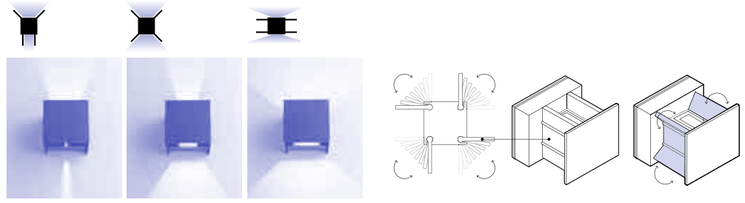

Materiale
alluminio

Colore
goffrato bianco
goffrato antracite
goffrato corten

Temperatura colore
3000K / 4000K


Driver
incluso

Material
aluminum


Colour
embossed white
embossed anthracite
embossed corten

Colour temperature
3000K / 4000K

Driver
included

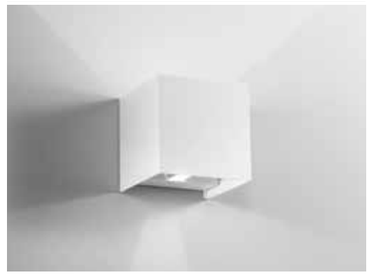


LED-W-ALFA-20-BCO
8031414905867
lumen 1800 lm
watt 20W
beam angle ↓ 10°/120° + 10°/120° ↑






LED-W-ALFA-20-ANT
8031414905874
lumen 1800 lm
watt 20W
beam angle ↓ 10°/120° + 10°/120° ↑






LED-W-ALFA-20-BRO
8031414905881
lumen 1800 lm
watt 20W
beam angle ↓ 10°/120° + 10°/120° ↑



Luce biemissione con paratie regolabili indipendenti /
Bi-emission light with independent adjustable wings

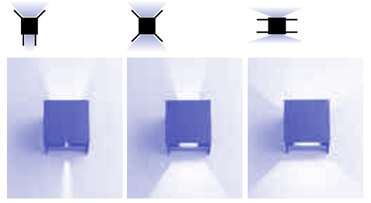

DELTA

Applique a LED in alluminio bianco o silver goffrato con paratie regolabili indipendenti.
Aluminum LED wall lamp in embossed white or silver finish with independent adjustable wings.

Materiale
alluminio

Colore
goffrato bianco
goffrato silver

Temperatura colore
3000K / 4000K

Driver
incluso

Material
aluminum

Colour
embossed white
embossed silver

Colour temperature
3000K / 4000K

Driver
included





outdoor use · accommodation areas use · urban areas use

IN&OUT · IP54 · degree IK04 · CRI >80 · LED SMD · CCT




	colour temp.	colour
LED-W-DELTA-10-BCO 8031414905829		
lumen	700 lm	
watt	2 × 5W	
beam angle	↓ 10°/120° + 10°/120° ↑	




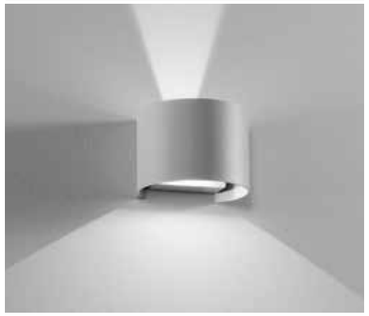


	colour temp.	colour
LED-W-DELTA-10-GR 8031414905836		
lumen	700 lm	
watt	2 × 5W	
beam angle	↓ 10°/120° + 10°/120° ↑	



Luce biemissione con paratie regolabili indipendenti /
Bi-emission light with independent adjustable wings

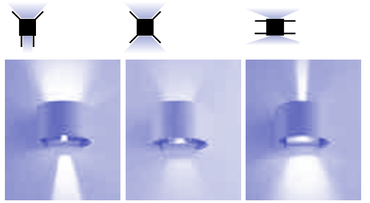



PARKER

Applique a LED in cemento bianco o grigio naturale.
LED wall lamp in natural white or grey concrete.

outdoor use · accommodation areas use · urban areas use

Materiale
cemento

Colore
bianco
grigio

Temperatura colore
4000K

Temperatura colore selezionabile
3000K / 4000K

Driver
incluso


Material
concrete

Colour
white
grey

Colour temperature
4000K

Selectable color temperature
3000K / 4000K

Driver
included

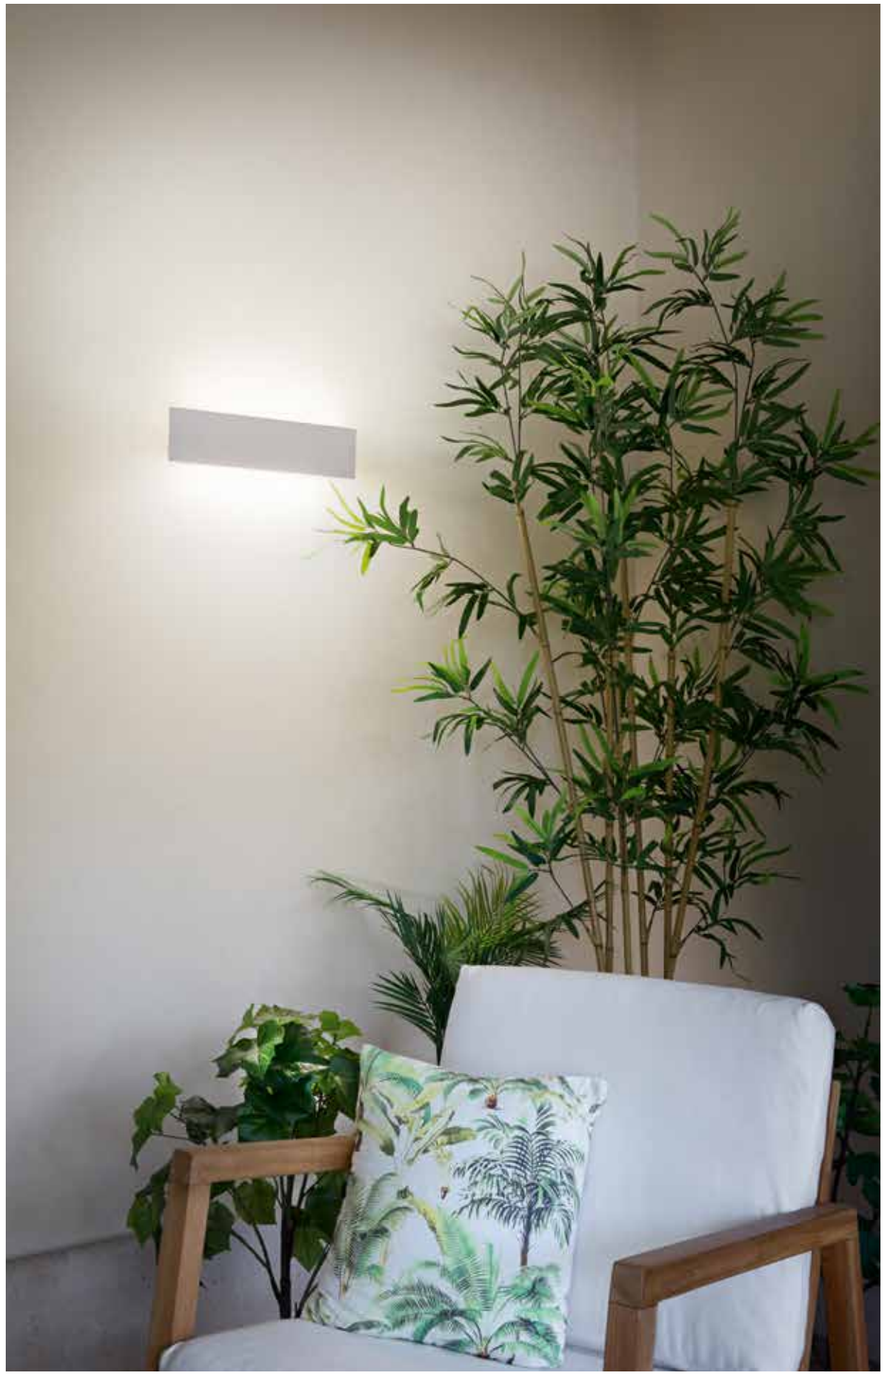





LED-PARKER-AP30
8031414864195

	colour temp.	colour
lumen	1080 lm	
watt	9W	
beam angle	↓120° + 120°↑	



Connettore IP65 incluso / IP65 connector included






LED-PARKER-AP30 GR
8031414866977

	colour temp.	colour
lumen	1080 lm	
watt	8,6W	
beam angle	↓120° + 120°↑	



Connettore IP65 incluso / IP65 connector included






LED-PARKER-AP40
8031414864201

	colour temp.	colour
lumen	1400 lm	
watt	12W	
beam angle	↓120° + 120°↑	



Connettore IP65 incluso / IP65 connector included






LED-PARKER-AP50 GR
8031414866984

	colour temp.	colour
lumen	2100 lm	
watt	16W	
beam angle	↓120° + 120°↑	



Connettore IP65 incluso / IP65 connector included






LED-PARKER-AP60
8031414862504

	colour temp.	colour
lumen	2640 lm	
watt	20W	
beam angle	↓120° + 120°↑	



Connettore IP65 incluso / IP65 connector included






LED-PARKER-AP120
8031414862511

	colour temp.	colour
lumen	1500 lm	
watt	30W	
beam angle	↓120° + 120°↑	



Connettore IP65 incluso / IP65 connector included



PORTLAND

Applique cilindrico in cemento bianco.
Cylindrical wall lamp in white concrete.

outdoor use | accommodation areas use | urban areas use




CE | IP65 | concrete finish | degree IK04 | GU10

colour

I-PORTLAND-AP2 BCO
8031414863563

2 x GU10 MAX 35W



Connettore IP65 incluso /
IP65 connector included

Lampadina non inclusa /
Light bulb not included

OAKLAND

Applique in cemento bianco.
Wall lamp in white concrete.

outdoor use | accommodation areas use | urban areas use




CE | IP65 | concrete finish | degree IK04 | GU10

colour

I-OAKLAND-AP2 BCO
8031414864218

2 x GU10 MAX 10W



Connettore IP65 incluso /
IP65 connector included

Lampadina non inclusa /
Light bulb not included

JUMP

Applique in alluminio bianco, silver o in acciaio inox.
Wall lamp aluminum white, silver finish or stainless steel.





IP44


CE

GU10



	colour
I-JUMP-AP2 BCO 8031414862351	
I-JUMP-AP2 SIL 8031414862344	
I-JUMP-AP2 INOX 8031414862368	

2 x GU10 MAX 35W




Lampadina non inclusa / Light bulb not included

E27



	colour
I-JUMP-AP2-E27 SIL 8031414865390	

2XE27 MAX 60W



Lampadina non inclusa / Light bulb not included

ONE

Applique a LED in alluminio con singola o doppia emissione bianco, antracite o corten goffrato.
Aluminum LED wall light with single or double emission in embossed white, anthracite or corten.




outdoor use · accommodation areas use · urban areas use

IN&OUT · IP54 · GU10



	colour
I-ONE-AP1 BCO 8031414878857	
I-ONE-AP1 ANT 8031414073009	
I-ONE-AP1 BRO 8031414048861	

1 x GU10 MAX 35W




Lampadina non inclusa / Light bulb not included



	colour
I-ONE-AP2 BCO 8031414878864	
I-ONE-AP2 ANT 8031414082100	
I-ONE-AP2 BRO 8031414079995	

2 x GU10 MAX 35W



Lampadina non inclusa / Light bulb not included

QUBO

Applique a LED in alluminio con singola o doppia emissione bianco, antracite o corten goffrato.
Aluminum LED wall light with single or double emission in embossed white, anthracite or corten.



IN&OUT IP54 GU10

CE




colour

I-QUBO-AP1 BCO
8031414878833

I-QUBO-AP1 ANT
8031414084203

I-QUBO-AP1 BRO
8031414082117

1 x GU10 MAX 35W



Lampadina non inclusa / Light bulb not included




colour

I-QUBO-AP2 BCO
8031414878840

I-QUBO-AP2 ANT
8031414084289

I-QUBO-AP2 BRO
8031414083336

2 x GU10 MAX 35W



Lampadina non inclusa / Light bulb not included

TUCSON


Applique in alluminio bianco, silver o bronzo goffrato con diffusore in policarbonato.
Aluminum wall lamp in embossed white, silver or bronze PC diffuser.

outdoor use · accommodation areas use · urban areas use



technical information **TUCSON**

IN&OUT · IP44 · E14

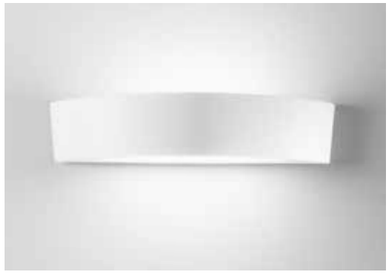

colour

I-TUCSON-AP BCO
8031414862160

2 x E14 MAX 40W



H105 Ø40 — Lampadina consigliata / Suggested light bulb

Lampadina non inclusa / Light bulb not included



colour

I-TUCSON-AP SIL
8031414862184

2 x E14 MAX 40W



H105 Ø40 — Lampadina consigliata / Suggested light bulb

Lampadina non inclusa / Light bulb not included



colour

I-TUCSON-AP BRO
8031414862191

2 x E14 MAX 40W



H105 Ø40 — Lampadina consigliata / Suggested light bulb

Lampadina non inclusa / Light bulb not included

HURACAN

Applique in alluminio pressofuso antracite goffrato.
Aluminum die-cast wall lamp embossed anthracite finish.

outdoor use | accommodation areas use | urban areas use




IP54 GU10



colour

I-HURACAN-AP
8031440361026

1 x GU10 MAX 35W



Lampadina non inclusa /
Light bulb not included

SEATTLE

Applique in alluminio, finitura antracite con diffusore opale in policarbonato.
Aluminum wall lamp with anthracite finish and PC opal diffuser.

outdoor use | accommodation areas use | urban areas use




IP54 E27



colour

I-SEATTLE-AP
8031440312233

1 x E27 MAX 42W



Lampadina non inclusa /
Light bulb not included

AUSTIN

Applique in alluminio bianco, silver, nero o bronzo con diffusore in policarbonato.
Aluminum wall lamp white, silver, black or bronze PC diffuser.



outdoor use · accommodation areas use · urban areas use

IP54 · E27 · 120° · 120° · 120°


CE



colour

I-AUSTIN-AP BCO
8031440362122

1 x E27 MAX 42W




Lampadina non inclusa / Light bulb not included



colour

I-AUSTIN-AP SIL
8031414862429

1 x E27 MAX 42W




Lampadina non inclusa / Light bulb not included



colour

I-AUSTIN-AP NER
8031440362139

1 x E27 MAX 42W




Lampadina non inclusa / Light bulb not included



colour

I-AUSTIN-AP BRO
8031440362108

1 x E27 MAX 42W



Lampadina non inclusa / Light bulb not included

BOSTON

Applique in alluminio finitura antracite con diffusore opale in policarbonato.
Aluminum wall lamp anthracite finish with PC opal diffuser.

outdoor use · accommodation areas use · urban areas use



IP54 · E27 · CE

colour

I-BOSTON-AP
8031440312240

1 x E27 MAX 42W

Lampadina non inclusa / Light bulb not included

ATLANTA

Applique in alluminio finitura antracite con diffusore opale in policarbonato.
Aluminum wall lamp anthracite finish with PC opal diffuser.

outdoor use · accommodation areas use · urban areas use




IP54 · E27 · CE

colour

I-ATLANTA-AP
8031440312257


1 x E27 MAX 42W



Lampadina non inclusa / Light bulb not included

DENVER

Applique in alluminio finitura antracite con diffusore opale in policarbonato.
Aluminum wall lamp anthracite finish with PC opal diffuser.

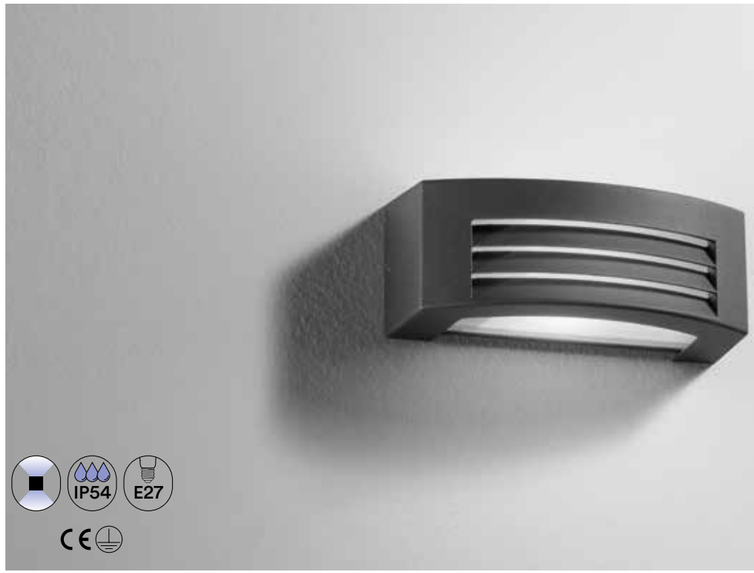


IP54 · E27 · CE

colour

I-DENVER-AP
8031440312264

1 x E27 MAX 42W



Lampadina non inclusa / Light bulb not included

MONDRIAN

Applique in metallo bianco, nero, silver o bronzo con diffusore in vetro.
Metal wall lamp white, black, silver or bronze glass diffuser.


outdoor use | accommodation areas use | urban areas use



IP44 E27

	colour
I-MONDRIAN-AP BCO 8031414896134	
I-MONDRIAN-AP SIL 8031414862306	
I-MONDRIAN-AP NER 8031414896127	
I-MONDRIAN-AP BRO 8031414862313	

1 x E27 MAX 25W



Lampadina non inclusa / Light bulb not included

GAETA

Lanterna in alluminio pressofuso finitura nero-oro con diffusore in vetro.
Diecast aluminum black-gold finish lantern with glass diffuser.

outdoor use | accommodation areas use | urban areas use

IP44 E27

	colour
LANT-GAETA-AP1 8031440313278	

1 x E27 MAX 60W




Lampadina non inclusa / Light bulb not included

GRUBB

Proiettore in termoplastica picchetto incluso.
Termoplastic flood light with spike included.

outdoor use · accommodation areas use · urban areas use

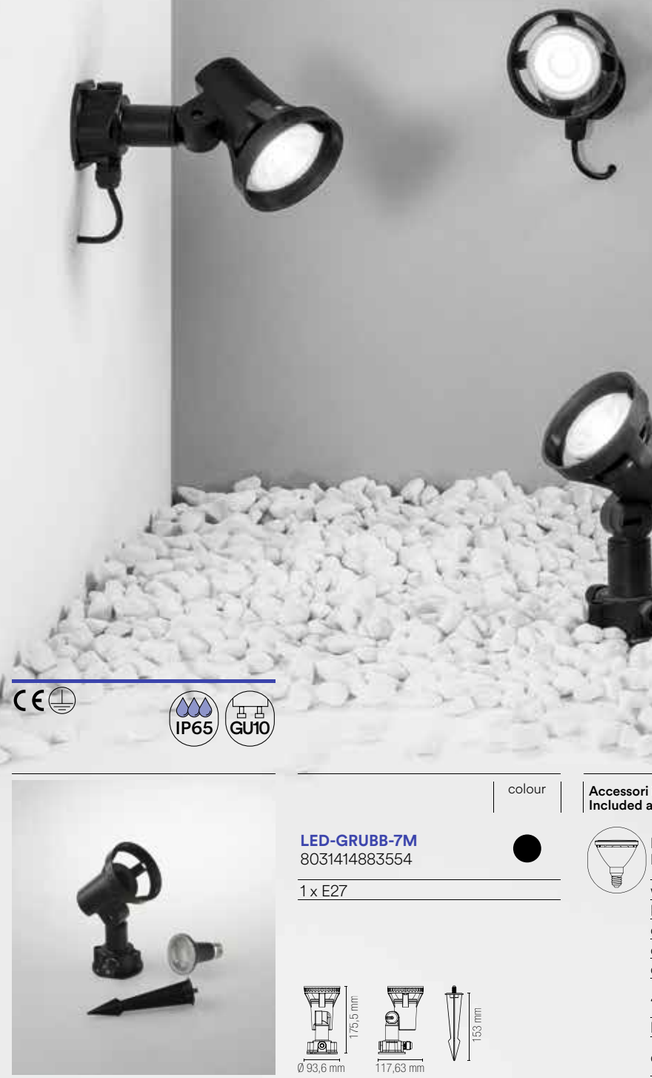

IP65 · GU10

colour

LED-GRUBB-7M
8031414883554

1 x E27

Accessori inclusi / Included accessories

Lampadina LED SMD / LED SMD light bulb


watt	7W
beam angle	100°
cri	80
on/off	>10.000
durata/life time	25000h
4000K	
lumen	510 lm
dimmer	



colour

LED-GRUBB-15M
8031414883547

1 x E27



Accessori inclusi / Included accessories

Lampadina LED SMD / LED SMD light bulb

watt	15W
beam angle	100°
cri	80
on/off	>10.000
durata/life time	25000h
4000K	
lumen	1100 lm
dimmer	

AKRON

Proiettore in alluminio con picchetto incluso.
Aluminum flood light with spike included.

outdoor use · accommodation areas use · urban areas use



IP65 · GU10



colour

I-AKRON-BCO
8031414882649

I-AKRON-NER
8031414882663

I-AKRON-BRO
8031414882656

1 x GU10 MAX 35W

Lampadina non inclusa / Light bulb not included

PEG

outdoor use · accommodation areas use · urban areas use



IP65 · CRI >80 · LED SMD

Materiale
PC

Colore
nero

Temperatura colore
3000K / 4000K

Driver
integrato

Material
PC

Colour
black

Colour temperature
3000K / 4000K

Driver
built-in


Proiettore in termoplastica con picchetto incluso.
Termoplastic flood light with spike included.





	colour temp.	colour
LED-PEG-9C-NER 8031414889600 lumen	900 lm	
LED-PEG-9M-NER 8031414895403 lumen	900 lm	

watt	9W
beam angle	60°



TOGO

Plafoniera a LED in acrilico.
LED acrylic ceiling lamp with diffuser.

outdoor use · accommodation areas use · urban areas use

Materiale
Acrilico PMMA

Colore
bianco

Temperatura colore selezionabile
3000K / 4000K / 6500K

Driver
integrato

Material
PMMA acrylic

Colour
white

Selectable color temperature
3000K / 4000K / 6500K

Driver
built-in driver




IN&OUT · IP65 · CRI >80 · LED SMD



LED-TOGO-Q10
8031414883615


	colour temp.	colour
lumen	600 lm	
watt	5W	
beam angle	120°	





LED-TOGO-Q25
8031414883646

	colour temp.	colour
lumen	2400 lm	
watt	20W	
beam angle	120°	





LED-TOGO-RT20
8031414883622


	colour temp.	colour
lumen	1000 lm	
watt	8W	
beam angle	120°	






LED-TOGO-RT30
8031414883639

	colour temp.	colour
lumen	1500 lm	
watt	12W	
beam angle	120°	



OUTDOOR

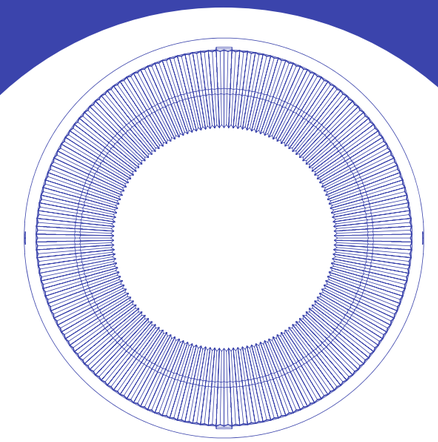

PLAFONIERE
CEILING LAMPS

ZOOM

Plafoniera a LED wifi con videocamera di sicurezza integrata.
LED wifi ceiling lamp with built-in security camera.

outdoor use · accommodation areas use · urban areas use

Materiale
alluminio + PC

Colore
goffrato antracite

Temperatura colore
4000K

Driver
integrato

Material
aluminium + PC

Colour
Embossed anthracite

Colour temperature
4000K

Driver
built-in





IN&OUT · SECURITY CAMERA · IP54 · degree IK08 · CRI >85 · LED SMD


WI-FI SMART INTEC · CE · EMC




	colour temp.	colour
LED-ZOOM-INT		
8031414877874		
lumen	3600 lm	
watt	30W	
beam angle	110°	
pf	0.95	










Tipo di sensore video Video sensor type	**1/2,9" CMOS**
Pixel	**2.0 Mega**
Illuminazione minima Min illuminance	**Color 0.10lux @F2.0, black and white 0.01lux @F2.0**
Angolo vista camera Camera view angle	**135°**
Otturatore Shutter	**1/25-1/100,000 per second**
Infrarossi IR	**High power LED with ICR**
WDR	**Digital WDR**
Video compression standard	**H.264 32Kbps - 2Mbps**
Risoluzione video Max picture size	**1920×1080**
Frequenza fotogrammi Frame rate	**1-20 per second**
Audio	**Full duplex audio (doppio sistema di comunicazione)**
Memoria	**Support SD card (MAX 128Gb) Cloud storage NVR**
Impostazione immagine Image setting	**Support HD/SD; support mirror**
Reset	**Support**
Controllo della luce Lighting control	**Support manual, sensor, plan switch light (gestione accensioni)**
Interfaccia di protocollo Interface protocol	**Private**
Comunicazione di protocollo Communication protocol	**TCP/IP, HTTP, DHCP, DNS, RTSP**
Funzioni generali General function	**Dual stream, password protection**
Wi-Fi	**IEEE802.11b/g/n**
PIR	**Support PIR and motion detection**

SMART INTEC · SMART LIFE · Powered by tuya Intelligence Inside

Control system easy installation

Smart Intec WIFI · **RF 2.4G control system** · **ALEXA e GOOGLE HOME voice control** · **compatible with AMAZON ECHO SHOW GOOGLE CHROME CAST**

Full duplex audio



CITIZEN

Plafoniera in alluminio nelle versioni bianco, nero o corten.
Ceiling wall lamp white, black or corten finish.



IN&OUT · IP54 · E27





	colour
I-CITIZEN-Q1-BCO 8031414882922	
I-CITIZEN-Q1-NER 8031414882939	
I-CITIZEN-Q1-BRO 8031414882915	

1 x E27




Lampadina non inclusa / Light bulb not included





	colour
I-CITIZEN-R1-BCO 8031414882892	
I-CITIZEN-R1-NER 8031414882908	
I-CITIZEN-R1-BRO 8031414882885	

1 x E27



Lampadina non inclusa / Light bulb not included

TOWER

Plafoniera in alluminio nelle versioni bianco, nero o corten.
Ceiling wall lamp white, black or corten finish.



outdoor use · accommodation areas use · urban areas use

IN&OUT · IP54 · GX53



	colour
I-TOWER-Q1-BCO 8031414922093	
I-TOWER-Q1-NER 8031414922116	
I-TOWER-Q1-BRO 8031414922109	

1 x GX53



Lampadina non inclusa / Light bulb not included



	colour
I-TOWER-R1-BCO 8031414918522	
I-TOWER-R1-NER 8031414918515	
I-TOWER-R1-BRO 8031414918539	

1 x GX53



Lampadina non inclusa / Light bulb not included

ISCHIA

Plafoniera LED integrato, in termoplastica bianco con diffusore trasparente effetto diamantato.
Thermoplastic LED ceiling lamp with transparent diamond effect diffuser.

outdoor use · accommodation areas use · urban areas use



Materiale
termoplastica

Temperatura colore
3000K / 4000K

Driver
integrato

Material
thermoplastic


Colour temperature
3000K / 4000K

Driver
built-in

IN&OUT · IP65 · degree IK06 · CRI >80 · LED SMD · CCT



	colour temp.	colour
LED-ISCHIA-L-BCO		
8031414883608		
lumen	2300 lm	
watt	20W	
beam angle	100°	



CAPRI

Plafoniera LED integrato, in termoplastica bianco con diffusore trasparente effetto diamantato.
Thermoplastic LED ceiling lamp with transparent diamond effect diffuser.

outdoor use · accommodation areas use · urban areas use

Materiale
termoplastica

Temperatura colore
3000K / 4000K

Driver
integrato


Material
thermoplastic

Colour temperature
3000K / 4000K


Driver
built-in

IN&OUT · IP65 · degree IK06 · CRI >80 · LED SMD · CCT

	colour temp.	colour
LED-CAPRI-S-BCO		
8031414883585		
lumen	2350 lm	
watt	20W	
beam angle	100°	



	colour temp.	colour
LED-CAPRI-L-BCO		
8031414883592		
lumen	3200 lm	
watt	30W	
beam angle	100°	



ALWAYS

outdoor use · accommodation areas use · urban areas use

Materiale
PC + PC

Temperatura colore
2700K / 3000K / 4000K / 5000K / 6500K

Driver
integrato


Material
PC + PC

Colour temperature
2700K / 3000K / 4000K / 5000K / 6500K

Driver
built-in

IN&OUT · IP65 · CRI >80 · LED SMD · CCT

Plafoniera in termoplastica con selettore interno di watt e gradi Kelvin. Sensore radar 5.8GHz integrato con tasto di regolazione durata.
Thermoplastic ceiling lamp with internal watt and Kelvin selector. integrated 5.8GHz radar sensor with duration adjustment button.








LED-ALWAYS-RS
8031414926923

	colour temp.	colour
lumen	1500lm / 1900lm / 2250lm	
watt	15W / 20W / 25W	
beam angle	120°	
pf	0.90	

Accessori inclusi / Included accessories

Sensore di movimento radar /
Radar motion sensor





Modalità sensore:
solo movimento - crepuscolare + movimento - solo crepuscolare /
Sensor mode: motion only - dusk + motion - dusk only

Selezione durata accensione
con sensore di movimento 60S - 180S /
Motion sensor duration selection: 60S - 180S

Selezione gradi kelvin: 2700K 3000K 4000K 5000K 6500K /
Kelvin degrees selection: 2700K 3000K 4000K 5000K 6500K

Selezione potenza: 15W 25W 30W /
Power selection: 15W 25W 30W

HUBLOT SENS

outdoor use · accommodation areas use · urban areas use

Materiale
PC + PC

Temperatura colore
3000K / 4000K / 6500K

Driver
integrato


Material
PC + PC

Colour temperature
3000K / 4000K / 6500K

Driver
built-in

IN&OUT · IP65 · degree IK08 · CRI >80 · LED SMD · CCT

Plafoniera in termoplastica con selettore interno Kelvin, sensore microwave regolabile integrato regolabile.
Thermoplastic ceiling lamp with internal Kelvin selector, integrated adjustable microwave sensor.







LED-HUBLOT-SENS
8031414919604

	colour temp.	colour
lumen	1800 lm	
watt	18W	
beam angle	120°	
pf	0.90	

Accessori inclusi / Included accessories

Sensore di movimento 100% luce
Dopo 30 secondi 20% luce /
Motion sensor 100% light
After 30 seconds 20% light



sensore regolabile con LED-SENSOR-REMOTE p. 860
adjustable sensor with LED-SENSOR-REMOTE p. 860

SENSITIVE

outdoor use · accommodation areas use · urban areas use



IN&OUT · IP54 · degree IK06 · CRI >80 · LED SMD

Materiale
PP + PC

Colore
bianco
antracite

Temperatura colore
3000K / 4000K


Driver
integrato

Material
PP + PC

Colour
white
anthracite

Colour temperature
3000K / 4000K

Driver
built-in



Doppio sistema
di installazione /
Double installation system


Plafoniera LED integrato con sensore di movimento; materiale base in PP bianco o antracite con diffusore bianco PC.
LED ceiling lamp with motion sensor; PP white base or anthracite colour with white PC diffuser.



Accessori inclusi / Included accessories

Sensore di movimento regolabile / Adjustable motion sensor

12m 90° · **10-60**" · **off** · **on** 10-2000 LUX



	colour temp.	colour
LED-SENSITIVE-C BCO		
8031414876815		
lumen	1000 lm	
LED-SENSITIVE-BCO		
8031440361750		
lumen	1600 lm	
LED-SENSITIVE-ANT		
8031440361743		
lumen	1600	

watt	14W
beam angle	120°

EXTRA



IN&OUT · IP54 · degree IK06 · CRI >80 · LED SMD

Materiale
PP + PC

Colore
bianco
antracite

Temperatura colore
4000K

Driver
integrato


Material
PP + PC


Colour
white
anthracite

Colour temperature
4000K

Driver
built-in


Plafoniera LED integrato materiale base PP bianco con diffusore bianco PC adatte ad installazione con impianto canaline esterne.
Ceiling LED integrated white PP base material with white PC diffuser fit for surface mount cable ducts connections.

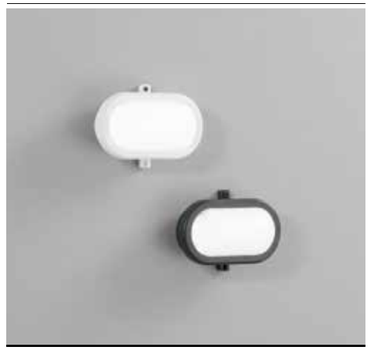




	colour temp.	colour
LED-EXTRA-BCO 8031440361071		
lumen	1100 lm	
LED-EXTRA-ANT 8031440361064		
lumen	1100 lm	

watt	10W
beam angle	120°



Doppio sistema di installazione / Double installation system



Adatte ad installazione con impianto canaline esterne / Surface mount cable ducts connections

SHELLY



IN&OUT · IP65 · degree IK06 · CRI >80 · LED SMD

Materiale
PC + PC

Colore
bianco
antracite

Temperatura colore
4000K

Driver
integrato

Material
PC + PC

Colour
white
anthracite

Colour temperature
4000K

Driver
built-in

Plafoniera LED integrato con sensore, base in policarbonato bianco o antracite diffusore in policarbonato bianco.
Polycarbonate built-in LED ceiling lamp with sensor in white or anthracite colour with white PC diffuser.



Accessori inclusi / Included accessories


Sensore di movimento regolabile / Adjustable motion sensor





	colour temp.	colour
LED-SHELLY-Q-MW BCO		
8031414862153		
lumen	2500 lm	
LED-SHELLY-Q-MW ANT		
8031414862177		
lumen	2500 lm	

watt	20W
beam angle	120°



Doppio sistema di installazione / Double installation system

Materiale
PC + PC

Colore
bianco
antracite

Temperatura colore
3000K / 4000K

Driver
integrato

Material
PC + PC

Colour
white
anthracite


Colour temperature
3000K / 4000K

Driver
built-in

Plafoniera LED integrato, base in policarbonato bianco o antracite diffusore in policarbonato bianco.
Polycarbonate built-in LED ceiling lamp in white or anthracite colour with white PC diffuser.





	colour temp.	colour
LED-SHELLY-Q-S BCO		
8031414085507		
lumen	1900 lm	
LED-SHELLY-Q-S ANT		
8031414862009		
lumen	1900 lm	
watt	15W	
beam angle	120°	





	colour temp.	colour
LED-SHELLY-Q-L BCO		
8031414862016		
lumen	2500 lm	
LED-SHELLY-Q-L ANT		
8031414862023		
lumen	2500 lm	
watt	20W	
beam angle	120°	





Doppio sistema
di installazione /
Double installation system

Materiale
PC + PC

Colore
bianco
antracite

Temperatura colore
3000K / 4000K

Driver
integrato


Material
PC + PC

Colour
white
anthracite


Colour temperature
3000K / 4000K

Driver
built-in

Plafoniera LED integrato, base in policarbonato bianco o antracite diffusore in policarbonato bianco.
Polycarbonate built-in LED ceiling lamp in white or anthracite colour with white PC diffuser.

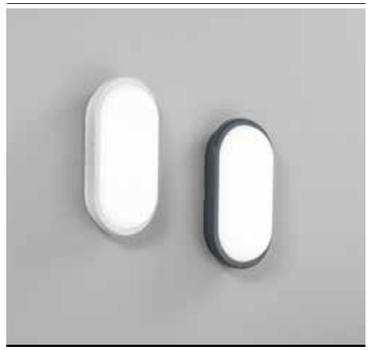



	colour temp.	colour
LED-SHELLY-S BCO		
8031440351720		
lumen	1900 lm	
LED-SHELLY-S ANT		
8031440351706		
lumen	1900 lm	
watt	15W	
beam angle	120°	





	colour temp.	colour
LED-SHELLY-L BCO		
8031440351713		
lumen	2500 lm	
LED-SHELLY-L ANT		
8031440351690		
lumen	2500 lm	
watt	20W	
beam angle	120°	





Doppio sistema
di installazione /
Double installation system

EVER



IN&OUT · IP65 · degree IK06 · CRI >80 · LED SMD · CCT

Materiale
PC + PC

Colore
bianco
antracite

Temperatura colore
3000K / 4000K

Driver
integrato

Material
PC + PC

Colour
white
anthracite

Colour temperature
3000K / 4000K

Driver
built-in

Plafoniera LED integrato, base in policarbonato bianco o antracite, diffusore in policarbonato bianco.
Polycarbonate built-in LED ceiling lamp in white or anthracite colour with white PC diffuser.




	colour temp.	colour
LED-EVER-Q-S BCO 8031414862238	●	○
lumen	1900 lm	
LED-EVER-Q-S ANT 8031414862269	●	●
lumen	1900 lm	
watt	15W	
beam angle	120°	
pf	-	





	colour temp.	colour
LED-EVER-Q-L BCO 8031414862276	●	○
lumen	3420	
LED-EVER-Q-L ANT 8031414862283	●	●
lumen	3420	
watt	28W	
beam angle	120°	
pf	0.90	





Doppio sistema
di installazione /
Double installation system

Materiale
PC + PC

Colore
bianco
antracite

Temperatura colore
3000K / 4000K

Driver
integrato

Material
PC + PC

Colour
white
anthracite


Colour temperature
3000K / 4000K

Driver
built-in

Plafoniera LED integrato, base in policarbonato bianco o antracite, diffusore in policarbonato bianco.
Polycarbonate built-in LED ceiling lamp in white or anthracite colour with white PC diffuser.





	colour temp.	colour
LED-EVER-LP BCO		
8031440355650		
lumen	2500 lm	
LED-EVER-LP ANT		
8031440355643		
lumen	2500 lm	
watt	20W	
beam angle	120°	
pf	-	





	colour temp.	colour
LED-EVER-XLP BCO		
8031440355636		
lumen	3750 lm	
LED-EVER-XLP ANT		
8031440355629		
lumen	3750 lm	
watt	28W	
beam angle	120°	
pf	0.90	





Doppio sistema
di installazione /
Double installation system

Materiale
PC + PC

Colore
bianco
antracite

Temperatura colore
3000K / 4000K

Driver
integrato


Material
PC + PC

Colour
white
anthracite


Colour temperature
3000K / 4000K


Driver
built-in

Plafoniera LED integrato, base in policarbonato bianco o antracite, diffusore in policarbonato bianco.
Polycarbonate built-in LED ceiling lamp in white or anthracite colour with white PC diffuser.

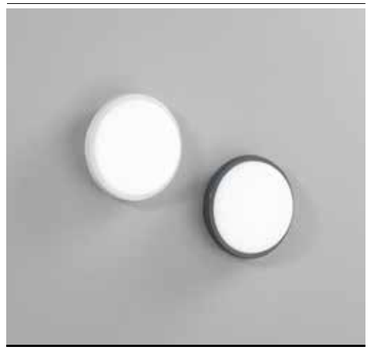



	colour temp.	colour
LED-EVER-S BCO		
8031440351683		
lumen	1900 lm	
LED-EVER-S ANT		
8031440351638		
lumen	1900 lm	
watt	15W	
beam angle	120°	
pf	-	



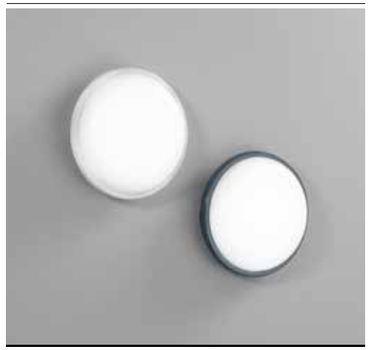

	colour temp.	colour
LED-EVER-L BCO		
8031440351676		
lumen	2500 lm	
LED-EVER-L ANT		
8031440351645		
lumen	2500 lm	
watt	20W	
beam angle	120°	
pf	0.90	





Doppio sistema
di installazione /
Double installation system

EVER



Materiale
PC + PC

Colore
bianco
silver

Temperatura colore
3000K / 4000K

Driver
integrato


Material
PC + PC

Colour
white
silver


Colour temperature
3000K / 4000K


Driver
built-in

Plafoniera LED integrato, base policarbonato bianco o silver con diffusore in policarbonato bianco.
Polycarbonate built-in LED ceiling lamp PC base white or silver with white PC diffuser.

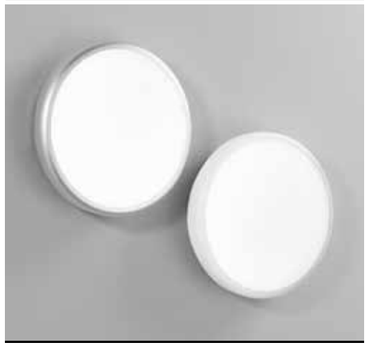

	colour temp.	colour
LED-EVER-XL BCO 8031440355612		
lumen	3750 lm	
LED-EVER-XL SIL 8031440355605		
lumen	3750 lm	
watt	28W	
beam angle	120°	
pf	0.90	





Doppio sistema di installazione / Double installation system

Materiale
PC + PC

Colore
bianco
silver

Temperatura colore
4000K

Driver
integrato


Material
PC + PC

Colour
white
silver


Colour temperature
4000K


Driver
built-in

Plafoniera con sensore di movimento microwave, base in policarbonato, diffusore in policarbonato bianco.
Ceiling lamp with microwave sensor in polycarbonate ceiling with white PC diffuser.

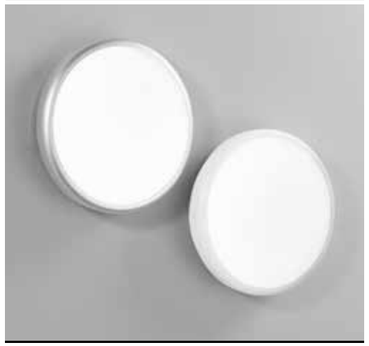

	colour temp.	colour
LED-EVER-XL-MW BCO 8031414862375		
lumen	3750 lm	
LED-EVER-XL-MW SIL 8031414862610		
lumen	3750 lm	
watt	28W	
beam angle	120°	
pf	0.90	






Doppio sistema di installazione / Double installation system

Accessori inclusi / Included accessories

Sensore di movimento regolabile / Adjustable motion sensor



FLIPPY



Materiale
PC

Colore
bianco

Temperatura colore
3000K / 4000K

Driver
integrato

Material
white PC


Colour
white

Colour temperature
3000K / 4000K

Driver
built-in

Plafoniera con base in policarbonato, diffusore in policarbonato bianco.
Ceiling lamp with polycarbonate ceiling with white PC diffuser.





	colour temp.	colour
LED-FLIPPY-12C 8031414922024		
lumen	1160 lm	
watt	12W	
beam angle	120°	

LED-FLIPPY-12M 8031414922031	
lumen	1160 lm
watt	12W
beam angle	120°

SPEEDY



IN&OUT · IP65 · CRI >80 · LED SMD

Materiale
PC

Colore
bianco

Temperatura colore
3000K / 4000K

Driver
integrato

Material
PC


Colour
white

Colour temperature
3000K / 4000K

Driver
built-in

Plafoniera con base in policarbonato, diffusore in policarbonato bianco.
Ceiling lamp with polycarbonate ceiling with white PC diffuser.





		colour temp.	colour
LED-SPEEDY-18C			
8031414922000			
lumen	1800 lm		
watt	18W		
beam angle	120°		

		colour temp.	colour
LED-SPEEDY-18M			
8031414922017			
lumen	1800 lm		
watt	18W		
beam angle	120°		

TURTLE

outdoor use · accommodation areas use · urban areas use



IN&OUT · IP54 · CE

Plafoniera bianca o nera con struttura in termoplastica e diffusore in vetro. Disponibile in forma circolare o ovale.
White or black ceiling lamp with thermoplastic frame and glass diffuser. Available in circular or oval shape.




colour

I-TURTLE-AP-BCO
8031414918577

I-TURTLE-AP-NER
8031414918560

1 x E27






colour

I-TURTLE-PL-BCO
8031414918553

I-TURTLE-PL-NER
8031414918546

1 x E27



Lampadina non inclusa / Light bulb not included

PICNIC COLOR

outdoor use

accommodation areas use




CE

Stringa elettrificata E12 per esterno con cavo in PVC inclusiva di spina schuko e connettore modulabile.
Light string E12 PVC cable inclusive of schuko plug and modular connector.

IN&OUT · E12 · IP44



colour	Accessori inclusi / Included accessories
I-PICNIC-COLOR 8031414891863	**Lampadina E12 / E12 light bulb** 7 rosse/red 6 gialle/yellow 6 verdi/green 6 blu/blue
25 x E12 MAX 20W	watt 0,3W volt 230V




END-TO-END
easy connection / max 1000W



Stringa elettrificata E12 per esterno con cavo in PVC inclusiva di spina schuko e connettore modulabile.
Light string E12 PVC cable inclusive of schuko plug and modular connector.

IN&OUT · E12 · IP44

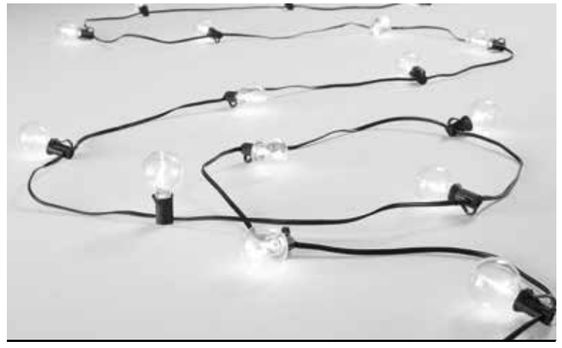

colour


Accessori inclusi / Included accessories

Lampadina E12
E12 light bulb

I-PICNIC-LED
8031414884407

watt	0,3W
volt	230V
3000K	

25 x E12 MAX 20W



Stringa elettrificata E12 per esterno con cavo in PVC inclusiva di pannello solare.
Light string E12 PVC cable inclusive solar panel.

E12 · IP44



colour

Accessori inclusi / Included accessories

Lampadina E12
E12 light bulb

I-PICNIC-SOLAR
8031414884414


watt	0,3W
volt	3V
3000K	

25 x E12 MAX 20W


3 hours

6V 1.5W

3.7V 2200mAh
Batteria ricaricabile non sostituibile / Rechargeable battery non replaceable



END-TO-END
easy connection / max 1000W

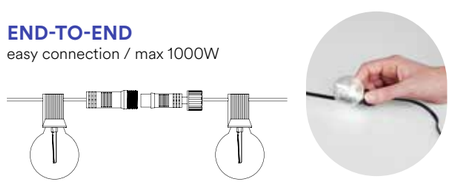

Stringa elettrificata E14 o E27 per esterno con cavo in gomma inclusiva di spina schuko e connettore modulabile.
Light string E14 or E27 for outdoor rubber cable inclusive of schuko plug and modular connector.

IN&OUT · E27 · IP54




colour

I-PICNIC-E27-BCO
8031414043064

I-PICNIC-E27
8031414862719


10 x E27 MAX 25W

Lampadina non inclusa / Light bulb not included





END-TO-END
easy connection / max 1000W



IN&OUT · E14 · IP54




colour

I-PICNIC-E14-BCO
8031414023745

I-PICNIC-E14
8031414862726


10 x E14 MAX 25W

Lampadina non inclusa / Light bulb not included





END-TO-END
easy connection / max 1000W



PICNIC RGB

Stringa luminosa LED per esterno con cavo in PVC, inclusa spina schuko e connettore modulabile. Telecomando per gestire il colore RGB.
Outdoor LED light string with PVC cable, including schuko plug and modular connector. Remote control to manage RGB color.

Materiale
PC + PVC

Colore
nero

Temperatura colore
RGB

Driver
integrato

Material
PC + PVC

Colour
black


Colour temperature
RGB

Driver
built-in


IN&OUT · E12 · IR · IP44 · CRI >80 · RGB



	colour temp.	colour
I-PICNIC-LED-RGB 8031414921911	RGB	
watt		10W



END-TO-END
easy connection / max 1000W

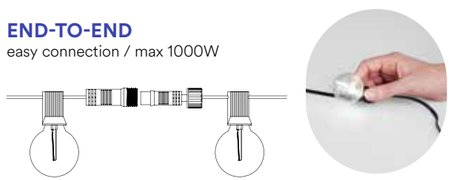

PICNIC INT

Stringa elettrificata a LED per esterno con cavo in PVC inclusiva di spina schuko e connettore modulabile.
LED light string with PVC cable inclusive of schuko plug and modular connector.

Materiale
PC + PVC

Colore
nero

Temperatura colore
RGB + CCT

Driver
integrato

Material
PC + PVC

Colour
black

Colour temperature
RGB + CCT


Driver
built-in

WI-FI SMART INTEC


IN&OUT · 10-100% · IP65 · CRI >80 · CCT · RGB



	colour temp.	colour
I-PICNIC-INT 8031414884391	400 lm	
lumen		
watt		10 × 0,5W
beam angle		110°




END-TO-END
easy connection / max 1000W

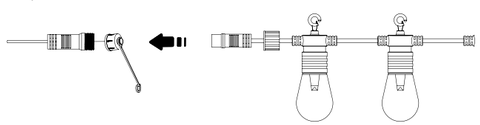

Control system easy installation

SMART INTEC · SMART LIFE · Powered by tuya Intelligence Inside

Smart Intec WIFI · **RF 2.4G control system** · **ALEXA e GOOGLE HOME voice control**

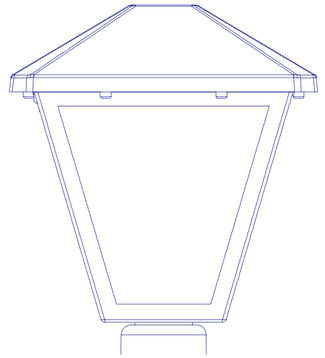

APPLIQUE SOSPENSIONI E PALETTI CORRELATI
WALL SUSPENSION AND FLOOR LAMPS COMBINED



POLLY



POLLY

Collezione con base in fibre di plastica e sfere in PMMA nei colori trasparente, bianco o fumè.
Collection with base in plastic fibers and spheres in PMMA in transparent, white or smoked colors.

IP44 E27

CE




colour

I-POLLY-G20-TR180
8031414921973

1 x E27 MAX 20W




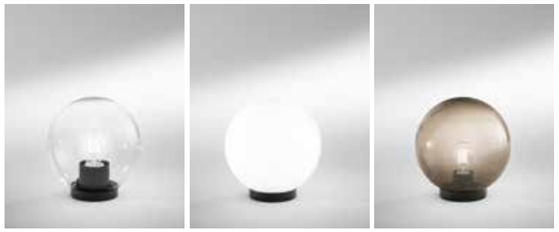

colour

I-POLLY-G20-TR
8031414889136
I-POLLY-G20-BCO
8031414889112
I-POLLY-G20-GR
8031414889129

1 x E27 MAX 20W







colour

I-POLLY-G25-TR180
8031414921980

1 x E27 MAX 20W




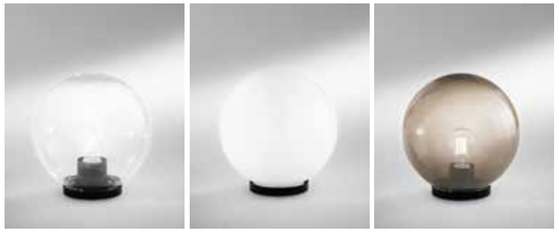

colour

I-POLLY-G25-TR
8031414889167
I-POLLY-G25-BCO
8031414889143
I-POLLY-G25-GR
8031414889150

1 x E27 MAX 20W







colour

I-POLLY-G30-TR180
8031414921997

1 x E27 MAX 20W




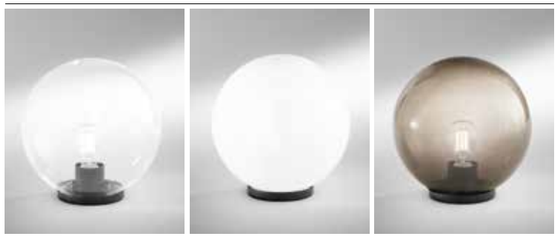


colour

I-POLLY-G30-TR
8031414889198
I-POLLY-G30-BCO
8031414889174
I-POLLY-G30-GR
8031414889181

1 x E27 MAX 20W




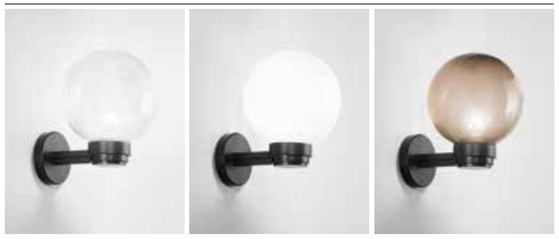

colour

I-POLLY-AP-TR
8031414889105
I-POLLY-AP-BCO
8031414889389
I-POLLY-AP-GR
8031414889099

1 x E27 MAX 20W



Lampadina non inclusa / Light bulb not included

POLLY






colour

I-POLLY-PD
8031414921942

Accessorio per sospensione con cavo in gomma e connettore /
Suspension accessory with rubber cable





colour

I-POLLY-SPK
8031414921959

Accessorio per fissaggio a picchetto con connettore e fermacavo /
Accessory for peg fixing with connector and cable holder





colour

I-POLLY-SPK-S
8031414921966

Accessorio per fissaggio a picchetto con cavo in gomma e presa schuko /
Accessory for peg fixing with rubber cable and schuko socket



Accessori inclusi / Included accessories




Cavo 2,5 m
con spina shuko /
2,5 m of cable
with schuko plug

IP44

POLLY





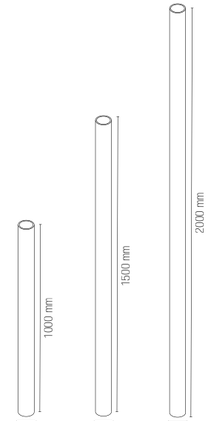

	colour
I-POLLY-TUBE100 8031414890149	●
I-POLLY-TUBE150 8031414890156	●
I-POLLY-TUBE200 8031414890163	●



	colour
I-POLLY-BASE 8031414889235	●






	colour
I-POLLY-JOINT 8031414890170	●





	colour
I-POLLY-BASE-AP 8031414904587	●



WAMI

Collezione a LED integrato in alluminio pressofuso nei colori antracite o corten goffrato con temperatura colore selezionabile.
Integrated LED collection in die-cast aluminum in anthracite or corten embossed colors with selectable color temperature.

outdoor use · accommodation areas use · urban areas use

Materiale
alluminio

Colore
goffrato antracite
goffrato corten

Temperatura colore selezionabile
3000K / 4000K

Driver
integrato

Material
aluminum

Colour
embossed anthracite
embossed corten

Selectable color temperature
3000K / 4000K


Driver
built-in



IP65 · degree IK08 · CRI >80 · LED SMD




	colour temp.	colour
LED-WAMI-AP-ANT		
8031414890026		
lumen	1530 lm	
LED-WAMI-AP-BRO		
8031414890057		
lumen	1530 lm	
watt	12W	
beam angle	120°	






	colour temp.	colour
LED-WAMI-P25-ANT		
8031414890033		
lumen	1530 lm	
LED-WAMI-P25-BRO		
8031414890064		
lumen	1530 lm	
watt	12W	
beam angle	120°	





	colour temp.	colour
LED-WAMI-P80-ANT		
8031414890040		
lumen	1530 lm	
LED-WAMI-P80-BRO		
8031414890071		
lumen	1530 lm	
watt	12W	
beam angle	120°	



SAIL

Collezione in alluminio a LED integrato con finitura bianco o antracite goffrato.
Aluminum collection LED lamp white or anthracite embossed finish.

outdoor use · accommodation areas use · urban areas use

Materiale
alluminio

Colore
goffrato bianco
goffrato antracite

Temperatura colore
3000K / 4000K

Driver
integrato

Material
aluminum

Colour
embossed white
embossed anthracite

Colour temperature
3000K / 4000K


Driver
built-in



IP65 · degree IK08 · CRI >80 · LED SMD



	colour temp.	colour
LED-SAIL-AP-BCO		
8031414918614		
lumen	1440 lm	
LED-SAIL-AP-ANT		
8031414920174		
lumen	1440 lm	
watt	12W	
beam angle	180°	






	colour temp.	colour
LED-SAIL-APS-BCO		
8031414920181		
lumen	1440 lm	
LED-SAIL-APS-ANT		
8031414918621		
lumen	1440 lm	
watt	12W	
beam angle	180°	

Accessori inclusi / Included accessories




Sensore di movimento regolabile distanza max 6m 120° / Adjustable motion sensor max distance 6m 120°






	colour temp.	colour
LED-SAIL-P90-BCO		
8031414918638		
lumen	1440 lm	
LED-SAIL-P90-ANT		
8031414918645		
lumen	1440 lm	
watt	12W	
beam angle	180°	




DISCOVERY

Collezione a LED integrato in alluminio con finitura antracite goffrato.
Aluminum collection LED lamp anthracite embossed finish.

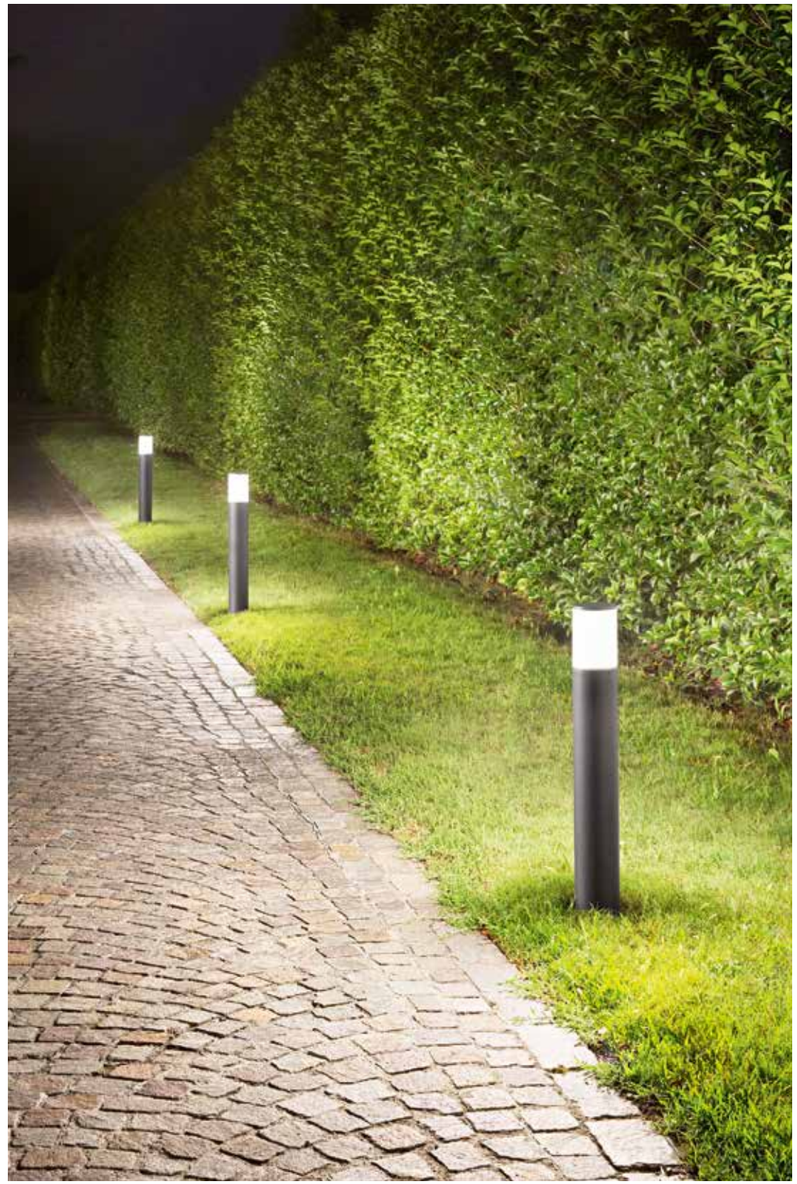

DISCOVERY

outdoor use · accommodation areas use · urban areas use

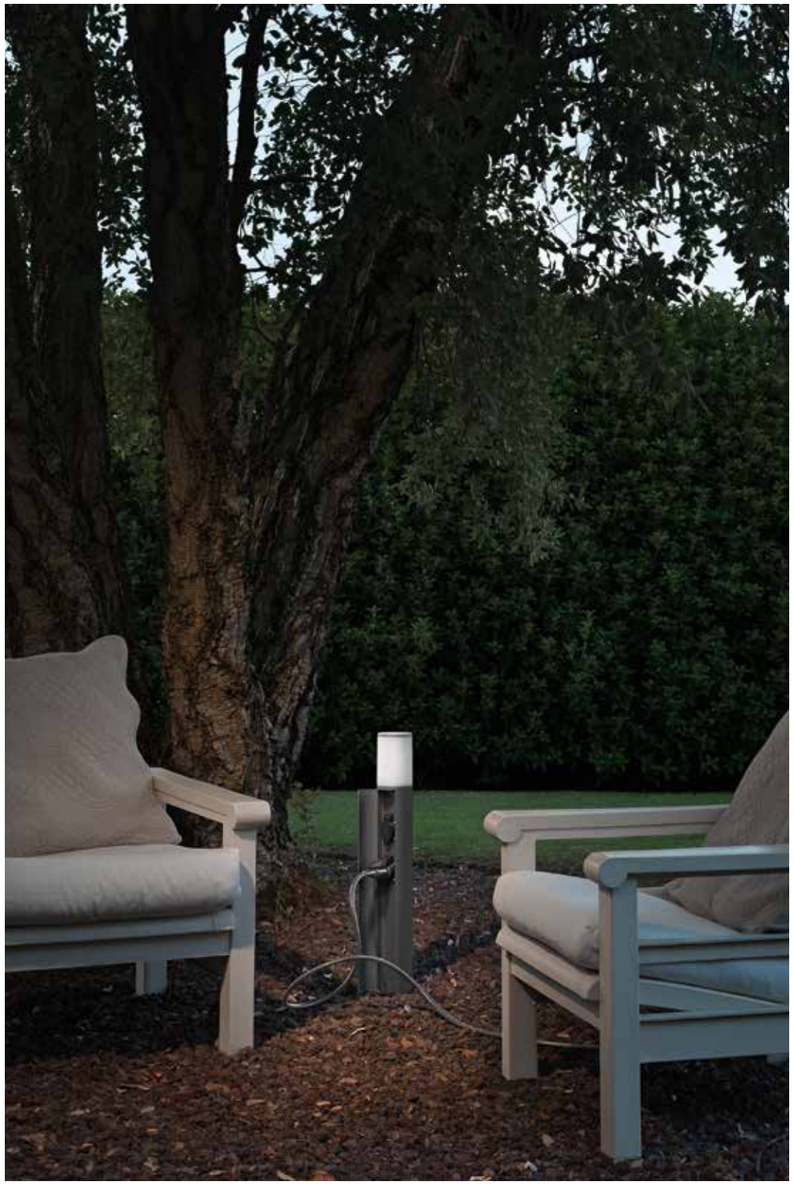

Materiale
alluminio

Colore
goffrato antracite

Temperatura colore
4000K

Driver
integrato

Material
aluminum

Colour
embossed anthracite

Colour temperature
4000K


Driver
built-in

IP54 · degree IK08 · CRI >85 · LED SMD



LED-DISCOVERY-AP
8031414877836

	colour temp.	colour
lumen	1440 lm	
watt	13W	
beam angle	360°	





LED-DISCOVERY-P65
8031414877850

	colour temp.	colour
lumen	1440 lm	
watt	13W	
beam angle	360°	





LED-DISCOVERY-HUB
8031414877867

	colour temp.	colour
lumen	1440 lm	
watt	13W	
beam angle	360°	
	Plug 2X max 15A 250V 2500W	



IDEM

Lampada in alluminio a LED integrato finitura antracite goffrato.
Aluminum collection anthracite colour built-in LED.

outdoor use · accommodation areas use · urban areas use

Materiale
alluminio

Colore
goffrato antracite

Temperatura colore
4000K

Driver
integrato


Material
aluminum

Colour
embossed anthracite

Colour temperature
4000K


Driver
built-in




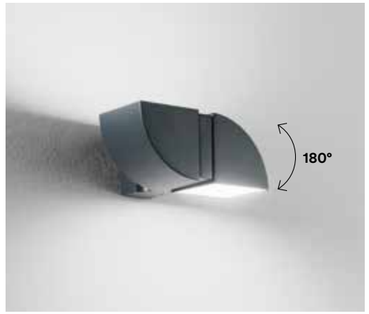

LED-IDEM-AP
8031414883103


	colour temp.	colour
lumen	840 lm	
watt	8W	
beam angle	120°	



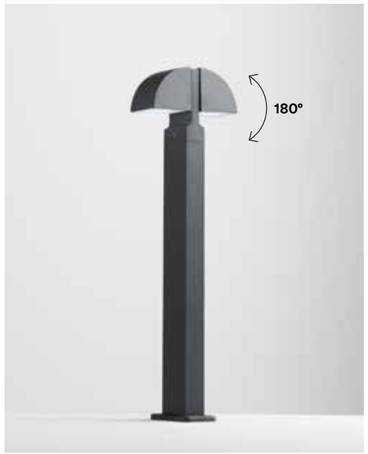

LED-IDEM-P1
8031414883110

	colour temp.	colour
lumen	840 lm	
watt	8W	
beam angle	120°	



REVERSE

Lampada in alluminio a LED integrato finitura antracite goffrato.
Aluminum collection anthracite colour built-in LED.



Materiale
alluminio

Colore
goffrato antracite

Temperatura colore
4000K


Driver
integrato

Material
aluminum


Colour
embossed anthracite

Colour temperature
4000K

Driver
built-in

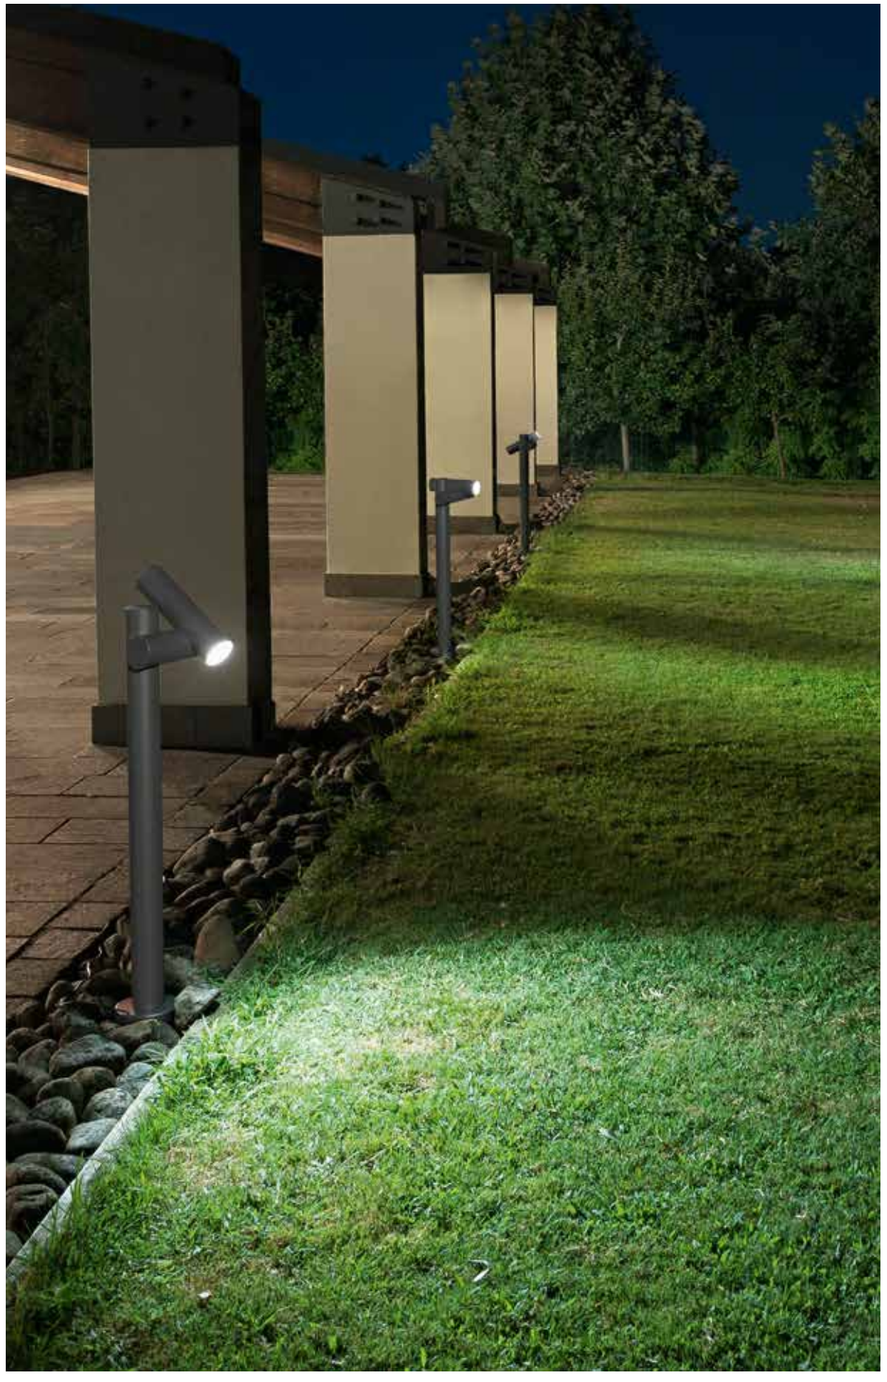


IP44 · degree IK07 · CRI >80 · LED SMD

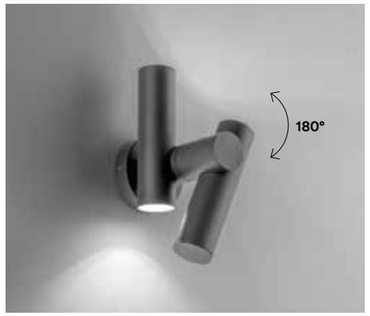

LED-REVERSE-AP
8031414883127


	colour temp.	colour
lumen	620 lm	
watt	7,5W	
beam angle	120°	





LED-REVERSE-P1
8031414883134

	colour temp.	colour
lumen	460 lm	
watt	5,3W	
beam angle	120°	



SINTESI

Lampada in alluminio a LED integrato con finitura bianco o nero goffrato.
Built in aluminum LED lamp white or black embossed finish.

outdoor use · accommodation areas use · urban areas use

Materiale
alluminio

Colore
goffrato bianco
goffrato nero

Temperatura colore
4000K


Driver
integrato

Material
aluminum

Colour
embossed white
embossed black

Colour temperature
4000K

Driver
built-in

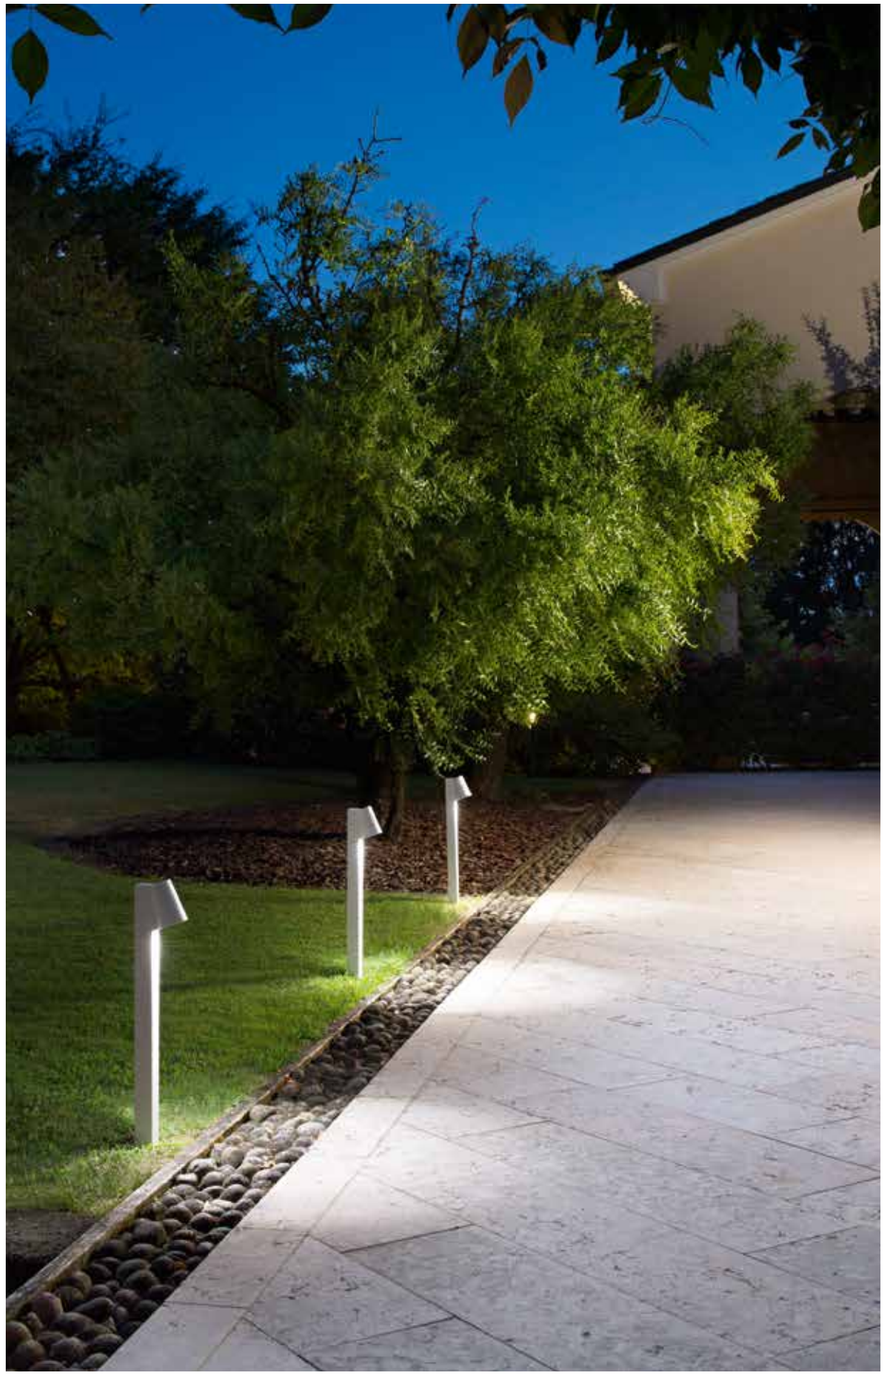

IP44 · degree IK07 · CRI >80 · LED SMD






	colour temp.	colour
LED-SINTESI-AP BCO		
8031414862207		
lumen	400 lm	
LED-SINTESI-AP NERO		
8031414862221		
lumen	400 lm	
watt	6W	
beam angle	100°	







	colour temp.	colour
LED-SINTESI-P BCO		
8031414862245		
lumen	400 lm	
LED-SINTESI-P NERO		
8031414862252		
lumen	400 lm	
watt	6W	
beam angle	100°	



ALYSON

Lampada in alluminio pressofuso a LED integrato nei colori nero o bianco goffrato con diffusore il policarbonato.
Built in aluminum LED lamp white
or black embossed finish with PC diffuser.



outdoor use
accommodation areas use
urban areas use

Materiale
alluminio

Colore
goffrato bianco
goffrato nero

Temperatura colore
4000K

Driver
integrato

Material
aluminum

Colour
embossed white
embossed black

Colour temperature
4000K

Driver
built-in


IP44 · degree IK07 · CRI >80 · LED SMD

technical information **ALYSON**






	colour temp.	colour
LANT-ALYSON/AP BCO		
8031440361514		
lumen	1300 lm	
LANT-ALYSON/AP		
8031440361552		
lumen	1300 lm	
watt	12W	
beam angle	120°	







	colour temp.	colour
LANT-ALYSON/P1 BCO		
8031440361538		
lumen	1300 lm	
LANT-ALYSON/P1		
8031440361569		
lumen	1300 lm	
watt	12W	
beam angle	120°	



BITT

Lampada in alluminio a LED integrato finitura antracite e corten goffrato.
Aluminum collection anthracite and corten colour built-in LED.

outdoor use · accommodation areas use · urban areas use

Materiale
alluminio

Colore
goffrato antracite
goffrato corten

Temperatura colore selezionabile
3000K / 4000K


Driver
integrato

Material
aluminum

Colour
embossed anthracite
embossed corten

Selectable color temperature
3000K / 4000K

Driver
built-in

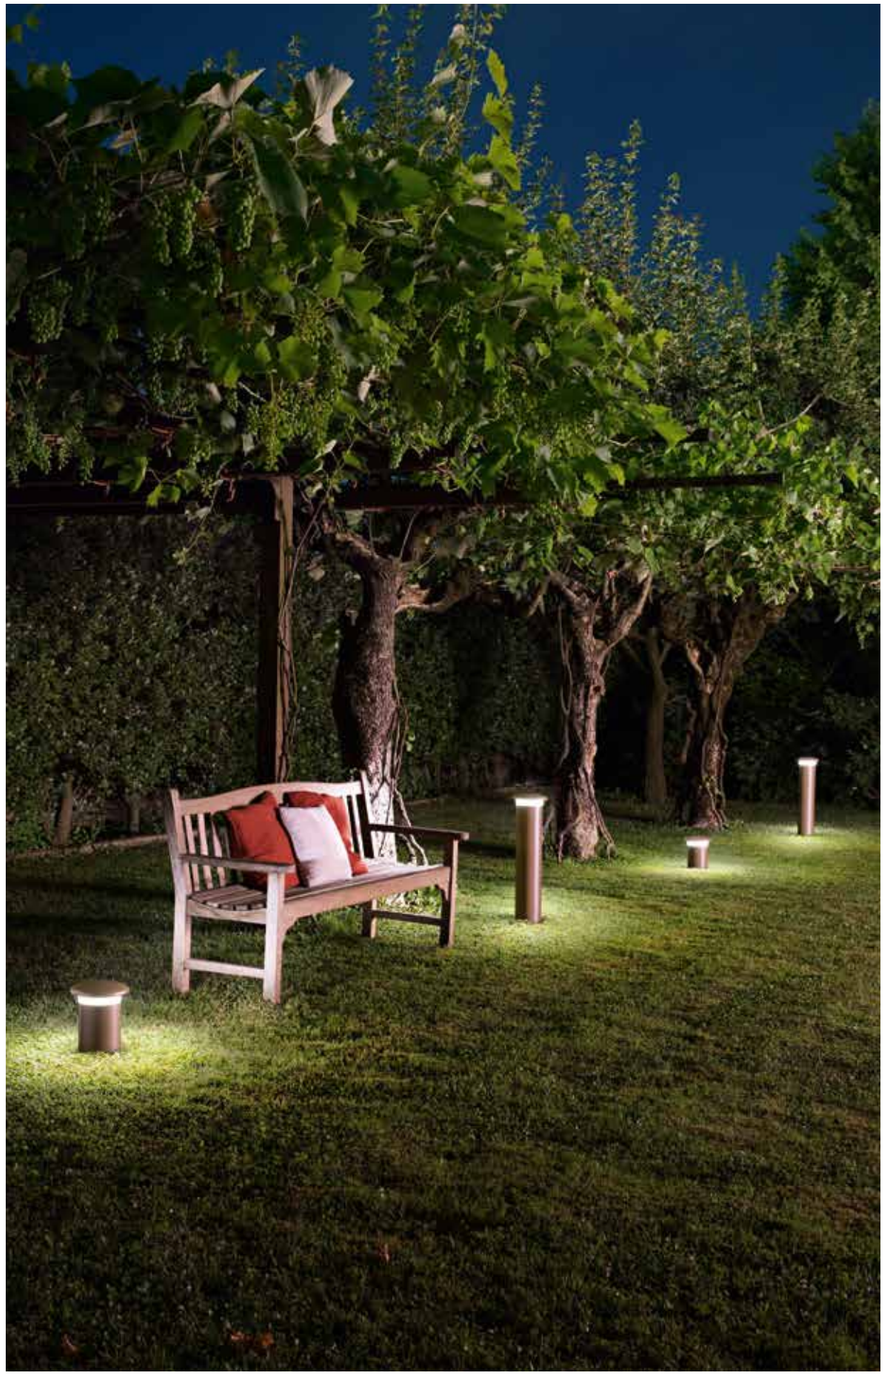

IP65 · degree IK07 · CRI >80 · LED SMD





	colour temp.	colour
LED-BITT-P28-ANT		
8031414883011		
lumen	1200 lm	
LED-BITT-P28-BRO		
8031414883028		
lumen	1284 lm	
watt	10W	
beam angle	120°	







	colour temp.	colour
LED-BITT-P76-ANT		
8031414883035		
lumen	1200 lm	
LED-BITT-P76-BRO		
8031414883042		
lumen	1284 lm	
watt	10W	
beam angle	120°	



NISMO

Collezione in alluminio a LED integrato finitura bianco goffrato.
Aluminum collection LED lamp white embossed finish.

outdoor use

accommodation areas use

Materiale
alluminio

Colore
goffrato bianco

Temperatura colore selezionabile
3000K / 4000K

Driver
integrato

Material
aluminum

Colour
embossed white


Selectable color temperature
3000K / 4000K

Driver
built-in

IP54 · degree IK09 · CRI >85 · LED SMD



	colour temp.	colour
LED-NISMO-AP		
8031440361224		
lumen	1430 lm	
watt	12W	
beam angle	120°	





	colour temp.	colour
LED-NISMO-P60		
8031440361231		
lumen	1430 lm	
watt	12W	
beam angle	120°	







STATION

Collezione in acciaio finitura antracite.
Diffusore in policarbonato bianco.
Stainless steel collection anthracite finish.
White PC diffuser.

outdoor use | accommodation areas use | urban areas use

CE

IP44 | E27




colour

I-STATION-E27-SC2
8031414879571

1 x E27 MAX 60W

Plug 2X max 15A 250V 2500W






colour

I-STATION-SC2
8031414879564

Plug 2X max 15A 250V 2500W




Lampadina non inclusa /
Light bulb not included

UNDERWOOD

Collezione in metallo finitura antracite o corten.
Metal collection anthracite or corten finish.



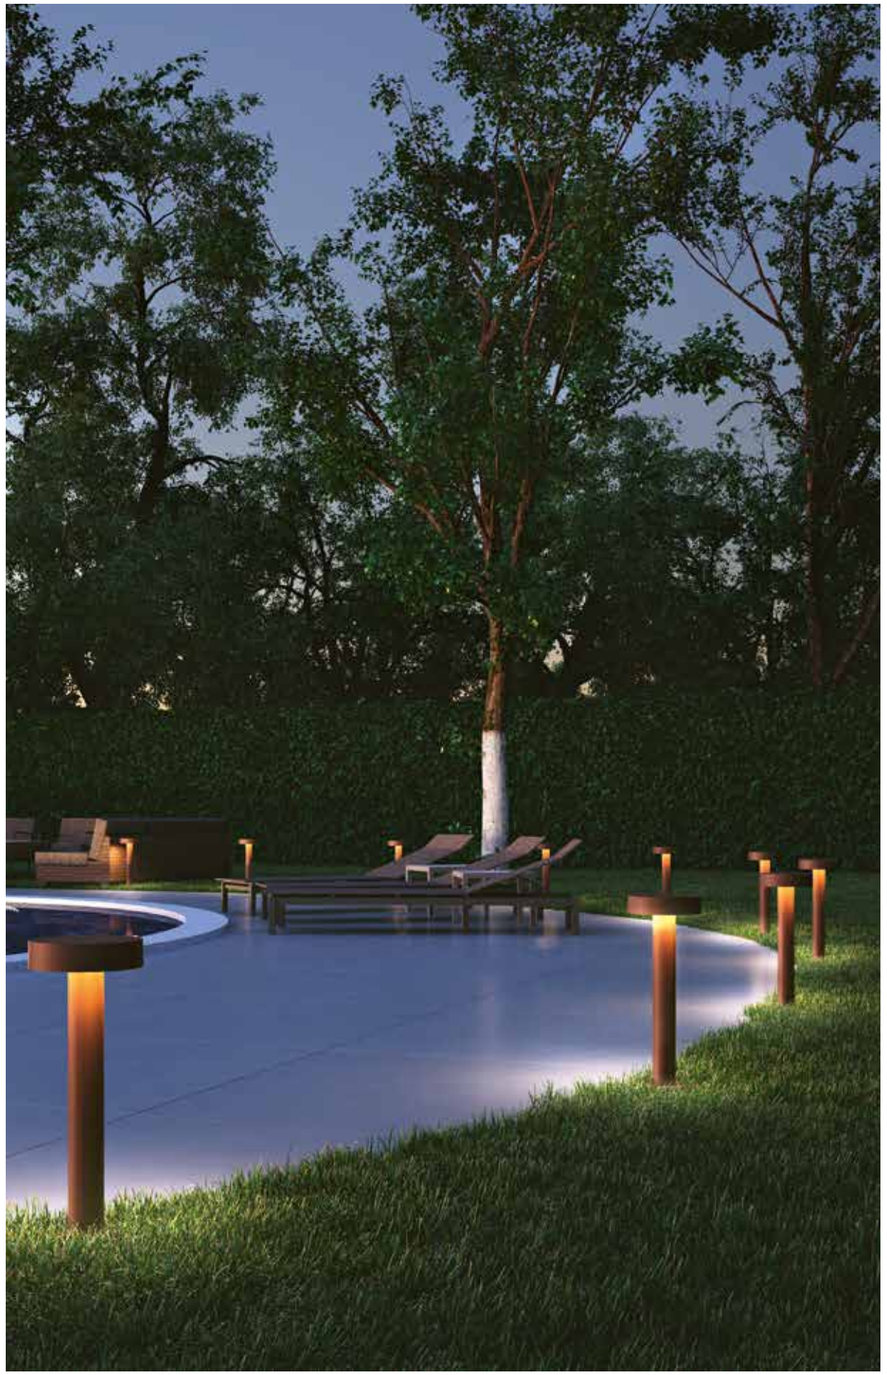




	colour
I-UNDERWOOD-P70-ANT 8031414883059	
I-UNDERWOOD-P70-BRO 8031414883066	

4 x G9 LED 10W

Lampadina non inclusa / Light bulb not included



FOCUS

Collezione a LED in policarbonato nei colori bianco e nero.
LED polycarbonate collection in black and white colors.






IP65 · degree IK08 · GU10



colour

I-FOCUS-R-AP-BCO
8031414916290
I-FOCUS-R-AP-NER
8031414916283

1 x GU10 MAX 35W



Connettore IP65 incluso / IP65 connector included


Lampadina non inclusa / Light bulb not included



colour

I-FOCUS-Q-AP-BCO
8031414916313
I-FOCUS-Q-AP-NER
8031414916306

1 x GU10 MAX 35W



Connettore IP65 incluso / IP65 connector included

Lampadina non inclusa / Light bulb not included



colour

I-FOCUS-R-P-BCO
8031414916252
I-FOCUS-R-P-NER
8031414916245

1 x GU10 MAX 35W



Connettore IP65 incluso / IP65 connector included

Picchetto per installazione nel terreno incluso / Picchetto per installazione nel terreno non incluso /


Lampadina non inclusa / Light bulb not included



colour

I-FOCUS-Q-P-BCO
8031414916276
I-FOCUS-Q-P-NER
8031414916269

1 x GU10 MAX 35W



Connettore IP65 incluso / IP65 connector included

Picchetto per installazione nel terreno incluso / Picchetto per installazione nel terreno non incluso /

Lampadina non inclusa / Light bulb not included

DARK

Collezione in acciaio inox con diffusore in policarbonato. Disponibile in antracite.
Stainless steel collection with polycarbonate diffuser. Available in anthracite.



outdoor use · accommodation areas use · urban areas use

IP54 · E27


CE



colour


I-DARK-AP1
8031414918775

1 x E27 MAX 25W



I-DARK-AP1-S
8031414919093

1 x E27 MAX 25W






colour

I-DARK-AP2
8031414919109

2 x E27 MAX 25W






colour

I-DARK-APV
8031414919116

1 x E27 MAX 25W






colour

I-DARK-P1
8031414918782

1 x E27 MAX 25W



Accessori inclusi / Included accessories



Sensore di movimento regolabile distanza max 10m 100° / Adjustable motion sensor max distance 10m 100°


Lampadina non inclusa / Light bulb not included

TOKYO

Collezione in acciaio inox con diffusore in policarbonato.
Finiture bianco, bronzo, nikel spazzolato e grigio antracite.
Stainless steel collection with polycarbonate diffuser.
White, bronze, brushed nikel and anthracite grey finishes.





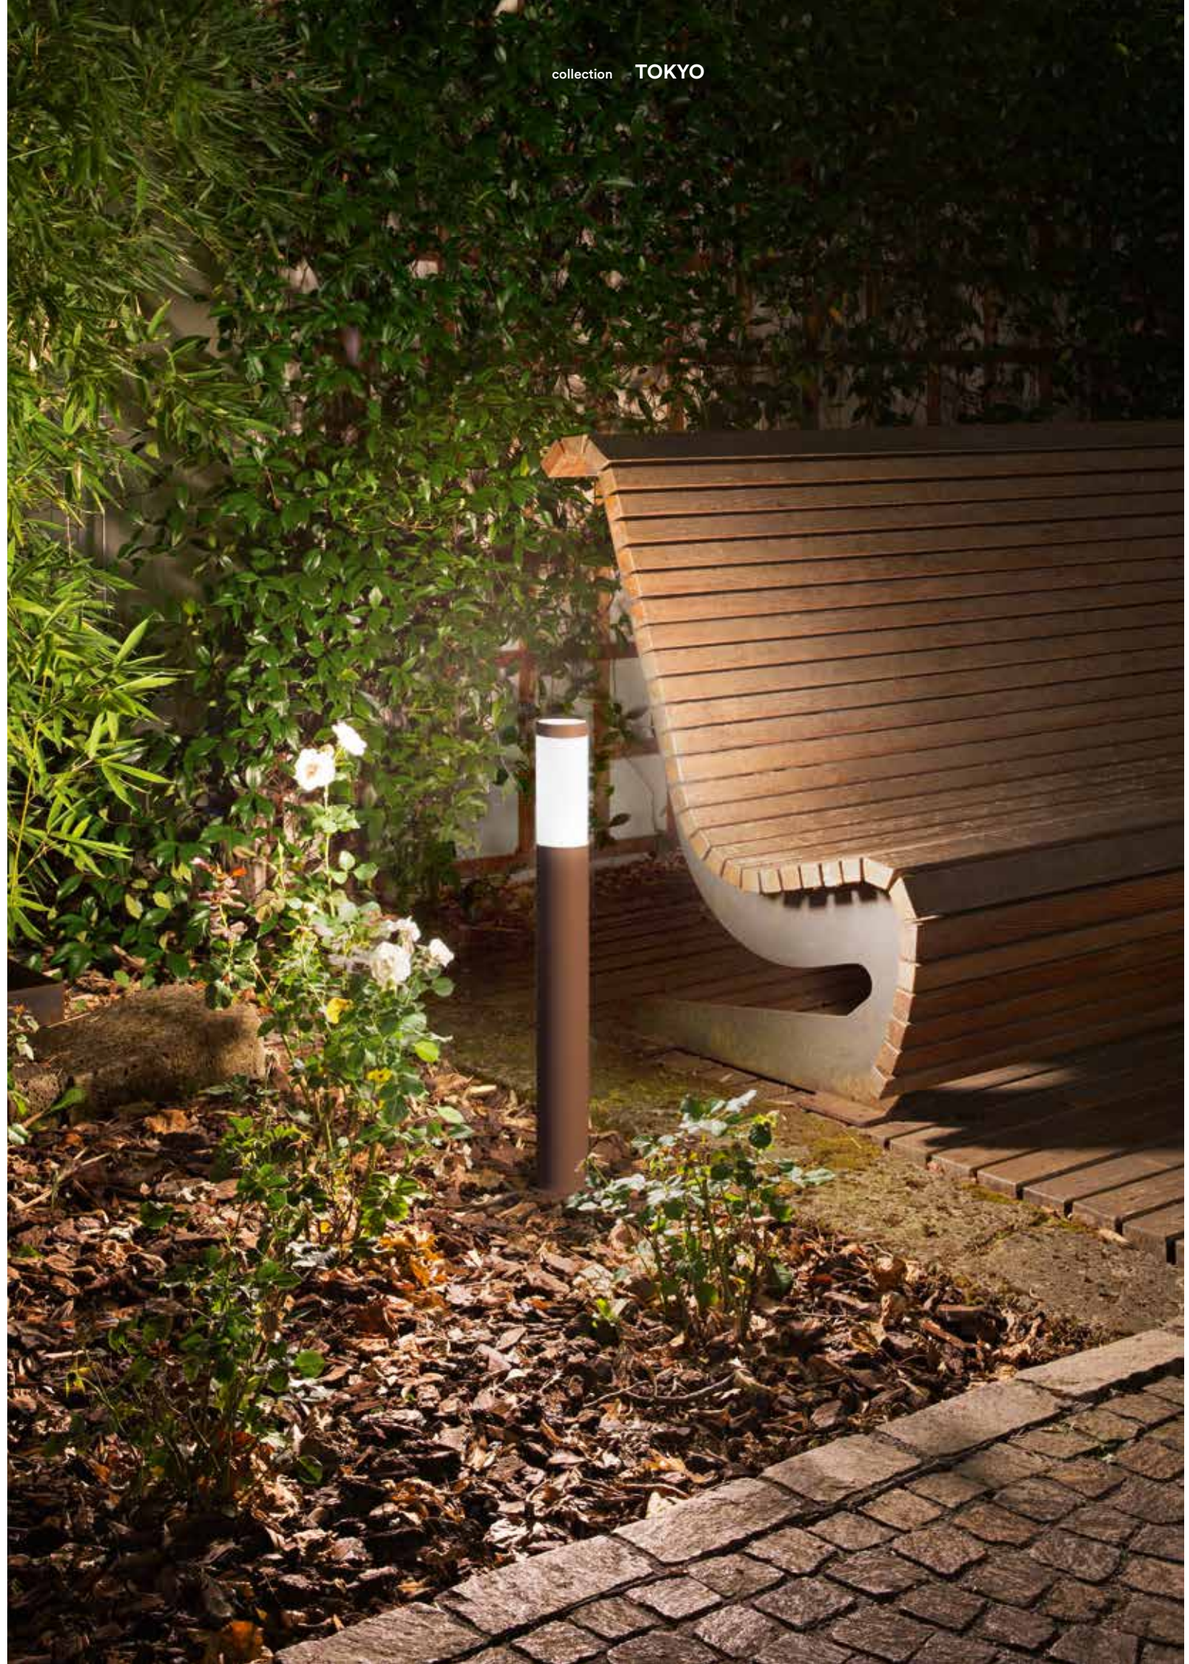

TOKYO



IP44 · degree IK07 · H160 Ø57 · E27

technical information **TOKYO**





colour

I-TOKYO-P BCO
8031414864416

I-TOKYO-P ANT
8031414888801


I-ST022-1100
8031421661084


I-TOKYO-P BRO
8031414864393

1 x E27 MAX 40W

H160 Ø57 — Lampadina consigliata / Suggested light bulb

Lampadina non inclusa / Light bulb not included

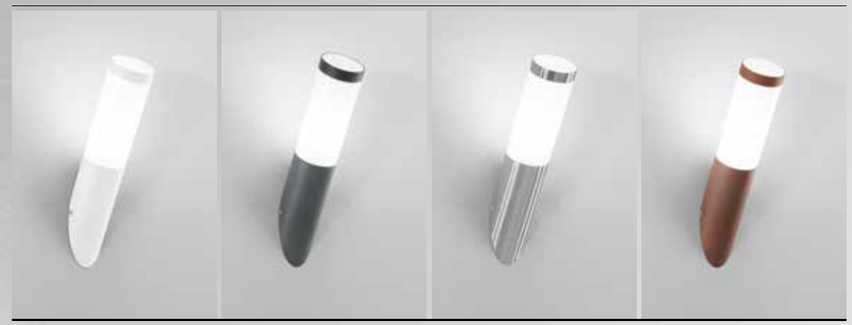



colour

I-TOKYO-AP BCO
8031414864447

I-TOKYO-AP ANT
8031414888795

I-ST021
8031421451081


I-TOKYO-AP BRO
8031414864423

1 x E27 MAX 40W

H160 Ø57 — Lampadina consigliata / Suggested light bulb

Lampadina non inclusa / Light bulb not included





colour

I-TOKYO-P70 BCO
8031414875320

I-TOKYO-P70 ANT
8031414888818

I-ST022-700
8031414877225

I-TOKYO-P70 BRO
8031414871780

1 x E27 MAX 40W

H160 Ø57 — Lampadina consigliata / Suggested light bulb

Lampadina non inclusa / Light bulb not included

WAX

Collezione in alluminio a LED integrato con finitura antracite.
Aluminum collection LED lamp with embossed anthracite finish.

outdoor use | accommodation areas use | urban areas use

Materiale
alluminio

Colore
goffrato antracite

Temperatura colore
3000K

Driver
DC24V
tensione costante
non incluso

Material
aluminum

Colour
goffrato antracite

Colour temperature
3000K

Driver
DC24V
costant voltage
not included

Driver p. 843-852
Controller p. 854-857


IP65 | degree IK05 | CRI >80 | LED SMD





	colour temp.	colour
LED-WAX-P120		
8031414922956		
lumen	363lm	

watt	3W
beam angle	120°
pf	0.90





Picchetto per installazione nel terreno incluso /
Picchetto per installazione nel terreno non incluso /



PUCK

Collezione in alluminio a LED integrato con finitura antracite o corten goffrato.
Aluminum collection with integrated LED with anthracite or corten embossed finish.

outdoor use · accommodation areas use · urban areas use

Materiale
alluminio

Colore
goffrato antracite
goffrato corten

Temperatura colore
3000K

Driver
DC24V
tensione costante
non incluso

Material
aluminum

Colour
goffrato antracite
goffrato corten

Colour temperature
3000K

Driver
DC24V
costant voltage
not included


IP65 · degree IK08 · CRI >80 · LED SMD





	colour temp.	colour
LED-PUCK-P120-ANT 8031414918652		
lumen	360 lm	
LED-PUCK-P120-BRO 8031414918669		
lumen	360 lm	

watt	3W
beam angle	180°





DROP

Collezione in alluminio finitura antracite con diffusore in policarbonato.
Aluminum collection anthracite finish with PC diffuser.

outdoor use · accommodation areas use · urban areas use



technical information **DROP**


IP65 · G9



colour

I-DROP-P33-ANT
8031414883073

1 x G9 LED



H63 Ø19 Lampadina consigliata / Suggested light bulb


Lampadina non inclusa / Light bulb not included



colour

I-DROP-P53-ANT
8031414883080

1 x G9 LED



H63 Ø19 Lampadina consigliata / Suggested light bulb


Lampadina non inclusa / Light bulb not included



colour

I-DROP-P73-ANT
8031414882793

1 x G9 LED



H63 Ø19 Lampadina consigliata / Suggested light bulb

Lampadina non inclusa / Light bulb not included

BOOSTER

Collezione in metallo finitura silver.
Metal collection silver finish.


outdoor use | accommodation areas use | urban areas use

colour

I-BOOSTER-AP
8031414918492

1 x E27 MAX 40W

Lampadina non inclusa /
Light bulb not included

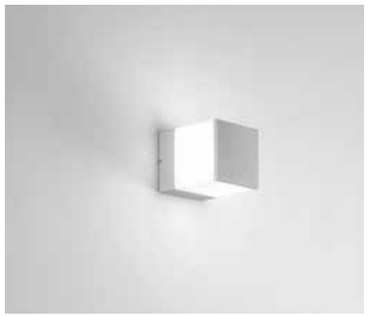




colour

I-BOOSTER-P60
8031414918508

1 x E27 MAX 40W

Lampadina non inclusa /
Light bulb not included





IP54 | degree IK08 | E27

technical information **BOOSTER**

CE



In.tec light **OUTDOOR** APPLIQUE SOSPENSIONI E PALETTI CORRELATI / WALL SUSPENSION AND FLOOR LAMPS COMBINED

GECO DJ

Lampada portatile LED RGBW in polietilene con speaker bluetooth incorporato.
LED portable RGBW lamp with speaker bluetooth included polyethylene material.

outdoor use | accommodation areas use | urban areas use

Materiale
PE

Temperatura colore
RGB + 4000K

Driver
incluso

Material
PE


Colour temperature
RGB + 4000K

Driver
included



CE | EMC | IN&OUT | IP44 | LED SMD

	colour temp.
I-GECO-DJ-L25	
8031414862542	
lumen	RGB + 180 lm - 8h
watt	3W



Accessori inclusi / Included accessories

Cavo per ricarica con adattatore DC5V 1A 1,2 m / Charging cable with adaptor DC5V 1A 1,2 m 230V 50Hz — IP20

Telecomando infrarossi / IR remote control

Speaker 10W Bluetooth 4.0, distanza connessione max 15 m, durata 2h / 10w speaker bluetooth 4.0 connection distance max 15 m, lasting time 2h

6 hours — Batteria ricaricabile non sostituibile / Rechargeable battery non replaceable



GECO LED

Vaso e lampada LED RGBW in polietilene.
Vase and RGBW LED lamp in polyethylene.

outdoor use · accommodation areas use · urban areas use

IN&OUT · IP65 · LED SMD · RGB

Materiale
PE

Temperatura colore
RGB + 4000K

Driver
incluso

Material
PE

Colour temperature
RGB + 4000K


Driver
included






	colour temp.		
I-GECO-VASO-Q-L			
8031414862535			
lumen	RGB	+	240 lm - 8h
I-GECO-VASO-Q-XL			
8031414864713			
lumen	RGB	+	240 lm - 8h
watt			4W

	colour temp.		
I-GECO-VASO-R-L			
8031414862528			
lumen	RGB	+	240 lm - 8h
I-GECO-VASO-R-XL			
8031414864720			
lumen	RGB	+	240 lm - 8h
watt			4W





Accessori inclusi / Included accessories

Cavo per ricarica con adattatore DC5V 1A 1,2 m / Charging cable with adaptor DC5V 1A 1,2 m 230V 5oHz — IP20

Telecomando infrarossi / IR remote control


6 hours — Batteria ricaricabile non sostituibile / Rechargeable battery non replaceable




	colour temp.		
I-GECO-SFERA-L30			
8031414862436			
lumen	RGB	+	240 lm - 8h
I-GECO-SFERA-L40			
8031414862443			
lumen	RGB	+	240 lm - 8h
I-GECO-SFERA-L50			
8031414862450			
lumen	RGB	+	240 lm - 8h
watt			4W



	colour temp.		
I-GECO-CUBO-L30			
8031414862467			
lumen	RGB	+	240 lm - 8h
I-GECO-CUBO-L40			
8031414862474			
lumen	RGB	+	240 lm - 8h
I-GECO-CUBO-L50			
8031414862481			
lumen	RGB	+	240 lm - 8h
watt			4W



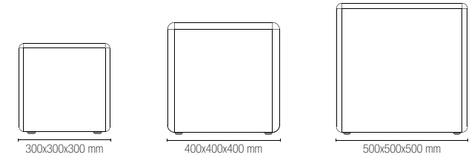

GECO E27



outdoor use · accommodation areas use · urban areas use

CE

Lampadine LED Intec consigliate per illuminazione multicolor o bianco dinamico presenti nel catalogo BULBS COLLECTION / Suggested LED Intec bulbs for multicolor or dynamic white lighting included in the catalogue BULBS COLLECTION

+ – · CRI >80 · LED SMD · RGB · E27



Lampada LED RGBW classe F / LED RGBW bulb class F	colour temp.
KLASSIC-E27-RGBW 8031414905003	RGB + 806 lm
watt	9W
beam angle	300°

IR

IR Control system

GECO E27

Collezione di lampade con attacco E27 in polietilene.
PE lamp with E27 lampholder.


outdoor use · accommodation areas use · urban areas use

IN&OUT · IP44 · E27



I-GECO-SFERA-S30
8031414864461


1 x E27 MAX 42W





I-GECO-SFERA-S40
8031414864454

1 x E27 MAX 42W



Lampadina non inclusa /
Light bulb not included



outdoor use | accommodation areas use | urban areas use

IN&OUT | IP65 | E27



I-GECO-VASO-E-Q-L
8031414868506
I-GECO-VASO-E-Q-XL
8031414868131

1 x E27 MAX 42W



I-GECO-VASO-E-R-L
8031414868513
I-GECO-VASO-E-R-XL
8031414868520

1 x E27 MAX 42W



I-GECO-SFERA-E-L30
8031414868476
I-GECO-SFERA-E-L40
8031414868483
I-GECO-SFERA-E-L50
8031414868490

1 x E27 MAX 42W



I-GECO-SPK
8031414878437

Picchetto alluminio per lampade GECO E27 / Aluminum spike for E27 GECO family




I-GECO-CUBO-E-L30
8031414867943
I-GECO-CUBO-E-L40
8031414868117
I-GECO-CUBO-E-L50
8031414868124


1 x E27 MAX 42W





I-GECO-SPK
8031414878437

Picchetto alluminio per lampade GECO E27 / Aluminum spike for E27 GECO family





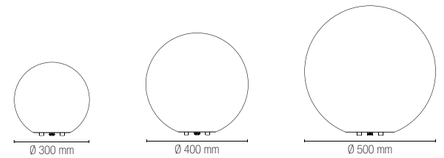

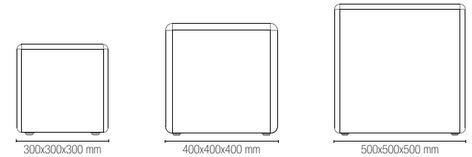

Lampadina non inclusa /
Light bulb not included

GECO E27

Piantana in polietilene con struttura in metallo bianco opaco o antracite.
PE floor lamp with metal structure white or anthracyte colour.



outdoor use · accommodation areas use · urban areas use





colour

I-GECO-BAR-PT
8031414868599

1 x E27 MAX 42W

Accessori inclusi / Included accessories

Cavo 2,5 m
con spina shuko /
2,5 m of cable
with schuko plug

IP44

Lampadina non inclusa /
Light bulb not included

IN&OUT · IP65 · E27

technical information

GECO E27



In.tec light **OUTDOOR** APPLIQUE SOSPENSIONI E PALETTI CORRELATI / WALL SUSPENSION AND FLOOR LAMPS COMBINED



colour

I-GECO-SFERA-PT30
8031414864430

1 x E27 MAX 42W

Accessori inclusi / Included accessories

Cavo 2,5 m
con spina shuko /
2,5 m of cable
with schuko plug

IP44

Lampadina non inclusa /
Light bulb not included



GECO LED SOLAR

Lampada portatile e gallegiante LED RGBW in polietilene con autoricarica solare.
PE LED portable and floating RGBW lamp with solar self charge.

outdoor use | accommodation areas use | urban areas use

Materiale
PE

Temperatura colore
RGB + 4000K

Driver
incluso

Material
PE

Colour temperature
RGB + 4000K

Driver
included

IP65 | LED SMD | RGB





	colour temp.	
I-GECO-SFERA-SOL30		
8031414870868		
lumen	RGB +	90 lm - 12h
I-GECO-SFERA-SOL40		
8031414870875		
lumen	RGB +	90 lm - 12h
watt		1,5W

	colour temp.	
I-GECO-CUBO-SOL30		
8031414870837		
lumen	RGB +	90 lm - 12h
I-GECO-CUBO-SOL40		
8031414870844		
lumen	RGB +	90 lm - 12h
watt		1,5W

Accessori inclusi / Included accessories

Cavo per ricarica con adattatore DC5V 1A 1,2 m / Charging cable with adaptor DC5V 1A 1,2 m 230V 5oHz — IP20


Telecomando infrarossi / IR remote control


>5 hours — **Carica alimentatore / DC charge** Batteria ricaricabile non sostituibile / Rechargeable battery non replaceable

>15 hours — **Carica solare / Auto solar charge** Batteria ricaricabile non sostituibile / Rechargeable battery non replaceable


Ø 300 mm
SFERA-SOL30


Ø 400 mm
SFERA-SOL40


300x300x300 mm
CUBO-SOL30


400x400x400 mm
CUBO-SOL40



MANDALA

Collezione in metallo antracite con diffusore in vetro trasparente.
Metal collection anthracite finish with trasparent glass diffuser.

outdoor use

accommodation areas use

CE

IN&OUT

IP44

E27






H115 Ø60 Lampadina consigliata / Suggested light bulb

Lampadina non inclusa / Light bulb not included

colour

LANT-MANDALA/S1
8031414870684


1 x E27 MAX 60W



colour

LANT-MANDALA/AP
8031414862641

1 x E27 MAX 60W





YORK

Collezione in alluminio nero con diffusore in policarbonato.
Black aluminum collection with PC diffuser.

outdoor use

accommodation areas use

IN&OUT

IP44


E27



colour

LANT-YORK/S1
8031414862764

1 x E27 MAX 60W






colour

LANT-YORK/AP
8031414862757

1 x E27 MAX 60W



H115
Ø60

Lampadina consigliata /
Suggested light bulb

Lampadina non inclusa /
Light bulb not included

PAVÈ

Proiettore in metallo color antracite con diffusore trasparente lucido nero in vetro.
Anthracite-colored metal projector with transparent glossy black glass diffuser.

Materiale
metallo
diffusore
vetro trasparente

Colore
antracite

Temperatura colore
3000K / 4000K


Driver
integrato

Material
metal
trasparent glass
diffuser

Colour
anthracite

Colour temperature
3000K / 4000K

Driver
built-in

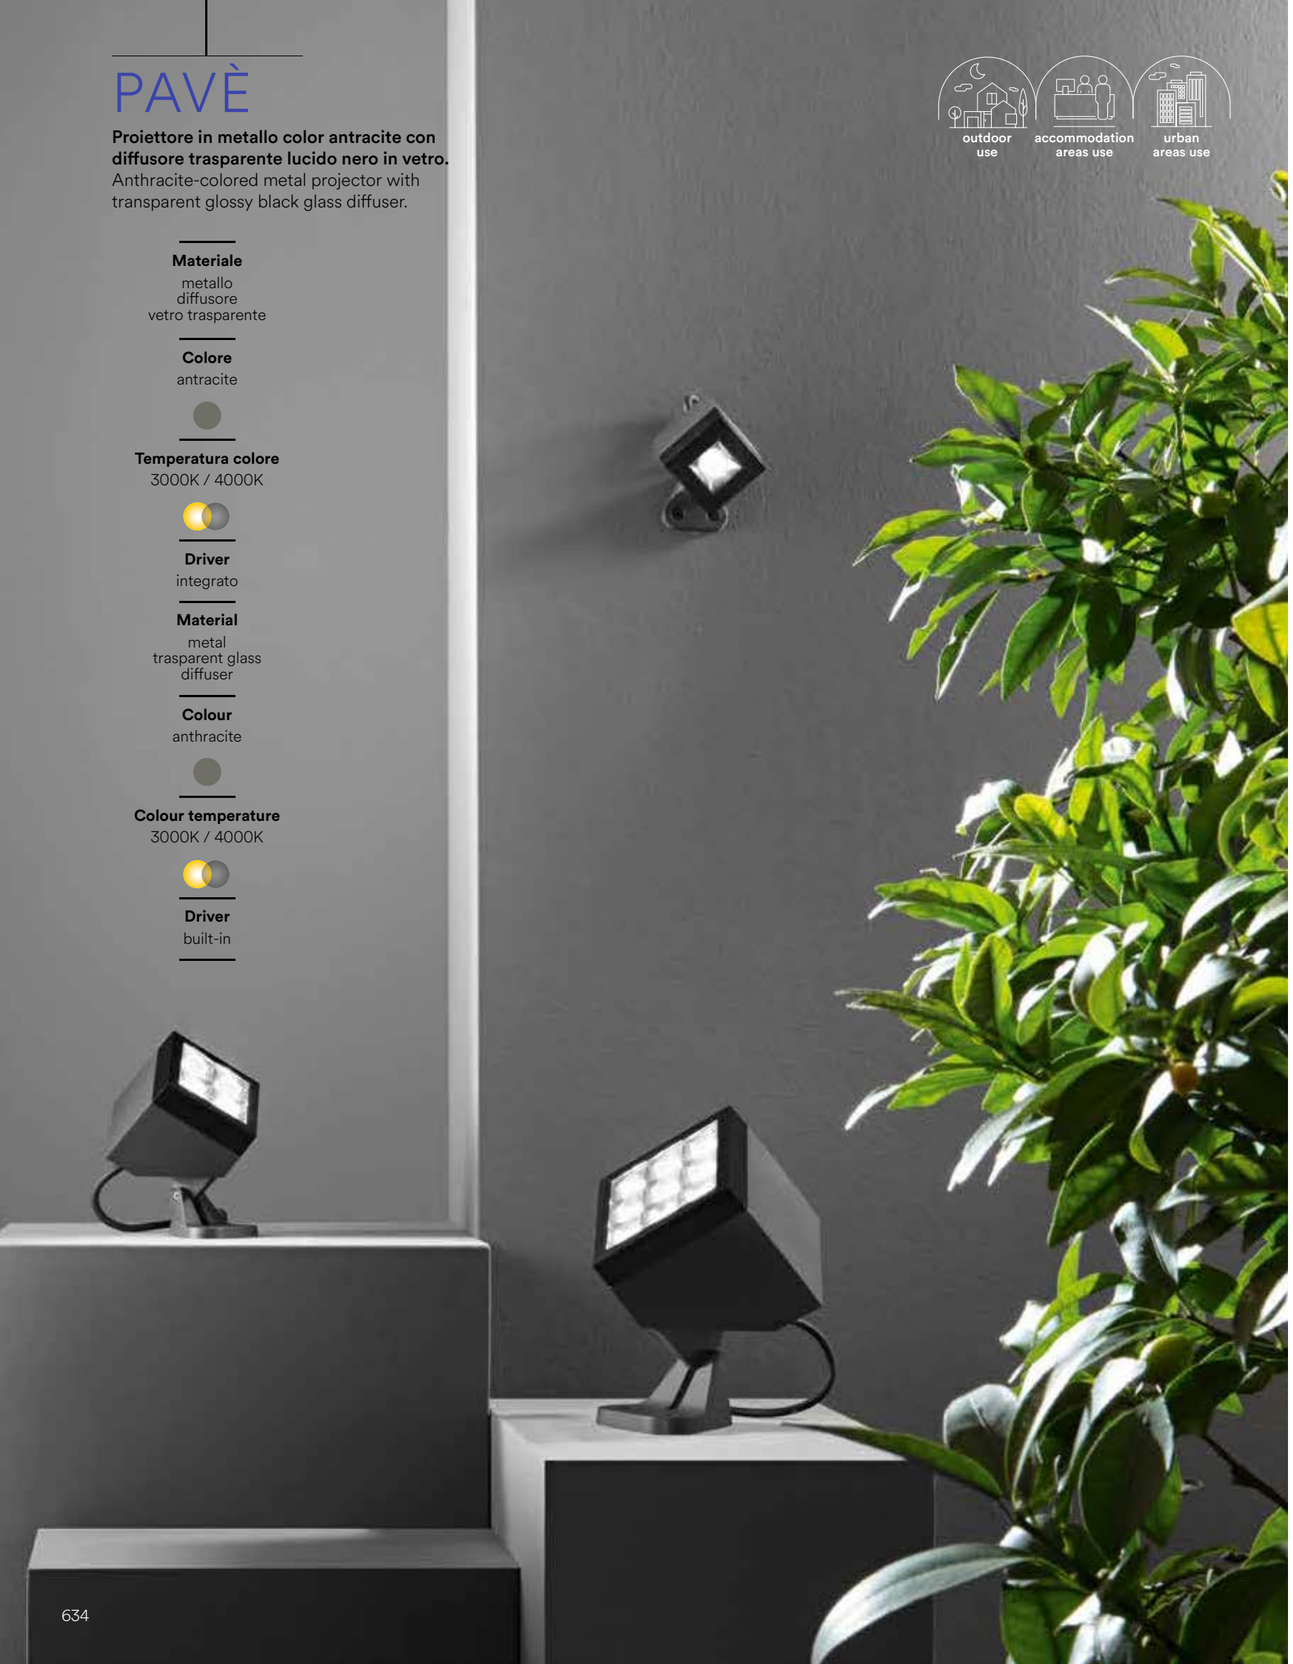


IP65 · degree IK08 · CRI >80 · LED SMD · CCT

technical information **PAVÈ**




LED-PAVE-6
8031414922925


	colour temp.	colour
lumen	720 lm	
watt	6W	
beam angle	45°	
pf	-	






LED-PAVE-18
8031414922932


	colour temp.	colour
lumen	2215 lm	
watt	18W	
beam angle	45°	
pf	-	






LED-PAVE-30
8031414922949

	colour temp.	colour
lumen	3750 lm	
watt	30W	
beam angle	45°	
pf	0.90	



LUMINA

Collezione in metallo color antracite con punto luce LED integrato.
Lumina applique può essere utilizzato anche come segnapassi.
Anthracite-colored metal collection with integrated LED light point.
Limuna wall lamp can also be used as a step marker.

Materiale
alluminio

Colore
goffrato antracite

Temperatura colore
3000K / 4000K

Driver
integrato

Material
aluminum

Colour
embossed anthracite

Colour temperature
3000K / 4000K

Driver
built-in




outdoor use | accommodation areas use | urban areas use

IP65 | degree IK08 | CRI >80 | LED SMD | CCT




	colour temp.	colour
LED-LUMINA-AP		
8031414922864		
lumen	1440 lm	
watt	12W	
beam angle	120°	
pf	-	






	colour temp.	colour
LED-LUMINA-P80		
8031414922871		
lumen	1440 lm	
watt	12W	
beam angle	120°	
pf	-	





	colour temp.	colour
LED-LUMINA-P200		
8031414922888		
lumen	3690 lm	
watt	30W	
beam angle	120°	
pf	0.90	



MIRAGE

Lanterna in metallo colore bianco o antracite diffusore in vetro trasparente.
Metal lantern white or anthracite finish with clear glass diffuser.

outdoor use · accommodation areas use · urban areas use

IP44 · E27






CE

colour	
LANT-MIRAGE-AP-BCO 8031414896394	
LANT-MIRAGE-AP 8031414867059	

1 x E27 MAX 60W




Lampadina non inclusa /
Light bulb not included



CE

colour	
LANT-MIRAGE-S1-BCO 8031414896431	
LANT-MIRAGE-S1 8031414867066	

1 x E27 MAX 60W






CE

colour	
LANT-MIRAGE-L1-BCO 8031414896400	
LANT-MIRAGE-L1 8031414869190	

1 x E27 MAX 60W



Accessori inclusi / Included accessories

Cavo 2,5 m
con spina shuko /
2,5 m of cable
with schuko plug


IP44



CE

colour	
LANT-MIRAGE-P90-BCO 8031414896424	
LANT-MIRAGE-P90 8031414869206	

1 x E27 MAX 60W





CE

colour	
LANT-MIRAGE-P200-BCO 8031414896417	
LANT-MIRAGE-P200 8031414869213	

1 x E27 MAX 60W



SKITTLE





IP54 E27


Collezione in alluminio pressofuso colore antracite con diffusore in PC.
Collection in die-cast aluminum in anthracite colour with PC diffuser.



colour

I-SKITTLE-AP
8031414881819

1 x E27 MAX 28W






colour

I-SKITTLE-PL
8031414881826

1 x E27 MAX 28W





colour

I-SKITTLE-P65
8031414881833

1 x E27 MAX 28W





colour

I-SKITTLE-P100
8031414882434

1 x E27 MAX 28W





Lampadina consigliata /
Suggested light bulb



Lampadina non inclusa /
Light bulb not included

ORBIT

Lanterna in acrilico PMMA e base in alluminio pressofuso nero.
Acrylic PMMA lantern with base in die cast aluminum black finish.



IP44 E27

CE






colour

LANT-ORBIT/AP
8031414862658

1 x E27 MAX 60W





colour

LANT-ORBIT/S1
8031414862665

1 x E27 MAX 60W






colour

LANT-ORBIT/L1
8031414866335

1 x E27 MAX 60W






colour

LANT-ORBIT/P1
8031414862689

1 x E27 MAX 60W






colour

LANT-ORBIT/P3
8031414862702

3 x E27 MAX 60W

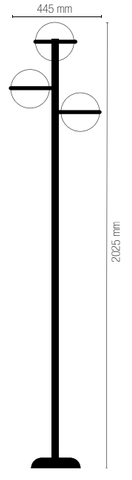



Lampadina non inclusa /
Light bulb not included

PRISMA

Lanterna in alluminio pressofuso colore antracite diffusore in vetro trasparente.
Die cast aluminum lantern anthracite finish with clear glass diffuser.

outdoor use | accommodation areas use | urban areas use


IP44 E27



colour

LANT-PRISMA/AP1A
8031414867103

1 x E27 MAX 60W






colour

LANT-PRISMA/AP1B
8031414867073

1 x E27 MAX 60W






colour

LANT-PRISMA/S1
8031414867080

1 x E27 MAX 60W






colour

LANT-PRISMA/P1
8031414869183

1 x E27 MAX 60W





Lampadina consigliata / Suggested light bulb



Lampadina non inclusa / Light bulb not included

ROMA

Lanterne in alluminio pressofuso con diffusore in vetro trasparente.
Die-cast aluminum lantern with clear glass diffuser.

outdoor use · accommodation areas use · urban areas use

IP44 · E27 · CE



colour

LANT-ROMA/AP1A BCO
8031434661217

LANT-ROMA/AP1A
8031430751172

1 x E27 MAX 60W





colour

LANT-ROMA/AP1A-S
8031435921235

1 x E27 MAX 60W



Accessori integrati / Built in accessories

Sensore di movimento regolabile / Adjustable motion sensor

ON	10lux
distanza / distance	1-8m
	90°
5 seconds - 5 minutes	



colour

LANT-ROMA/AP1B BCO
8031434671216

LANT-ROMA/AP1B
8031430761171

1 x E27 MAX 60W





colour

LANT-ROMA/S1 BCO
8031434681215

LANT-ROMA/S1
8031430791178

1 x E27 MAX 60W



Lampadina non inclusa / Light bulb not included



colour

LANT-ROMA/L1 BCO
8031436951248

LANT-PALETTO
8031414042203

1 x E27 MAX 60W






colour

LANT-ROMA/P1 BCO
8031436941249

LANT-ROMA/P1
8031430771170

1 x E27 MAX 60W






colour

LANT-ROMA/P3
8031430781179

3 x E27 MAX 60W

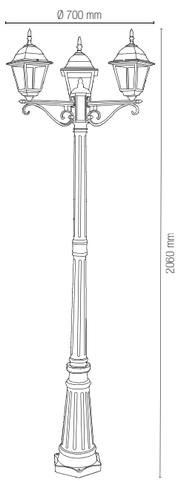




colour

LANT-ROMA-HEAD21
8031414878512

1 x E27 MAX 60W

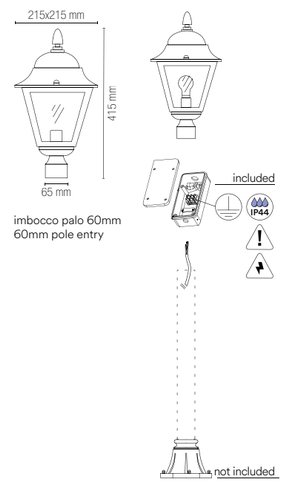

on photo: **ROMA**



on photo: **MILANO**



MILANO

Lanterne in alluminio pressofuso con diffusore in vetro trasparente.
Die-cast aluminum lantern with clear glass diffuser.



outdoor use | accommodation areas use | urban areas use



colour

LANT-MILANO/AP1A BCO
8031436931240

LANT-MILANO/AP1A
8031436921241

1 x E27 MAX 60W





colour

LANT-MILANO/AP1B BCO
8031436911242

LANT-MILANO/AP1B
8031436901243

1 x E27 MAX 60W



Lampadina non inclusa /
Light bulb not included

IP44 | E27



colour

LANT-MILANO/S1 BCO
8031436851234

LANT-MILANO/S1
8031436841235

1 x E27 MAX 60W





colour

LANT-MILANO/L1 BCO
8031436891247

LANT-MILANO/L1
8031436881248

1 x E27 MAX 60W






colour

LANT-MILANO/P1 BCO
8031436871232

LANT-MILANO/P1
8031436971246

1 x E27 MAX 60W






colour

LANT-MILANO-HEAD23
8031414878529

1 x E27 MAX 60W

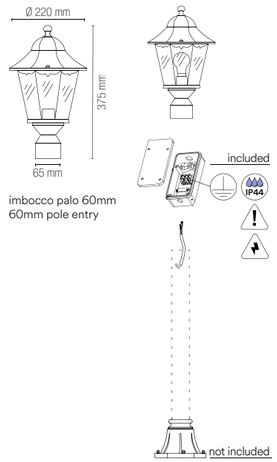

FIRENZE

Lanterne in alluminio pressofuso nero pennellato argento con diffusore in vetro trasparente.
Diecast aluminum lantern black
brush silver with clear glass diffuser.

outdoor use | accommodation areas use | urban areas use



IP44 E27

CE



colour

LANT-FIRENZE/AP1A
8031430701177

1 x E27 MAX 60W



Lampadina non inclusa /
Light bulb not included



colour

LANT-FIRENZE/AP1B
8031430711176

1 x E27 MAX 60W






colour

LANT-FIRENZE/S1
8031430741173

1 x E27 MAX 60W






colour

LANT-FIRENZE/P1
8031430721175

1 x E27 MAX 60W






colour

LANT-FIRENZE/P3
8031430731174

3 x E27 MAX 60W

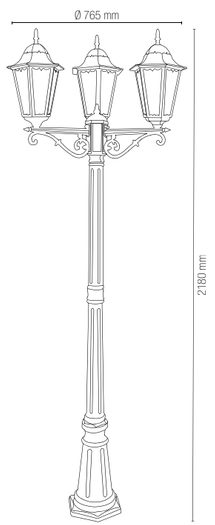

SANTIAGO

Lanterne in alluminio pressofuso nero pennellato verde con diffusore in vetro trasparente.
Diecast aluminum lantern black
brush green with clear glass diffuser.



outdoor use · accommodation areas use · urban areas use

IP44 · E27



colour

LANT-SANTIAGO/AP1A
8031430801174

1 x E27 MAX 60W




Lampadina non inclusa /
Light bulb not included



colour

LANT-SANTIAGO/AP1B
8031430811173

1 x E27 MAX 60W





colour

LANT-SANTIAGO/S1
8031430841170

1 x E27 MAX 60W






colour

LANT-SANTIAGO/P1
8031430821172

1 x E27 MAX 60W






colour

LANT-SANTIAGO/P3
8031430831171

3 x E27 MAX 60W

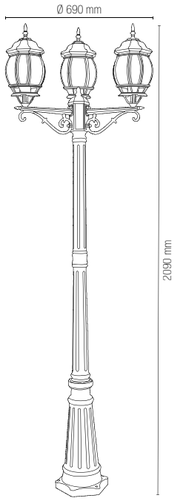

VENEZIA

Lanterne in alluminio pressofuso con finiture in colore rame con diffusore in policarbonato trasparente.
Aluminum die-cast lantern with copper colour finish and clear polycarbonate diffuser.



outdoor use | accommodation areas use | urban areas use


IP44 E27



colour

LANT-VENEZIA-AP1A
8031440312004

1 x E27 MAX 60W






colour

LANT-VENEZIA-AP1B
8031440311991

1 x E27 MAX 60W




Lampadina non inclusa / Light bulb not included



colour

LANT-VENEZIA-S1
8031440313285

1 x E27 MAX 60W





colour

LANT-VENEZIA-L1
8031440311984

1 x E27 MAX 60W






colour

LANT-VENEZIA-P1
8031440313308

1 x E27 MAX 60W






colour

LANT-VENEZIA-P3
8031440313292

3 x E27 MAX 60W

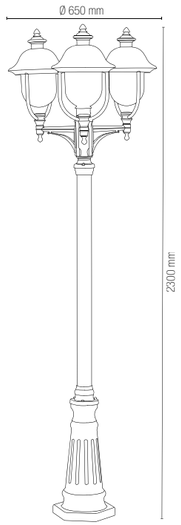

PAVIA

Lanterne in alluminio pressofuso nero goffrato con diffusore in acrilico trasparente.
Die-cast aluminum lantern in embossed black colour with clear acrylic diffuser.

outdoor use | accommodation areas use | urban areas use



IP44 E27


CE



colour

LANT-PAVIA-AP1
8031440312028

1 x E27 MAX 60W






colour

LANT-PAVIA-S1
8031440312042

1 x E27 MAX 60W






colour

LANT-PAVIA-P1
8031440312035

1 x E27 MAX 60W

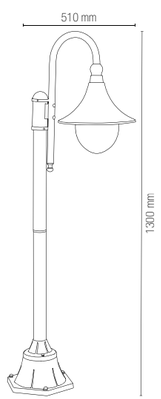




colour

LANT-PAVIA-P3
8031440312011

3 x E27 MAX 60W

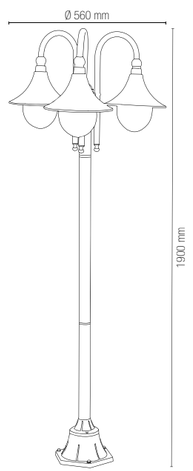

Lampadina non inclusa /
Light bulb not included

BRIGHTMAX

Modulo LED per lampioni con alimentatore OSRAM OT60 dali e mezzanotte virtuales
LED module for lampposts with OSRAM OT60 dali power supply and virtual midnight.

outdoor use · accommodation areas use · urban areas use

Materiale
alluminio

Colore
nero

Temperatura colore
2700K / 4000K

Driver
incluso
DALI

Durata e on/off
50.000h
>25.000 on/off

Material
aluminum


Colour
black


Colour temperature
2700K / 4000K

Driver
included
DALI

Life time and on/off
50.000h
>25.000 on/off




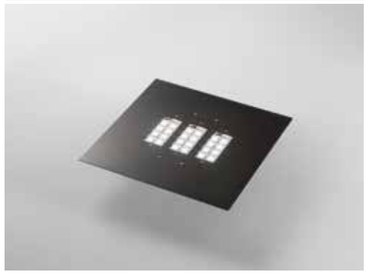



	colour temp.	colour
BRIGHTMAX-60C		
8031414883899		
lumen	9600 lm	
BRIGHTMAX-60M		
8031414883905		
lumen	9600 lm	
watt		60W
beam angle		360°


Fotometria del prodotto / Photometric curve




beam angle 360°

BRIGHTMAX-LENS
8031414883912
Lente bi-asimmetrico e tri-asimmetrico /
Be-asymmetric and three-asymmetric lens

Fotometria del prodotto / Photometric curve



beam angle be-asymmetric




beam angle three-asymmetric

Mezzanotte Virtuale / Virtual Midnight


Sistema indipendente della riduzione della luce in 5 STEP. Il modulo LED è programmato con un determinato programma (personalizzabile su richiesta) per ottimizzare il risparmio energetico durante le ore notturne. L'apparecchio prevede un sistema di autoapprendimento che determina in maniera autonoma, in base alle accensioni e agli spegnimenti pregressi, il punto di Mezzanotte Virtuale.
La Mezzanotte Virtuale è il punto che determina la riduzione di flusso in base al profilo impostato, lasciando invariato l'impianto. Per un corretto funzionamento del sistema Mezzanotte Virtuale è necessario un'accensione e uno spegnimento regolare quotidiano.

Indipendent system of light reduction in 5 steps. The LED module is set with a specific program (customizable) to optimize the energy saving time during night hours. The device is equipped with a outo-feedback system which determine indipendently, the Virtual Midnigh point based on the past switch on-switch-off time record.
Virtual Midnight is the point which determines the light flux reduction based on the set profile, keeping the electrical system untouched. For a correct working of the system of Virtual Midnight it is necessary a daily regular cycle of switching on-off.



Impostazioni di fabbrica / Default Settings

hours	flux
ON ÷ 10:00	**100%**
10:00 ÷ 11:30	**75%**
11:30 ÷ 02:30	**50%**
02:30 ÷ 04:00	**75%**
04:00 ÷ OFF	**100%**

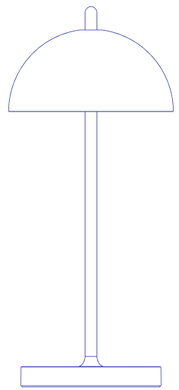

LAMPADE DA TAVOLO RICARICABILI
RECHARGEABLE TABLE LAMP

PARTY

Lampada da tavolo ricaricabile.
Rechargeable table lamp.

outdoor use | accommodation areas use | urban areas use

Materiale
metallo

Colore
goffrato bianco
goffrato nero
goffrato verde
goffrato oro
goffrato crema
goffrato corten

Temperatura colore
3000K

Material
metal


Colour
embossed white
embossed black
embossed green
embossed gold
embossed cream
embossed corten

Colour temperature
3000K



	colour temp.	colour
LED-PARTY-S-BCO 8031414915965 lumen	134 lm - 12h	
LED-PARTY-S-NER 8031414915958 lumen	134 lm - 12h	
LED-PARTY-S-VDE 8031414915996 lumen	134 lm - 12h	
LED-PARTY-S-ORO 8031414916009 lumen	134 lm - 12h	
LED-PARTY-S-CRM 8031414915989 lumen	134 lm - 12h	
LED-PARTY-S-BRO 8031414915972 lumen	134 lm - 12h	
watt	1,5W	

	colour temp.	colour
LED-PARTY-L-BCO 8031414916023 lumen	350 lm - 12h	
LED-PARTY-L-NER 8031414916016 lumen	350 lm - 12h	
LED-PARTY-L-VDE 8031414916054 lumen	350 lm - 12h	
LED-PARTY-L-ORO 8031414916061 lumen	350 lm - 12h	
LED-PARTY-L-CRM 8031414916047 lumen	350 lm - 12h	
LED-PARTY-L-BRO 8031414916030 lumen	350 lm - 12h	
watt	2,5W	



IN&OUT | TOUCH DIMMER | IP44 | LED SMD

Accessorio non incluso / Not included accessory


Adattatore DC5V 1A / Adaptor DC5V 1A

Accessori inclusi / Included accessories

Cavo per ricarica magnetico / Magnetic charging cable

5-7 hours

DC3.7V 4000 mAh
Batteria ricaricabile non sostituibile / Rechargeable battery non replaceable

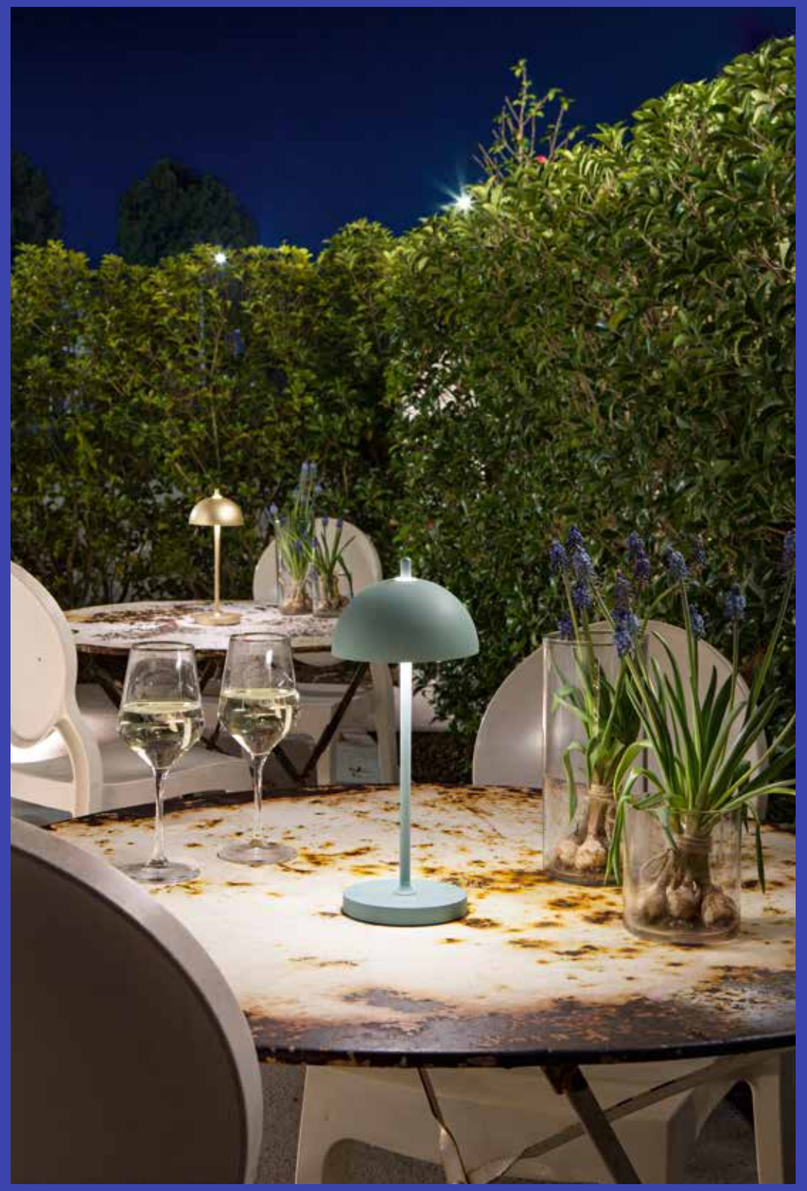

LIBERTY

Lampada da tavolo ricaricabile.
Rechargeable table lamp.

outdoor use · accommodation areas use · urban areas use

Materiale
metallo

Colore
goffrato bianco
goffrato nero
goffrato cromo lucido
goffrato oro lucido

Temperatura colore
3000K

Material
metal

Colour
embossed white
embossed black
embossed glossy chrome
embossed glossy gold


Colour temperature
3000K




	colour temp.	colour
LED-LIBERTY-BCO 8031414916078		
lumen	300 lm - 8h	
LED-LIBERTY-NER 8031414916085		
lumen	300 lm - 8h	
LED-LIBERTY-CR 8031414916092		
lumen	300 lm - 8h	
LED-LIBERTY-ORO 8031414916108		
lumen	300 lm - 8h	
watt	2W	

LED-LIBERTY-STATION
8031414916115

input 12V 6A output V 1.5A





IN&OUT · TOUCH DIMMER · IP44 · LED SMD

Accessorio non incluso / Not included accessory


Adattatore 12V 6A / Adaptor 12V 6A

Accessori inclusi / Included accessories

Cavo per ricarica magnetico / Magnetic charging cable

5-7 hours

DC3.7V 4000 mAh
Batteria ricaricabile non sostituibile / Rechargeable battery non replaceable

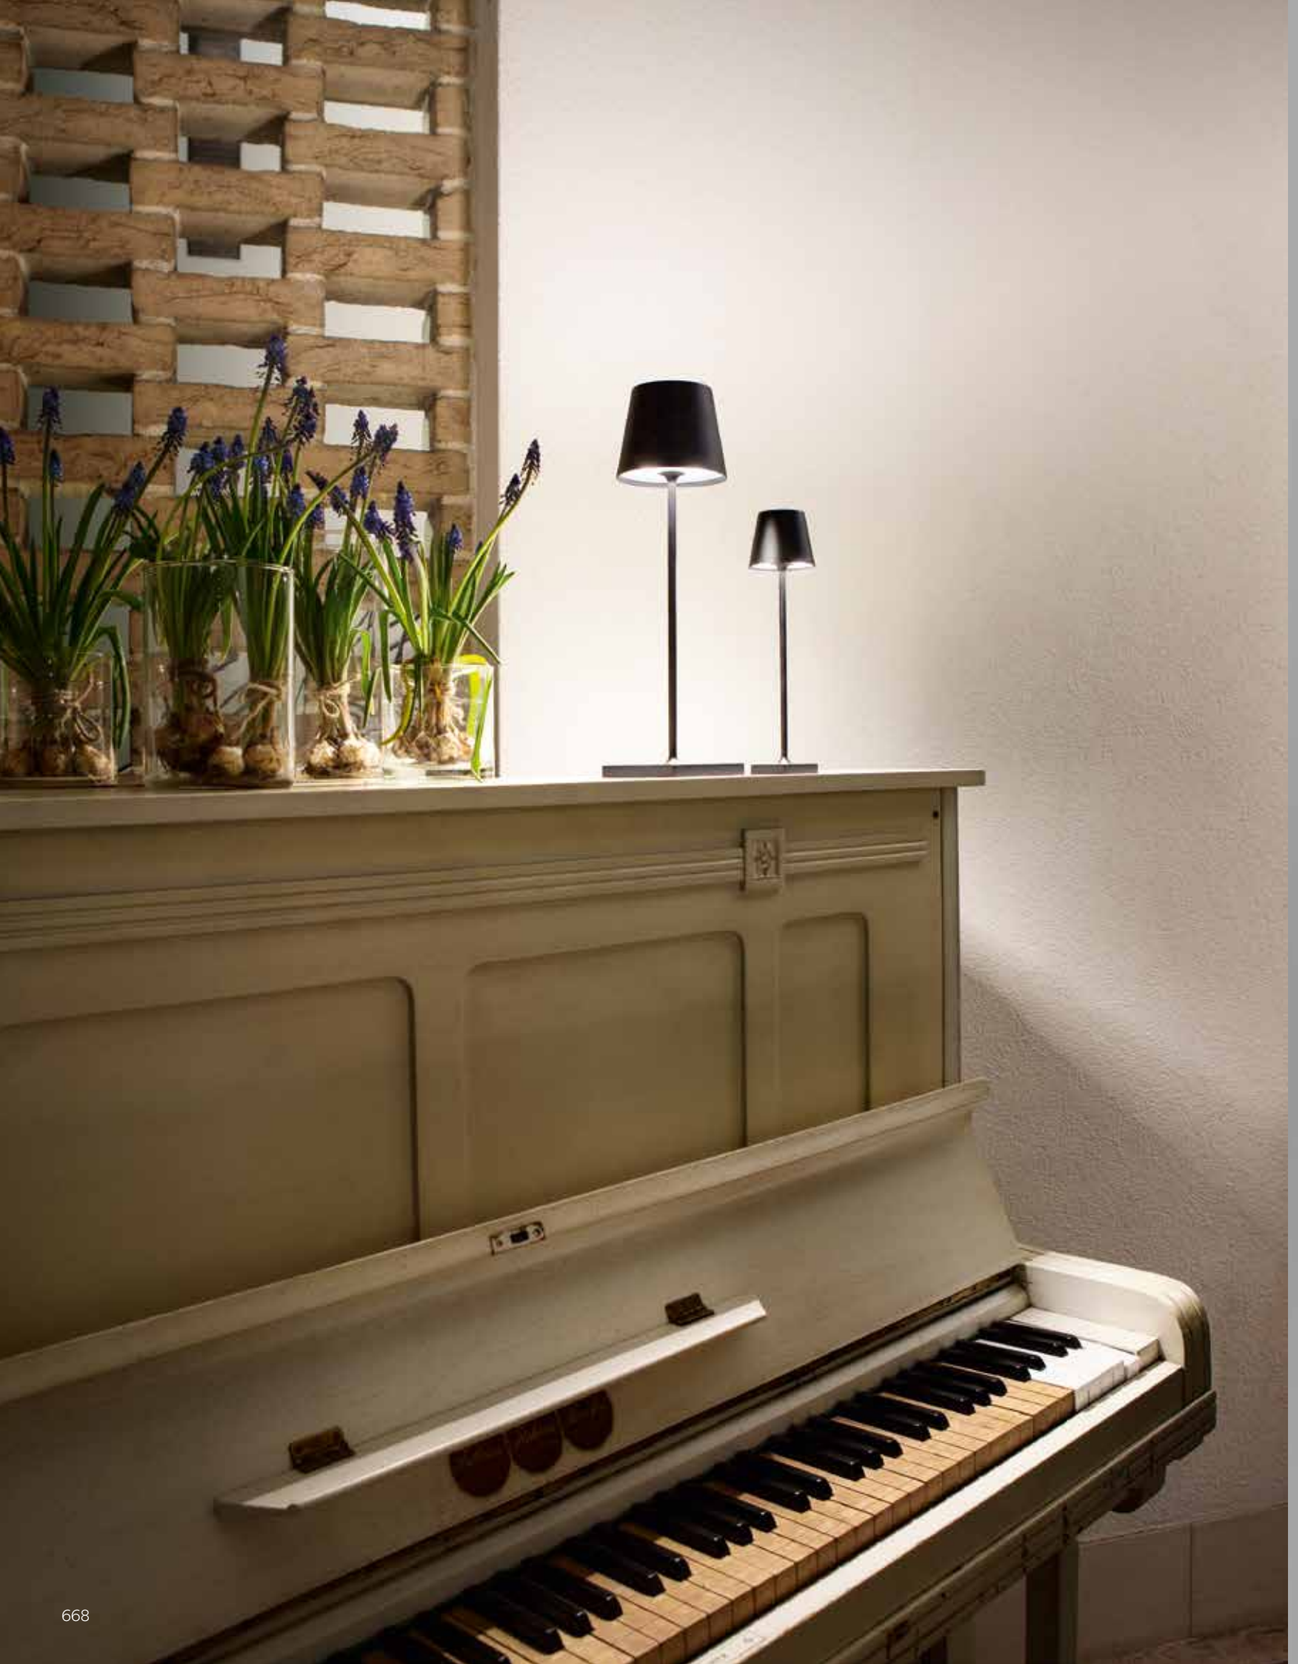

SMALL DRINK

Lampada da tavolo ricaricabile.
Rechargeable table lamp.

outdoor use · accommodation areas use · urban areas use

Materiale
metallo

Colore
goffrato bianco
goffrato nero
goffrato oro
goffrato corten

Temperatura colore
3000K

Material
metal


Colour
embossed white
embossed black
embossed gold
embossed corten

Colour temperature
3000K



IN&OUT · TOUCH DIMMER · IP54 · LED SMD

	colour temp.	colour
LED-DRINK-S-BCO 8031414922963		
lumen	165 lm - 9h	
LED-DRINK-S-NER 8031414922987		
lumen	165 lm - 9h	
LED-DRINK-S-ORO 8031414922994		
lumen	165 lm - 9h	
LED-DRINK-S-BRO 8031414922970		
lumen	165 lm - 9h	
watt	1,5W	




Accessori inclusi / Included accessories

Base per ricarica con USB / Charging base with USB

5-7 hours **DC3.7V 2x2200 mAh**
Batteria ricaricabile non sostituibile / Rechargeable battery non replaceable

LED-DRINK-PS-S 8031414923014

input 220/240V 50/60hz output 5V 3A



Accessori inclusi / Included accessories

Cavo per ricarica 2,5m / Charging cable 2,5m

DRINK

Lampada da tavolo ricaricabile.
Rechargeable table lamp.

outdoor use · accommodation areas use · urban areas use

Materiale
metallo

Colore
goffrato bianco
goffrato nero
goffrato oro
goffrato corten

Temperatura colore
3000K

Material
metal

Colour
embossed white
embossed black
embossed gold
embossed corten


Colour temperature
3000K






IN&OUT · TOUCH DIMMER · IP54 · LED SMD

	colour temp.	colour
LED-DRINK-BCO 8031414885299		
lumen	190 lm - 9h	
LED-DRINK-NER 8031414885312		
lumen	190 lm - 9h	
LED-DRINK-ORO 8031414885329		
lumen	190 lm - 9h	
LED-DRINK-BRO 8031414885305		
lumen	190 lm - 9h	
watt	2,2W	



LED-DRINK-PS
8031414923007

input 220/240V 50hz output 5V 3A max 15W



Accessori inclusi /
Included accessories

Base per ricarica con USB /
Charging base with USB

5-7 hours

DC3.7V 2×2200 mAh
Batteria ricaricabile non sostituibile /
Rechargeable battery non replaceable



JAMMIN

Lampada da tavolo ricaricabile.
Rechargeable table lamp.

outdoor use | accommodation areas use | urban areas use

Materiale
metallo e PE

Colore
goffrato bianco
goffrato nero

Temperatura colore
3000K

Material
metal and PE


Colour
embossed white
embossed black

Colour temperature
3000K





	colour temp.	colour
LED-JAMMIN-L-BCO 8031414884377		
lumen	60 lm - 9h	
LED-JAMMIN-L-NER 8031414884384		
lumen	60 lm - 9h	
watt	2,2W	



IN&OUT | TOUCH DIMMER | IP54 | LED SMD

Accessori inclusi /
Included accessories

USB A 5V 2A
USB C 5V 2A
Cavo per ricarica /
Charging cable

5-7 hours
DC3.7V 4000 mAh
Batteria ricaricabile
non sostituibile /
Rechargeable battery
non replaceable



BRIO

Lampada da tavolo ricaricabile.
Rechargeable table lamp.

outdoor use | accommodation areas use | urban areas use

Materiale
PC

Colore
bianco
nero

Temperatura colore
3000K

Material
PC


Colour
white
black

Colour temperature
3000K



IN&OUT | IP44 | LED SMD

	colour temp.	colour
LED-BRIO-BCO 8031414889594		
lumen	200 lm	
LED-BRIO-NER 8031414889587		
lumen	200 lm	
watt	2,5W	



Accessori inclusi /
Included accessories

USB
Cavo per ricarica /
Charging cable

7 hours

DC5V 2200 mAh
Batteria ricaricabile
non sostituibile /
Rechargeable battery
non replaceable



MYKES

Lampada da tavolo ricaricabile.
Rechargeable table lamp.

outdoor use
accommodation areas use
urban areas use

Materiale
metallo e PE

Colore
goffrato bianco
goffrato nero

Temperatura colore selezionabile
3000K / 4000K / 5000K

Material
metal and PE


Colour
embossed white
embossed black

Selectable color temperature
3000K / 4000K / 5000K



TOUCH DIMMER
LED SMD

	colour temp.	colour
LEDT-MYKES-WHITE 8031414884445		
lumen	300 lm	
LEDT-MYKES-BLACK 8031414884438		
lumen	300 lm	
watt	4,5W	



Accessori inclusi / Included accessories

Cavo per ricarica con adattatore DC5V 2A / Charging and speacker cable with adaptor DC5V 2A



COCKTAIL

Lampada da tavolo ricaricabile.
Rechargeable table lamp.

outdoor use | accommodation areas use | urban areas use

Materiale
metallo

Colore
goffrato bianco
goffrato nero
goffrato oro
goffrato corten

Temperatura colore
3000K

Material
metal

Colour
embossed white
embossed black
embossed gold
embossed corten

Colour temperature
3000K





	colour temp.	colour
LED-COCKTAIL-BCO 8031414882496		
lumen	192 lm - 9h	
LED-COCKTAIL-NER 8031414882502		
lumen	192 lm - 9h	
LED-COCKTAIL-ORO 8031414885282		
lumen	192 lm - 9h	
LED-COCKTAIL-BRO 8031414882519		
lumen	192 lm - 9h	
watt	2,2W	




IN&OUT | TOUCH DIMMER | IP54 | LED SMD

Accessori inclusi /
Included accessories

Cavo per ricarica /
Charging cable

5-7 hours

DC3.7V 2×2200 mAh
Batteria ricaricabile non sostituibile /
Rechargeable battery non replaceable

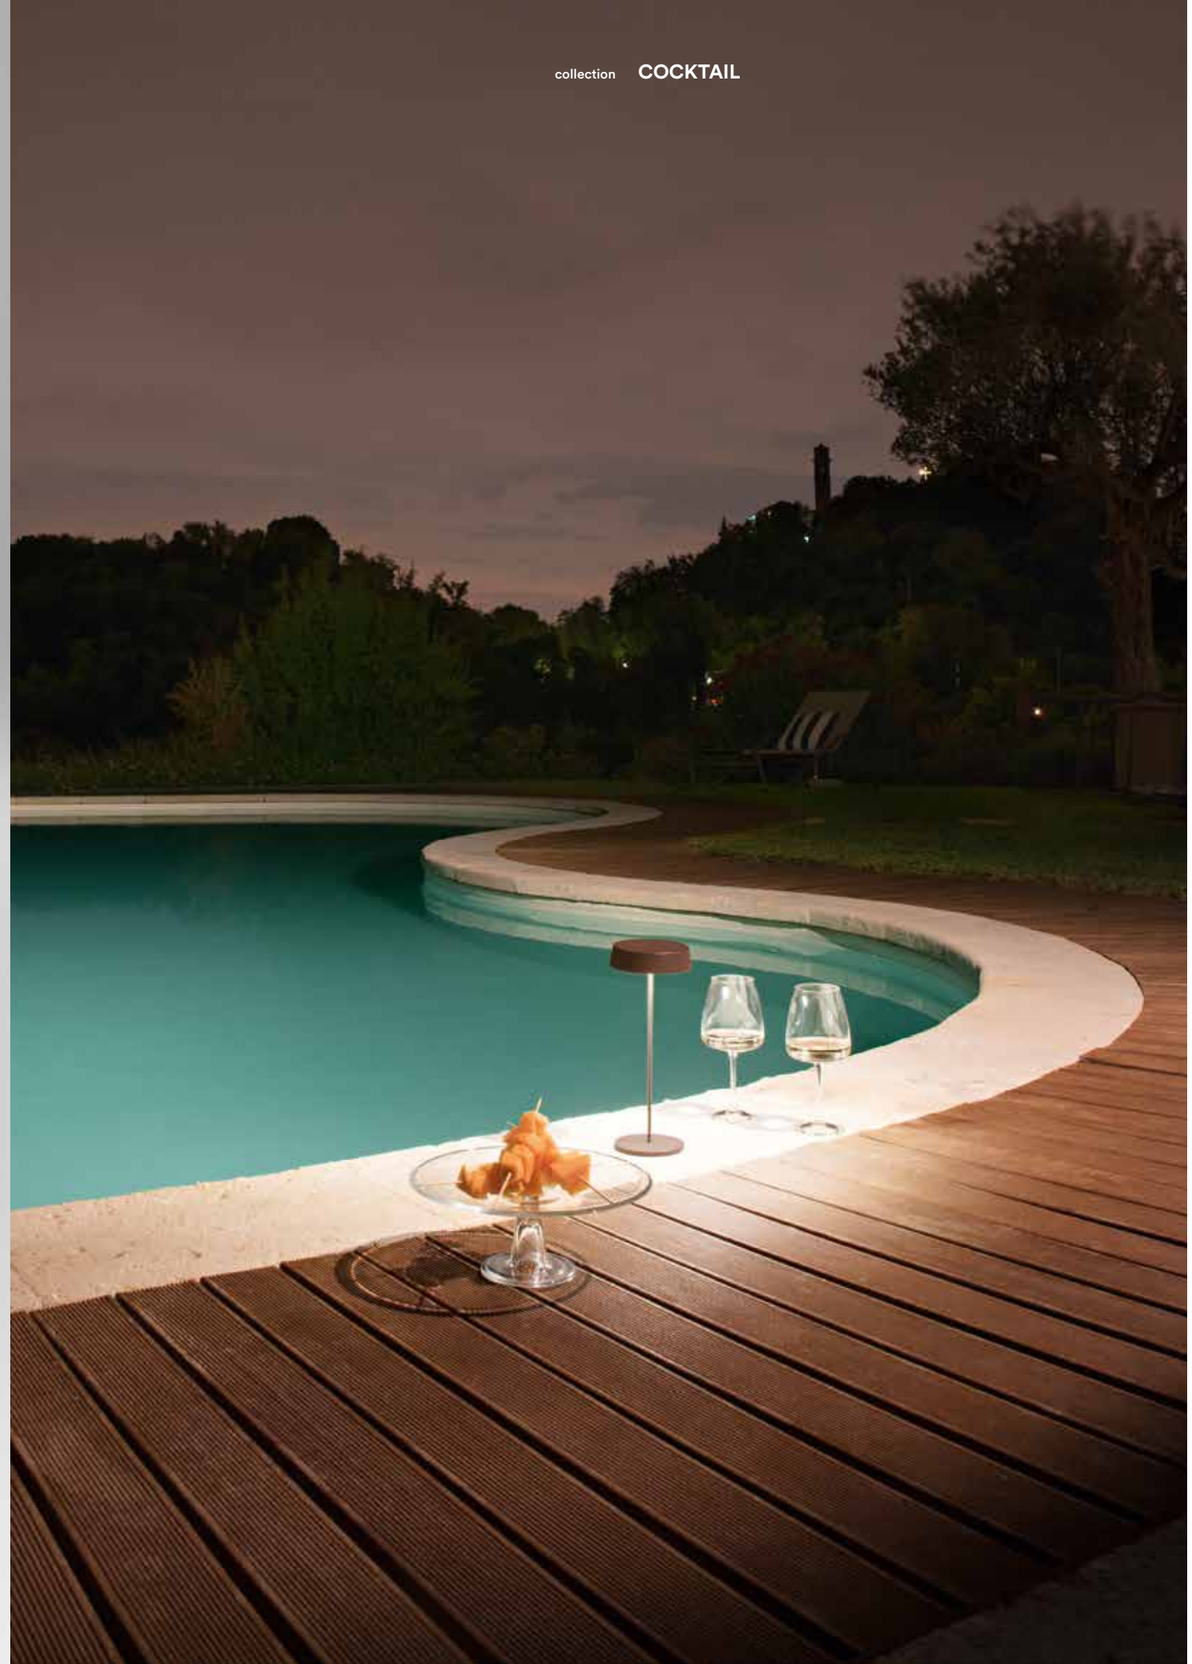

CLIMAX

Lanterna ricaricabile.
Rechargeable lamp.

outdoor use | accommodation areas use | urban areas use

Materiale
metallo - acrilico

Colore
nero opaco

Temperatura colore
3000K

Material
metal - acrylic

Colour
matt black

Colour temperature
3000K



IN&OUT | TOUCH DIMMER | IP54 | LED SMD

	colour temp.	colour
LED-CLIMAX-L1 8031414883141 lumen	140 lm - 8h	
watt	2W	

	colour temp.	colour
LED-CLIMAX-LG1 8031414883158 lumen	140 lm - 8h	
watt	2W	





Accessori inclusi / Included accessories

USB
Cavo per ricarica /
Charging cable

5-7 hours
DC3.7V 2600 mAh
Batteria ricaricabile
non sostituibile /
Rechargeable battery
non replaceable





OBERON

Lanterna ricaricabile.
Rechargeable lamp.

outdoor use · accommodation areas use · urban areas use

Materiale
metallo

Colore
bianco

Temperatura colore
3000K

Material
metal

Colour
white

Colour temperature
3000K


IN&OUT · TOUCH DIMMER · IP54 · LED SMD







	colour temp.	colour
LANT-OBERON 8031414882526		
lumen	168 lm - 9h	
watt	2,2W	



LANT-OBERON-KIT-AP
8031414882533

Kit staffa applique per lume /
Wall lamp bracket kit



LANT-OBERON-KIT-S
8031414882540

Kit sospensione per lume cavo 2 m /
Suspension kit 2 m cable




Accessori inclusi / Included accessories

Cavo per ricarica con adattatore DC5V 1A 1,2 m / Charging cable with adaptor DC5V 1A 1,2 m

6 hours

DC3.7V 2×2200 mAh
Batteria ricaricabile non sostituibile / Rechargeable battery non replaceable



INCASSI E SEGNAPASSI
INGROUND AND WALK LIGHTS

BARRET

Segnapassi incasso.
Recessed light.

outdoor use | accommodation areas use | urban areas use

Materiale
alluminio

Colore
nikel

Temperatura colore
3000K / 4000K

Driver
350mA 3,5V
corrente costante
non incluso

Material
aluminum

Colour
nikel

Colour temperature
3000K / 4000K

Driver
350mA 3,5V
costant current
not included




CE

IP67 | CRI >80 | LED SMD




	colour temp.	colour
LED-BARRET-R24C		
8031440355070		
lumen	85 lm	
LED-BARRET-R24		
8031440364416		
lumen	85 lm	

watt	1W
driver	3,5V DC
beam angle	40°
pressure loads	max 250 kg
	Ø 16 mm




Fotometria del prodotto / Photometric curve



LED-BARRET-R24

Connessione in serie / Serie connection system **Driver p. 843-852**



Accessori inclusi / Included accessories



x1
Cavo 1 m /
1 m cable



SUBWAY

Segnapassi incasso.
Recessed light.

outdoor use | accommodation areas use | urban areas use

Materiale
alluminio

Colore
nikel

Temperatura colore
3000K / 4000K / BLU

Driver
DC 12-24V
tensione costante
non incluso

Material
aluminum

Colour
nikel

Colour temperature
3000K / 4000K

Driver
DC 12-24V
costant voltage
not included




CE

IP67 | degree IK07 | CRI >80 | LED SMD




	colour temp.	colour
LED-SUBWAY-R1C		
8031414879342		
lumen	385 lm	
LED-SUBWAY-R1M		
8031414877263		
lumen	420 lm	
LED-SUBWAY-R1B		
8031414877270		
lumen	53 lm	

watt	3W
driver	12/24V
beam angle	15°
pressure loads	max 1000 kg
	Ø 24 mm




Fotometria del prodotto / Photometric curve



LED-SUBWAY-R1

Connessione in parallelo / Serie connection system **Driver p. 843-852 Controller p. 854-857**



Accessori inclusi / Included accessories



x1
Cavo 1 m /
1 m cable



RIDER

Kit 6 pz segnapassi incasso.
Kit 6pcs recessed light.



IP67 · CRI >80 · LED SMD

Materiale
acciaio

Colore
acciaio

Temperatura colore
RGB

Driver
12V 6W
incluso

Material
steel


Colour
stainless steel

Colour temperature
RGB

Driver
12V 6W
included




	colour temp.	colour
LED-RIDER-R6		
8031436141236		
lumen	360 lm	
watt	6 × 0,6W	
driver	12V 6W DC	
beam angle	120°	
pressure loads	max 100 kg	
	Ø 23 mm	

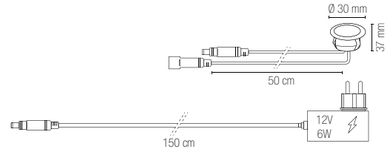




	colour temp.	colour
LED-RIDER-R6-RGB		
8031439871260		
lumen	RGB	
watt	6 × 0,6W	
driver	12V 6W DC	
beam angle	120°	
pressure loads	max 100 kg	
	Ø 23 mm	

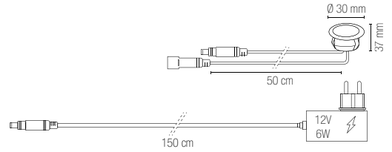



Fotometria del prodotto / Photometric curve



LED-RIDER-R6

Accessori inclusi / Included accessories



x6



x6
Cavo 1,5 m /
1,5 m cable

IP44

Accessori inclusi / Included accessories



x6



x1
Cavo 1,5 m /
1,5 m cable

IP44



IR
Control system

RIDER

Kit 6 pz segnapassi incasso.
Kit 6pcs recessed light.

outdoor use · accommodation areas use · urban areas use

Materiale
lega di zinco

Colore
silver

Temperatura colore
4000K

Driver
12V 6W DC
incluso

Material
zinc alloy

Colour
silver


Colour temperature
4000K

Driver
12V 6W DC
included


IP65 · CRI >80 · LED SMD

	colour temp.	colour
LED-RIDER-R6-DIR		
8031439921279		
lumen	100 lm	

watt	6 × 0,6W
driver	12V 6W DC
beam angle	105°
pressure loads	max 100 kg
	Ø 23 mm



Fotometria del prodotto / Photometric curve



LED-RIDER-R6-DIR

Accessori inclusi / Included accessories

x6

x1
Cavo 1,5 m / 1,5 m cable

IP44

IMPACT

Segnapassi incasso in alluminio.
Aluminum recessed steplight.

outdoor use · accommodation areas use · urban areas use

Materiale
alluminio

Colore
nikel

Temperatura colore
3000K / 4000K

Driver
DC 24V
tensione costante
non incluso

Material
aluminum

Colour
nikel

Colour temperature
3000K / 4000K

Driver
DC 24V
costant voltage
not included



Connessione in parallelo / Serie connection system
Driver p. 843-852
Controller p. 854-857


IP67 · degree IK10 · CRI >80 · LED SMD

EASY DOMOTICA

	colour temp.	colour	recessed box
LED-IMPACT24V-R1C			
8031414879298			
lumen	170 lm		
LED-IMPACT24V-R1M			
8031414879304			
lumen	170 lm		

watt	2W
driver	DC 24V
beam angle	105°
pressure loads	max 250 kg
	Ø 35 mm







	colour temp.	colour	recessed box
LED-IMPACT24V-Q1C			
8031414879311			
lumen	170 lm		
LED-IMPACT24V-Q1M			
8031414879328			
lumen	170 lm		

watt	2W
driver	DC 24V
beam angle	105°
pressure loads	max 250 kg
	Ø 35 mm






Fotometria del prodotto / Photometric curve



LED-IMPACT24V-R1C
LED-IMPACT24V-Q1C



LED-IMPACT24V-R1M
LED-IMPACT24V-Q1M

Accessori inclusi / Included accessories

x1
Cavo 1 m / 1 m cable

STEP

Segnapassi incasso in alluminio.
Aluminum recessed steplight.



Materiale
alluminio

Colore
silver

Temperatura colore
3000K / 4000K

Driver
DC 24V
tensione costante
non incluso

Material
aluminum

Colour
silver


Colour temperature
3000K / 4000K

Driver
DC 24V
costant voltage
not included



	colour temp.	colour	recessed box
LED-STEP24V-R1C 8031414879250			
lumen	170 lm		
LED-STEP24V-R1M 8031414879267			
lumen	170 lm		

watt	2W
driver	DC 24V
beam angle	105°
pressure loads	max 250 kg
	Ø 35 mm






	colour temp.	colour	recessed box
LED-STEP24V-R4C 8031414879274			
lumen	170 lm		
LED-STEP24V-R4M 8031414879281			
lumen	170 lm		


watt	2W
driver	DC 24V
beam angle	105°
pressure loads	max 250 kg
	Ø 35 mm

Connessione in parallelo /
Serie connection system
Driver p. 843-852
Controller p. 854-857


Fotometria del prodotto / Photometric curve




LED-STEP24V-R1C



LED-STEP24V-R1M



LED-STEP24V-R4C



LED-STEP24V-R4M

Accessori inclusi /
Included accessories



x1
Cavo 1 m /
1 m cable

WALK

Faro calpestabile ad incasso in acciaio inox.
Walkable recessed light in stainless steel.

outdoor use | accommodation areas use | urban areas use

Materiale
acciaio inox


Temperatura colore
4000K

Driver
integrato

Material
stainless steel

Colour temperature
4000K


Driver
built-in

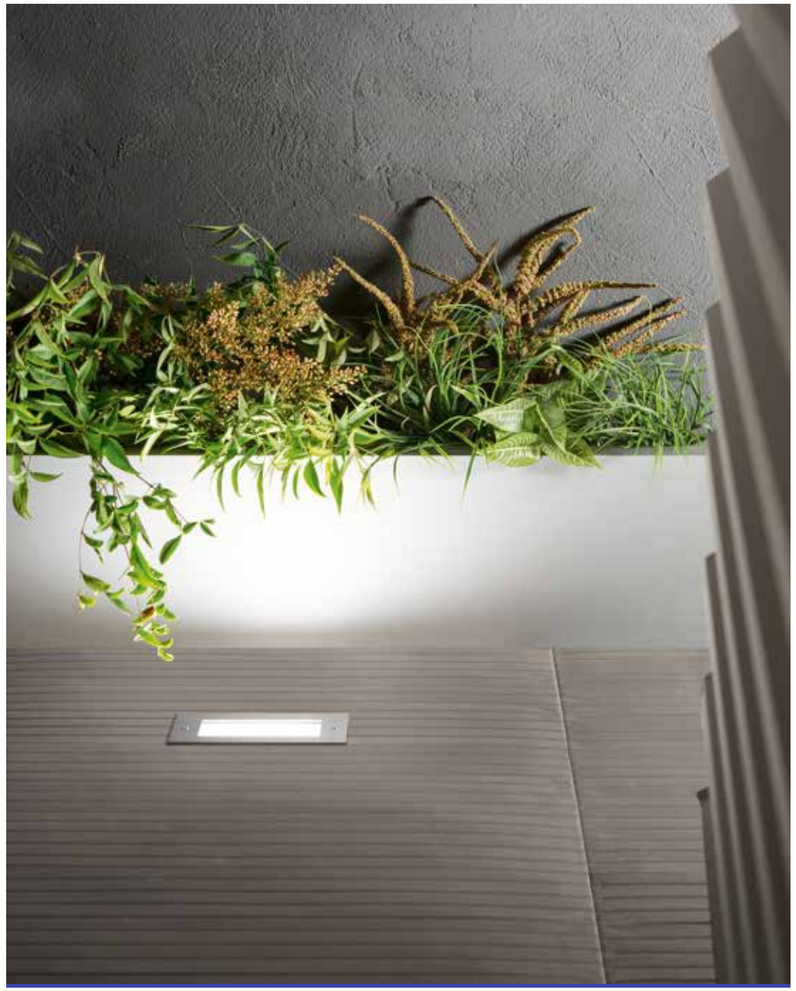

IP67 | degree IK10 | CRI >80 | LED COB




	colour temp.	colour	recessed box
LED-WALK-RT			
8031414882816			
lumen	1500 lm		
watt	12W		
beam angle	30°		
pressure loads	max 2000 kg		






	colour temp.	colour	recessed box
LED-WALK-Q7C 8031414885824			
lumen	345 lm		
LED-WALK-Q7 8031440355599			
lumen	375 lm		
watt	3W		
beam angle	30°		
pressure loads	max 2000 kg		






	colour temp.	colour	recessed box
LED-WALK-Q11C 8031414885800			
lumen	930 lm		
LED-WALK-Q11 8031440355575			
lumen	990 lm		
watt	8W		
beam angle	30°		
pressure loads	max 2000 kg		






	colour temp.	colour	recessed box
LED-WALK-Q14C 8031414885817			
lumen	1400 lm		
LED-WALK-Q14 8031440355551			
lumen	1500 lm		
watt	12W		
beam angle	30°		
pressure loads	max 2000 kg		




Fotometria del prodotto / Photometric curve

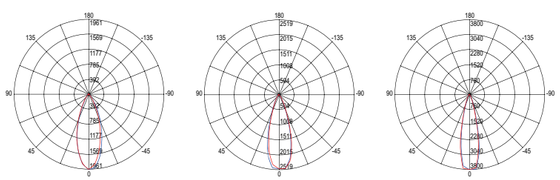

LED-WALK-Q7 LED-WALK-Q11 LED-WALK-Q14




	colour temp.	colour	recessed box
LED-WALK-R7C 8031414885855			
lumen	345 lm		
LED-WALK-R7 8031440355582			
lumen	375 lm		
watt	3W		
beam angle	30°		
pressure loads	max 2000 kg		






	colour temp.	colour	recessed box
LED-WALK-R11C 8031414885831			
lumen	930 lm		
LED-WALK-R11 8031440355568			
lumen	990 lm		
watt	8W		
beam angle	30°		
pressure loads	max 2000 kg		






	colour temp.	colour	recessed box
LED-WALK-R14C 8031414885848			
lumen	1400 lm		
LED-WALK-R14 8031440355544			
lumen	1500 lm		
watt	12W		
beam angle	30°		
pressure loads	max 2000 kg		



Fotometria del prodotto / Photometric curve

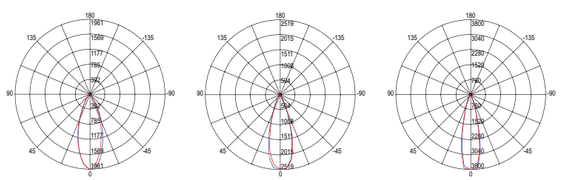

LED-WALK-R7 LED-WALK-R11 LED-WALK-R14

HUMMER

Faro carrabile ad incasso in acciaio inox.
Driveover recessed light in stainless steel.



outdoor use · accommodation areas use · urban areas use

IP67 · degree IK10 · GU10


CE



colour | recessed box

I-HUMMER-R1
8031414893188
I-HUMMER-R1-ANT
8031414895830
I-HUMMER-R1-BRO
8031414893195

1 x GU10 MAX 35W
pressure loads max 500 kg








Lampadina non inclusa / Light bulb not included



colour | recessed box

I-HUMMER-R2
8031414893201
I-HUMMER-R2-ANT
8031414895847
I-HUMMER-R2-BRO
8031414893218

1 x GU10 MAX 35W
pressure loads max 500 kg








Lampadina non inclusa / Light bulb not included



colour | recessed box

I-HUMMER-R4
8031414877249
I-HUMMER-R4-ANT
8031414895854
I-HUMMER-R4-BRO
8031414893225

1 x GU10 MAX 35W
pressure loads max 500 kg








Lampadina non inclusa / Light bulb not included



colour | recessed box

I-HUMMER-UP
8031414893232
I-HUMMER-UP-ANT
8031414895861
I-HUMMER-UP-BRO
8031414893249

1 x GU10 MAX 35W
pressure loads max 500 kg








Lampadina non inclusa / Light bulb not included

DRIVE

Faro calpestabile ad incasso in acciaio inox.
Walkable recessed light in stainless steel.

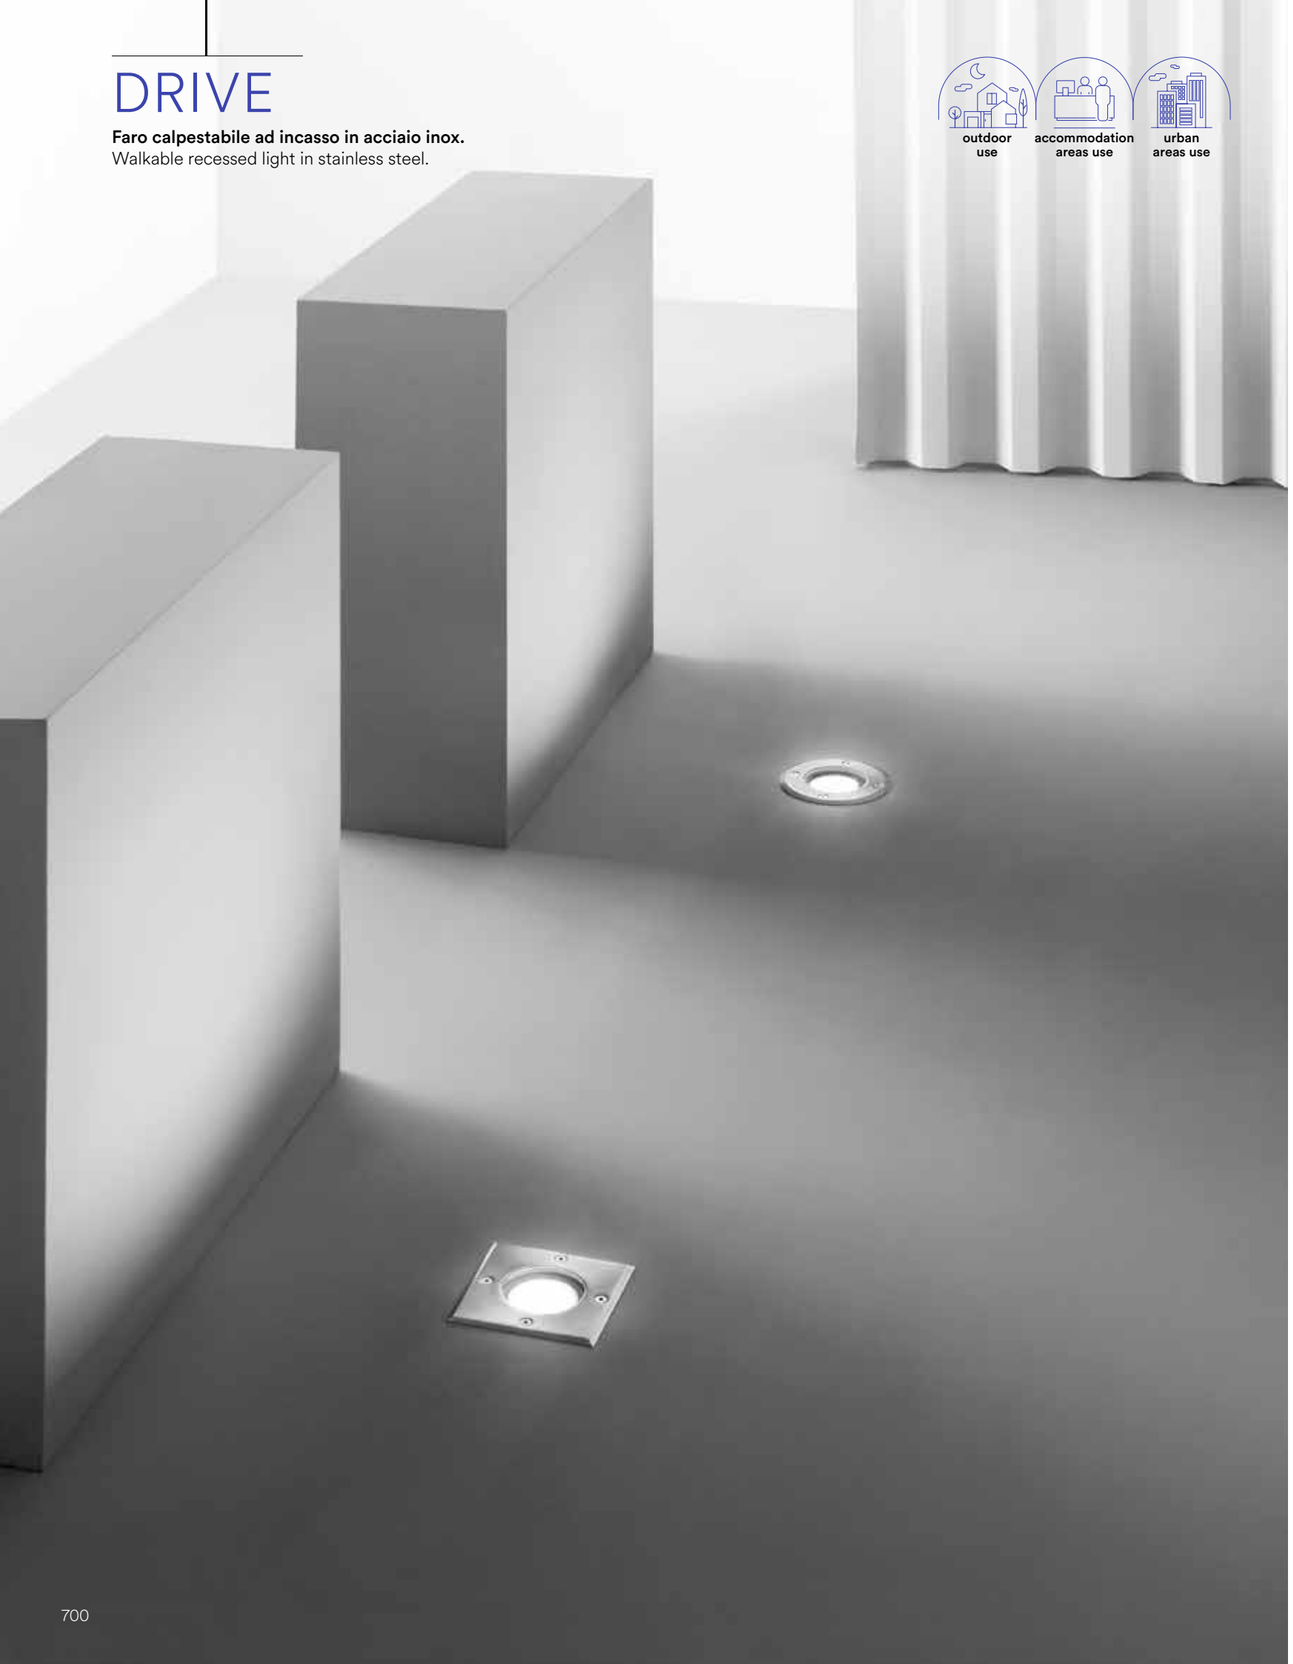

outdoor use · accommodation areas use · urban areas use

IP67 · degree IK10 · GU10 · E27




colour

recessed box

I-DRIVE-R1
8031440313261

1 x GU10 MAX 42W
pressure loads max 500 kg





Lampadina non inclusa / Light bulb not included




colour

recessed box

I-DRIVE-Q1
8031440313254

1 x GU10 MAX 42W
pressure loads max 500 kg





Lampadina non inclusa / Light bulb not included




colour

recessed box

I-DRIVE-M-R1
8031440313247

1 x GU10 MAX 42W
pressure loads max 500 kg







Lampadina non inclusa / Light bulb not included




colour

recessed box

I-DRIVE-E27
8031440313230

1 x E27 MAX 60W
pressure loads max 500 kg





Lampadina non inclusa / Light bulb not included

ELMO

Segnapassi in alluminio pressofuso.
Die-cast aluminum steplight.

Materiale
alluminio

Colore
silver

Temperatura colore
3000K / 4000K

Driver
DC 24V
tensione costante
non incluso

Material
aluminum

Colour
silver

Colour temperature
3000K / 4000K

Driver
DC 24V
costant voltage
not included



outdoor use
accommodation areas use
urban areas use

IP54
degree IK09
LED SMD

technical information **ELMO**





	colour temp.	colour
LED-ELMO-R1C		
8031414882823		
lumen	59 lm	
LED-ELMO-R1M		
8031414882830		
lumen	65 lm	

watt	0,5W
beam angle	90°
pressure loads	max 1000 kg

Ø 70 mm
15 mm





	colour temp.	colour
LED-ELMO-R2C		
8031414882847		
lumen	116 lm	
LED-ELMO-R2M		
8031414882854		
lumen	121 lm	

watt	1W
beam angle	90° x 2
pressure loads	max 1000 kg

Ø 70 mm
15 mm





	colour temp.	colour
LED-ELMO-R4C		
8031414882861		
lumen	226 lm	
LED-ELMO-R4M		
8031414882878		
lumen	236 lm	

watt	2W
beam angle	90° x 4
pressure loads	max 1000 kg

Ø 70 mm
15 mm





	colour temp.	colour
LED-ELMO-UPC		
8031414897247		
lumen	360 lm	
LED-ELMO-UPM		
8031414897254		
lumen	380 lm	

watt	3W
beam angle	180°
pressure loads	max 200 kg

Ø 70 mm
15 mm



I-ELMO-SPK
8031414888092

Accessori inclusi / Included accessories



x1
Cavo 30 cm /
30 cm cable

GROUND

Segnapassi in alluminio pressofuso colore antracite.
Die-cast aluminum steplight in anthracite colour.

outdoor use · accommodation areas use · urban areas use



Materiale
alluminio

Colore
antracite

Temperatura colore selezionabile
3000K / 4000K

Driver
DC 24V
tensione costante
non incluso

Material
aluminum

Colour
anthracite

Selectable color temperature
3000K / 4000K

Driver
DC 24V
costant voltage
not included


IP65 · degree IK10 · CRI >80 · LED SMD





LED-GROUND-R1
8031414897261

	colour temp.	colour
lumen	730 lm	
watt	6W	
beam angle	120°	
pressure loads	max 2000 kg	








LED-GROUND-R2
8031414897278

	colour temp.	colour
lumen	1460 lm	
watt	12W	
beam angle	120°	
pressure loads	max 2000 kg	







LED-GROUND-R4
8031414897285

	colour temp.	colour
lumen	1960 lm	
watt	16W	
beam angle	120°	
pressure loads	max 2000 kg	








LED-GROUND-UP
8031414897292

	colour temp.	colour
lumen	1480 lm	
watt	12W	
beam angle	120°	
pressure loads	max 1000 kg	





LED-GROUND-SPK
8031414897308

ONYX

Segnapassi in alluminio pressofuso finitura nero o bianco goffrato.
Die-cast aluminum steplight in embossed black or white finish.

outdoor use · accommodation areas use · urban areas use

Materiale
alluminio

Colore
bianco
nero

Temperatura colore
4000K

Driver
integrato

Material
aluminum


Colour
white
black

Colour temperature
4000K

Driver
built-in

IN&OUT · IP54 · degree IK10 · CRI >80 · LED COB



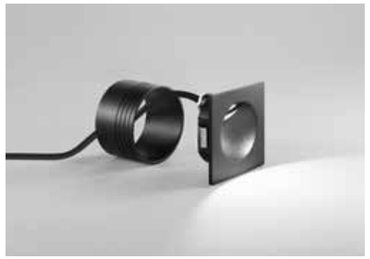


	colour temp.	colour
INC-ONYX-Q1 BCO		
8031414864089		
lumen	420 lm	
INC-ONYX-Q1 NERO		
8031440361262		
lumen	420 lm	

watt	2W
beam angle	45°
	Ø 68 mm

recessed box










	colour temp.	colour
INC-ONYX-R1 BCO		
8031440361248		
lumen	420 lm	
INC-ONYX-R1 NERO		
8031440361255		
lumen	420 lm	

watt	2W
beam angle	45°
	Ø 68 mm

recessed box





STRATOS

Incasso segnapassi alloggio in cassetta di derivazione 503 o 504 o 506, con mascherine in alluminio nei colori bianco, antracite, silver o corten.
Downlight for recess box 503, 504 or 506, with aluminum masks in white, anthracite, silver or corten.

Materiale
alluminio

Colore
bianco
silver
nero
corten

Temperatura colore selezionabile
3000K / 4000K / 6000K

Driver
integrato

Material
aluminum

Colour
white
silver
black
corten

Selectable color temperature
3000K / 4000K / 6000K

Driver
built-in

outdoor use
accommodation areas use
urban areas use



IN&OUT · IP65 · CRI >80 · LED SMD



colour temp.

INC-STRATOS-503
8031414888184
lumen 360 lm
watt 3W
beam angle 120°



colour temp.


INC-STRATOS-504
8031414888221
lumen 360 lm
watt 3W
beam angle 120°




colour temp.

INC-STRATOS-506
8031414888276
lumen 600 lm
watt 5W
beam angle 120°


	colour
INC-STRATOS-503W 8031414886890	
INC-STRATOS-503S 8031414888214	
INC-STRATOS-503B 8031414888191	
INC-STRATOS-503C 8031414888207	




scatola derivazione 503
503 junction box
non inclusa / not included




	colour
INC-STRATOS-504W 8031414888269	
INC-STRATOS-504S 8031414888252	
INC-STRATOS-504B 8031414888238	
INC-STRATOS-504C 8031414888245	




scatola derivazione 503
503 junction box
non inclusa / not included




scatola derivazione 504
504 junction box
non inclusa / not included



	colour
INC-STRATOS-506W 8031414888313	
INC-STRATOS-506S 8031414888306	
INC-STRATOS-506B 8031414888283	
INC-STRATOS-506C 8031414888290	



scatola derivazione 506L
506L junction box
non inclusa / not included



SLAB

Incasso segnapassi alloggio in cassetta di derivazione 503 o 502 o 506, con diffusore in vetro temperato bianco.
Down light for recess box 503 or 502 or 506 with white tempered glass diffuser.



Materiale
struttura in alluminio e diffusore in vetro temperato

Temperatura colore selezionabile
3000K / 4000K / 5500K

Driver
integrato

Material
structure in aluminum and tempered glass diffuser


Selectable color temperature
3000K / 4000K / 5500K

Driver
built-in

IN&OUT · IP65 · CRI >80 · LED SMD




	colour temp.	colour
INC-SLAB-502		
8031414888177		
lumen	360 lm	
watt	3W	
beam angle	120°	
	Ø 60 mm	



molle incluse / spring included




	colour temp.	colour
INC-SLAB-503		
8031414864683		
lumen	440 lm	
watt	3W	
beam angle	120°	
	92 × 55 × 31 mm	






	colour temp.	colour
INC-SLAB-506		
8031414877232		
lumen	730 lm	
watt	5W	
beam angle	120°	
	163 × 60 × 50 mm	



Doppio sistema di fissaggio / Double fixing system



fissaggio incasso a muro o soffitto / Recessed wall or ceiling mounting




scatola derivazione 502E
502E junction box
non inclusa / not included

scatola derivazione 503
503 junction box
non inclusa / not included



scatola derivazione 506L
506L junction box
non inclusa / not included



BREEN

Incasso segnapassi alloggio in cassetta di derivazione 503 o 506, nei colori bianco, antracite o corten goffrato.
Downlight for recess box 503 or 506 in white, anthracite or corten embossed.



Materiale
policarbonato

Colore
bianco goffrato
antracite goffrato
corten goffrato

Temperatura colore selezionabile
3000K / 4000K

Driver
integrato

Material
polycarbonate

Colour
embossed white
embossed antracyte
embossed corten

Selectable color temperature
3000K / 4000K


Driver
built-in

IN&OUT · IP65 · CRI >80 · LED SMD




	colour temp.	colour
INC-BREEN-503 BCO 8031414864690		
lumen	290 lm	
INC-BREEN-503 ANT 8031414866809		
lumen	300 lm	
INC-BREEN-503 BRO 8031414888139		
lumen	290 lm	

watt 3W




scatola derivazione 503
503 junction box
non inclusa / not included






	colour temp.	colour
INC-BREEN-506 BCO 8031414888153		
lumen	380 lm	
INC-BREEN-506 ANT 8031414888146		
lumen	380 lm	
INC-BREEN-506 BRO 8031414888160		
lumen	380 lm	

watt 4W




scatola derivazione 506L
506L junction box
non inclusa / not included



Doppio sistema di fissaggio / Double fixing system



fissaggio a muro / wall fixing



fissaggio su cassetta 503 / fixing on box 503
non inclusa / not included

SMILE

Applique segnapassi a LED doppio fissaggio.
Fissaggio a muro e su cassetta 502E.
Aluminum LED walk light double mounting system.
Wall or 502E junction box mounting.

Materiale
alluminio

Colore
bianco
nero

Temperatura colore selezionabile
3000K / 3500K / 4000K

Driver
integrato

Material
aluminum

Colour
white
black

Selectable color temperature
3000K / 3500K / 4000K

Driver
built-in




outdoor use | accommodation areas use | urban areas use

IN&OUT | IP54 | CRI >80 | LED SMD



LED-SMILE-BCO
8031414881574

	colour temp.	colour
lumen	250 lm	
watt	3W	
beam angle	100°	



Doppio sistema di fissaggio / Double fixing system




fissaggio a muro / wall fixing

fissaggio su cassetta 502E / fixing on box 502E
non inclusa / not included



LED-SMILE-ANT
8031414881567

	colour temp.	colour
lumen	300 lm	
watt	3W	
beam angle	100°	



Doppio sistema di fissaggio / Double fixing system

fissaggio a muro / wall fixing

fissaggio su cassetta 502E / fixing on box 502E
non inclusa / not included

indoor use · outdoor use · accommodation areas use · office use · commercial areas use

IN&OUT · IP65 · CRI >80 · LED SMD

Materiale
alluminio e placchette in acciaio

Colore
nikel
bianco

Temperatura colore
4000K

Driver
integrato

Material
aluminum and steel frames

Colour
nikel
white


Colour temperature
4000K

Driver
built-in


Incasso segnapassi alloggio in cassetta di derivazione 503 funzione con sensore di movimento e crepuscolare con doppia placchetta in acciao intercambiabile nei colori nikel o bianco.
Down light for recess box 503 and double sensor function motion and crepuscular with double interchangeable steel frame in nikel or white colours.



	colour temp.	colour
INC-BOLT-503S		
8031414866281		
lumen	200 lm	
watt		3W
beam angle		120°



scatola derivazione 503
503 junction box
non inclusa / not included




Installare più prodotti lateralmente ad una distanza minimo di 2 m / Install multiple bolt 503S within 2 m of each other



Non installare i prodotti uno di fronte all'altro per possibile conflitto / Do not install products one of facing each other for possible conflict



Il prodotto non va installato vicino ad una fonte di luce intensa e costante superiore di 20 LUX / Do not install the bolt 503S near a light source with intensity over 20 LUX



Accessori inclusi / Included accessories



2x placchette / frames

2x staffette / brackets



Sensore di movimento regolabile / Adjustable motion sensor



Sensore crepuscolare / Crepuscolar sensor

Materiale
PC e placchette in acciaio

Colore
nikel
bianco

Temperatura colore selezionabile
3000K / 4000K / 6500K

Driver
integrato

Material
PC and steel frames

Colour
nikel
white


Selectable color temperature
3000K / 4000K / 6500K

Driver
built-in


Incasso segnapassi alloggio in cassetta di derivazione 503 o 506L con doppia placchetta in acciao intercambiabile nei colori nikel o bianco.
Down light for recess box 503 or 506L with double interchangeable steel frame in nikel or white colours.




	colour temp.	colour
INC-BOLT-503CCT		
8031414881543		
lumen	350 lm	
watt		3W
beam angle		120°




scatola derivazione 503
503 junction box
non inclusa / not included



	colour temp.	colour
INC-BOLT-506CCT		
8031414881550		
lumen	650 lm	
watt		5W
beam angle		120°



scatola derivazione 506L
506L junction box
non inclusa / not included



Accessori inclusi / Included accessories



2x placchette / frames



2x staffette / brackets

STEPLIGHT

Applique segnapassi a LED in termoplastica antracite.
Thermoplastic LED walk light anthracite finish.

outdoor use · accommodation areas use · urban areas use

Materiale
termoplastica

Colore
antracite goffrato

Temperatura colore
4000K

Driver
integrato

Material
thermoplastic

Colour
embossed antracyte

Colour temperature
4000K

Driver
built-in



IN&OUT · IP65 · degree IK07 · CRI >80 · LED SMD



	colour temp.	colour
LED-STEPLIGHT		
8031414882304		
lumen	95 lm	
watt	1W	
beam angle	120°	

70 mm · 11,5 mm · 50 mm

SHELBY

Applique segnapassi a LED in alluminio antracite.
Aluminum LED walk light anthracite finish.

outdoor use · accommodation areas use · urban areas use

Materiale
alluminio

Colore
antracite goffrato

Temperatura colore selezionabile
3000K / 4000K

Driver
integrato

Material
aluminum

Colour
embossed antracyte

Selectable color temperature
3000K / 4000K

Driver
built-in



IN&OUT · IP54 · degree IK07 · CRI >80 · LED SMD



	colour temp.	colour
LED-W-SHELBY-130		
8031440361002		
lumen	445 lm	
watt	4W	
beam angle	120°	

130 mm · 55 mm · 32 mm



	colour temp.	colour
LED-W-SHELBY-170		
8031440361019		
lumen	670 lm	
watt	6W	
beam angle	120°	

170 mm · 60 mm · 32 mm

BREEN

Incasso segnapassi alloggio in cassetta di derivazione 503 o 506, nei colori bianco, antracite o corten goffrato.
Downlight for recess box 503 or 506
in white, anthracite or corten embossed.



Materiale
policarbonato

Colore
bianco goffrato
antracite goffrato
corten goffrato

Temperatura colore selezionabile
3000K / 3500K / 4000K

Driver
integrato

Material
polycarbonate


Colour
embossed white
embossed antracyte
embossed corten

Selectable color temperature
3000K / 3500K / 4000K


Driver
built-in



	colour temp.	colour
INC-BREEN-503 BCO 8031414864690		
lumen	290 lm	
INC-BREEN-503 ANT 8031414866809		
lumen	300 lm	
INC-BREEN-503 BRO 8031414888139		
lumen	290 lm	
watt	3W	




scatola derivazione 503
503 junction box
non inclusa / not included






	colour temp.	colour
INC-BREEN-506 BCO 8031414888153		
lumen	380 lm	
INC-BREEN-506 ANT 8031414888146		
lumen	380 lm	
INC-BREEN-506 BRO 8031414888160		
lumen	380 lm	
watt	4W	




scatola derivazione 506L
506L junction box
non inclusa / not included




**Doppio sistema di fissaggio /
Double fixing system**



fissaggio a muro /
wall fixing



fissaggio su cassetta 503 /
fixing on box 503
non inclusa / not included

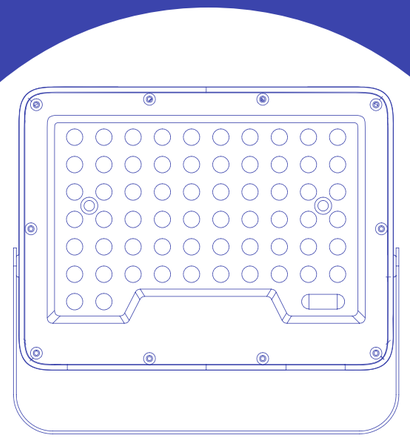

SOLARI
SOLAR LAMPS

KYOTO

Collezione in alluminio antracite con sensore e pannello solare.
Anthracite aluminum collection with sensor and solar panel.

outdoor use · accommodation areas use · urban areas use

Materiale
alluminio

Colore
antracite goffrato

Temperatura colore
4000K

Driver
integrato

Material
aluminum

Colour
embossed anthracite

Colour temperature
4000K


Driver
built-in






IP44 · LED SMD

	colour temp.	colour
LED-KYOTO-AP 8031414883868		
lumen	300 lm	
watt	2,5W	
beam angle	120°	



	colour temp.	colour
LED-KYOTO-P80 8031414883875		
lumen	300 lm	
watt	2,5W	
beam angle	120°	




Accessori inclusi / Included accessories

Pannello solare / Solar panel

Lithium 3,7V 2200mAh
Batteria non sostituibile / Battery non replaceable

max 4m 90° **25"**
Sensore di movimento / Adjustable motion sensor

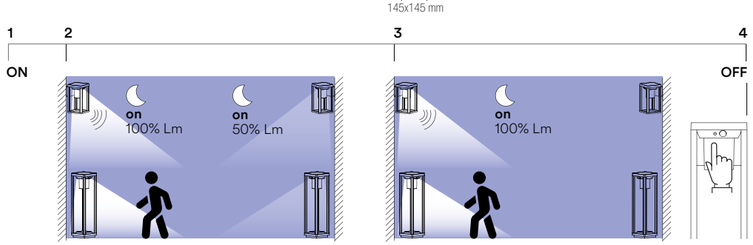

Sensore di movimento 100% luce
Dopo 25 secondi 50% luce /
Motion sensor 100% light
After 25 seconds 50% light

Sensore di movimento 100% luce
Dopo 25 secondi spegnimento luce /
Motion sensor 100% light
Light turns off after 25 seconds

ENYA

Collezione in alluminio antracite con sensore e pannello solare.
Anthracite aluminum collection with sensor and solar panel.

outdoor use · accommodation areas use · urban areas use

Materiale
alluminio

Colore
antracite goffrato

Temperatura colore
4000K

Driver
integrato

Material
aluminum

Colour
embossed anthracite

Colour temperature
4000K


Driver
built-in






IP44 · LED SMD

	colour temp.	colour
LED-ENYA-AP 8031414883844		
lumen	600 lm	
watt	5W	
beam angle	120°	



	colour temp.	colour
LED-ENYA-P80 8031414883851		
lumen	600 lm	
watt	5W	
beam angle	120°	




Accessori inclusi / Included accessories

Pannello solare / Solar panel

Lithium 3,7V 2200mAh
Batteria non sostituibile / Battery non replaceable

max 4m 90° **25"**
Sensore di movimento / Adjustable motion sensor

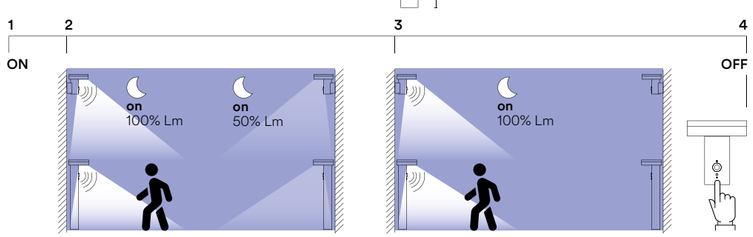

Sensore di movimento 100% luce
Dopo 25 secondi 50% luce /
Motion sensor 100% light
After 25 seconds 50% light

Sensore di movimento 100% luce
Dopo 25 secondi spegnimento luce /
Motion sensor 100% light
Light turns off after 25 seconds

TED

Applique LED in alluminio antracite con sensore e pannello solare.
Aluminum LED wall light anthracite finish with sensor and solar panel.

outdoor use | accommodation areas use | urban areas use

Materiale
alluminio

Colore
antracite

Temperatura colore
4000K

Driver
integrato

Material
aluminum

Colour
anthracite

Colour temperature
4000K

Driver
built-in



IP54 LED SMD



	colour temp.	colour
LED-TED-AP		
8031414883837		
lumen	300 lm	
watt	3W	
beam angle	120°	


75 mm
173 mm
143 mm

Accessori inclusi / Included accessories

Pannello solare / Solar panel

Li-ion 3,7V 2200 mAh
Batteria non sostituibile /
Battery non replaceable

max 4m
90°
25"
Sensore di movimento /
Adjustable motion sensor

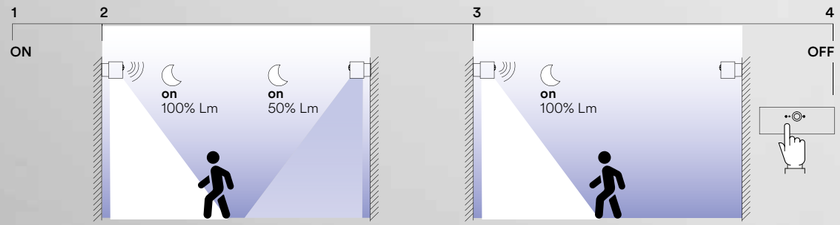

Sensore di movimento 100% luce
Dopo 25 secondi 50% luce /
Motion sensor 100% light
After 25 seconds 50% light

Sensore di movimento 100% luce
Dopo 25 secondi spegnimento luce /
Motion sensor 100% light
Light turns off after 25 seconds

ALBERT

Applique LED in alluminio antracite con sensore e pannello solare.
Aluminum LED wall light anthracite finish with sensor and solar panel.

outdoor use | accommodation areas use | urban areas use

Materiale
alluminio

Colore
antracite

Temperatura colore
4000K

Driver
integrato

Material
aluminum

Colour
anthracite

Colour temperature
4000K

Driver
built-in



IP54 LED SMD



	colour temp.	colour
LED-ALBERT-AP		
8031414058716		
lumen	300 lm	
watt	2,5W	
beam angle	120°	


181 mm
91 mm
66 mm

Accessori inclusi / Included accessories

Pannello solare / Solar panel

Li-ion 3,7V 2000 mAh
Batteria non sostituibile /
Battery non replaceable

max 4m
90°
25"
Sensore di movimento /
Adjustable motion sensor

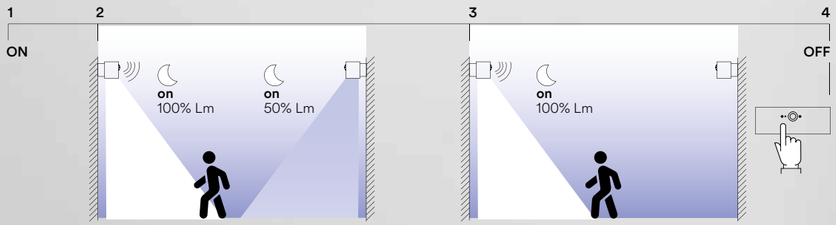

Sensore di movimento 100% luce
Dopo 25 secondi 50% luce /
Motion sensor 100% light
After 25 seconds 50% light

Sensore di movimento 100% luce
Dopo 25 secondi spegnimento luce /
Motion sensor 100% light
Light turns off after 25 seconds

COSMO

Proiettore a batteria in termoplastica nero con sensore di movimento regolabile.
Flood light with battery power in black thermoplastic with adjustable motion sensor.

outdoor use · accommodation areas use · urban areas use





Materiale
termoplastica

Temperatura colore
6500K


Driver
integrato

Material
thermoplastic

Colour temperature
6500K


Driver
built-in

IP44 · LED SMD

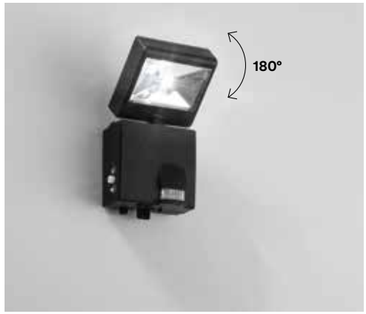


LED-COSMO/S
8031439841263
lumen 80 lm
watt 1W
beam angle 120°

colour temp. · colour



Accessori inclusi / Included accessories



Sensore di movimento regolabile / Adjustable motion sensor

Accessori non inclusi / Not included accessories



3 × 1,2V AAA
Batteria / Battery



LED-COSMO/S-FV
8031439821265
lumen 80 lm
watt 1W
beam angle 120°

colour temp. · colour



Accessori inclusi / Included accessories



Pannello solare / Solar panel



Li-ion 3,7V 1200 mAh
Batteria non sostituibile / Battery non replaceable /

Sensore di movimento regolabile, accensione con 15 lux / Adjustable motion sensor, switch on 15 lux

Cavo 3,4 m / 3,4 m cable

ELIOS

Proiettore in alluminio silver con pannello solare e sensore di movimento regolabile.
Silver aluminium flood light with solar panel and adjustable motion sensor.

outdoor use · accommodation areas use · urban areas use

Materiale
alluminio

Colore
antracite

Temperatura colore
5000K

Driver
integrato

Material
aluminium

Colour
anthracite


Colour temperature
5000K

Driver
built-in




IP44 · LED SMD

	colour temp.	colour
LED-ELIOS-SOLAR 8031440355124		
lumen	620 lm	
watt	9W	
beam angle	120°	



Accessori inclusi / Included accessories

- Pannello solare / Solar panel
- **Lithium 7,4V 1800 mAh** Batteria non sostituibile / Battery non replaceable / — 12 hours
- off 2 LUX · on 2000 LUX · 12m 120° · 10-60" — Sensore di movimento regolabile / Adjustable motion sensor
- Cavo 3,2 m / 3,2 m cable



EOS

Proiettore in termoplastica silver con pannello solare, sensore di movimento e crepuscolare.
Silver thermoplastic flood light with solar panel, motion and crepuscolar sensor.

outdoor use · accommodation areas use · urban areas use

Materiale
termoplastica

Colore
silver

Temperatura colore
4000K

Driver
integrato

Material
thermoplastic

Colour
silver

Colour temperature
4000K


Driver
built-in



IP66 · LED SMD




	colour temp.	colour
LED-EOS-SOLAR 8031414862740		
lumen	450 lm	
watt	4W	
beam angle	100°	



Accessori inclusi / Included accessories

- Pannello solare / Solar panel
- **lithium 3,9V 4400mAh** Batteria non sostituibile / Battery non replaceable — 6 hours
- max 6m 120° — Sensore di movimento regolabile distanza max 6m 120° / Adjustable motion sensor max distance 6m 120°

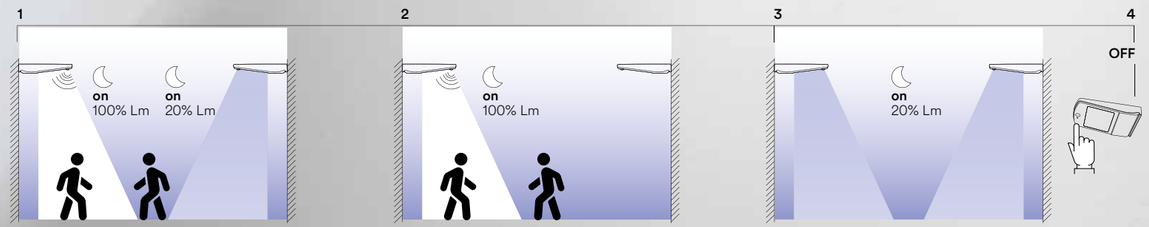

1 — Sensore di movimento 100% luce
Sensore crepuscolare 20% luce / Motion sensor 100% light. Crepuscolar sensor 20% light

2 — Sensore di movimento 100% luce
No sensore crepuscolare / Motion sensor 100% light
No crepuscolar sensor

3 — Sensore crepuscolare 20% luce
No sensore movimento / Crepuscolar sensor 20% light
No motion sensor

SKYP

Applique LED in termoplastica bianco con sensore e pannello solare.
Thermoplastic LED wall light white finish with sensor and solar panel.

outdoor use | accommodation areas use | urban areas use

Materiale
termoplastica

Temperatura colore
4000K

Driver
integrato

Material
thermoplastic

Colour temperature
4000K


Driver
built-in



IP54 | LED SMD



	colour temp.	colour
LED-SKYP-AP		
8031414870783		
lumen	130 lm	
watt	3W	
beam angle	120°	



Accessori inclusi / Included accessories

Pannello solare /
Solar panel

8-10 hours

Li-ion 3,7V 1200 mAh
Batteria
non sostituibile /
Battery
non replaceable /

4-6m
100°
30"
off
15 LUX
on
<15 LUX

Sensore di movimento,
accensione con 15 lux /
Motion sensor,
switch on 15 lux

ON/OFF

Base easy-up che permette il duplice utilizzo del faro come lampada da muro e lampada portatile /
Easy-up base for double use of the lamp,
as wall and portable lamp

OPEN

Applique LED in termoplastica bianco con sensore e pannello solare.
Thermoplastic LED wall light white finish with sensor and solar panel.

outdoor use | accommodation areas use | urban areas use

Materiale
termoplastica

Temperatura colore
4000K

Driver
integrato

Material
thermoplastic

Colour temperature
4000K


Driver
built-in



IP54 | LED SMD



	colour temp.	colour
LED-OPEN-AP		
8031414870752		
lumen	300 lm	
watt	3W	
beam angle	120°	



Accessori inclusi / Included accessories

Pannello solare /
Solar panel

8-10 hours

Li-ion 1200 mAh
Batteria
non sostituibile /
Battery
non replaceable /

4-6m
100°
30"
off
15 LUX
on
<15 LUX

Sensore di
movimento regolabile,
accensione con 15 lux /
Adjustable motion sensor,
switch on 15 lux

ON/OFF

Base easy-up che permette il duplice utilizzo del faro come lampada da muro e lampada portatile /
Easy-up base for double use of the lamp,
as wall and portable lamp



ARGO

Proiettore in alluminio antracite con diffusore in acrilico con pannello solare, sensore di movimento e crepuscolare.
Anthracite aluminum flood light with acrylic diffuser, solar panel, motion and crepuscolar sensor.

outdoor use · accommodation areas use · urban areas use

Materiale
alluminio e acrilico

Colore
antracite

Temperatura colore
4000K

Driver
integrato

Material
aluminum and acrylic

Colour
anthracite

Colour temperature
4000K


Driver
built-in



IP54 · LED SMD

	colour temp.	colour
LED-ARGO-SOLAR 8031414865345 lumen	130 lm	
watt	1,8W	
beam angle	120°	





Accessori inclusi / Included accessories

- Pannello solare / Solar panel
- **Li-ion 3,7V 2200 mAh** Batteria non sostituibile / Battery non replaceable / (12 hours)
- Sensore di movimento / Motion sensor (5m 100° · 30" · **on** 130Lm 1,5 hours)
- Sensore crepuscolare / Crepuscolar sensor (**off** · **on** 26 Lm 8 horus)

SHIVA

Proiettore in termoplastica antracite con pannello solare e sensore di movimento.
Anthracite thermoplastic flood light with solar panel and motion sensor.

outdoor use | accommodation areas use | urban areas use

Materiale
termoplastica

Colore
antracite

Temperatura colore
4000K

Driver
integrato

Material
aluminum and acrylic

Colour
anthracite

Colour temperature
4000K

Driver
built-in





IP54 | LED COB

	colour temp.	colour
LED-SHIVA-SOLAR 8031414870769		
lumen	230 lm	
watt	2 × 1,5W	
beam angle	120°	



Accessori inclusi / Included accessories

Pannello solare / Solar panel

Li-ion 3,7V 1200 mAh
Batteria non sostituibile / Battery non replaceable /

8 hours

6m 110° 30" on 230Lm 1,5 hours
Sensore di movimento accensione <15 lux / Motion sensor switch on <15 lux

Cavo 1,9 m / 1,9 m cable



Base easy-up che permette il duplice utilizzo del faro come lampada da muro e lampada portatile /
Easy-up base for double use of the lamp, as wall and portable lamp



3 × 1,2V AAA
non inclusa / not included

Doppia funzione: auto-ricarica con pannello solare o alimentazione con pile AAA (non incluse) /
Double function: auto recharge by solar panel or power by AAA battery (not included)

ULYSSE

Proiettore in termoplastica antracite con pannello solare e sensore di movimento regolabile.
Anthracite thermoplastic flood light with solar panel and adjustable motion sensor.

outdoor use | accommodation areas use | urban areas use

Materiale
termoplastica

Colore
antracite

Temperatura colore
4000K

Driver
integrato

Material
thermoplastic

Colour
anthracite


Colour temperature
4000K

Driver
built-in






Doppio sistema di montaggio / Double mounting system



IP54 | LED SMD

	colour temp.	colour
LED-ULYSSE-SOLAR 8031414882588		
lumen	1000 lm	
watt	10W	
beam angle	120°	




Accessori inclusi / Included accessories

Pannello solare / Solar panel

lithium 3,7V 3000 mAh
Batteria non sostituibile / Battery non replaceable

8m 110° 10-60" on 600Lm 1 hours
Sensore di movimento e crepuscolare regolabili / Adjustable motion and crepuscolar sensor

Cavo 2 m / 2 m cable

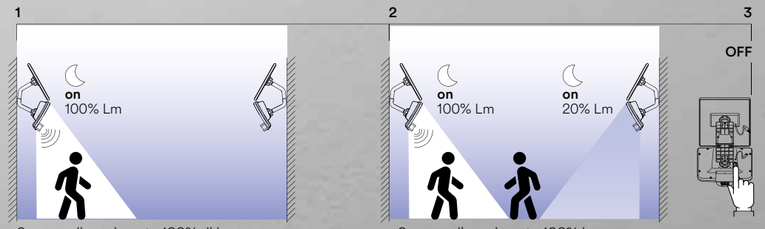

Sensore di movimento 100% di luce
No sensore crepuscolare /
Motion sensor 100% light
No crepuscolar sensor

Sensore di movimento 100% luce
Sensore crepuscolare 20% luce /
Motion sensor 100% light
Crepuscolar sensor 20% light

GLASER

Glaser è il proiettore a batteria con ricarica solare.
Un dispositivo pratico ed efficiente per l'illuminazione sostenibile.
Glaser is the battery-powered floodlight with solar charging.
A practical and efficient device for sustainable lighting.



Materiale
alluminio

Colore
silver

Temperatura colore
3000K / 4000K

Material
aluminum


Colour
silver

Colour temperature
3000K / 4000K

IP65 · degree IK07 · CRI >80 · LED SMD



	colour temp.	colour
LED-GLASER-SOL100C 8031414917082		
lumen	1200 lm	
LED-GLASER-SOL100M 8031414917075		
lumen	1200 lm	
beam angle	120°	

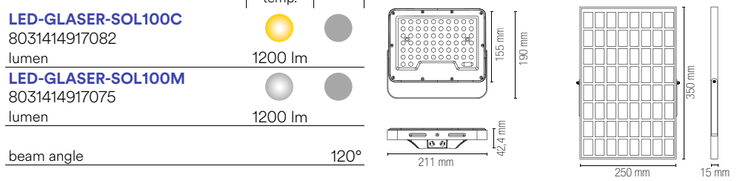



entrata cavo **DC** /
DC connector


Accessori inclusi / Included accessories

6 hours

Li-ion 3.2V 10Ah
Batteria non sostituibile /
Battery non replaceable



	colour temp.	colour
LED-GLASER-SOL200C 8031414917105		
lumen	1800 lm	
LED-GLASER-SOL200M 8031414917099		
lumen	1800 lm	
beam angle	120°	

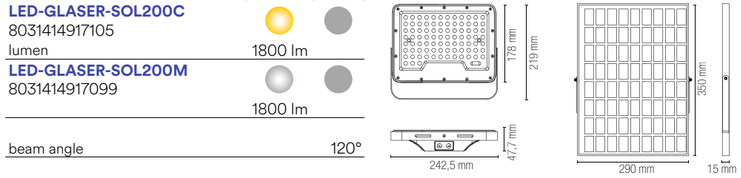



entrata cavo **DC** /
DC connector


Accessori inclusi / Included accessories

6 hours

Li-ion 3.2V 15Ah
Batteria non sostituibile /
Battery non replaceable



	colour temp.	colour
LED-GLASER-SOL400C 8031414917129		
lumen	3500 lm	
LED-GLASER-SOL400M 8031414917112		
lumen	3500 lm	
beam angle	120°	

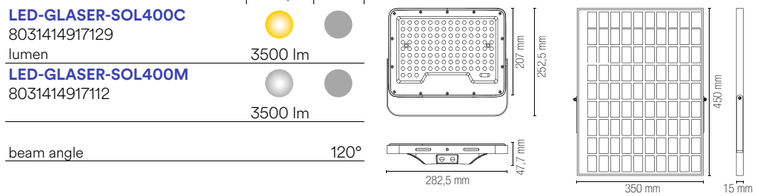




entrata cavo **DC** /
DC connector

Accessori inclusi / Included accessories

6 hours

Li-ion 3.2V 24Ah
Batteria non sostituibile /
Battery non replaceable

Accessori inclusi / Included accessories



Pannello solare /
Solar panel



Batteria non sostituibile /
Battery non replaceable



Telecomando /
Remote control

Accessorio non incluso / Not included accessory

LED-GLASER-CABLE
8031414917136

Cavo 2 m per pannello solare
con attacco maschio/femmina /
2 m extension cable for
solar panel with male/female



LUXOR

Lampione solare LUXOR, versatile con doppia opzione di installazione come applique o palo.
LUXOR solar streetlight, versatile with dual installation options as a sconce or a pole.

Materiale
PC

Colore
antracite

Temperatura colore
3000K / 4000K

Material
PC

Colour
anthracite

Colour temperature
3000K / 4000K



IP54 · LED SMD




	colour temp.	colour
LED-LUXOR-6C-SOLAR 8031414921898		
lumen	600 lm	
LED-LUXOR-6M-SOLAR 8031414921904		
lumen	600 lm	
watt	6,5W	
beam angle	90° x 110°	

Accessori inclusi / Included accessories

Pannello solare /
Solar panel

Li-ion 3.7V 5.4AH
Batteria
non sostituibile /
Battery
non replaceable /

8 hours






Interruttore per due funzioni / Switch for two functions

1. Sensore crepuscolare
ON 100% luce per 10 min
Dopo 2 ore graduale
riduzione fino al 10% luce /
Crepuscolar sensor
ON 100% light for 10 min
After 2 hours gradual
reduction to 10% light

2. Sensore di movimento
ON 100% luce
Dopo 20 secondi 20% luce /
Motion sensor
ON 100% light
After 20 seconds 20% light

OUTDOOR

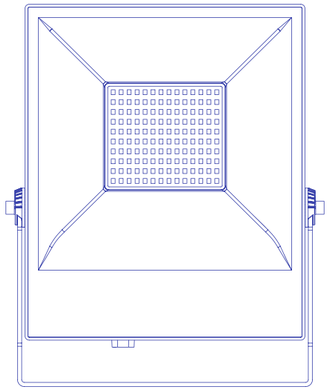

PROIETTORI
FLOOD LIGHTS

VYSOR

outdoor use | accommodation areas use | urban areas use



Proiettore con telecamera di sicurezza colore antracite con funzione smart Wi-Fi, compatibili con dispositivi iOS,android e VOICE CONTROL.
Flood light with security camera, anthracite, smart Wi-Fi, compatible with iOS devices, android and VOICE CONTROL devices.

SECURITY CAMERA | IP54 | degree IK08 | CRI >85 | LED SMD | WI-FI SMART INTEC | CE EMC

Materiale
alluminio + PC

Colore
antracite

Temperatura colore
4000K

Driver
integrato

Material
aluminium + PC


Colour
anthracite


Colour temperature
4000K


Driver
built-in



	colour temp.	colour
LED-VYSOR-SECURITY 8031414871810		
lumen	2640 lm	
watt	20W	
beam angle	120°	







on <100 LUX PIR

off >100 LUX PIR

Tipo di sensore video Video sensor type	**1/2,9" CMOS**
Pixel	**2.0 Mega**
Illuminazione minima Min illuminance	**Color 0.10lux @F2.0, black and white 0.01lux @F2.0**
Angolo vista camera Camera view angle	**135°**
Otturatore Shutter	**1/25-1/100,000 per second**
Infrarossi IR	**High power LED with ICR**
WDR	**Digital WDR**
Video compression standard	**H.264 32Kbps - 2Mbps**
Risoluzione video Max picture size	**1920×1080**
Frequenza fotogrammi Frame rate	**1-20 per second**
Audio	**Full duplex audio (doppio sistema di comunicazione)**
Memoria (non inclusa) Storage (not included)	**Support SD card (MAX 128Gb) Cloud storage NVR**
Impostazione immagine Image setting	**Support HD/SD; support mirror**
Reset	**Support**
Controllo della luce Lighting control	**Support manual, sensor, plan switch light (gestione accensioni)**
Interfaccia di protocollo Interface protocol	**Private**
Comunicazione di protocollo Communication protocol	**TCP/IP, HTTP, DHCP, DNS, RTSP**
Funzioni generali General function	**Dual stream, password protection**
Wi-Fi	**IEEE802.11b/g/n**
PIR	**Support PIR and motion detection**

SMART INTEC | SMART LIFE | Powered by tuya Intelligence Inside

Control system easy installation


Smart Intec WIFI

RF 2.4G control system

ALEXA e GOOGLE HOME voice control


compatible with AMAZON ECHO SHOW GOOGLE CHROME CAST

Full duplex audio



BANNER

outdoor use
accommodation areas use
urban areas use

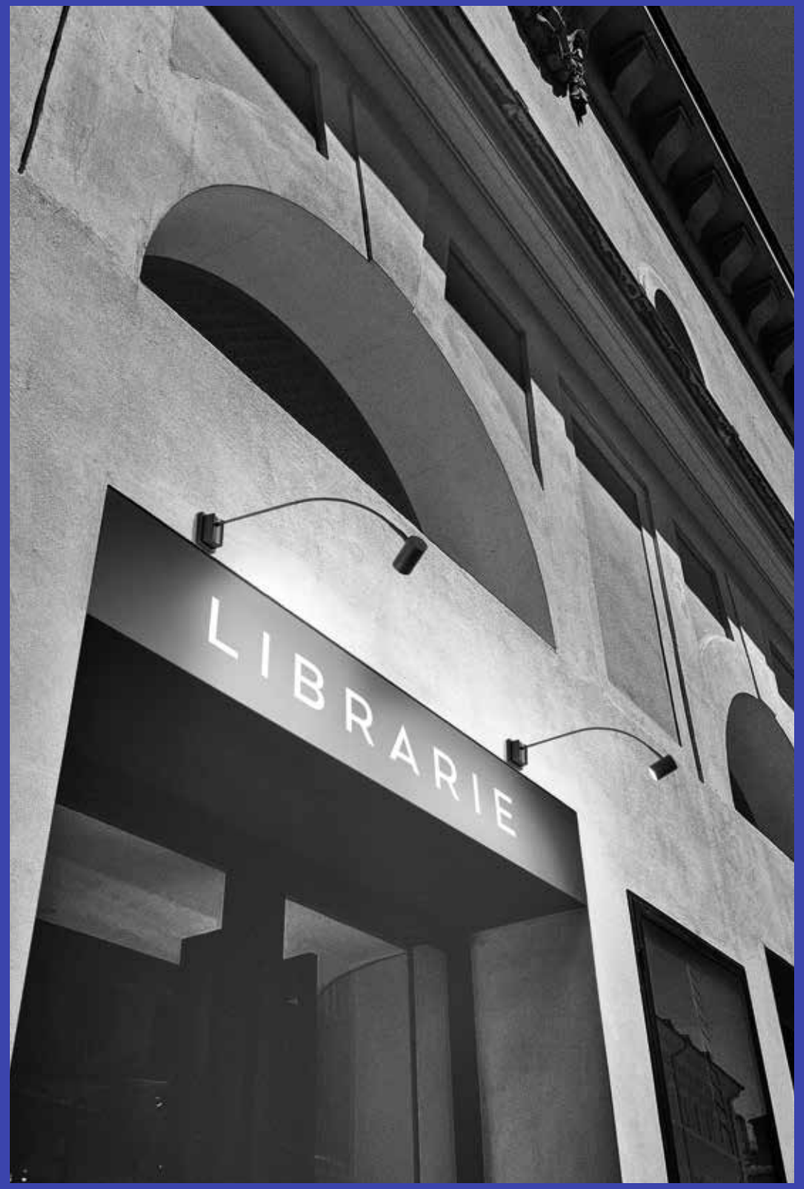

IP55 GU10

Materiale
metallo


Colore
nero satinato

Material
metal

Colour
satin black

Proiettore in metallo nero satinato con struttura flessibile e punto luce orientabile.
Black satin metal projector with flexible structure and adjustable light point.



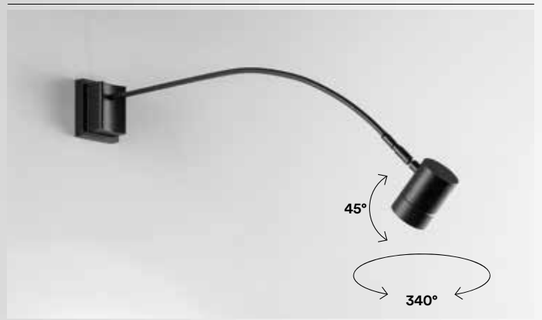


colour

I-BANNER-AP
8031414883004

1 x GU10 MAX 35W

Lampadina non inclusa / Light bulb not included



SAT





IP54 CRI >80 LED SMD

Materiale
termoplastica

Colore
antracite

Temperatura colore
4000K

Driver
integrato

Material
thermoplastic

Colour
anthracite

Colour temperature
4000K

Driver
included

Proiettore in termoplastica LED integrato finitura antracite con diffusore in acrilico con sensore di movimento e crepuscolare regolabile.
Built-in LED thermoplastic flood lamp anthracite finish with acrylic diffuser with adjustable night and motion sensor.




**Accessori inclusi /
Included accessories**

Sensore di movimento regolabile / Adjustable motion sensor






	colour temp.	colour
LED-SAT-10		
8031414868261		
lumen	1200 lm	
watt	10W	
beam angle	120°	





	colour temp.	colour
LED-SAT-20		
8031414868278		
lumen	2400 lm	
watt	2 × 10W	
beam angle	120°	



AXEL

Proiettore in alluminio LED integrato finitura bianco o silver goffrato.
Built-in LED aluminium flood lamp embossed white or silver finish.

outdoor use | accommodation areas use | urban areas use

Materiale
alluminio
diffusore acrilico

Colore
bianco goffrato
silver goffrato

Temperatura colore
3000K / 4000K


Driver
integrato

Material
aluminium
acrylic diffuser

Colour
embossed white
embossed silver

Colour temperature
3000K / 4000K

Driver
built-in

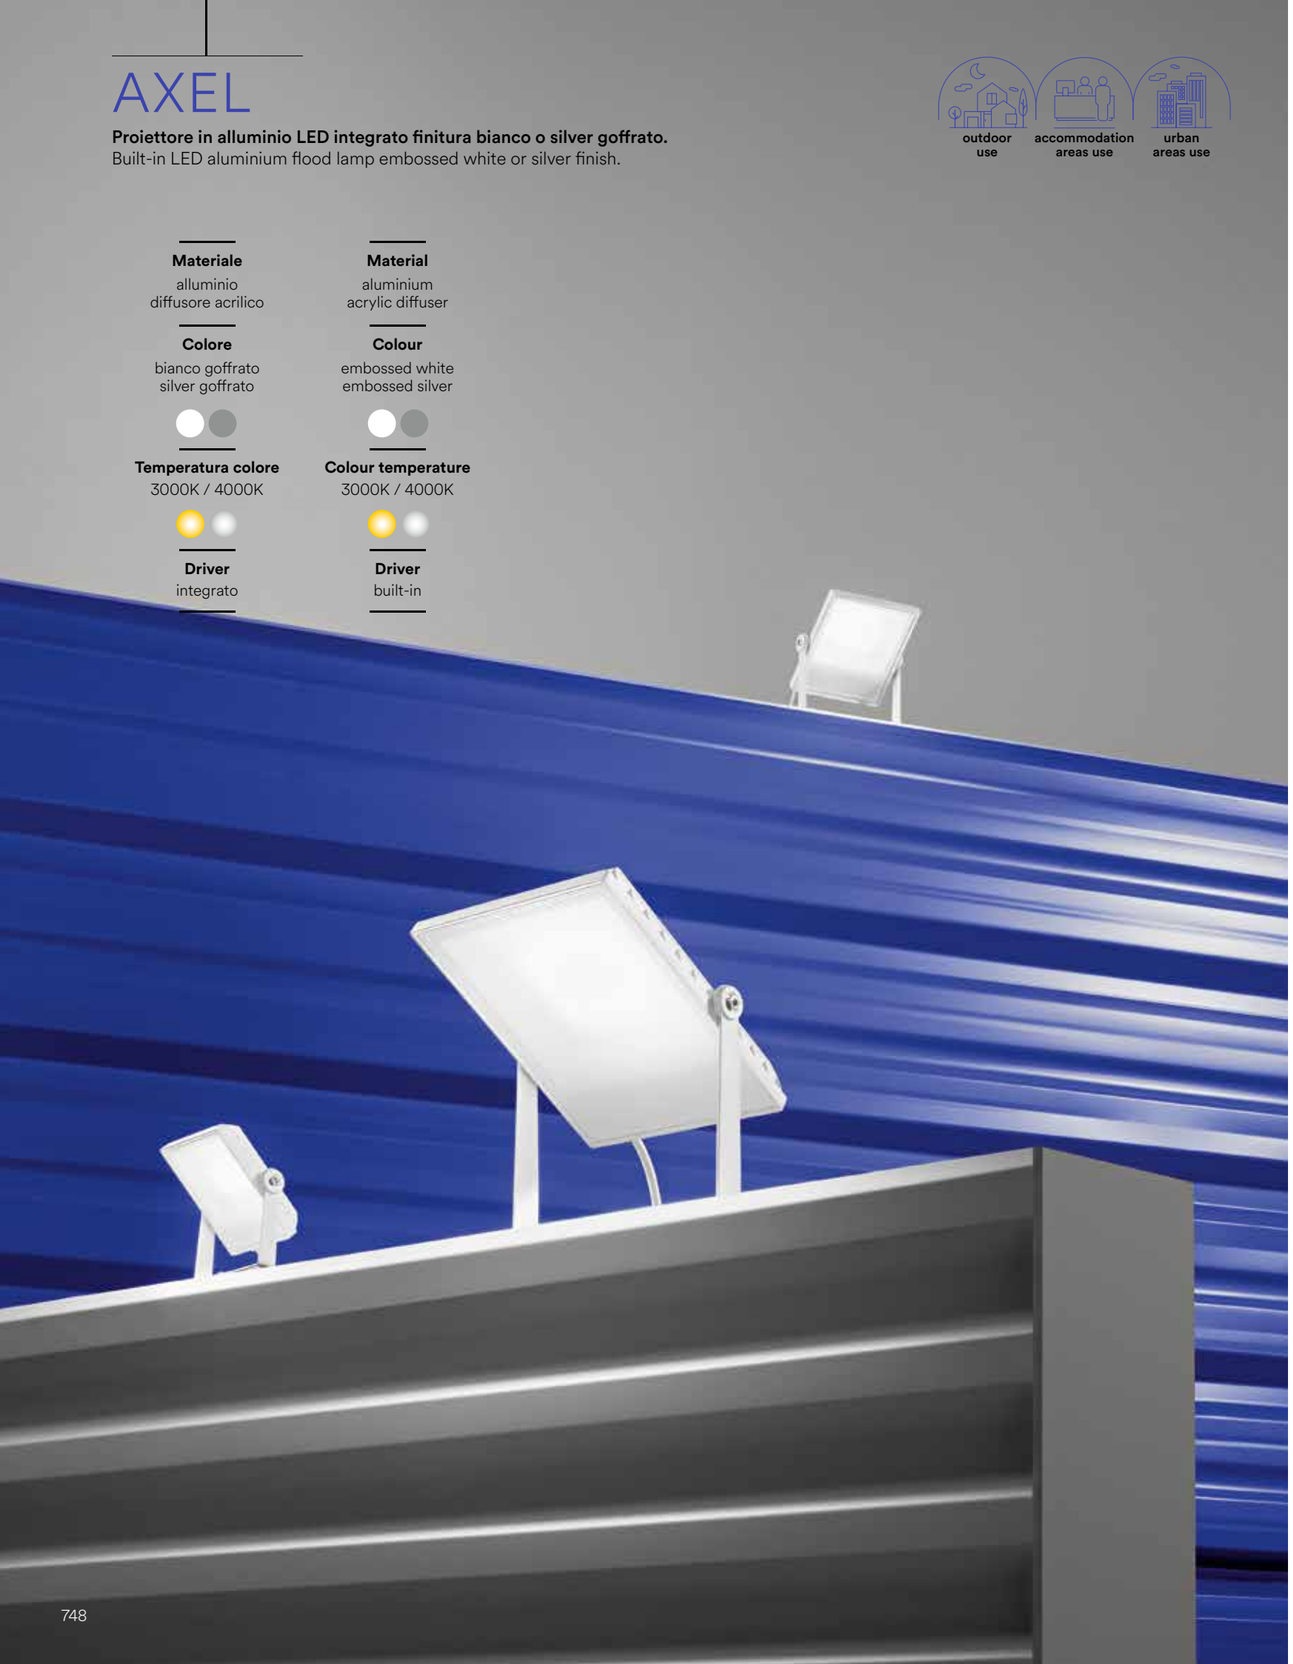




AXEL





LED-AXEL-10-BCO
8031414918744


	colour temp.	colour
lumen	1100 lm	
watt	10W	
beam angle	100°	
pf	-	





LED-AXEL-20-BCO
8031414918751


	colour temp.	colour
lumen	2200 lm	
watt	20W	
beam angle	100°	
pf	-	






LED-AXEL-50-BCO
8031414918768

	colour temp.	colour
lumen	5500 lm	
watt	50W	
beam angle	100°	
pf	0.90	




Fotometria del prodotto / Photometric curve

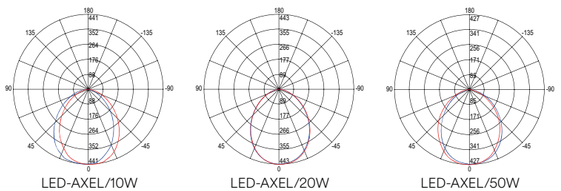



LED-AXEL-10-SIL
8031414918676


	colour temp.	colour
lumen	1100 lm	
watt	10	
beam angle	100°	
pf	-	





LED-AXEL-20-SIL
8031414918683


	colour temp.	colour
lumen	2200 lm	
watt	20W	
beam angle	100°	
pf	-	





LED-AXEL-30-SIL
8031414918690


	colour temp.	colour
lumen	3300 lm	
watt	30W	
beam angle	100°	
pf	0.90	






LED-AXEL-50-SIL
8031414918706

	colour temp.	colour
lumen	5500 lm	
watt	50W	
beam angle	100°	
pf	0.90	



Fotometria del prodotto / Photometric curve

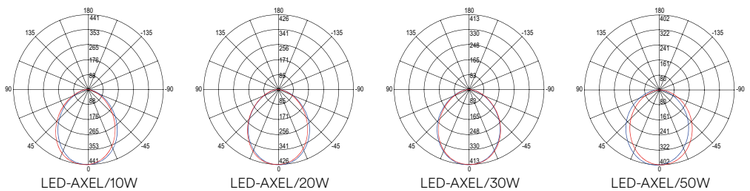

AXEL SENSOR

Proiettore in alluminio LED integrato finitura silver con sensore di movimento e crepuscolare regolabile.
Built-in LED aluminium flood lamp embossed silver finish with adjustable night and motion sensor.

outdoor use · accommodation areas use · urban areas use

Materiale
alluminio

Colore
silver goffrato

Temperatura colore
3000K / 4000K

Driver
integrato

Material
aluminium

Colour
embossed silver

Colour temperature
3000K / 4000K

Driver
built-in

IP44 · CRI >80 · LED SMD · CCT


Accessori inclusi / Accessories included


Sensore di movimento regolabile / Adjustable motion sensor

max 8m 120° · 10" sec – 7' min · off · on 3-2000 LUX



LED-AXEL-S10-SIL
8031414918713
lumen 1100 lm
colour temp. · colour





LED-AXEL-S/10W

watt 10W
beam angle 110°


Accessori inclusi / Accessories included


Sensore di movimento regolabile / Adjustable motion sensor

max 8m 120° · 10" sec – 7' min · off · on 3-2000 LUX



LED-AXEL-S30-SIL
8031414918737
lumen 3300 lm
colour temp. · colour





LED-AXEL-S/30W

watt 30W
beam angle 110°

AXEL PORTABLE

Proiettore LED portatile.
LED portable flood light.

outdoor use · accommodation areas use · urban areas use

Materiale
alluminio

Colore
giallo/nero

Temperatura colore
3000K / 4000K

Driver
integrato

Material
aluminium

Colour
yellow/black

Colour temperature
3000K / 4000K


Driver
built-in


IP65 · CRI >80 · LED SMD · CCT

Accessori inclusi / Included accessories

Cavo 1,6 metri con spina / 1,6 meter cable with plug
IP44

LED-AXEL-P20-NER
8031414918720
lumen 2200 lm
colour temp. · colour





LED-AXEL-P/20W

watt 20W
beam angle 110°

BULL

La collezione Bull presenta i proiettori portatili a batteria, disponibili in due versioni: con e senza bluetooth integrato.
The Bull collection presents battery-powered portable projectors, available in two versions: with and without built-in Bluetooth.

outdoor use | accommodation areas use | urban areas use

Materiale
plastica

Colore
giallo/nero

Temperatura colore
6500K

Driver
integrato

Material
plastic

Colour
yellow/black


Colour temperature
6500K

Driver
built-in


IP54 | LED SMD




	colour temp.	colour
LED-BULL-15DJ		
8031414917167		
lumen	1200 lm	
watt	15W	
beam angle	90°	
switch DIMMER 25% 50% 70% 100% OFF		

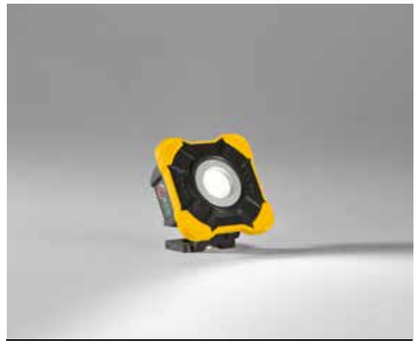

	colour temp.	colour
LED-BULL-10		
8031414917150		
lumen	1000 lm	
watt	10W	
beam angle	90°	
switch DIMMER 25% 50% 70% 100% OFF		





SPEAKER
2×5W connessione bluetooth 4.2 max 10 m /
2×5W bluetooth 4.2 connection max 10 m

Accessori inclusi / Included accessories

USB
Cavo per ricarica 60 cm /
60 cm charging cable

4 hours
3.7V/6600 mAh
Batteria ricaricabile, non sostituibile /
Rechargeable battery, non replaceable

Accessori inclusi / Included accessories

USB
Cavo per ricarica 60 cm /
60 cm charging cable

2 hours
3.7V/6600 mAh
Batteria ricaricabile, non sostituibile /
Rechargeable battery, non replaceable

Adattatore non incluso /
Adaptor not included









KNOX

Realizzato in plastica e alluminio, Knox è un proiettore con temperatura selezionabile e con doppia presa schuko.
Made of plastic and aluminum, Knox is a fixture with selectable temperature and dual schuko plugs.



outdoor use
accommodation areas use
urban areas use

Materiale
plastica

Colore
giallo/nero

Temperatura colore
6500K

Driver
integrato

Material
plastic

Colour
yellow/black

color temperature
6500K


Driver
built-in

IP54 · CRI >80 · LED SMD



LED-KNOX-45
8031414917174


	colour temp.	colour
lumen	2500 - 4959 lm	
watt	45W	
beam angle	120°	
Plug 2X max 15A 250V 2500W	IP54	



Accessori inclusi / Included accessories
Cavo 3 metri con spina / 3 meter cable with plug — IP44

LED-KNOX-80
8031414917181

	colour temp.	colour
lumen	4600 - 9200 lm	
watt	80W	
beam angle	120°	
Plug 2X max 15A 250V 2500W	IP54	



Accessori inclusi / Included accessories
Cavo 3 metri con spina / 3 meter cable with plug — IP44

ATHOS

Proiettore a led integrato in allumino silver e diffusore satinato.
Built-in LED aluminium flood lamp silvefr finish with satin diffuser.

Materiale
alluminio

Colore
silver

Temperatura colore
4000K / 6000K

Driver
integrato

Material
aluminium

Colour
silver

Colour temperature
4000K / 6000K


Driver
built-in



IP65 · degree IK10 · CRI >80 · LED SMD




	colour temp.	colour
LED-ATHOS-100 8031414884186		
lumen	10115 lm	
LED-ATHOS-100F 8031414884193		
lumen	9624 lm	
watt	100W	
beam angle	120°	
pf	0.90	






	colour temp.	colour
LED-ATHOS-150 8031414884209		
lumen	14557 lm	
LED-ATHOS-150F 8031414884216		
lumen	14388 lm	
watt	150W	
beam angle	120°	
pf	0.90	







	colour temp.	colour
LED-ATHOS-200 8031414884223		
lumen	20371 lm	
LED-ATHOS-200F 8031414884230		
lumen	20310 lm	
watt	300W	
beam angle	120°	
pf	0.90	




Fotometria del prodotto / Photometric curve



LED-ATHOS-100



LED-ATHOS-150



LED-ATHOS-200

TAURUS

Proiettore a led integrato in allumino nero diffusore in vetro temperato.
Built-in LED aluminium flood lamp black aluminium body with tempered glass diffuser.

outdoor use · accommodation areas use · urban areas use

Materiale
alluminio

Colore
nero

Temperatura colore
4000K / 6500K

Driver
integrato

Durata e on/off
50.000 h
>25.000 on/off


Material
aluminium

Colour
black

Colour temperature
4000K / 6500K

Driver
built-in

Life time and on/off
50.000 h
>25.000 on/off

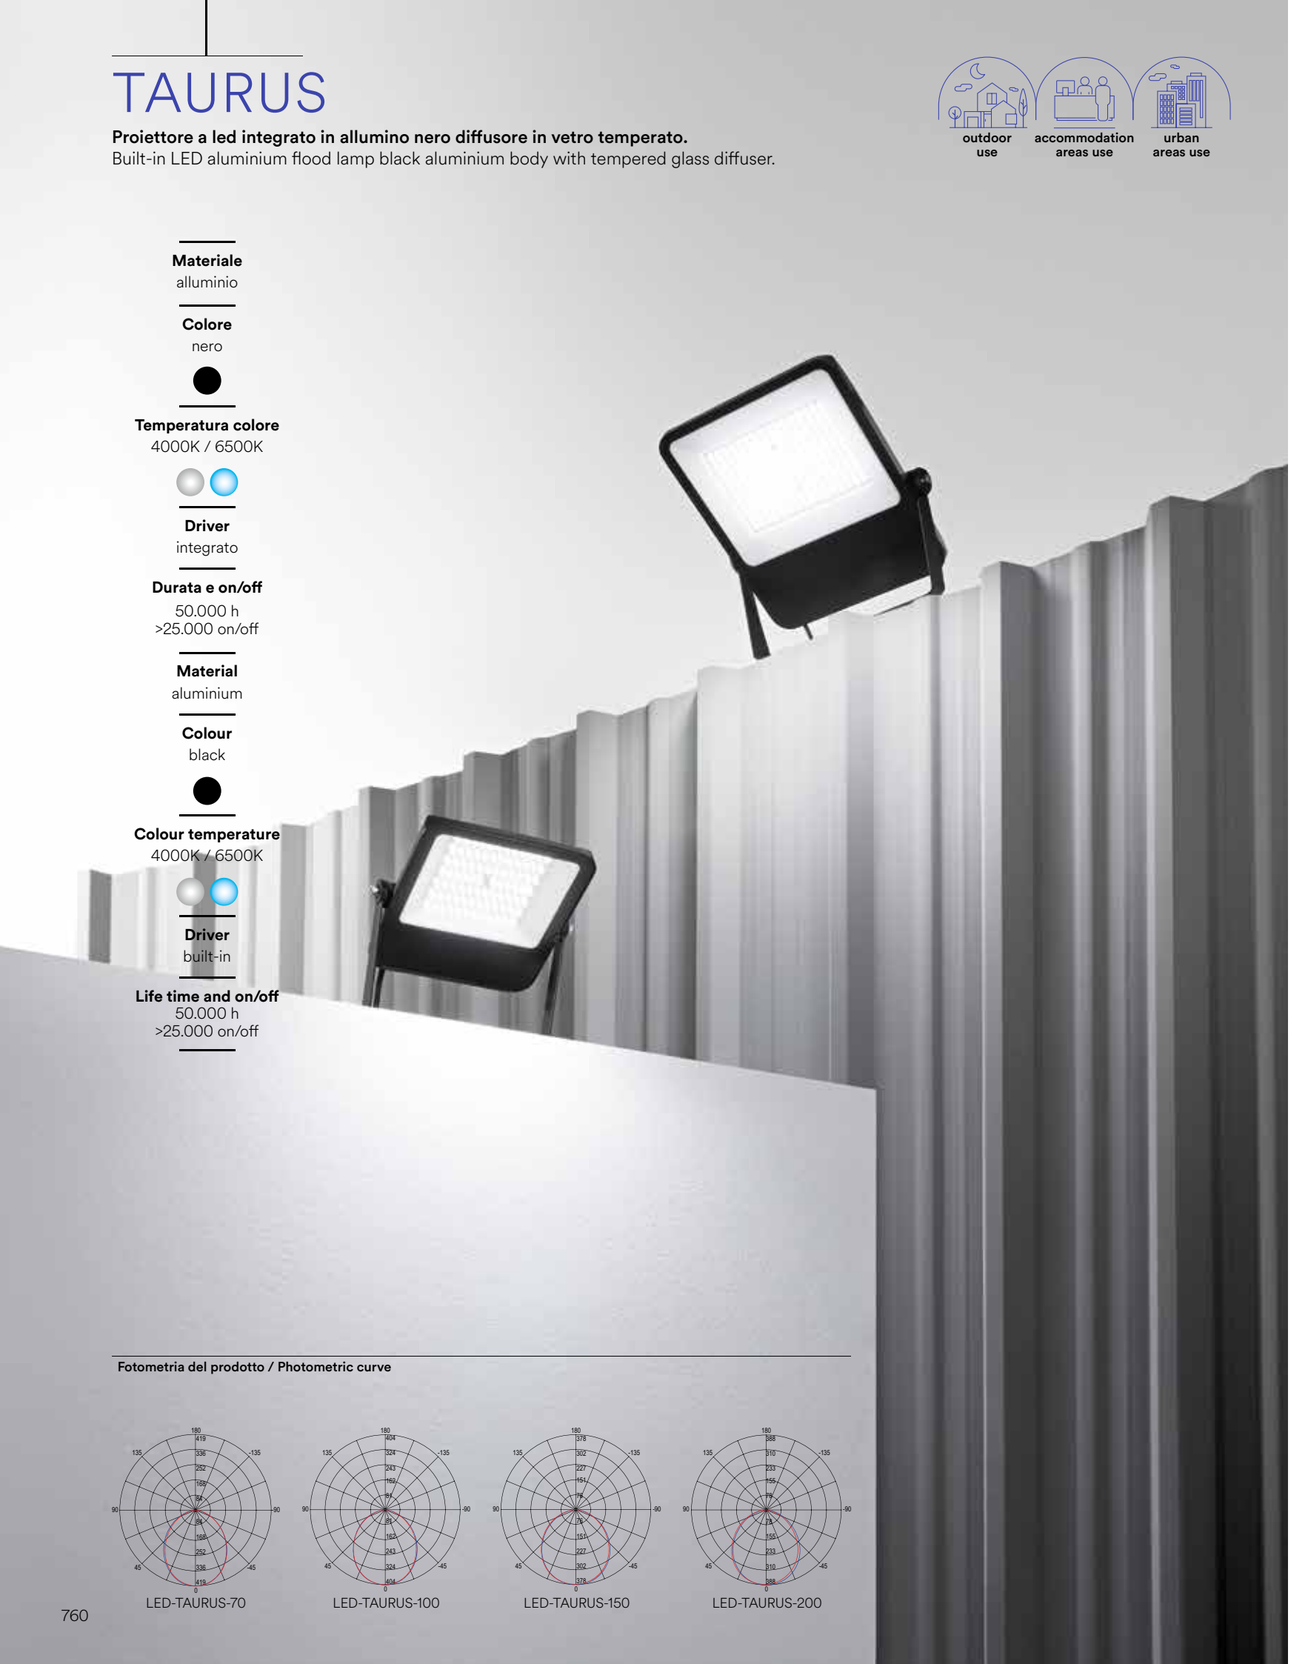

Fotometria del prodotto / Photometric curve

LED-TAURUS-70 · LED-TAURUS-100 · LED-TAURUS-150 · LED-TAURUS-200


5 YEARS WARRANTY · IP65 · degree IK07 · CRI >80 · LED SMD

technical information **TAURUS**





	colour temp.	colour
LED-TAURUS-70		
8031414875757		
lumen	8400 lm	
LED-TAURUS-70F		
8031414876662		
lumen	8400 lm	
watt	70W	
beam angle	110°	
pf	0.90	






	colour temp.	colour
LED-TAURUS-100		
8031414875764		
lumen	12000 lm	
LED-TAURUS-100F		
8031414876631		
lumen	12000 lm	
watt	100W	
beam angle	110°	
pf	0.90	




	colour temp.	colour
LED-TAURUS-150		
8031414875771		
lumen	18000 lm	
LED-TAURUS-150F		
8031414876648		
lumen	18000 lm	
watt	150W	
beam angle	110°	
pf	0.90	





	colour temp.	colour
LED-TAURUS-200		
8031414875788		
lumen	26000 lm	
LED-TAURUS-200F		
8031414876655		
lumen	26000 lm	
watt	200W	
beam angle	110°	
pf	0.90	









I-FRAME-L-BCO
8031440364577

Staffa fissaggio angolare colore bianco	Metal corner wall arms white color

I-FRAME-L-GR
8031440361880

Staffa fissaggio angolare colore grigio	Metal corner wall arms gray color







I-FRAME-V-BCO
8031440364553

Staffa V movibile 30° fissaggio parete colore bianco	Metal wall arms orientable 30° white color

I-FRAME-V-GR
8031440364584

Staffa V movibile 30° fissaggio parete colore grigio	Metal wall arms orientable 30° gray color




I-TRIPOD
8031440361729

Accessori per proiettori Sistema di fissaggio singolo e doppio	Flood light accessories Single and double connection system

Accessori inclusi / Included accessories

Cavo 2,8 metri con spina / 2,8 meter cable with plug

IP44





I-SPIKE-ANT
8031414877973

Picchetto alluminio antracite	Anthracite aluminum spike



GIOVE

Proiettore LED integrato struttura in alluminio pressofuso e diffusore in vetro temperato.
Built-in LED floor light die-cast aluminium body and tempered glass diffuser.

Materiale
alluminio

Colore
nero

Temperatura colore
6000K

Driver
incluso

Durata e on/off
50.000 h
>25.000 on/off

Material
aluminium

Colour
black

Colour temperature
6000K


Driver
included

Life time and on/off
50.000 h
>25.000 on/off

outdoor use
accommodation areas use
urban areas use




Fotometria del prodotto
Photometric curve

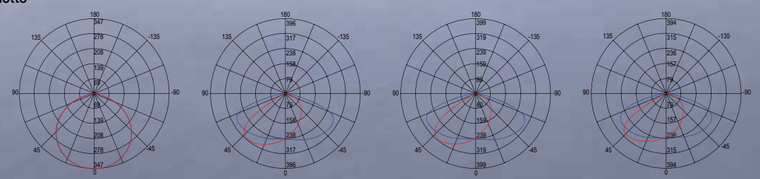

LED PERFORMANCE · 5 YEARS WARRANTY · IP66 · degree IK08 · CRI >70 · LED SMD




	colour temp.	beam angle	colour
LED-GIOVE-100			
8031414882557			
lumen	15670 lm	150° x 80°	
watt			100W
pf			0.90






	colour temp.	beam angle	colour
LED-GIOVE-200			
8031414876365			
lumen	32666 lm	150° x 80°	
LED-GIOVE-200-30			
8031414885138			
lumen	32666 lm	30°	
LED-GIOVE-200-60			
8031414885145			
lumen	32666 lm	60°	
LED-GIOVE-200R-30			
8031414885152			
lumen	RED	30°	
LED-GIOVE-200R-60			
8031414885169			
lumen	RED	60°	
LED-GIOVE-200V-30			
8031414885176			
lumen	GREEN	30°	
LED-GIOVE-200V-60			
8031414885183			
lumen	GREEN	60°	
watt			200W
pf			0.90






	colour temp.	beam angle	colour
LED-GIOVE-300			
8031414876372			
lumen	47150 lm	150° x 80°	
watt			300W
pf			0.90





	colour temp.	beam angle	colour
LED-GIOVE-400			
8031414876389			
lumen	66031 lm	150° x 80°	
watt			400W
pf			0.90




MASTER



Proiettore LED integrato struttura in alluminio pressofuso e diffusore con lenti in materiale autoestinguente, antiurto, anti-UV.
Built-in LED floor light die-cast aluminium body and lens in anti-UV, self-extinguishing, shockproof material.

outdoor use | accommodation areas use | urban areas use

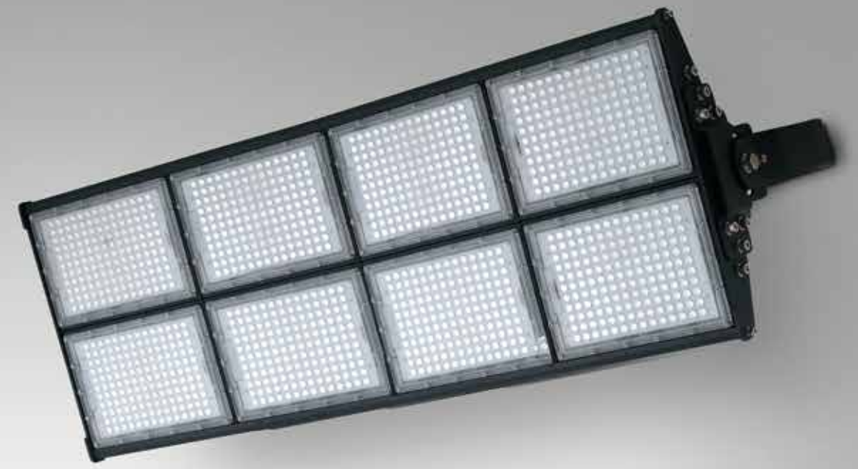

Materiale
alluminio

Colore
nero

Temperatura colore
5700K

Driver
incluso

Durata e on/off
50.000 h
>25.000 on/off

Material
aluminium

Colour
black


Colour temperature
5700K

Driver
included


Life time and on/off
50.000 h
>25.000 on/off

LED PERFORMANCE | IP65 | degree IK10 | CRI >80 | LED SMD

	colour temp.	colour
LED-MASTER-960		
8031414862122		
lumen	129600 lm	
watt	960W	
beam angle	60° x 100°	
pf	0.90	



LED-MASTER-960

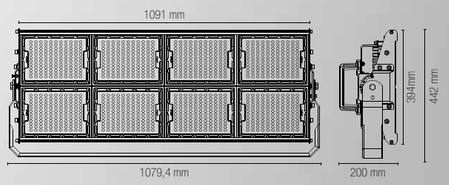

ENERGY

Faro LED integrato per pensiline struttura in alluminio pressofuso e diffusore con lenti in materiale autoestinguente, antiurto, anti-UV.
Gas station built-in LED light in die-cast aluminium body and lens in anti-UV, self-extinguishing, shockproof material.

Materiale
alluminio

Colore
bianco

Temperatura colore
4000K

Driver
incluso

Durata e on/off
50.000 h
>25.000 on/off

Material
aluminium

Colour
white

Colour temperature
4000K

Driver
included

Life time and on/off
50.000 h
>25.000 on/off

outdoor use | accommodation areas use | urban areas use




LED PERFORMANCE | IP65 | degree IK10 | CRI >80 | LED SMD

CE EMC



LED-ENERGY-80-INC
8031414862085


	colour temp.	colour
lumen	11100 lm	
watt	80W	
beam angle	80°	
pf	0.90	






LED-ENERGY-80-PL
8031414862078


	colour temp.	colour
lumen	11100 lm	
watt	80W	
beam angle	80°	
pf	0.90	




Fotometria del prodotto / Photometric curve



LED-ENERGY-80-INC



LED-ENERGY-80-PL

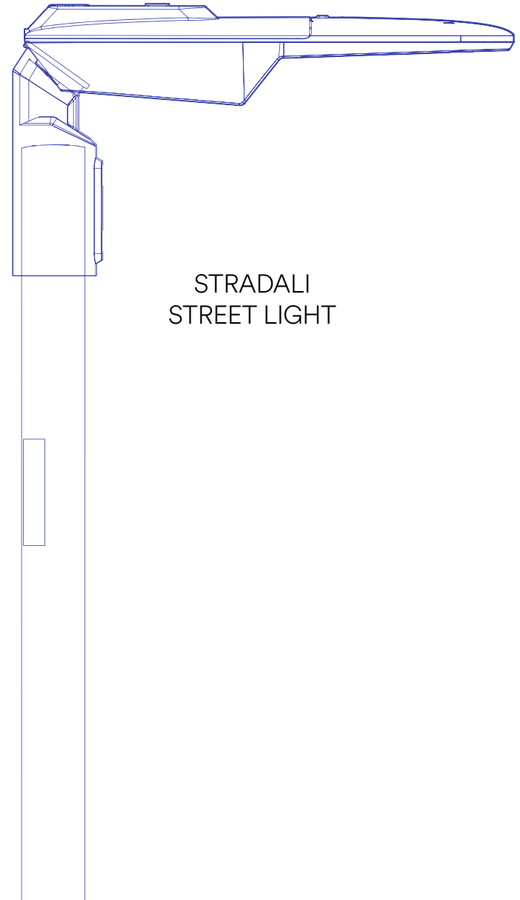

STRADALI
STREET LIGHT

AUREUS

Faro stradale LED in alluminio con pannello solare integrato.
Aluminum LED street light with integrated solar panel.

outdoor use | accommodation areas use | urban areas use



Materiale
alluminio

Colore
antracite

Temperatura colore
3000K / 4000K

Driver
incluso

Material
aluminum

Colour
anthracite

Colour temperature
3000K / 4000K


Driver
included

IP65 | degree IK05 | CRI >80 | LED SMD

CE EMC



	colour temp.	colour
LED-AUREUS-20C-SOLAR		
8031414921874		
lumen	1600 lm	
LED-AUREUS-20M-SOLAR		
8031414921881		
lumen	1600 lm	
watt	20W	
beam angle	80° x 80°	



Accessori inclusi / Included accessories

Pannello solare /
Solar panel

3.2V 20Ah LiFePO4
Batteria ricaricabile
non sostituibile /
Rechargeable battery
non replaceable



Radiocomando /
Remote control



Interruttore per due funzioni / Switch for two functions

1. Sensore crepuscolare
ON 100% luce per 10 min
Dopo 2 ore graduale
riduzione fino al 10% luce /
Crepuscolar sensor
ON 100% light for 10 min
After 2 hours gradual
reduction to 10% light

2. Sensore di movimento
ON 100% luce
Dopo 20 secondi 20% luce /
Motion sensor
ON 100% light
After 20 seconds 20% light

RADIUS

Faro stradale LED in alluminio silver con pannello solare.
Silver aluminum LED street light with solar panel.

outdoor use · accommodation areas use · urban areas use



Materiale
alluminio

Colore
silver

Temperatura colore
3000K / 4000K

Driver
incluso

Material
aluminum

Colour
silver


Colour temperature
3000K / 4000K


Driver
included

IP65 · degree IK10 · CRI >70 · LED SMD




	colour temp.	colour
LED-RADIUS-15C-SOLAR		
8031414917006		
lumen	2100 lm	
LED-RADIUS-15M-SOLAR		
8031414917013		
lumen	2100 lm	
watt	48W	
beam angle	80° x 140°	
pf	0.90	



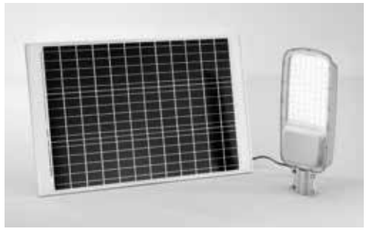

	colour temp.	colour
LED-RADIUS-30C-SOLAR		
8031414917020		
lumen	4200 lm	
LED-RADIUS-30M-SOLAR		
8031414917037		
lumen	4200 lm	
watt	64W	
beam angle	80° x 140°	
pf	0.90	

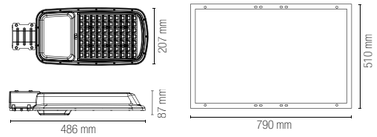


Accessori inclusi / Included accessories

Pannello solare /
Solar panel

50W - lithium 12,8V 54000 mAh
75W - lithium 25,6V 36000 mAh
Batteria ricaricabile
non sostituibile /
Rechargeable battery
non replaceable

imbocco palo 60 mm /
60 mm pole entry

Fotometria del prodotto / Photometric curve

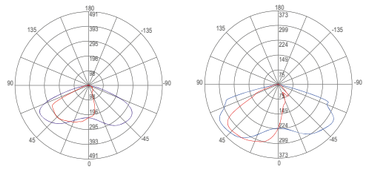

LED-RADIUS-15-SOLAR · LED-RADIUS-30-SOLAR

Accessori non inclusi / Not included accessories




LED-RADIUS-REMOTE
8031414917068

Radiocomando /
Remote control



LED-RADIUS-ST
8031414917044


Staffa per montaggio su palo /
Pole mounting bracket







LED-RADIUS-ST-W
8031414917051

Staffa per montaggio su palo o a muro /
Pole or wall mounting bracket





Sensore crepuscolare
ON 80% luce
Dopo 20 secondi 20% luce /
Crepuscolar sensor
ON 80% light
After 20 seconds 20% light



Sensore di movimento
ON 80% luce
Dopo 20 secondi 20% luce /
Motion sensor
ON 80% light
After 20 seconds 20% light

FEBO

Faro stradale LED in alluminio con pannello solare.
Aluminum LED street light with solar panel.

outdoor use | accommodation areas use | urban areas use



Materiale
alluminio

Materiale pannello solare
celle in silicio monocristallino

Colore
silver

Temperatura colore
4000K

Material
aluminum

Solar panel material
monocrystalline silicon

Colour
silver


Colour temperature
4000K

IP66 | LED SMD



Lenti in materiale autoestinguente, antiurto, anti-UV / Lens in anti-UV, self-extinguishing, shockproof material

	colour temp.	colour
LED-FEBO-SOLAR 8031414879052 lumen	6800 lm	
watt	40W	
beam angle	140° x 85°	

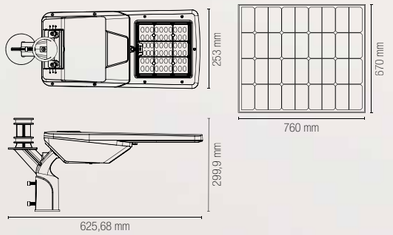


Accessori inclusi / Included accessories

Pannello solare / Solar panel


Lithium 12,8V 30AH
Batteria ricaricabile non sostituibile / Rechargeable battery non replaceable

imbocco palo 60 mm / 60 mm pole entry

Fotometria del prodotto / Photometric curve



LED-FEBO-SOLAR



Impostazioni di fabbrica / Default Settings

	hours	flux
T1	<20lux ÷ +2h	**100%**
T2	T1 ÷ +2h	**60%**
T3	T2 ÷ +7h	**10%**
T4	T3 ÷ +2h	**50%**
	+12h off	

IPERION

Faro stradale LED in alluminio silver con pannello solare.
Silver aluminum LED street light with solar panel.

outdoor use | accommodation areas use | urban areas use



Materiale
alluminio

Materiale pannello solare
celle in silicio monocristallino

Colore
silver

Temperatura colore
4000K

Material
aluminum

Solar panel material
monocrystalline silicon

Colour
silver

Colour temperature
4000K

	colour temp.
LED-IPERION-50-SOLAR	
8031414879069	
lumen	9000 lm
LED-IPERION-75-SOLAR	
8031414879076	
lumen	13500 lm
watt	50W
beam angle	156° x 71°

LED-IPERION-50-SOLAR LED-IPERION-75-SOLAR

IP66 | LED SMD



Accessorio non incluso / Not included accessory

LED-IPERION-REMOTE
8031414879083

Radiocomando multifunzione /
Remote control multi-mode control

*regolabile solo con radiocomando multifunzione LED-IPERION-REMOTE /
* adjustable only with LED-IPERION-REMOTE remote control

Accessori inclusi / Included accessories


Palo 60 cm /
Pole 60 cm

Pannello solare /
Solar panel


50W - lithium 12,8V 54000 mAh
75W - lithium 25,6V 36000 mAh
Batteria ricaricabile non sostituibile /
Rechargeable battery non replaceable

imbocco palo 60 mm /
60 mm pole entry


Fotometria del prodotto / Photometric curve




LED-IPERION-50-SOLAR



LED-IPERION-75-SOLAR



Sensore crepuscolare
ON 80% luce
Dopo 20 secondi 20% luce /
Crepuscolar sensor
ON 80% light
After 20 seconds 20% light



Sensore di movimento
ON 80% luce
Dopo 20 secondi 20% luce /
Motion sensor
ON 80% light
After 20 seconds 20% light

STREETWAY

Faro stradale LED integrato struttura in alluminio pressofuso e diffusore con lenti in materiale autoestinguente, antiurto, anti-UV.
Built-in LED street light die-cast aluminum body and lens in anti-UV, self-extinguishing shockproof material.

outdoor use · accommodation areas use · urban areas use

Materiale
alluminio

Colore
silver

Temperatura colore
4000K

Driver
incluso

Durata e on/off
50.000 h
>25.000 on/off

Material
aluminum

Colour
silver

Colour temperature
4000K


Driver
included

Life time and on/off
50.000 h
>25.000 on/off






	colour temp.	colour
LED-STREETWAY-50		
8031414876334		
lumen	7800 lm	
watt	50W	
beam angle	80° x 140°	
pf	0.90	






	colour temp.	colour
LED-STREETWAY-100		
8031414876341		
lumen	15500 lm	
LED-STREETWAY-100FC		
8031414879113		
lumen	15500 lm	
crepuscolar sensor	on 6 lux	off 50 lux
watt	100W	
beam angle	80° x 140°	
pf	0.90	






	colour temp.	colour
LED-STREETWAY-150		
8031414876358		
lumen	22000 lm	
watt	150W	
beam angle	80° x 140°	
pf	0.90	








	colour temp.	colour
LED-STREETWAY-200		
8031414879106		
lumen	29900 lm	
watt	200W	
beam angle	80° x 140°	
pf	0.90	





Fotometria del prodotto / Photometric curve


LED-STREETWAY-50W


LED-STREETWAY-100W


LED-STREETWAY-150W


LED-STREETWAY-200W



Doppio sistema di montaggio. Per palo Ø 60 mm /
Double mounting system. Fit for Ø 60 mm pole

HIGHWAY

Faro stradale LED integrato struttura in alluminio pressofuso e diffusore con lenti in materiale autoestinguente, antiurto, anti-UV.
Built-in LED street light die-cast aluminum body and lens in anti-UV, self-extinguishing shockproof material.

outdoor use · accommodation areas use · urban areas use

Materiale
alluminio

Colore
antracite

Temperatura colore
4000K

Driver
incluso

Durata e on/off
30.000 h
>15.000 on/off

Material
aluminum

Colour
anthracite

Colour temperature
4000K

Driver
included

Life time and on/off
30.000 h
>15.000 on/off




LED PERFORMANCE · IP65 · degree IK06 · CRI >70 · LED SMD



LED-HIGHWAY-50
8031414877034


	colour temp.	colour
lumen	7500 lm	
watt	50W	
beam angle	135° x 80°	
pf	0.90	





LED-HIGHWAY-100
8031414877041


	colour temp.	colour
lumen	14000 lm	
watt	100W	
beam angle	135° x 80°	
pf	0.90	






LED-HIGHWAY-150
8031414877058


	colour temp.	colour
lumen	20000 lm	
watt	150W	
beam angle	135° x 80°	
pf	0.90	



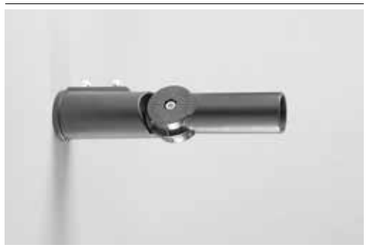


LED-HIGHWAY-ADAT
8031414877904


Adattatore 90° armature stradali highway imbocco palo 60 mm / 90° adapter 60 mm pole entry for street light




imbocco palo 60 mm / 60 mm pole entry

Fotometria del prodotto / Photometric curve


LED-HIGHWAY-50


LED-HIGHWAY-100


LED-HIGHWAY-150

POLIS

Faro stradale LED con fissaggio su palo verticale orizzontale più versione a sospensione, in alluminio pressofuso con diffusore in vetro temperato.
Built-in LED street light die-cast aluminum body with tempered glass diffuser structure with mount bracket on vertical or horizontal pole and version with suspension mount bracket.



outdoor use · accommodation areas use · urban areas use

Materiale
alluminio pressofuso

Colore
silver

Temperatura colore
4000K

Driver
incluso

Durata e on/off
50.000 h
>25.000 on/off

Material
die-cust aluminum

Colour
silver

Colour temperature
4000K

Driver
included


Life time and on/off
50.000 h
>25.000 on/off







imbocco palo 60mm
60mm pole entry

	colour temp.	colour
LED-POLIS-50		
8031414879465		
lumen	7000 lm	
watt	50W	
beam angle	155° x 75°	
pf	0.90	












	colour temp.	colour
LED-POLIS-S50		
8031414879472		
lumen	7000 lm	
watt	50W	
beam angle	155° x 75°	
pf	0.90	



Fotometria del prodotto / Photometric curve




LED-POLIS-50



LED-POLIS-S50

INDUSTRIAL

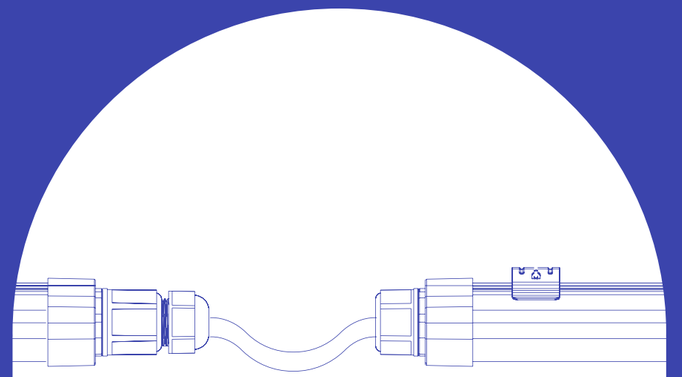

HIGH BAY & TRI-PROOF

AVATAR

Lampada LED high bay in alluminio nero.
Black aluminium high bay LED lamp.

industrial use · commercial areas use · urban areas use

Materiale
alluminio

Colore
nero

Temperatura colore
4000K

Driver
incluso

Durata e on/off
50.000 h
>25.000 on/off

Material
aluminum

Colour
black


Colour temperature
4000K

Driver
included

Life time and on/off
50.000 h
>25.000 on/off



Fotometria del prodotto / Photometric curve

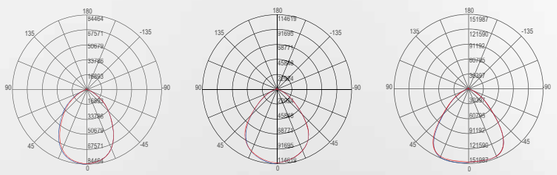

LED-AVATAR-100 · LED-AVATAR-150 · LED-AVATAR-200


LED PERFORMANCE · IP65 · CRI >80 · LED SMD



colour temp.

LED-AVATAR-100
8031414903733
lumen 15000 lm

watt 100W
beam angle 90°
pf 0.90



Accessorio non incluso / Not included accessory



LED-AVATAR-ST1015
8031414903771
Staffa per fissaggio a parete/soffitto AVATAR 100 e 150 /
Bracket for wall/ceiling fixing AVATAR 100 and 150




Connettore IP67 incluso / IP67 connector included



colour temp.

LED-AVATAR-150
8031414903740
lumen 22500 lm

watt 150W
beam angle 90°
pf 0.90



Accessorio non incluso / Not included accessory

LED-AVATAR-ST1015
8031414903771
Staffa per fissaggio a parete/soffitto AVATAR 100 e 150 /
Bracket for wall/ceiling fixing AVATAR 100 and 150




Connettore IP67 incluso / IP67 connector included



colour temp.

LED-AVATAR-200
8031414903757
lumen 30000 lm

watt 200W
beam angle 90°
pf 0.90



Accessorio non incluso / Not included accessory



LED-AVATAR-ST200
8031414903795
Staffa per fissaggio a parete/soffitto AVATAR 200 /
Bracket for wall/ceiling fixing AVATAR 200



Connettore IP67 incluso / IP67 connector included



LED-AVATAR-DR-HELP
8031414903764


emergency light 15W

Driver d'emergenza con staffa inclusa /
Emergency driver with bracket included

Li-FePO4 3000mAh-11.1V
Batteria per emergenza inclusa /
Included emergency battery

3 hours

Funzione MAINTAIN sempre accesa / MAINTAIN function always on




Funzione NON-MAINTAIN emergenza / NON-MAINTAIN function only emergency



ATLANTIC

Plafoniera stagna per tubi a LED bilampada in PC+PC.
Waterproof lamp for double LED tube in PC+PC.



IP65 LED T8 PC + PC


CE



LED-ATLANTIC-ST-60
8031440355315

2 x T8 230V


Lampadina non inclusa / Light bulb not included





LED-ATLANTIC-ST-120
8031440355322


2 x T8 230V





LED-ATLANTIC-ST-150
8031440355292

2 x T8 230V



NAUTILUS

Plafoniere stagno in policarbonato.
Waterproof ceiling lamps in polycarbonate.



Materiale
policarbonato

Colore
silver

Temperatura colore
4000K

Driver
integrato

Durata e on/off
50.000 h
>25.000 on/off

Material
polycarbonate

Colour
silver

Colour temperature
4000K

Driver
built-in

Life time and on/off
50.000 h
>25.000 on/off

Fotometria del prodotto / Photometric curve



LED PERFORMANCE · IP65 · degree IK08 · CRI >80 · LED SMD


technical information **NAUTILUS**

CE · EMC



LED-NAUTILUS-60
8031414876501


	colour temp.	colour
lumen	2900 lm	
watt	21W	
beam angle	120°	
pf	-	





LED-NAUTILUS-120
8031414876518


	colour temp.	colour
lumen	5400 lm	
watt	40W	
beam angle	120°	
pf	0.90	





LED-NAUTILUS-150
8031414876525


	colour temp.	colour
lumen	7500 lm	
watt	55W	
beam angle	120°	
pf	0.90	





LED-NAUTILUS-PRO
8031414876532


	colour temp.	colour
lumen	10600 lm	
watt	80W	
beam angle	120°	
pf	0.90	





LED-NAUTILUS-120HP
8031414919512

	colour temp.	colour
lumen	5400 lm	
emergency light	3 h - 4W - 560 lm	
watt	40W	
beam angle	120°	
pf	0.90	



16 hours

LiFePo4 1500mAh, 3000mAh
Batteria per emergenza inclusa / Included emergency battery





NAUTILUS-SENS
8031414878758



In un ambiente sufficientemente luminoso la lampada non si accende anche se viene rilevato movimento.

With sufficient ambient light, the light will not be switched on even if with motion signal.



In un ambiente poco luminoso il sensore accende la lampada non appena viene rilevato un movimento.

With insufficient ambient light, the sensor switches on the light when motion is detected.



Trascorso il tempo di attesa, il sensore spegne la lampada quando non viene rilevato movimento.

After elapse of hold time, the sensor switches off the light when no motion is detected.

ARTIC

Plafoniera stagna LED integrato in policarbonato.
Built-in LED TRI PROOF ceiling lamps in PC.



Materiale
policarbonato

Colore
bianco

Temperatura colore
4000K

Driver
integrato

Durata e on/off
50.000 h
>25.000 on/off

Material
polycarbonate

Colour
white

Colour temperature
4000K

Driver
built-in

Life time and on/off
50.000 h
>25.000 on/off


LED PERFORMANCE · IP65 · degree IK10 · CRI >80 · LED SMD


technical information **ARTIC**



LED-ARTIC-30
8031414882625

	colour temp.	colour
lumen	1200 lm	
watt	9W	
beam angle	120°	
pf	-	









LED-ARTIC-60
8031414882632

	colour temp.	colour
lumen	1800 lm	
watt	15W	
beam angle	120°	
pf	-	










LED-ARTIC-120
8031414882601

	colour temp.	colour
lumen	4000 lm	
watt	30W	
beam angle	120°	
pf	0.90	







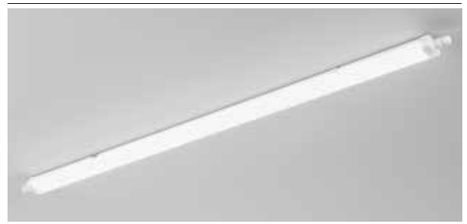


LED-ARTIC-150
8031414882618

	colour temp.	colour
lumen	5500 lm	
watt	45W	
beam angle	120°	
pf	0.90	







Fotometria del prodotto / Photometric curve




LED-ARTIC-30



LED-ARTIC-60



LED-ARTIC-120



LED-ARTIC-150

OCEAN

Plafoniera stagna LED integrato in policarbonato.
Built-in LED TRI PROOF ceiling lamps in PC.

industrial use | commercial areas use | urban areas use

Materiale
policarbonato

Colore
bianco

Temperatura colore
4000K

Driver
integrato

Durata e on/off
30.000 h
>15.000 on/off

Material
polycarbonate

Colour
white


Colour temperature
4000K

Driver
built-in

Life time and on/off
30.000 h
>15.000 on/off



	colour temp.	colour
LED-OCEAN-SENS		
8031414868858		
lumen	3240 lm	
watt	36W	
beam angle	120°	
pf	0.90	



Accessori inclusi / Included accessories	crepuscolar sensor	motion sensor
Sensore microonde di movimento / Microwave motion sensor	20% Lm off on < 30 LUX	3-8m 100° 60" on 100% Lm on 20% Lm

degree IK07 | CRI >80 | LED SMD


technical information **ARTIC**





EASY DOMOTIC 24V

EASY DOMOTICA **24V**



Con questo segmento tecnico intendiamo soddisfare al meglio la crescente esigenza di migliorare la qualità di vita domestica, e lavorativa attraverso l'utilizzo di dispositivi di illuminazione sempre più interconnessi fra loro tramite collegamenti sempre più semplificati dalle tecnologie wireless.

I dispositivi di illuminazione diventano uno strumento estremamente personalizzato e modulabile che si fondono, anche in diversi momenti della giornata, con le evolute esigenze di illuminazione non più fine a se stessa ma adattata ai diversi umori sia di una utenza professionale che di una utenza domestica o ludica. Questa sezione raggruppa diverse tipologie di prodotti 24V (ad esempio indoor e outdoor) che, grazie all'utilizzo di accessori easy connector, possono essere connessi tra di loro per il controllo simultaneo. Il controllo dei dispositivi diventa easy: la connessione ad alimentatori a tensione costante in parallelo è compatibile con centraline di controllo in Radio Frequenza 2.4G, Infrarossi, Wifi o Buetooth e le centraline, a loro volta, prevedono interfacce wifi, bluetooth oppure possono essere controllate tramite wall pad o radiocomandi.

With this technical segment, we intend meet in the best way the growing need to improve the quality of home and working life through the use of lighting devices that are increasingly interconnected with each other through connections that are increasingly simplified by wireless technologies.

The lighting devices become an extremely personalized and modular tool that merge, even at different times of the day, with the evolved lighting needs no longer as light source itself but light adapted to the different moods of both professional users, domestic users, playful users. This section groups 24V products (for example indoor or outdoor) that, thanks to easy connector accessories, can be connected each other for simultaneous control.
Devices control becomes easy: constant voltage power supply in parallel connection system are compatible with 2.4G Radio Frequency, Infrared, Wifi or Bluetooth control units and the control units can be controlled by wifi, bluetooth devices or via a wall pad or remote control.



CAVO-4CH-CONN-MF IP67
8031414878772

100 cm
Cavo di connessione
connettore M+F /
100 cm
Connection cable
M+F connector



CAVO-4CH-CONN-T IP67
8031414878789

40+20 cm
Cavo di connessione
a T connettore M+F+F /
40+20 cm
T connection cable M+F+F
connector



CAVO-4CH-CONN-M IP67
8031414878796

50 cm
Cavo di connessione
connettore M+cavi sciolti /
50 cm
Connection cable
M+cables



XANTO-RF

Incasso in alluminio pressofuso antiriflesso con cavo easy connection integrato.
Diecast aluminum anti-glare down-light with built-in easy domotic cable.

indoor use · accommodation areas use · office use · commercial areas use

Materiale
alluminio pressofuso

Colore
bianco

Temperatura colore
RGB + 4000K

Driver
DC 24V non incluso
Tensione costante
connessione
in parallelo

Durata e on/off
25.000h
>15.000 on/off

Material
die cast aluminum

Colour
white

Colour temperature
RGB + 4000K

Driver
DC 24V not included
Costant voltage
parallel connecting
system

Life time and on/off
25.000 h
>15.000 on/off



CRI >80 · LED SMD · RGB


EASY DOMOTICA 24V

Driver p. 843-852
Controller p. 854-857



INC-XANTO-R120-24V
8031414877942


	colour temp.
lumen	1120 lm
watt	12W
beam angle	120°
pf	-
	Ø 110 mm






INC-XANTO-R220-24V
8031414878697


	colour temp.
lumen	3000 lm
watt	30W
beam angle	120°
pf	0.90
	Ø 200 mm



Fotometria del prodotto / Photometric curve



INC-XANTO-R120-24V



INC-XANTO-R220-24V

PANEL

Pannello LED con struttura in alluminio diffusore in acrilico con cavo easy connection integrato.
LED panel with aluminum structure and acrylic diffuser with built-in easy domotic cable.

indoor use · accommodation areas use · office use · commercial areas use

Materiale
alluminio
diffusore in acrilico

Colore
bianco

Temperatura colore
RGB + 4000K

Driver
DC24V
tensione costante
non incluso

Durata e on/off
20.000h
>10.000 on/off

Material
aluminum
acrylic diffuser

Colour
white

Colour temperature
RGB + 4000K

Driver
DC24V
costant voltage
not included


Life time and on/off
20.000h
>10.000 on/off



CRI >80 · LED SMD · RGB


EASY DOMOTICA 24V

Driver p. 843-852
Controller p. 854-857

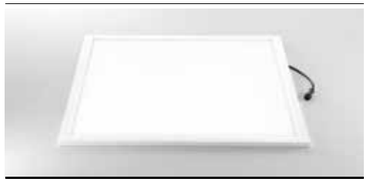


LED-PANEL-60X60-24V
8031414875313

	colour temp.
lumen	3280 lm
watt	30W
beam angle	120°
pf	0.90
	590 × 590 mm



Fotometria del prodotto / Photometric curve



LED-PANEL-60×60-24V

STRIP

indoor use · accommodation areas use · office use · commercial areas use

Rotolo 5 metri strip led.
Roll 5 meters strip-led.



EASY DOMOTICA 24V

Driver p. 843-852
Controller p. 854-857

IP20 · CRI >80 · LED SMD · RGB

Materiale
kapton
senza silicone

Temperatura colore
RGB + 4000K

Driver
DC24V
tensione costante
non incluso


Durata e on/off
50.000h
>25.000 on/off

Material
kapton
without silicone

Colour temperature
RGB + 4000K


Driver
DC24V
costant voltage
not included

Life time and on/off
50.000h
>25.000 on/off



STRIP24V-5050-RGBW

misura taglio /
cut size



	colour temp.
STRIP24V-5050-RGBW	
8031414871384	
lumen	5400 lm/m

light source	SMD 5050
watt/m	19,2W
led/m	60

Rotolo 5 metri strip led.
Roll 5 meters strip-led.



EASY DOMOTICA 24V

Driver p. 843-852
Controller p. 854-857

IP68 · CRI >80 · LED SMD · RGB

Materiale
kapton con
rivestimento
in silicone

Temperatura colore
RGB + 4000K

Driver
DC24V
tensione costante
non incluso


Durata e on/off
50.000h
>25.000 on/off

Material
kapton
with silicone
cover


Colour temperature
RGB + 4000K

Driver
DC24V
costant voltage
not included

Life time and on/off
50.000h
>25.000 on/off



STRIP24V-5050RGBW-IP68



misura taglio /
cut size

	colour temp.
STRIP24V-5050RGBW-IP68	
8031414871407	
lumen	5400 lm/m

light source	SMD 5050
watt/m	19,2W
led/m	60

TARGET

Faro proiettore in alluminio con picchetto incluso, cavo easy connection integrato.
Aluminum flood light with spike included, built-in easy domotic cable.

outdoor use · accommodation areas use · urban areas use

Materiale
alluminio

Colore
nero

Temperatura colore
RGB + 4000K

Driver
DC24V
tensione costante
non incluso

Durata e on/off
30.000h
>15.000 on/off

Material
aluminum

Colour
black

Colour temperature
RGB + 4000K

Driver
DC24V
costant voltage
not included

Life time and on/off
30.000h
>15.000 on/off



EASY DOMOTICA 24V

Driver p. 843-852
Controller p. 854-857

IP67 · degree IK10 · CRI >80 · LED COB · RGB



	colour temp.
LED-TARGET-8-24V	
8031414878604	
lumen	190 lm

watt	8W
beam angle	30°





	colour temp.
LED-TARGET-30-24V	
8031414878550	
lumen	468 lm


watt	30W
beam angle	30°



Fotometria del prodotto / Photometric curve



LED-TARGET-8-24V



LED-TARGET-30-24V

AGILITY



IP65 · CRI >80 · LED SMD · RGB

Materiale
alluminio
diffusore in vetro

Colore
nero

Temperatura colore
RGB + 4000K

Driver
DC24V
tensione costante
non incluso

Durata e on/off
20.000h
>10.000 on/off

Material
aluminum
glass diffuser

Colour
black

Colour temperature
RGB + 4000K

Driver
DC24V
costant voltage
not included

Life time and on/off
20.000h
>10.000 on/off

Proiettore a led integrato in allumino nero e diffusore trasparente.
Built-in LED aluminium flood lamp black finish with trasparent diffuser.

EASY DOMOTICA 24V

Driver p. 843-852
Controller p. 854-857



LED-AGILITY-36-24V
8031414915828


	colour temp.
lumen	735 lm
watt	36W
beam angle	120°




LED-AGILITY-72-24V
8031414915835

	colour temp.
lumen	1540 lm
watt	72W
beam angle	120°

Fotometria del prodotto / Photometric curve



LED-AGILITY-36-24V



LED-AGILITY-72-24V

QUICK

outdoor use

accommodation areas use

urban areas use



IP65 · CRI >80 · LED SMD · RGB

Materiale
alluminio
diffusore in vetro

Colore
nero

Temperatura colore
RGB

Driver
DC24V
tensione costante
non incluso

Durata e on/off
20.000h
>10.000 on/off

Material
aluminum
glass diffuser

Colour
black

Colour temperature
RGB

Driver
DC24V
costant voltage
not included

Life time and on/off
20.000h
>10.000 on/off


Proiettore a led integrato in allumino silver e diffusore trasparente.
Built-in LED aluminium flood lamp silver finish with trasparent diffuser.

EASY DOMOTICA 24V


Driver p. 843-852
Controller p. 854-857




	colour temp.	
LED-QUICK-36-24V		
8031414915842		
lumen		735 lm
watt		36W
beam angle		120°
LED-QUICK-72-24V		
8031414915859		
lumen		1800 lm
watt		72W
beam angle		120°



Fotometria del prodotto / Photometric curve



LED-QUICK-36-24V



LED-QUICK-72-24V

SPRINT

Segnapassi incasso a pavimento o parete con cavo easy connection integrato.
Inground and wall recessed light with built-in easy domotic cable.

outdoor use · accommodation areas use · urban areas use

Materiale
alluminio

Colore
acciaio

Temperatura colore
RGB + 4000K

Driver
DC 24V
tensione costante
non incluso

Durata e on/off
25.000h
>10.000 on/off

Material
aluminum

Colour
stainless steel

Colour temperature
RGB + 4000K

Driver
DC 24V
costant voltage
not included


Life time and on/off
25.000h
>10.000 on/off

EASY DOMOTICA 24V · IP67 · degree IK08 · CRI >80 · RGB



Driver p. 843-852
Controller p. 854-857

Fotometria del prodotto / Photometric curve



LED-SPRINT-R5-24V

	colour temp.
LED-SPRINT-R5-24V	
8031414878543	
lumen	60 lm
watt	1,5W
beam angle	108°
pressure loads	max 100 kg
	Ø 42 mm





RUNNER

Segnapassi incasso a pavimento o parete con cavo easy connection integrato.
Inground and wall recessed light with built-in easy domotic cable.

outdoor use · accommodation areas use · urban areas use

Materiale
alluminio

Colore
nikel spazzolato

Temperatura colore
RGB + 4000K

Driver
DC 24V
tensione costante
non incluso

Durata e on/off
30.000h
>15.000 on/off

Material
aluminum

Colour
brushed nickel

Colour temperature
RGB + 4000K

Driver
DC 24V
costant voltage
not included


Life time and on/off
30.000h
>15.000 on/off

IP67 · degree IK08 · CRI >80 · RGB

EASY DOMOTICA 24V

Driver p. 843-852
Controller p. 854-857

Fotometria del prodotto / Photometric curve



LED-RUNNER-Q8-24V
LED-RUNNER-R8-24V

	colour temp.	colour temp.
		
LED-RUNNER-Q8-24V		
8031414878536		
lumen	1020 lm	
watt	10W	10W
beam angle	30°	30°
pressure loads	max 100 kg	max 100 kg
	Ø 63 mm	Ø 63 mm
LED-RUNNER-R8-24V		
8031414878567		
lumen		1020 lm


Accessori inclusi / Included accessories

x1
Cassetta di derivazione / Recessed box







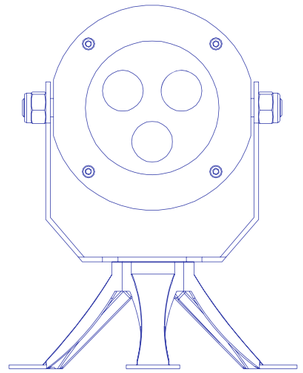

LUCI DECORATIVE TECNICHE DMX
DMX TECHNICAL DECORATION LIGHTING



RF 2.4G CONTROL SYSTEM included · IP22 · RGBW+UV

Materiale
alluminio

Temperatura colore
RGBW + UV

Driver
integrato

Durata e on/off
50.000h
>25.000 on/off

Material
aluminum

Colour temperature
RGBW + UV


Driver
built-in

Life time and on/off
50.000h
>25.000 on/off

Proiettore LED RGB full color in alluminio e wallwasher a batteria ricaricabile con 9 LED RGBW+UV e ricevitore DMX 512 integrato, per emettere una vasta gamma di colori mixando sei colori principali: rosso, verde, blu, bianco, ambra e ultravioletto.
Full color RGB LED projector made of aluminum and rechargeable battery-powered wallwasher with 9 RGBW+UV LEDs and built-in DMX 512 receiver to emit a wide range of colors by mixing six main colors: red, green, blue, white, amber and ultraviolet.



	colour temp.	colour
LED-SHOW-WW9		
8031414915446		
lumen	RGBW+UV	
watt	9 × 18W	
beam angle	45°	



Tempo di ricarica / Charging time	**Ricarica completa in 5 ore / Full recharge in 5 hours**
Durata accensione / Ignition duration	**RGBW+UV con la luminosità al massimo 3 ore / RGBW+UV with maximum brightness 3 hours**
Modalità auto / Auto mode	**7 ore moncromatico più di 20 ore / 7 hours monochrome more than 20 hours**
Modalità canali / Channel mode	**6/11 DMX channel - 16.7 milioni di combinazioni colori / 6/11 DMX channels - 16.7 million color combinations**
Modalità automatiche tramite tasto / Automatic modes via push-button	**Cambio colore colore stroboscopico, dimmerazione colore cambio colore graduale, cambio colori a step / Color change, strobe color, color dimming, gradual color change, step color change**
Control mode	**DMX512, master/slave, auto, sound active/ Wireless DMX, WiFi mobile phone APP control**

Accessori inclusi / Included accessories

Accessori Wi-Fi / Wi-Fi accesories

5 hours **13200 mAh**
Batteria ricaricabile, non sostituibile / Rechargeable battery, non replaceable

Control system easy installation

Smart WIFI

ALEXA e GOOGLE HOME voice control

SHOW PAR

outdoor use · accommodation areas use · office use · commercial areas use



RF 2.4G CONTROL SYSTEM included · IP65 · RGBW+UV · WI-FI SMART INTEC · CE EMC

Materiale
alluminio

Temperatura colore
RGBW + UV

Driver
integrato

Durata e on/off
50.000h
>25.000 on/off

Material
aluminum

Colour temperature
RGBW + UV


Driver
built-in

Life time and on/off
50.000h
>25.000 on/off

Faro LED a batteria ricaricabile con 9 LED RGBW+UV e ricevitore DMX 512 integrato, emette una vasta gamma di colori mixando i sei principali: rosso, verde, blu, bianco, ambra e ultravioletto, permettendo di creare ogni colore desiderato.
Rechargeable battery-powered LED spotlight with 9 RGBW+UV LEDs and built-in DMX 512 receiver, emits a wide range of colors by mixing the six main ones: red, green, blue, white, amber and ultraviolet, allowing you to create any color you want.



	colour temp.	colour
LED-SHOW-PAR9		
8031414915439		
lumen	RGBW+UV	
watt	9 × 18W	
beam angle	45°	



Tempo di ricarica / Charging time	**Ricarica completa in 5 ore / Full recharge in 5 hours**
Durata accensione / Ignition duration	**RGBW+UV con la luminosità al massimo 3 ore / RGBW+UV with maximum brightness 3 hours**
Modalità auto / Auto mode	**7 ore moncromatico più di 20 ore / 7 hours monochrome more than 20 hours**
Modalità canali / Channel mode	**6/11 DMX channel - 16.7 milioni di combinazioni colori / 6/11 DMX channels - 16.7 million color combinations**
Modalità automatiche tramite tasto / Automatic modes via push-button	**Cambio colore colore stroboscopico, dimmerazione colore cambio colore graduale, cambio colori a step / Color change, strobe color, color dimming, gradual color change, step color change**
Control mode	**DMX512, master/slave, auto, sound active/ Wireless DMX, WiFi mobile phone APP control**

Accessori inclusi / Included accessories

Accessori Wi-Fi / Wi-Fi accesories

5 hours **13200 mAh**
Batteria ricaricabile, non sostituibile / Rechargeable battery, non replaceable

Control system easy installation

Smart WIFI

ALEXA e GOOGLE HOME voice control

SHOW Q



RF 2.4G CONTROL SYSTEM included · IP22 · RGBW+UV

WI-FI SMART INTEC

Materiale
alluminio

Temperatura colore
RGBW + UV

Driver
integrato

Durata e on/off
50.000h
>25.000 on/off

Material
aluminum

Colour temperature
RGBW + UV


Driver
built-in

Life time and on/off
50.000h
>25.000 on/off

Faro LED a batteria ricaricabile con 6 LED RGBW+UV e ricevitore DMX 512 integrato, emette una vasta gamma di colori mescolando i sei principali: rosso, verde, blu, bianco, ambra e ultravioletto, consentendo la creazione di ogni colore desiderato.
Rechargeable battery-operated LED spotlight with 6 RGBW+UV LEDs and built-in DMX 512 receiver, emits a wide range of colors by mixing the six main ones: red, green, blue, white, amber and ultraviolet, allowing the creation of any desired color.



	colour temp.	colour
LED-SHOW-Q6 8031414915408		
lumen	RGBW+UV	
watt	6 × 18W	
beam angle	45°	



Tempo di ricarica / Charging time	**Ricarica completa in 5 ore / Full recharge in 5 hours**
Durata accensione / Ignition duration	**RGBW+UV con la luminosità al massimo 3 ore / RGBW+UV with maximum brightness 3 hours**
Modalità auto / Auto mode	**7 ore moncromatico più di 20 ore / 7 hours monochrome more than 20 hours**
Modalità canali / Channel mode	**6/11 DMX channel - 16.7 milioni di combinazioni colori / 6/11 DMX channels - 16.7 million color combinations**
Modalità automatiche tramite tasto / Automatic modes via push-button	**Cambio colore colore stroboscopico, dimmerazione colore cambio colore graduale, cambio colori a step / Color change, strobe color, color dimming, gradual color change, step color change**
Control mode	**DMX512, master/slave, auto, sound active/ Wireless DMX, WiFi mobile phone APP control**

Accessorio non incluso / Not included accessory



LED-SHOW-CASE
8031414915415

Valigia per 10 pezzi / Case for 10 pcs

Accessori inclusi / Included accessories

Accessori Wi-Fi / Wi-Fi accesories

5 hours
9600 mAh
Batteria ricaricabile, non sostituibile / Rechargeable battery, non replaceable


Control system easy installation

Smart WIFI

ALEXA e GOOGLE HOME voice control

SHOW TUBE

Faro LED a batteria ricaricabile con 9 LED RGBW+UV e ricevitore DMX 512 integrato, emette una vasta gamma di colori mescolando i sei principali: rosso, verde, blu, bianco, ambra e ultravioletto, permettendo la creazione di qualsiasi colore desiderato, dalle tonalità calde a quelle fredde.
Rechargeable battery-powered LED spotlight with 9 RGBW+UV LEDs and built-in DMX 512 receiver, emits a wide range of colors by mixing the six main ones: red, green, blue, white, amber and ultraviolet, allowing the creation of any desired color from warm to cool tones.





SHOW TUBE

RF 2.4G CONTROL SYSTEM included · IP65 · RGBW+UV

Materiale
alluminio

Temperatura colore
RGBW + UV

Driver
integrato

Durata e on/off
50.000h
>25.000 on/off

Material
aluminum

Colour temperature
RGBW + UV

Driver
built-in

Life time and on/off
50.000h
>25.000 on/off





	colour temp.	colour
LED-SHOW-TUBE		
8031414915422		
lumen	RGBW+UV	

watt	8 × 28W
beam angle	360°

Tempo di ricarica / Charging time	**Ricarica completa in 5 ore / Full recharge in 5 hours**
Durata accensione / Ignition duration	**RGBW+UV con la luminosità al massimo 3 ore / RGBW+UV with maximum brightness 3 hours**
Modalità auto / Auto mode	**7 ore moncromatico più di 20 ore / 7 hours monochrome more than 20 hours**
Modalità canali / Channel mode	**6/11 DMX channel - 16.7 milioni di combinazioni colori / 6/11 DMX channels - 16.7 million color combinations**
Modalità automatiche tramite tasto / Automatic modes via push-button	**Cambio colore colore stroboscopico, dimmerazione colore cambio colore graduale, cambio colori a step / Color change, strobe color, color dimming, gradual color change, step color change**
Control mode	**DMX512, master/slave, auto, sound active/ Wireless DMX, WiFi mobile phone APP control**



Accessori inclusi / Included accessories

Accessori Wi-Fi / Wi-Fi accesories

5 hours — **10000 mAh** Batteria ricaricabile, non sostituibile / Rechargeable battery, non replaceable

Control system easy installation

Smart WIFI

ALEXA e GOOGLE HOME voice control

RAYS

outdoor use · accommodation areas use · office use · commercial areas use



10-100% · IP65 · degree IK10 · RGB

Proiettore LED RGB FULL COLOR in alluminio.
LED RGB FULL COLOR lamp in aluminium.

Materiale
alluminio

Temperatura colore
RGB full color

Driver
incluso

Durata e on/off
50.000h
>25.000 on/offf


Material
aluminum

Colour temperature
RGB full color

Driver
included

Life time and on/off
50.000h
>25.000 on/off







colour temp. | colour

LED-RAYS-36P
8031440355445
lumen — RGB

watt — 30 × 1W
beam angle — 45°










colour temp. | colour

LED-RAYS-72P
8031440358040
lumen — RGB

watt — 72 × 2W
beam angle — 45°







WALLWASHER

Proiettore LED RGB FULL COLOR in alluminio.
LED RGB FULL COLOR lamp in aluminium.



Materiale
alluminio

Temperatura colore
RGB full color

Driver
integrato

Durata e on/off
50.000h
>25.000 on/off

Material
aluminum

Colour temperature
RGB full color

Driver
built-in


Life time and on/off
50.000h
>25.000 on/off














colour temp. | colour

LED-WALLWASHER-18
8031440359559
lumen — RGB

watt — 18 × 2W
beam angle — 45°







colour temp. | colour

LED-WALLWASHER-36
8031440359528
lumen — RGB

watt — 36 × 2W
beam angle — 45°







IRIDE

outdoor use · accommodation areas use · office use · commercial areas use



10-100% · IP65 · degree IK10 · CRI >80 · RGB

Proiettore LED monocolore o RGB FULL COLOR in alluminio.
LED single colour or RGB FULL COLOR lamp in aluminium.

Materiale
alluminio

Temperatura colore
RGB full color + 6000K

Driver
DC 12/24V
non incluso

Durata e on/off
50.000h
>25.000 on/offf

Material
aluminum

Colour temperature
RGB full color + 6000K

Driver
DC 12/24V
not included

Life time and on/off
50.000h
>25.000 on/offf





LED-IRIDE-3P
8031440358101

	colour temp.	colour
lumen	RGB	
watt	3 × 1W	
driver	DC12/24V	
beam angle	45°	

LED-IRIDE-3P-BCO
8031440359719

	colour temp.	colour
lumen	240 lm	
watt	3 × 1W	
driver	DC12/24V	
beam angle	30°	

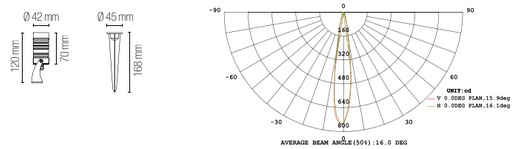







LED-IRIDE-9P
8031440358118

	colour temp.	colour
lumen	RGB	
watt	9 × 1W	
driver	DC12/24V	
beam angle	40°	

LED-IRIDE-9P-BCO
8031440359702

	colour temp.	colour
lumen	720 lm	
watt	9 × 1W	
driver	DC12/24V	
beam angle	30°	

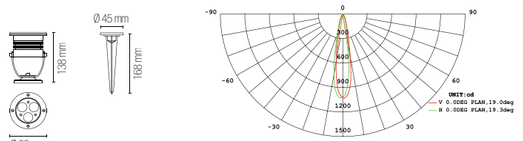







LED-IRIDE-18P
8031440358088

	colour temp.	colour
lumen	RGB	
watt	18 × 1W	
driver	DC24V	
beam angle	40°	

LED-IRIDE-18P-BCO
8031440359689

	colour temp.	colour
lumen	1620 lm	
watt	18 × 1W	
driver	DC24V	
beam angle	30°	

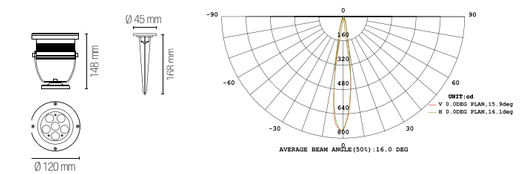



IRIDE

outdoor use | accommodation areas use | office use | commercial areas use



IP67 | degree IK10 | RGB | +10-100% −

technical information

IRIDE

Incassi calpestabili LED RGB FULL COLOR corpo in lega di alluminio, ghiera in acciaio 316.
Walkable built-in LED RGB FULL COLOR light 316 stainless steel cover and aluminium alloy housing.

Materiale
alluminio pressofuso

Temperatura colore
RGB full color

Driver
DC 12/24V
non incluso

Durata e on/off
50.000h
>25.000 on/offf

Material
die cast aluminum

Colour temperature
RGB full color

Driver
DC 12/24V
not included

Life time and on/off
50.000h
>25.000 on/offf





colour temp. | colour | recessed box


LED-IRIDE-R6
8031414868971

lumen	RGB
watt	3 × 1W
driver	DC12/24V
beam angle	15°













colour temp. | colour | recessed box


LED-IRIDE-R12
8031414868988

lumen	RGB
watt	9 × 1W
driver	DC12/24V
beam angle	15°













colour temp. | colour | recessed box


LED-IRIDE-R14
8031414868995

lumen	RGB
watt	18 × 1W
driver	DC12/24V
beam angle	15°










NEPTUNE



Materiale
acciaio inox 316

Colore
silver
nero

Temperatura colore
RGB full color

Driver
DC24V
non incluso

Durata e on/off
50.000h
>25.000 on/off

Material
316 stainless steel

Colour
black
silver

Colour temperature
RGB full color

Driver
DC24V
not included

Life time and on/off
50.000h
>25.000 on/off

Proiettori per fontane LED RGB FULL COLOR.
LED RGB FULL COLOR fountain flood lamp.


+ 10-100% – | IP68 | degree IK10 | RGB








	colour temp.	colour
LED-NEPTUNE-3P		
8031414869008		
lumen	RGB	
watt	3 × 3W	
beam angle	25°	


	colour temp.	colour
LED-NEPTUNE-36P		
8031440358057		
lumen	RGB	
watt	36 × 1W	
beam angle	45°	
























CROWN




Incasso per fontane LED RGB FULL COLOR.
LED RGB FULL COLOR fountain recess lamp.

+ 10-100% – | IP68 | degree IK10 | RGB




	colour temp.	colour
LED-CROWN-R14		
8031414869015		
lumen	RGB	
watt	9 × 2W	
beam angle	25°	





TREVIS

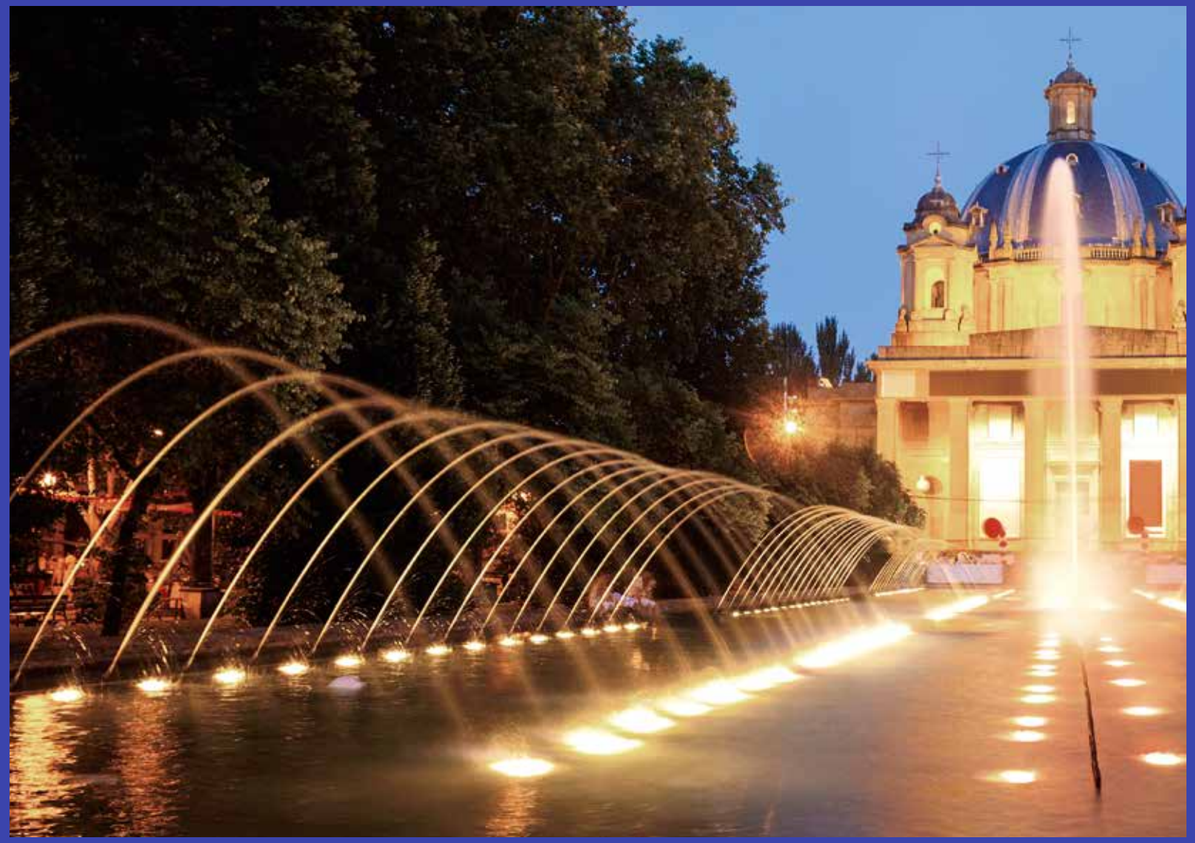

TREVIS

Incasso immersione LED RGB FULL COLOR.
Immersion recessed light LED RGB FULL COLOR.

Materiale
acciaio inox 316

Temperatura colore
RGB full color

Driver
DC 24V
non incluso

Durata e on/off
50.000h
>25.000 on/offf

Material
316 stainless steel

Colour temperature
RGB full color


Driver
DC 24V
not included


Life time and on/off
50.000h
>25.000 on/offf



	colour temp.	colour	recessed box
LED-TREVIS-R7			
8031414869022			
lumen	RGB		
watt	3W		
beam angle	25°		



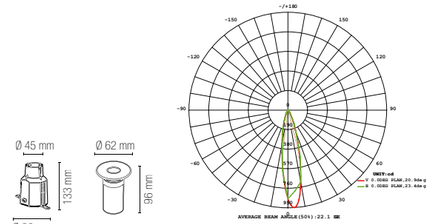







	colour temp.	colour	recessed box
LED-TREVIS-R11			
8031414869039			
lumen	RGB		
watt	9W		
beam angle	25°		







PAR56

outdoor use · accommodation areas use · office use · commercial areas use

Materiale
policarbonato

Temperatura colore
RGB full color + 6500K

Driver
AC 12V non incluso
DC 24V non incluso

Durata e on/off
50.000h
>25.000 on/offf

Material
PC

Colour temperature
RGB full color + 6500K

Driver
AC 12V not included
DC 24V not included

Life time and on/off
50.000h
>25.000 on/offf

Incasso LED a immersione per piscine.
Pool immersion LED down light.

CE · 10-100% · IP68 · degree IK10 · CRI >80 · RGB








	colour temp.	colour
LED-PAR56-24V-RGB		
8031414879755		
lumen	RGB	
watt	21W	
driver	DC24V	
beam angle	45°	
1 m cable included		
LED-PAR56-BCO		
8031440359504		
lumen	1050 lm	
watt	21W	
driver	12V AC	
beam angle	45°	


INC-POOL-PAR56
8031440359511


Struttura incasso per PAR 56
per piscine in cemento /
Recessed structure for
PAR56 for concrete swimming pool


1 m cable included

Ø 260 mm











PELPS

outdoor use · accommodation areas use · office use · commercial areas use

Materiale
policarbonato

Temperatura colore
RGB full color + 6500K

Driver
AC 12V non incluso
DC 24V non incluso

Durata e on/off
50.000h
>25.000 on/offf

Material
PC

Colour temperature
RGB full color + 6500K

Driver
AC 12V not included
DC 24V not included

Life time and on/off
50.000h
>25.000 on/offf

Lampada LED per piscine con fissaggio a parete.
Pool LED wall lamp.


CE · 10-100% · IP68 · degree IK10 · CRI >80 · RGB







	colour temp.	colour
LED-PELPS24V-RGB		
8031414868872		
lumen	RGB	
watt	18W	
driver	DC24V	
beam angle	45°	
1 m cable included		
LED-PELPS-BCO		
8031414865420		
lumen	1122 lm	
watt	18W	
driver	AC12V	
beam angle	45°	




CONTROLLER





CONTROLLER-POOL
8031440359481


Controller 240V
AC MAX 5A/1100W
IP65 distanza max 30M

Controller 240V
AC max 5A/1100W
IP65 max distance 30M





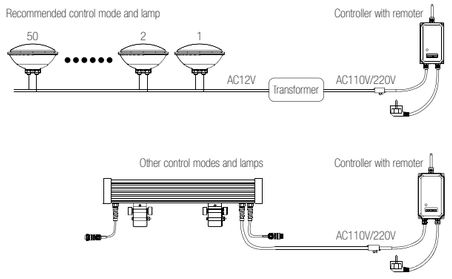

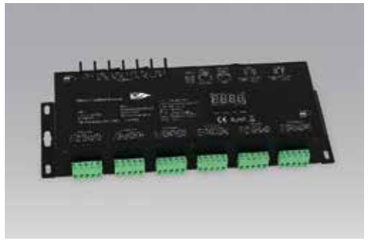

CONTROLLER-DMX-24
8031414872718

Controller DMX 24 canali
Tensione costante 4A
Input VOLTAGE 12/24V DC
Output POWER 24X(48-96)W
Output CURRENT 24X4A

Controller DMX 24 channels
Constant voltage 4A
Input VOLTAGE 12/24V DC
Output POWER 24X(48-96)W
Output CURRENT 24X4A

264,5 × 83 × 42 mm



SPLITTER-DMX-4
8031440359542

SPLITTER DMX
6W XLR-3X4PCS XLR-5X4PCS

DMX SPLITTER
6W XLR-3X4PCS XLR-5X4PCS




CONTROLLER



CONTROLLER-CTR-RGB
8031440358026

Centralina di comando
C/PORTA DMX512 LED RGB
Input 230V AC
Output DC (12V 144W - 24V 300W)
6 porte da 3 canali RGB


Control box with DMX512
Port for LED RGB
Input 230V AC
Output DC (12V 144W - 24V 300W)
6 ports 3 RGB channels



CONTROLLER-CTR-RGB12
8031440355438

Centralina di comando
C/PORTA DMX512 LED RGB
Input 230V AC
Output DC (12V 300W)
6 porte da 3 canali RGB

Control box with DMX512
Port for LED RGB
Input 230V AC
Output DC 12V 300W
6 ports 3 RGB channels

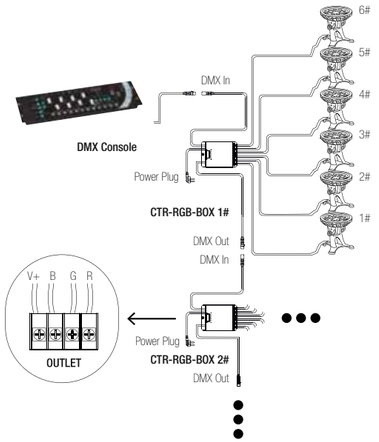




CONTROLLER-PRO-3
8031440358033

Controller Master 3 canali
per uso proiettori
in modalità EASY
IN 230V OUT DMX/XLR-3
2 canali IP20

Controller Master 3 channels
for flood in EASY MODE
IN 230V OUT DMX/XLR-3
2 channels IP20






CONTROLLER-PRO-2
8031440358002

Controller DMX LED
3 canali RGB SEGNALE OUTPUT
DMX/XLR-3 (due uscite)
IP20 con cavo di ricarica

Controller DMX LED
3 channels RGB OUTPUT SIGNAL
DMX/XLR-3 (two port)
IP20 with charge cable



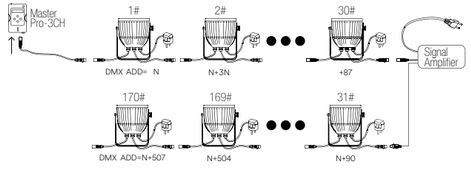


CONTROLLER



LED-SUNLITE-DE3
8031440359498


SUNLITE 2X512 DMX ESA PRO/SUITE 2







CONTROLLER

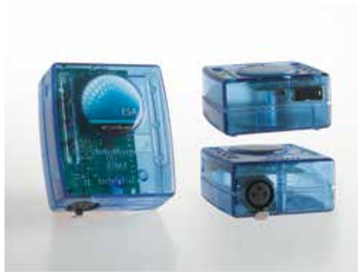

LED-SUNLITE-U9
8031440359467

SUNLITE Controller
256 canali Input
(218 steps max)

SUNLITE Controller
256 channels Input
(218 steps max)








LED-SUNLITE-GU2
8031422251093

SUNLITE DMX STICK-GU2
128 canali Input 240V

SUNLITE DMX STICK-GU2
128 channels Input 240V





COMPONENTISTICA
LIGHTING COMPONENTS



TRASFORMATORE-120
8031440355094
IP44

Trasformatore di tensione 120W Input 240V AC Output 12V AC IP44 10A	Voltage power supply 120W Input 240V AC Output 12V AC IP44 10A	180 × 134 × 63 mm



LED-IRIDE-CAVO-2M-2P
8031440355452
IP65

Cavo 2 poli per faro IRIDE bianco alluminio	Cable 2 poles for IRIDE white headlight aluminium	2 metri / 2 meters



LED-IRIDE-CAVO-2M
8031440358095
IP65

Cavo RGB 4 poli per faro IRIDE RGB bianco alluminio	RGB cable 4 poles for IRIDE RGB white headlight aluminium	2 metri / 2 meters



CONNETTORE-M
8031440355469
IP68

Connettore maschio per DMX	Male connector for DMX



CONNETTORE-F
8031440355476
IP68

Connettore femmina per DMX	Female connector for DMX



CONNECTBOX-IP68-3
8031440358903
IP68

Scatola connessione a tre poli	Connection box with three poles	35 × 115 × 71 mm



CONNECTBOX-IP68-2
8031440358927
IP68

Scatola connessione a due poli	Connection box with two poles	30 × 115 × 41 mm



GUAINA
8031440355483
IP65

Guaina isolante	Insulating sheath



CONNETTORE-IP20
8031414897681

Connettore IP20 2L+2N	IP20 2L+2N Connector



CONNETTORE-IP65
8031414897698
IP65

Connettore IP65	IP65 Connector



CONNETTORE-IP68
8031414897704
IP68

Connettore IP68	IP68 Connector

DRIVER

Driver MINI and LT



I-DRIVER/4W
8031414862801
IP65

MINI Driver corrente costante Output 2-12V 350mA 4W Input 100 ~ 240V	MINI constant current driver Output 2-12V 350mA 4W Input 100 ~ 240V	38 × 27 × 21 mm



I-DRIVER/4W-24V
8031414871797
IP65

MINI Driver corrente costante Output 24V DC 0.17A 4W Input 100 ~ 240V AC 50 ~ 60H	MINI constant voltage driver Output 24V DC 0.17A 4W Input 100 ~ 240V AC 50 ~ 60H	38 × 27 × 21 mm



I-DRIVER-LT-75-24
8031414876822

LT Driver tensione costante Output 24VDC 3.12A 75W Input 220 ~ 240V AC	LT constant voltage driver Output 24VDC 3.12A 75W Input 220 ~ 240V AC	305 × 30 × 17 mm



I-DRIVER-LT-150-24
8031414876846

LT Driver tensione costante Output 24V DC 6.25A 150W Input 220 ~ 240V AC	LT constant voltage driver Output 24V DC 6.25A 150W Input 220 ~ 240V AC	336 × 30 × 17 mm



I-DRIVER-LT-30-24
8031414896196

LT Driver tensione costante Output 24VDC 1.25A 30W Input 220 ~ 240V AC	LT constant voltage driver Output 24VDC 1.25A 30W Input 220 ~ 240V AC	251 × 30 × 16 mm



I-DRIVER-LT-60-24
8031414896202

LT Driver tensione costante Output 24VDC 2.5A 60W Input 220 ~ 240V AC	LT constant voltage driver Output 24VDC 2.5A 60W Input 220 ~ 240V AC	305 × 30 × 18,2 mm



I-DRIVER-LT-100-24
8031414896226

LT Driver tensione costante Output 24VDC 4.17A 100W Input 220 ~ 240V AC	LT constant voltage driver Output 24VDC 4.17A 100W Input 220 ~ 240V AC	312 × 30 × 18,2 mm



I-DRIVER-LT-200-24
8031414896240

LT Driver tensione costante Output 24VDC 8.34A 200W Input 220 ~ 240V AC	LT constant voltage driver Output 24VDC 8.34A 200W Input 220 ~ 240V AC	335 × 30 × 21,6 mm



I-DRIVER-LT-60-48
8031414896219

LT Driver tensione costante Output 48VDC 1.25A 60W Input 220 ~ 240V AC	LT constant voltage driver Output 48VDC 1.25A 60W Input 220 ~ 240V AC	305 × 30 × 18,2 mm



I-DRIVER-LT-150-48
8031414896233

LT Driver tensione costante Output 48VDC 3.125A 150W Input 220 ~ 240V AC	LT constant voltage driver Output 48VDC 3.125A 150W Input 220 ~ 240V AC	335 × 30 × 21,6 mm

ALIMENTATORI POWER SUPPLY

Alimentatori tensione costante LRS e RSP 12V / Constant voltage power supply LRS and RSP 12V



STRIP-DRIVER12V-35W
8031440360265
Output 12V 3A 36W
Input 85 ~ 264VAC 120 ~ 373VDC
99 × 82 × 30 mm



STRIP-DRIVER12V-50W
8031414866779
Output 12V 4.2A 50W
Input 85 ~ 264VAC 120 ~ 373VDC
99 × 82 × 30 mm



STRIP-DRIVER12V-75W
8031439581268
Output 12V 6A 72W
Input 85 ~ 264VAC 120 ~ 373VDC
99 × 97 × 30 mm



STRIP-DRIVER12V-100W
8031440359368
Output 12V 8.5A 102W
Input 85 ~ 264VAC 120 ~ 373VDC
129 × 97 × 30 mm



STRIP-DRIVER12V-150W
8031439611262
Output 12V 12.5A 150W
Input 85 ~ 132VAC / 170 ~ 264VAC
by switch
240 ~ 370VDC (switch on 230VAC)
159 × 97 × 30 mm



STRIP-DRIVER12V-200W
8031440359375
Output 12V 16,7A 200W
Input 85 ~ 264VAC 124 ~ 370VDC
215 × 115 × 30 mm



STRIP-DRIVER12V-320W
8031440359344
Output 12V 26,7A 320W
Input 88 ~ 264VAC 124 ~ 370VDC
215 × 115 × 30 mm

ALIMENTATORI POWER SUPPLY

Alimentatori tensione costante LRS e RSP 24V / Constant voltage power supply LRS and RSP 24V



STRIP-DRIVER24V-35W
8031414870943
Output 24V 1,5A 36W
Input 85 ~ 264VAC 120 ~ 373VDC
99 × 82 × 30 mm



STRIP-DRIVER24V-50W
8031440364744
Output 24V 2,2A 52W
Input 85 ~ 264VAC 120 ~ 373VDC
99 × 82 × 30 mm



STRIP-DRIVER24V-75W
8031414870950
Output 24V 3,2A 76W
Input 85 ~ 264VAC 120 ~ 373VDC
99 × 97 × 30 mm



STRIP-DRIVER24V-100W
8031440364751
Output 24V 4.5A 108W
Input 85 ~ 264VAC 120 ~ 373VDC
129 × 97 × 30 mm



STRIP-DRIVER24V-150W
8031414870967
Output 24V 6.5A 156W
Input 85 ~ 132VAC / 170 ~ 264VAC
by switch
240 ~ 370VDC (switch on 230VAC)
159 × 97 × 30 mm



STRIP-DRIVER24V-200W
8031440364737
Output 24V 8,4A 201W
Input 85 ~ 264VAC 124 ~ 370VDC
215 × 115 × 30 mm



STRIP-DRIVER24V-320W
8031414864959
Output 24V 13,4A 321W
Input 88 ~ 264VAC 124 ~ 370VDC
215 × 115 × 30 mm

ALIMENTATORI
POWER SUPPLY

Alimentatori tensione costante UHP 24V / Costant voltage power supply UHP 24V



I-DRIVER-UHP-200-24
8031414896387
Output 24V 8.4A 200W
Input 90 ~ 264VAC 127 ~ 370VDC
194 × 55 × 26 mm



I-DRIVER-UHP-350-24
8031414879618
Output 24V 14.6A 350W
Input 90 ~ 264VAC 127 ~ 370VDC
220 × 62 × 31 mm
senza ventola / without fan



I-DRIVER-UHP-500-24
8031414879625
Output 24V 20.9A 501W
Input 90 ~ 264VAC 127 ~ 370VDC
220 × 62 × 31 mm
senza ventola / without fan

Alimentatori tensione costante RSP 36V / Costant voltage power supply RSP 36V



STRIP-DRIVER36V-200W
8031414870974
Output 36V 5.56A 200W
Input 88 ~ 264VAC 124 ~ 370VDC
215 × 115 × 30 mm



STRIP-DRIVER36V-320W
8031414864829
Output 36V 8.9A 320W
Input 88 ~ 264VAC 124 ~ 370VDC
215 × 115 × 30 mm

Alimentatori tensione costante RSP 48V / Costant voltage power supply RSP 48V



STRIP-DRIVER48V-75W
8031414881536
Output 48V 1.6A 76,8W
Input 88 ~ 264VAC 124 ~ 370VDC
99 × 97 × 30 mm



STRIP-DRIVER48V-150W
8031414881529
Output 48V 3.3A 158,4W
Input 85 ~ 132VAC 240 ~ 370VDC
159 × 97 × 30 mm



STRIP-DRIVER48V-200W
8031414878307
Output 48V 4.2A 201W
Input 88 ~ 264VAC 124 ~ 370VDC
215 × 115 × 30 mm



STRIP-DRIVER48V-320W
8031414878314
Output 48V 4.2A 201W
Input 88 ~ 264VAC 124 ~ 370VDC
215 × 115 × 30 mm

DRIVER

Driver LPHC LPH and LCM



I-DRIVER/18W-24V
8031414875351
IP67
LPH
Output 24V 0.75A 18W
Input 180 ~ 264VAC 254 ~ 370VDC
140 × 30 × 22 mm



I-DRIVER/18W
8031439571269
IP67
LPHC
Output 6~48V 350mA 16,8W
Input 180 ~ 264VAC
140 × 30 × 22 mm



I-DRIVER-DIMM-LCM25
8031414924653
LCM dimmable 42W
Output DC 0~54V 350mA; 6~50V
500mA; 6~42V 600mA; 6~36V
700mA; 6~28V 900mA; 6~24V
1050mA
Input 180 ~ 277VAC 254~392VDC
105 × 68 × 23 mm



I-DRIVER-DIMM-LCM40
8031439591267
10-100%
LCM dimmable 42W
Output DC 2~100V 350mA; 2~80V
500mA; 2~67V 600mA; 2~57V
700mA; 2~45V 900mA; 2~40V
1050mA
Input 180 ~ 295VAC 254~417VDC
123,5 × 81,5 × 23 mm



I-DRIVER-DIMM-LCM60
8031439561260
10-100%
LCM dimmable 60W
Output DC 2~90V 500mA; 2~90V
600mA; 2~86V 700mA; 2~67V
900mA; 2~57V 1050mA; 2~42V
1400mA
Input 180 ~ 295VAC 254~417VDC
123,5 × 81,5 × 23 mm



I-DRIVER-DIMM-LCM25DA
8031414924660
DALI
LCM dimmable 42W
Output DC 0~54V 350mA; 6~50V
500mA; 6~42V 600mA; 6~36V
700mA; 6~28V 900mA; 6~24V
1050mA
Input 180 ~ 277VAC 254~380VDC(254~375VDC for DA2-Type)
105 × 68 × 23 mm



I-DRIVER-DIMM-LCM40DA
8031414924677
DALI
10-100%
LCM dimmable 42W
Output DC 2~100V 350mA; 2~80V
500mA; 2~67V 600mA; 2~57V
700mA; 2~45V 900mA; 2~40V
1050mA
Input 180 ~ 295VAC 254 ~ 392VDC
123,5 × 81,5 × 23 mm



I-DRIVER-DIMM-LCM60DA
8031414924684
DALI
10-100%
LCM dimmable 60W
Output DC 2~90V 500mA; 2~90V
600mA; 2~86V 700mA; 2~67V
900mA; 2~57V 1050mA; 2~42V
1400mA
Input 180 ~ 295VAC 254 ~ 392VDC
123,5 × 81,5 × 23 mm

Driver HLG IP67 12-24V



I-DRIVER-HLG-320-12
8031440360258
IP67
Output 12V 22A 264W
Input 90 ~ 305VAC 127 ~ 431VDC
252 × 90 × 43,8 mm

DRIVER

Driver ELG 24V IP67 dimmerabili e LPV 24V IP67 / Dimmable driver ELG 24V IP67 and LPV 24V IP67



I-DRIVER-ELG-100-24
8031414876914
IP67
199 × 63 × 35,5 mm

ELG Dimmable
Output 24V 4A 100W
Input 100 ~ 305VAC 142 ~ 431VDC
continue
320VAC for 24Hrs; 360VAC for 1Hr



I-DRIVER-ELG-100-24DA DALI
8031414876921
IP67
199 × 63 × 35,5 mm

ELG Dimmable DALI
Output 24V 4A 100W
Input 100 ~ 305VAC 142 ~ 431VDC
continue
320VAC for 24Hrs; 360VAC for 1Hr



I-DRIVER-ELG-150-24
8031414876891
IP67
219 × 63 × 35,5 mm

ELG Dimmable
Output 24V 6.25A 150W
Input 100 ~ 305VAC 142 ~ 431VDC



I-DRIVER-ELG-150-24DA DALI
8031414876907
IP67
219 × 63 × 35,5 mm

ELG Dimmable DALI
Output 24V 6.25A 150W
Input 100 ~ 305VAC 142 ~ 431VDC



I-DRIVER-ELG-240-24
8031414876877
IP67
244 × 71 × 37,5 mm

ELG Dimmable
Output 24V 10A 240W
Input 100 ~ 305VAC 142 ~ 431VDC



I-DRIVER-ELG-240-24DA DALI
8031414876884
IP67
244 × 71 × 37,5 mm

ELG Dimmable DALI
Output 24V 10A 240W
Input 100 ~ 305VAC 142 ~ 431VDC



I-DRIVER-LPV-60-24
8031414876839
IP67
162,5 × 42,5 × 32 mm

LPV Output 24V 2.5A 60W
Input 90 ~ 264VAC 127 ~ 370VDC



I-DRIVER-LPV-100-24
8031414876853
IP67
190 × 52 × 37 mm

LPV Output 24V 4.2A 100W
Input 90 ~ 264VAC 127 ~ 370VDC



I-DRIVER-LPV-150-24
8031414876860
IP67
191 × 63 × 37,5 mm

LPV Output 24V 6.3A 150W
Input 180 ~ 305VAC 254 ~ 431VDC

DRIVER

Driver XLG 24V IP67



I-DRIVER-XLG-75-24
8031414873708
IP67
140 × 63 × 32 mm

Output 24V 3.1A 75W
Input 100 ~ 305VAC 142 ~ 431VDC



I-DRIVER-XLG-100-24
8031414879595
IP67
140 × 63 × 32 mm

Output 24V 4A 100W
Input 100 ~ 305VAC 142 ~ 431VDC



I-DRIVER-XLG-150-24
8031414879601
IP67
180 × 63 × 35,5 mm

Output 24V 6.25A 150W
Input 100 ~ 305VAC 142 ~ 431VDC



I-DRIVER-XLG-200-24
8031414879588
IP67
199 × 63 × 35,5 mm

Output 24V 8.3A 200W
Input 100 ~ 305VAC 142 ~ 431VDC

DRIVER

Driver PWM DALI2



I-DRIVER-PWM-60-24DA DALI
8031414896356
IP67
150 × 53 × 35 mm

Output 24V 2.5A 60W
Input 90 ~ 305VAC 127 ~ 431VDC
DALI2



I-DRIVER-PWM-120-24DA DALI
8031414896363
IP67
191 × 63 × 37,5 mm

Output 24V 5A 120W
Input 90 ~ 305VAC 127 ~ 431VDC
DALI2



I-DRIVER-PWM-200-24DA DALI
8031414896370
IP67
195 × 68 × 39,5 mm

Output 24V 8.3A 200W
Input 100 ~ 305VAC 142 ~ 431VDC
DALI2

DRIVER

Guida DIN a forma di gradino ultra sottile /
Ultra Slim Step Shape DIN Rail



I-DRIVER-HDR-60-24
8031414896271

Output 24V 2.5A 60W
Input 85 ~ 264VAC
(277VAC operational) 120 ~ 370VDC
(390VAC operational)

52,5 × 90 × 54,5 mm



I-DRIVER-HDR-100-24
8031414896288

Output 24V 3.83A 100W
Input 85 ~ 264VAC
(277VAC operational) 120 ~ 370VDC
(390VAC operational)

70 × 90 × 54,5 mm



I-DRIVER-HDR-150-24
8031414896295

Output 24V 6.25A 150W
Input 85 ~ 264VAC
(277VAC operational) 120 ~ 370VDC
(390VAC operational)

105 × 90 × 54,5 mm

DRIVER

Guida DIN industriale a uscita singola /
Single Output Industrial DIN RAIL



I-DRIVER-NDR-240-24
8031414896301

Output 24V 10A 240W
Input 90 ~ 264VAC 127 ~ 370VDC

63 × 125,2 × 113,5 mm



I-DRIVER-NDR-480-24
8031414896325

Output 24V 20A 480W
Input 90 ~ 264VAC 127 ~ 370VDC

85,5 × 125,2 × 128,5 mm



I-DRIVER-NDR-240-48
8031414896318

Output 48V 5A 240W
Input 90 ~ 264VAC 127 ~ 370VDC

63 × 125,2 × 113,5 mm



I-DRIVER-NDR-480-48
8031414896332

Output 48V 10A 480W
Input 90 ~ 264VAC 127 ~ 370VDC

85,5 × 125,2 × 128,5 mm

DRIVER

Guida DIN industriale a uscita singola con funzione PFC /
Single Output Industrial DIN RAIL with PFC Function



I-DRIVER-SDR-960-24
8031414896349

Output 24V 40A 960W
Input 180 ~ 264VAC 254 ~ 370VDC

110 × 125,2 × 150 mm

DIMMER



I-DIMMER-D1-10
8031414877959

D1-10 dimmer
Dimming range
1%-100% 1-10V 40mA

D1-10 dimmer
Dimming range
1%-100% 1-10V 40mA

22,5 × 22,5 × 48,6 mm



I-DIMMER-D1-10S
8031414896257

D1-10 dimmer
Dimming range
1%-100% 1-10V 40mA

D1-10 dimmer
Dimming range
1%-100% 1-10V 40mA

83,5 × 83,5 × 44 mm



I-DIMMER-D350S
8031414896264

Dimmer a taglio di fase
220~240VAC
10~350W 1.5A

Trailing edge dimmer
220~240VAC
10~350W 1.5A

83,5 × 83,5 × 44 mm

DRIVER

Driver emergenza /
Emergency driver



I-DRIVER-EMERGENCY
8031414864751

Driver di emergenza
6-60V 400-40mA 4W 180Min
Batteria 3,6V 3.0Ah Ni-Cd

Emergency driver
6-60V 400-40mA 4W 180Min
Battery 3,6V 3.0Ah Ni-Cd

160 × 38 × 28 mm



I-DRIVER-HELP
8031414862559

Driver di emergenza
Output Voltage 10-120V
Input Voltage 85-265V
3-40W. emergenza 120 min.
18650 Li-Ion Battery
3,7V 2.4Ah

Emergency driver
Output Voltage 10-120V
Input Voltage 85-265V
3-40W. emergency 120 min.
18650 Li-Ion Battery
3,7V 2.4Ah

131 × 55 × 21 mm



I-DRIVER-HELP-HV
8031414882595

Emergency output
voltage 230V AC, adatto per:

2,5W emergency power
3 hours emergency time

3,5W emergency power
2 hours emergency time

5W emergency power
1,5 hours emergency time

Battery 18650 LiFePO4 6.4V 1500mAh

Emergency output
voltage 230V AC, suitable for:

2,5W emergency power
3 hours emergency time

3,5W emergency power
2 hours emergency time

5W emergency power
1,5 hours emergency time

Battery 18650 LiFePO4 6.4V 1500mAh

160 × 38 × 28 mm

DRIVER



I-DRIVER-60-24
8031414897797

Output 24V 2.5A 60W
Input 176 ~ 264VAC 176~370VDC

178 × 53 × 23 mm



I-DRIVER-60-24-IP67
8031414897841

IP67

Output 24V 2.5A 60W
Input 176 ~ 264VAC

160 × 50 × 31 mm



I-DRIVER-100-24
8031414897803

Output 24V 4.1A 100W
Input 176 ~ 264VAC 250 ~ 360VDC

188 × 53 × 23 mm



I-DRIVER-100-24-IP67
8031414897858

IP67

Output 24V 4.2A 100W
Input 176 ~ 264VAC

220 × 50 × 31 mm



I-DRIVER-150-24
8031414897810

Output 24V 6.3A 150W
Input 175 ~ 264VAC 176 ~ 370VDC

220 × 53 × 23 mm



I-DRIVER-150-24-IP67
8031414897865

IP67

Output 24V 6.25A 150W
Input 176 ~ 264VAC

230 × 65 × 21 mm



I-DRIVER-200-24
8031414897827

Output 24V 8.3A 200W
Input 175 ~ 264VAC 175 ~ 370VDC

274 × 53 × 23 mm



I-DRIVER-200-24-IP67
8031414897872

IP67

Output 24V 8.3A 200W
Input 175 ~ 264VAC

230 × 65 × 31 mm



I-DRIVER-300-24
8031414897834

Output 22-24V 11.5A 300W
Input 175 ~ 264VAC 175 ~ 370VDC

230 × 65 × 31 mm



I-DRIVER-DEL042
8031414897667

Output 6-38/40/42 VDC
0.45-1.10A 42W
Input 220 ~ 240VAC
DALI2 PUSH DIM

103 × 68,5 × 30,5 mm

DIMMER



STRIP-SOUND
8031434531213

Ricevitore musicale
+ telecomando
RGB 12V per strip LED

Musical control receiver
RGB 12V for strip LED
+ remote control

50 × 70 × 20 mm

ADATTATORI POWER SUPPLY

**Adattatore tensione costante /
Costant voltage power supply**



STRIP-ADAT-12W
8031433141208

12V 12W - Spina CEE 7/16 IP20
Output 12V 1A
Input 110-240V 0,5A
IP20 - CLASSE 2

38 × 67 × 42 mm
cavo/cable 1500 mm



STRIP-ADAT-24W
8031433251204

12V 24W - Spina CEE 7/16 IP20
Output 12V 2A
Input 110-240V 0,6A
IP20 - CLASSE 2

38 × 80 × 50 mm
cavo/cable 1500 mm



STRIP-ADAT-36W
8031436601235

LED 12V 36W - Spina CEE 7/16 IP20
Output 12V 3A
Input 110-240V 0,6A
IP20 - CLASSE 2

35 × 100 × 50 mm
cavo/cable 1500 mm

REMOTE CONTROL



RF-WALLPAD-1CH
8031414876426

Wallpad RF 2.4G controllo dimmer-varialuce 4 zone
1 canale 2xAAA non incluse

RF 2.4G wallpad dimming light 4 zone
1 channel 2xAAA not included

86 × 86 × 36,5 mm



RF-WALLPAD-2CH
8031414876433

Wallpad RF 2.4G controllo CCT bianco dinamico 4 zone
2 canali 2xAAA non incluse

RF 2.4G wallpad CCT adjustable white 4 zone
2 channels 2xAAA not included

86 × 86 × 36,5 mm



RF-WALLPAD-5CH
8031414876440

Wallpad RF 2.4G controllo RGB/RGBW/RGB+CCT 4 zone 5 canali
2xAAA non incluse

RF 2.4G wallpad RGB/RGBW/RGB+CCT 4 zone 5 channels
2xAAA not included

86 × 86 × 36,5 mm



RF-DMXPAD-1CH
8031414876457

Wallpad RF 2.4G controllo dimmer-varialuce 4 zone
1 canale 230V collegabile con protocollo DMX 512

RF 2.4G wallpad dimming light 4 zone
1 channel 230V linkable with DMX512 protocol

120 × 80 × 37 mm

formato universale per cassetta 503 / universal size for 503 box



RF-DMXPAD-2CH
8031414876464

Wallpad RF 2.4G controllo CCT bianco dinamico 4 zone
2 canali 230V collegabile con protocollo DMX 512

RF 2.4G wallpad CCT adjustable white 4 zone
2 channels 230V collegabile con protocollo DMX 512

120 × 80 × 37 mm

formato universale per cassetta 503 / universal size for 503 box



RF-DMXPAD-5CH
8031414876471

Wallpad RF 2.4G controllo RGB/RGBW/RGB+CCT 4 zone
5 canali 230V collegabile con protocollo DMX 512

RF 2.4G wallpad RGB/RGBW/RGB+CCT 4 zone
5 channels 230V collegabile con protocollo DMX 512

120 × 80 × 37 mm

formato universale per cassetta 503 / universal size for 503 box

REMOTE CONTROL



RF-COM-1CH
8031414876402

Radiocomando RF 2.4G controllo dimmer-varialuce 4 zone
1 canale 2xAAA non incluse

RF 2.4G remote control dimming light 4 zone
1 channel 2xAAA not included



RF-COM-2CH
8031414876396

Radiocomando RF 2.4G controllo CCT bianco dinamico 4 zone
2 canali 2xAAA non incluse

RF 2.4G remote control CCT adjustable white 4 zone
2 channels 2xAAA not included



RF-COM-5CH
8031414876419

Radiocomando RF 2.4G controllo RGB/RGBW/RGB+CCT 4 zone
5 canali 2xAAA non incluse

RF 2.4G remote control CCT adjustable white 4 zone
2 channels 2xAAA not included



RF-COM-5CH-1ZN
8031414897919

Controllo RGB+CCT 1 zone
Batteria CR2032

RGB+CCT Remote Control 1 zone
Battery CR2032



RF-COM-1CH-1ZN
8031414897896

Controllo luminosità 1 zone
Batteria CR2032

Brightness Remote Control 1 zone
Battery CR2032



RF-COM-2CH-1ZN
8031414897902

Controllo CCT 1 zone
Batteria CR2032

CCT Remote Control 1 zone
Battery CR2032



RF-COM-5CH-8ZN
8031414897926

Radiocomando RF 2.4G controllo RGB/RGBW/RGB+CCT 8 zone

8 scene 2xAAA non incluse
RF Remote Controller 8 zones 8 scenes
Battery: 2xAAA not included

REMOTE CONTROL



RF-RICEVITORE-1CH
8031414897933

Ricevitore RF 2.4G
1 canale per
WALLPAD
RADIOCOMANDO
WALLPAD DMX
utilizzabile per SINGOLO COLORE
Input 8.5A 12-24V
Output 1CH 8A - 40W/96W/192W/288W

RF 2.4G receiver box
2 channels for
WALLPAD
RADIOCOMANDO
WALLPAD DMX
usable for SINGLE COLOR
Input 8.5A 12-24V
Output 1CH 8A - 40W/96W/192W/288W

97 × 33 × 18 mm



RF-RICEVITORE-2CH
8031414876488

Ricevitore RF 2.4G
2 canali per
WALLPAD
RADIOCOMANDO
WALLPAD DMX
utilizzabile per SINGOLO COLORE/CCT
Input 10.5A 12-24V
Output 2CH;5A/CH - 2x(60-120)W

RF 2.4G receiver box
2 channels for
WALLPAD
RADIOCOMANDO
WALLPAD DMX
usable for SINGLE COLOR/CCT
Input 10.5A 12-24V
Output 2CH;5A/CH - 2x(60-120)W

97 × 33 × 18 mm



RF-RICEVITORE-5CH
8031414876495

Ricevitore RF 2.4G
5 canali per
WALLPAD
RADIOCOMANDO
WALLPAD DMX
utilizzabile per SINGOLO
COLORE/RGB/RGBW/RGB+CCT
Input 15.5A 12-24V
Output 5CH;3A/CH - 5x(36-72)W

F 2.4G receiver box
5 channels for
WALLPAD
RADIOCOMANDO
WALLPAD DMX
usable for SINGLE
COLOR/RGB/RGBW/RGB+CCT
Input 15.5A 12-24V
Output 5CH;3A/CH - 5x(36-72)W

114 × 38 × 20 mm



RF-RICEVITORE-5CH-PRO
8031414882724

Ricevitore RF 2.4G
5 canali per
WALLPAD
RADIOCOMANDO
WALLPAD DMX
utilizzabile per SINGOLO
COLORE/CCT/RGB/RGBW/RGB+CCT
Input 30.5A 12-48V
Output 5CH;6A/CH 12/24V 5 x (72-144)W
5CH;4A/CH 36/48V - 5x(144-192)W

RF 2.4G receiver box
5 channels for
WALLPAD
RADIOCOMANDO
WALLPAD DMX
usable for SINGLE
COLOR/CCT/RGB/RGBW/RGB+CCT
Input 30.5A 12-48V
Output 5CH;6A/CH 12/24V 5x(72-144)W
5CH;4A/CH 36/48V - 5x(144-192)W

179 × 56 × 30 mm



RF-RICEVITORE-4CH-IP67
8031414882717

IP67

Ricevitore RF 2.4G
4 canali per
WALLPAD
RADIOCOMANDO
WALLPAD DMX
utilizzabile per SINGOLO
COLORE/RGB/RGBW
Input 20.5A 12-36V
Output 4CH;5A/CH - 4x(60-180)W

RF 2.4G receiver box
4 channels for
WALLPAD
RADIOCOMANDO
WALLPAD DMX
usable for SINGLE
COLOR/RGB/RGBW
Input 20.5A 12-36V
Output 4CH;5A/CH - 4x(60-180)W

176 × 78 × 38 mm



RF-WIFI-CONTROL-5CH
8031414878710

Ricevitore Wi-Fi + RF 2.4G
5 canali per
WALLPAD
RADIOCOMANDO
WALLPAD DMX
utilizzabile per SINGOLO
COLORE/CCT/RGB/RGBW/RGB+CCT
Input 15.5A 12-24V
Output 5CH;3A/CH - 5x(36-72)W

Wi-Fi + RF 2.4G receiver box
5 channels for
WALLPAD
RADIOCOMANDO
WALLPAD DMX
usable for SINGLE
COLOR /CCT/RGB/RGBW/RGB+CCT
Input 15.5A 12-24V
Output 5CH;3A/CH - 5x(36-72)W

114 × 38 × 20 mm



RF-BT-CONTROL-5CH
8031414878826

Ricevitore Bluetooth + RF 2.4G
5 canali per
WALLPAD
RADIOCOMANDO
WALLPAD DMX
utilizzabile per SINGOLO
COLORE/CCT/RGB/RGBW/RGB+CCT
Input 15.5A 12-24V
Output 5CH;3A/CH - 5x(36-72)W

Bluetooth + RF 2.4G receiver box
5 channels for
WALLPAD
RADIOCOMANDO
WALLPAD DMX
usable for SINGLE
COLOR /CCT/RGB/RGBW/RGB+CCT
Input 15.5A 12-24V
Output 5CH;3A/CH - 5x(36-72)W

114 × 38 × 20 mm




RF-AMPLIFICATORE-5CH
8031414882700

Amplificatore 5 canali
Input 25.5A 12-24VDC
Output 5CH;5A/
CH 12/24V - 5x(60-120)W

5 Channel amplifier
Input 25.5A 12-24VDC
Output 5CH;5A/
CH 12/24V - 5x(60-120)W

107 × 75 × 24,5 mm

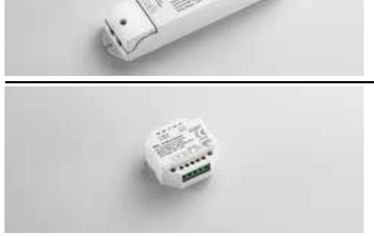

RF-AMPLIFICATORE-2CH
8031414882694

Amplificatore 2 canali
Input 16.5A 12-36VDC
Output 2CH;8A/
CH 12/36V - 2x(96-288)W

2 Channel amplifier
Input 16.5A 12-36VDC
Output 2CH;8A/
CH 12/36V - 2x(96-288)W

175 × 45 × 27 mm

RF-RIPETITORE
8031414882731

Ripetitore di segnale RF 2.4G
AC100-240V DC12-24V

RF 2.4G signal Repeater
AC100-240V DC12-24V

52 × 52 × 26 mm

SPI CONTROLLER





LED-FORREST-SPI
8031414927319

Controller per strip led
Pixel to Pixel effetto “RUN”.

Avvio Show e spegnimento
tramite pulsante N/O.

Compatibile con strip led Pixel to
Pixel SPI WS2811 o altri protocolli.

Lunghezza strip, direzione e
velocità programmabile
tramite APP NewlabForrest.

Uscita di sincronia per
effetti di rincorsa multipli.

Pixel to Pixel LED strip
controller with "RUN" effect.

Show start and turn off via N/O button.

Compatible with Pixel to Pixel
SPI WS2811 LED strips or other protocols.

Strip length, direction and
speed programmable via
NewlabForrest APP.

Synchronization output for
multiple chasing effects.



RF-CONTROL-SPI
8031414927340

5-24VDC; 8A
Input signal: RF2.4G;
work with R9 remote;
Output signal: SPI (TTL)
Control dots: 1024
Dynamic mode:
32 kinds color light, 8 kinds white light
Compatible with
49 kinds of Driving Ics

Compatible ICs: TM1803, TM1804, TM1809, TM1812, UCS1903, UCS1909, UCS1912, SK6813, UCS2903, UCS2909, UCS2912, WS2811, WS2812, WS2813, WS2815, TM1829, TLS3001, TLS3002, GW6205, MBI6120, TM1814B(RGBW), SK6812(RGBW), WS2813(RGBW), WS2814(RGBW), UCS8904B(RGBW), LPD6803, LPD1101, D705, UCS6909, UCS6912, LPD8803, LPD8806, WS2801, WS2803, P9813, SK9822, TM1914A, GS8206, GS8208, UCS2904, SM16804, SM16825, GS8206, UCS2603, SM16714D, SM16703P, UCS7604(RGBW), UCS7804(RGBW).

97 × 33 × 18 mm



RF-WIFI-CONTROL-SPI
8031414927333

5-24VDC; 8A
Input signal: Tuya APP + RF 2.4GHz;
Output signal: SPI(TTL) x 2
Control dots: Max.1000
Rich dynamic effects,
Multiple music rhythms,
Wireless remote control
Compatible with 49 kinds
of RGB or RGBW LED strips

114 × 38 × 20 mm



RF-DMX-DECODER-SPI
8031414927357

5-24VDC
Input signal: DMX512/RDM+RF 2.4G;
Output signal: pixel signal
Control dots: 170 pixels (RGB 510 CH);
Max 900pixels
Compatible with 37 kinds of Driving ICs; Numeric diaplay
Reverse Polarity Protection

Compatible ICs: TM1803, TM1804, TM1809, TM1812, UCS1903, UCS1909, UCS1912, SK6813, UCS2903, UCS2909, UCS2912, WS2811, WS2812, WS2813, WS2815, TM1829, TLS3001, TLS3002, GW6205, MBI6120, TM1814B(RGBW), SK6812(RGBW), SM16714(RGBW), SM16703P, SM16714D, WS2813(RGBW), WS2814(RGBW), UCS8904B(RGBW), LPD6803, LPD1101, D705, UCS6909, UCS6912, LPD8803, LPD8806, WS2801, WS2803, P9813, SK9822, TM1914A, GS8206, GS8208, UCS2904, SM16804, SM16825, UCS5603, UCS2603.

170 × 50 × 23 mm



RF-PIR-CONTROL-SPI
8031414927326

Input voltage: 5-24VDC;
Output type: 2*SPI(TTL),
Input type: PIR sensor + Push button
Pixel number: Max 960
Comes with 2 PIR Sensors(ER-C),
1 daylight sensor and 2 PIR sensor
extension line(5m)
Compatible with 28 kinds driving ICs

Compatible ICs: TM1804, TM1809, TM1812, UCS1903, UCS1909, UCS1912, UCS2903, UCS2909, UCS2912, WS2811, WS2812, TM1829, TM1914A, GW6205, GS8206,GS8208,LPD6803, LPD1101, D705, UCS6909, UCS6912, LPD8803, LPD8806, WS2801, WS2803, P9813, SK9822, SM16703P.

186 × 86 × 25 mm



RF-CONTROL-32CH-SPI
8031414927364

Input voltage: 5-24VDC;
Output voltage: 32 x (5-24)VDC;
32CH, 1A/CH; 32 x (5-24)W
Output type:
Constant voltage + SPI(TTL)
Reverse Polarity Protection
Comes with 2 PIR Sensors(ER-C)
and 1 daylight sensor,
2 PIR sensor extension line(5m)

Compatible ICs: TM1804, TM1809, TM1812, UCS1903, UCS1909, UCS1912, UCS2903, UCS2909, UCS2912, WS2811, WS2812, TM1829, TM1914A, GW6205, GS8206,GS8208,LPD6803, LPD1101, D705, UCS6909, UCS6912, LPD8803, LPD8806, WS2801, WS2803, P9813, SK9822, SM16703P.

186 × 86 × 25 mm



RF-COM-SPI
8031414927371

RGB/RGBW RF Remote Controller
1 zone
Battery: CR2032

58,5 × 9 × 107 mm

SENSORI
SENSORS

Sensori industriali di movimento /
Industrial motion sensors



LED-SENSOR-HB
8031414879731

Load capacity
400W
220V - 240V

Accessori inclusi /
Included accessories



1 / function




In un ambiente sufficientemente luminoso la lampada non si accende anche se viene rilevato movimento.

With sufficient ambient light, the light will not be switched on even if with motion signal.



In un ambiente poco luminoso il sensore accende la lampada non appena viene rilevato un movimento.

With insufficient ambient light, the sensor switches on the light when motion is detected.



Trascorso il tempo di attesa, il sensore spegne la lampada quando non viene rilevato movimento.

After elapse of hold time, the sensor switches off the light when no motion is detected.




LED-SENSOR-TP
8031414879724

IP65

Load capacity
no limitation
220V - 240V

1 / function




In un ambiente sufficientemente luminoso la lampada non si accende anche se viene rilevato movimento.

With sufficient ambient light, the light will not be switched on even if with motion signal.



In un ambiente poco luminoso il sensore accende la lampada non appena viene rilevato un movimento.

With insufficient ambient light, the sensor switches on the light when motion is detected.



Trascorso il tempo di attesa, il sensore spegne la lampada quando non viene rilevato movimento.

After elapse of hold time, the sensor switches off the light when no motion is detected.



LED-SENSOR-REMOTE
8031414879717

Radiocomando per sensori industriali.	Industrial sensor remote control.

SENSORI
SENSORS

Sensori adattabili a qualsiasi prodotto di Iluminotecnico /
Sensors compatible for any lighting products

I-SENSORE-360
8031435901237

IP44

Sensore PIR 230V max 1600W 360° distanza massima 5m. time 10 sec. - 4 min. lux 2 - 2000	PIR sensor 230V max 1600W 360° max 5m. time 10 sec. - 4 min. lux 2 - 2000






I-SENSORE-130
8031434401219

IP44

Sensore PIR 230V max 1000W 130° distanza massima 12m. time 10 sec. - 4 min. lux 2 - 2000 base accessoria angolare	PIR sensor 230V max 1000W 130° max 12m. time 10 sec. - 4 min. lux 2 - 2000 corner accessory base





I-CLAY-SCADER
8031414865031

Scatola di derivazione elettrica CLAY in porcellana bianca

White porcelain external junction box CLAY

Ø 80 x H 45 mm



I-CLAY-INTERRUTTORE
8031414865048

Interruttore rotativo CLAY in porcellana bianca 10A AC230V 50Hz

White porcelain rotating switch CLAY 10A AC230V 50Hz

Ø 65 x H 60 mm



I-CLAY-PRESA
8031414865055

Presa elettrica CLAY polivalente in porcellana bianca 10/16A AC230V 50Hz

White porcelain universal socket CLAY 10/16A AC230V 50Hz

Ø 65 x H 37 mm



I-CLAY-PRESA-F
8031414865062

Presa elettrica Schuko CLAY in porcellana bianca

White porcelaine Schuko socket CLAY

Ø 65 x H 50 mm



I-CLAY-E27
8031414871117

Portalampada CLAY in porcellana bianca E27 AC230V 50Hz

White porcelaine E27 lamp-holder AC230V 50Hz

Ø 45 x H 60 mm



I-CLAY-E14
8031414870929

Portalampada CLAY in porcellana bianca E14 AC230V 50Hz

White porcelaine E14 lamp-holder AC230V 50Hz

Ø 35 - H 60 mm



I-CLAY-BASE
8031414870936

Rosone in porcellana bianca

White porcelain canopy

Ø 105 x H 30 mm



I-CLAY-ISOLATORI
8031414865079

Kit 4 pz isolatori CLAY in porcellana bianca

White porcelain pulleys CLAY set 4 pcs

Ø 18 x H 20 mm



I-CLAY-CAVO-BCO
8031414865086

Cavo elettrico CLAY trecciato con rivestimento tessile bianco

Twisted white fabric wire CLAY

5 m
3 × 0,75 mm

I-CLAY-CAVO-2P-BCO
8031414865277

Cavo elettrico CLAY trecciato con rivestimento tessile bianco

Twisted white fabric wire CLAY

5 m
2 × 0,75 mm

I-CLAY-CAVO-R25 BCO
8031414871162

Cavo elettrico CLAY trecciato con rivestimento tessile bianco

Twisted white fabric wire CLAY

25 m
2 × 0,75 mm



I-CLAY-CAVO-ORO
8031414865093

Cavo elettrico CLAY trecciato con rivestimento tessile in oro

Gold twisted fabric wire CLAY

5 m
3 × 0,75 mm

I-CLAY-CAVO-2P-ORO
8031414865284

Cavo elettrico CLAY trecciato con rivestimento tessile oro

Gold twisted fabric wire CLAY

5 m
2 × 0,75 mm

I-CLAY-CAVO-R25 ORO
8031414871131

Cavo elettrico CLAY trecciato con rivestimento tessile oro

Gold twisted fabric wire CLAY

25 m
2 × 0,75 mm



I-CLAY-CAVO-R25 MAR
8031414871148

Cavo elettrico CLAY trecciato con rivestimento tessile marrone

Brown twisted fabric wire CLAY

25 m
3 × 0,75 mm



I-CLAY-CAVO3X1,5 BCO
8031414877980

Cavo elettrico CLAY trecciato con rivestimento tessile bianco

White twisted fabric wire CLAY

25 m
3 × 1,5 mm



I-CLAY-CAVO3X1,5 MAR
8031414878000

Cavo elettrico CLAY trecciato con rivestimento tessile in marrone

Brown twisted fabric wire CLAY

25 m
3 × 1,5 mm



I-CLAY-CAVO3X1,5 ORO
8031414877997

Cavo elettrico CLAY trecciato con rivestimento tessile in oro

Gold twisted fabric wire CLAY

25 m
3 × 1,5 mm



I-PORTALAMPADE-E14-L
8031440354592

Portalampada E14 con copertura liscia in PET
E14 lamp holder with smooth PET cover



I-PORTALAMPADE-E14-S
8031440354578

Portalampada E14 in PET con copertura filettata e ghiera
E14 PET lamp holder with cover threaded and ring



I-PORTALAMPADE-E14-T
8031440354585

Portalampada E14 in PET con copertura mezza filettata con ghiera
E14 PET lamp holder with half threaded



I-PORTALAMPADE-E27-L
8031440354554

Portalampada E27 con copertura liscia in PET
E27 lamp holder with smooth PET cover



I-PORTALAMPADE-E27-P
8031440354561

Portalampada E27 in PBT
E27 lamp holder in PBT



I-PORTALAMPADE-E27-S
8031440354530

Portalampada E27 in PET con copertura filettata e ghiera
E14 PET lamp holder with cover threaded and ring



I-PORTALAMPADE-E27-T
8031440354547

Portalampada E27 in PET con copertura mezza filettata con ghiera
E14 PET lamp holder with half threaded



I-PORTALAMPADE-GU10
8031435751221

Portalamapada GU10 in PBT con cavo di 12 cm
GU10 lamp holder in PBT with 12 cm cable



I-PORTALAMPADE-MR16
8031439761264

Portalampada MR16 in PBT con cavo di 10 cm
Lamp holder MR16 in PBT with 10 cm cable



I-PORTALAMPADE-T8
8031439851262

Portalampada T8 in PBT fissaggio a clip
Lamp holder T8 in PBT clip fixing




I-PORTALAMPADE-R7S
8031414861491

Portalampada R7S 118 mm in PBT incluso filo da 15 cm
Lamp holder R7S 118 mm in PBT including 15 cm wire



I-PORTALAMPADE-G9
8031414862962

Portalampada G9 in PBT con cavo di 10 cm
Lamp holder G9 in PBT with 10 cm cable



INC-MATRIX-KIT
8031436551233

Kit molle e anello per faretti incasso GU10
Kit springs and ring for recessed spotlights GU10



CABLAGGIO
8031414865499

Cabl. trip. cavo tondo bianco H05VV-F spina Italia 10A, 250V
White round cable harness H05VV-F plug Italy 10A, 250V
2,5 m
3 × 0,75 mm

ADATTATORI
LAMPHOLDER ADAPTERS



ADATTATORE-E14-E27
8031439351267

Adattatore da
E14 a E27 in PET

Lamp holder adapter
from E14 to E27 in PET



ADATTATORE-E27-E14
8031439391263

Adattatore da
E27 a E14 in PET

Lamp holder adapter
from E27 to E14 in PET



ADATTATORE-E27-2E27
80314439371265

Adattatore da
E27 a 2 E27 in PET

Lamp holder adapter
from E27 to E27 in PET



ADATTATORE-E27-GU10
8031436171233

Adattatore da
E27 a GU10 in PET

Lamp holder adapter
from E27 to GU10 in PET



ADATTATORE-E14-GU10
8031439361266

Adattatore da
E14 a GU10 in PET

Lamp holder adapter
from E14 to GU10 in PET



ADATTATORE-GU10-E14
8031439431266

Adattatore da
GU10 a E14 in PET

Lamp holder adapter
from GU10 to E14 in PET



ADATTATORE-GU10-E27
8031439421267

Adattatore da
GU10 a E27 in PET

Lamp holder adapter
from GU10 to E27 in PET



ADATTATORE-G9-E27
8031439411268

Adattatore da
G9 a E27 in PET

Lamp holder adapter
from G9 to E27 in PET

ADATTATORI
LAMPHOLDER ADAPTERS



ADATTATORE-G9-E14
8031439401269

Adattatore da
G9 a E14 in PET

Lamp holder adapter
from G9 to E14 in PET



ADATTATORE-E27-E27
8031439451264

Adattatore da E27 a E27
in PET con flessibile
20 cm in metallo

Lamp holder adapter
from E27 to E27 in PET with
20 cm metal flexible tube



ADATTATORE-EUC-UKG
8031414879809

Adattatore presa (EU) tipo C
a presa (UK) tipo G

Adaptor (EU) C to (UK) G



ADATTATORE-EUF-UKG
8031414879816

Adattatore (EU) F a (UK) G

Adaptor (EU) F to (UK) G





ADATTATORE-EU2-E27
8031414922796

Adattatore per
lampada d'emergenza

Emergency adapter

WI-FI
SMART INTEC

SMART INTEC SMART LIFE Powered by tuya Intelligence Inside

SMART INTEC

SMART HUB

SMART INTEC BLUETOOTH SIG MESH

SMART-GATEWAY-BT
8031414878970

Interfaccia di collegamento
dispositivi bluetooth
con rete WIFI


Device connection
interface bluetooth
with WIFI network



SMART PLUG

WI-FI SMART INTEC

SMART-IR
8031414878703

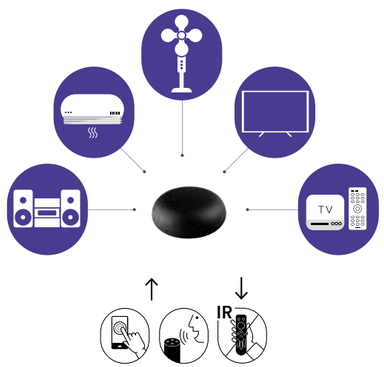



SMART PLUG

WI-FI SMART INTEC



SMART-POWER-SC4USB3
8031414879014

Adattatore multipresa WIFI
4 Schuko 3 USB 1000-2400W 10A
Input 100-240V
WIFI 2.4GHZ

WIFI multi-socket adapter
4 Schuko 3 USB 1000-2400W 10A
Input 100-240V
2.4GHZ WIFI

WI-FI SMART INTEC



SMART-PRESA
8031414878987

Adattatore presa
WIFI 230V 50HZ 16A
Frequenza 2.4GHz

WIFI socket adapter
230V 50HZ 16A
2.4GHz frequency

SMART CONTROLLER

WI-FI SMART INTEC



SMART-SWITCH-2
8031414879045

Controller WIFI 2.4GHZ
per accensione e timer
Interruttori 2 via 230V max 10A

2.4GHZ WIFI Controller
for ignition and timer
2-way switches 230V max 10A

WI-FI SMART INTEC



SMART-SWITCH-1
8031414879038

Controller WIFI 2.4GHZ
per accensione e timer
Interruttori 1 via 230V max 10A

2.4GHZ WIFI Controller
for ignition and timer
1-way switches 230V max 10A

WI-FI SMART INTEC



SMART-START
8031414879021

Controller WIFI 2.4GHz
per accensione e timer prodotti
230V max 2200W/10A

2.4GHZ WIFI Controller
for ignition and timer products
230V max 2200W/10A

SMART SENSOR

WI-FI SMART INTEC



SMART-SENSOR
8031414879007

Sensore infrarossi
WIFI 2.4GHz

Infrared sensor
WIFI 2.4GHz

WI-FI SMART INTEC



SMART-PORTER
8031414878994

Sensore porte e finestre
WIFI 2.4GHz alimentato
a batterie AAA1,5V2

Sensor for door and windows
WIFI 2.4ghz battery
powered AAA1,5V2

NOTES

NOTES

divisione F.A.N. EUROPE LIGHTING s.r.l. a socio unico

Agglomerato A.S.I

NAPOLI
Località Bosco Fangone
80035 Nola (NA)

T +39 081 3151017
T +39 081 8210771

MILANO
Via Monzoro, 46
20007 Cornaredo (MI)

T +39 02 84345083

info@faneurope.it
www.faneurope.it

Download Catalogue

SMART INTEC

Download App Smart Intec on:

SMART LIFE

Powered by tuya Intelligence Inside

concept
DITRE IDEAS MAKERS

graphic artwork & photo editing
Ditre.com

photo
Quasarfoto.com
Ditre.com
F.A.N. Europe photographic archive

imagebank
shutterstock.com
istockphoto.com
unsplash.com

styling
Cristina Romanello
Laila Casellato

credits
Infiniti Design
Pointhouse
Studio Menguante
Paolo Loschi
Gressoni
Vbc ceramiche

printed in Italy
Graficametelliana.com
April 2024

L'azienda si riserva il diritto
di effettuare modifiche ai
prodotti presenti in questo
catalogo senza preavviso alcuno
/
The company reserves
the right to make changes
to the products in this
catalog without prior notice

fan europe®

