




Cable entry via elastic membranes



DE 9346

- 1.5-4 mm², Cu 3~







- with terminals
- 5-pole per pole 6 x 1.5 mm² sol, 4 x 2.5 mm² sol, 3 x 4 mm² sol, 2 x 6 mm² sol
- 11 elastic membranes, closed cable entries, sealing range Ø 6-18 mm
- with one cable entry in the bottom, sealing range Ø 6-18 mm
- with cable retention (2 pc.) for cable tie up to 6.5 mm width
- colour: white, RAL 9016

| | |
|--------------------------------|----------------------------------|
| rated insulation voltage | U _i = 690 V a.c./d.c. |
| material | PP (polypropylene) |
| degree of protection | IP 55 |
| width | 98 mm |
| height | 98 mm |
| depth | 55 mm |
| weight | 0,143 kg |
| tightening torque for terminal | 1.2 Nm |
| in accordance with | IEC 60670-22 |

Drawings

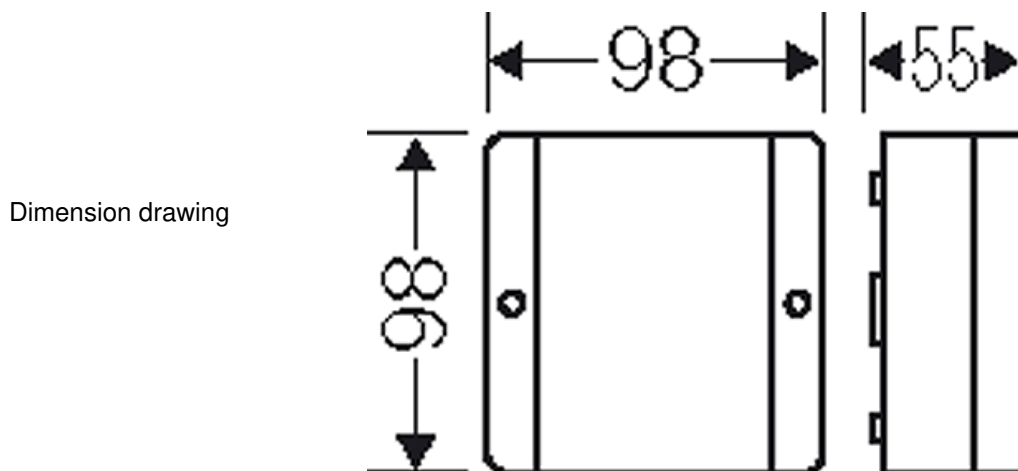

Detail mass

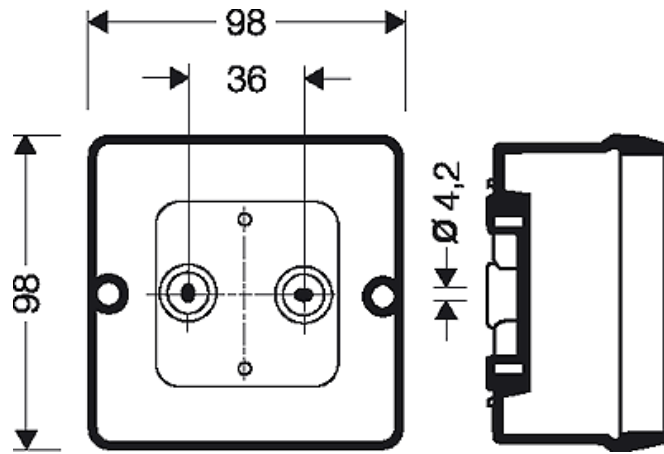

Box walls

Operating and ambient conditions

| | |
|---|--|
| Application area | Suitable for indoor installation and outdoor installation, protected against weather influences |
| Ambient temperature | Average value over 24 hours + 35 °C Maximum value + 40 °C Minimum value - 25 °C |
| Relative humidity | 50% at 40° C short-time 100% at 25° C |
| Fire protection in the event of internal faults | Demands placed on electrical devices from standards and laws Minimum requirements - Glow wire test in accordance with IEC 60695-2-11: - 650°C for boxes and cable glands - 850°C for parts of insulating material necessary to retain current carrying parts in position |
| Burning behaviour | Glow wire test IEC 60695-2-11: 750 °C UL Subject 94: V-2 |
| Degree of protection against mechanical load | IK07 (2 Joule) |
| Toxic behaviour | halogen-free silicone-free "halogen-free" in accordance with the examination of the cables and insulated wires - corrosiveness of fumes - as per IEC 60754-2 |
| Note: | For material properties see technical data. |