



iNTEC  
LIGHT



**IN.TEC**  
LIGHT

**In.tec: Materiali, Tecniche, Innovazione.**

Le collezioni della serie IN.TEC offrono la più ampia libertà di scelta, tra un gran numero di soluzioni coordinate per tutte le esigenze di illuminazione ad alto contenuto tecnologico. Ideali in qualsiasi ambientazione di arredo e per la fornitura Contract di alta qualità. Frutto della progredita ricerca e del know-how specifico Fan Europe, questi prodotti sono destinati a durare nel tempo, con in più quel tocco di originalità inconfondibile che li rende sempre protagonisti dell'ambiente.

**In.tec: Materiali, Tecniche, Innovazione.**

*IN.TEC collection series offer a wide choice of lighting solutions for any lighting option from the basic to the highest and newest technologies. Our products' versatility allow the utilization in any furniture setting even in the most exigent qualified contracts. Result of continuous research and innovation of company Fan Europe, these products are projected for long lasting and for following day by day the new borders of efficiency. Showing always some feature of originality our products are recognized as protagonists of any scene.*










# INDICE CATEGORIE - INDEX CATEGORIES

<b>SISTEMA A BINARI</b> <i>TRACK RAIL SYSTEM</i>	Pag. 8
<b>INCASSI</b> <i>RECESSED</i>	Pag. 22
<b>GESSO</b> <i>GYPSUM</i>	Pag. 74
<b>LAMPADE DA MURO</b> <i>WALL LAMP</i>	Pag. 102
<b>FARETTI</b> <i>SPOT LIGHT</i>	Pag. 138
<b>APPLIQUE DA BAGNO</b> <i>BATHROOM WALL LAMP</i>	Pag. 158
<b>SOTTOPENSILI</b> <i>LED CABINETS</i>	Pag. 173
<b>ESTERNI</b> <i>OUTDOOR</i>	Pag. 182
<b>PLAFONIERE E APPLIQUE DA ESTERNO</b> <i>OUTDOOR CEILING LAMP</i>	Pag. 232
<b>CALPESTABILI</b> <i>LED IN-GROUND</i>	Pag. 246
<b>PROIETTORI</b> <i>FLOOD LIGHT</i>	Pag. 262
<b>LAMPADE INDUSTRIALI</b> <i>HIGHT BAY</i>	Pag. 282
<b>LUCI DECORATIVE TECNICHE</b> <i>TECHNICAL DECORATION LIGHTING</i>	Pag. 294
<b>KIT STRIP E FIBRE OTTICHE</b> <i>STRIP</i>	Pag. 314



## SISTEMA A BINARI - TRACK RAIL SYSTEM

	TRAIN	Pag. 15
	EAGLE	Pag. 16
	ARROW	Pag. 19
	EXPRESS	Pag. 19
	TRACK	Pag. 20

## INCASSI - RECESSED

	APOLLO	Pag. 28
	ELITE	Pag. 34
	SINKRO	Pag. 36
	STARLIGHT	Pag. 38
	LYRA	Pag. 40
	MARK	Pag. 42
	DELTA	Pag. 43
	LYBRA	Pag. 44
	HORUS	Pag. 45

## INCASSI - RECESSED

	SLIM	Pag. 46
	PLASMA	Pag. 48
	FLAP RT	Pag. 49
	FLAP	Pag. 50
	PANEL	Pag. 52
	PANEL STRUTTURA	Pag. 55
	KLIO	Pag. 56
	GENESIS	Pag. 58
	ZENIT	Pag. 60
	POLARIS	Pag. 61
	ORIONE	Pag. 62
	GEMINI	Pag. 63
	POUND	Pag. 64
	KRONE	Pag. 65
	NADIR	Pag. 66

## INCASSI - RECESSED

	KLIPPE	Pag. 67
	SIRIO	Pag. 68
	FUSION	Pag. 70
	BLIZ	Pag. 71
	MATRIX	Pag. 72
	ALAN	Pag. 75
	GEMMA	Pag. 75
	ADAM	Pag. 76
	UP	Pag. 77

## GESSO - GYPSUM

	PHANTOM	Pag. 80
	SPETTRO	Pag. 81
	GHOST	Pag. 82
	SENSO	Pag. 84
	SPIRIT	Pag. 85

GESO - GYPSUM
















	SNOW	Pag. 86
	MORGANA	Pag. 87
	ARIEL	Pag. 89
	PROFY	Pag. 91
	SPACE	Pag. 92
	GABRIEL	Pag. 94
	ANIMA	Pag. 95
	SHINE	Pag. 96
	RUBIK	Pag. 96
	MOSES	Pag. 97
	CANDIDA	Pag. 98
	LEIRON	Pag. 99
	ABEL	Pag. 100
	SANTORINI	Pag. 101
	MYKONOS	Pag. 101

GESO - GYPSUM

	LELLA	Pag. 102
	PAULA	Pag. 102
	STEFAN	Pag. 102
	ANTHEA	Pag. 104
	BLUMA	Pag. 104
	ZARAH	Pag. 105
	FLORENZA	Pag. 105
	HYDRA	Pag. 108
	RIGEL	Pag. 109
	VEGA	Pag. 110
	ANDROMEDA	Pag. 111
	ANTARES	Pag. 112
	SIGMA	Pag. 113
	EPSILON	Pag. 114

LAMPADE DA MURO - WALL LAMP

LAMPADE DA MURO - WALL LAMP

	OMICRON	Pag. 115
	PHOENIX	Pag. 116
	ALCOR	Pag. 117
	ATLAS	Pag. 118
	OMEGA	Pag. 118
	LAMBDA	Pag. 119
	PEGASO	Pag. 119
	MERCURY	Pag. 120
	GAMMA	Pag. 121
	OMNIA	Pag. 122
	MIURA	Pag. 123
	TWILIGHT	Pag. 124
	MUSTANG	Pag. 125
	LANCER	Pag. 126
	VEYRON	Pag. 128

LAMPADE DA MURO - WALL LAMP

	BIOME	Pag. 129
	GOLF	Pag. 130
	AGERA	Pag. 131
	GRADO	Pag. 132
	KITE	Pag. 133
	DEZIR	Pag. 134
	ZONDA	Pag. 135
	HURACAN	Pag. 137
	ALFA	Pag. 138
	DELTA	Pag. 139
	GHIBLI	Pag. 140
	FOREVER	Pag. 144
	CAYENNE	Pag. 146
	TECHNO	Pag. 148

FARETTI - SPOT LIGHT

FARETTI - SPOT LIGHT

	MIAMI	Pag. 150
	SUNNY	Pag. 152
	COOPER	Pag. 154
	CADILLAC	Pag. 156
	LIMOGES	Pag. 157
	MITO	Pag. 158
	CARRERA	Pag. 160
	CRUISE	Pag. 164
	SCARAB	Pag. 165
	RIVA	Pag. 166
	WALLY	Pag. 167
	GAIA	Pag. 168
	KRISS	Pag. 168
	DADO	Pag. 169

APPLIQUE DA BAGNO - BATHROOM WALL LAMP

APPLIQUE DA BAGNO - BATHROOM WALL LAMP

	LELE	Pag. 169
	ROBY	Pag. 170
	ENDY	Pag. 171
	JOY	Pag. 171
	SHON	Pag. 172
	STEFANY	Pag. 173
	RAIN	Pag. 174
	F1/F2	Pag. 175
	Q1/Q2	Pag. 175
	ET	Pag. 176
	VISTA	Pag. 178
	SONAR	Pag. 179
	ODIC	Pag. 180
	YOUNG	Pag. 181

SOTTOPENSILI - LED CABINET











	SOTTOPENSILE	Pag. 182
	T5	Pag. 183
	BATTEN	Pag. 184
	EROS	Pag. 188
	NISMO	Pag. 189
	BETA	Pag. 190
	LADY	Pag. 192
	CLOE	Pag. 196
	MEGAN	Pag. 200
	ALYSON	Pag. 204
	OSLO	Pag. 206
	BOSTON	Pag. 207
	ATLANTA	Pag. 208
	DENVER	Pag. 208

	MEMPHIS	Pag. 209
	ORLANDO	Pag. 209
	LIONE	Pag. 210
	SEATTLE	Pag. 210
	AUSTIN	Pag. 211
	FOCUS	Pag. 213
	BONN	Pag. 214
	TOKIO	Pag. 214
	ROMA	Pag. 218
	MILANO	Pag. 220
	PISA	Pag. 222
	FIRENZE	Pag. 224
	SANTIAGO	Pag. 226
	VENEZIA	Pag. 228
	PAVIA	Pag. 230

	GAETA	Pag. 232
	BABILON	Pag. 8 234
	EXTRA	Pag. 238
	SENSITIVE	Pag. 239
	SHELLY	Pag. 240
	EVER	Pag. 241
	EASY	Pag. 244
	TOLEDO	Pag. 244
	SMART	Pag. 245
	IBIZA	Pag. 246
	BARCELONA	Pag. 249

	BARRET	Pag. 251
	RIDER	Pag. 252
	STEP	Pag. 254
	IMPACT	Pag. 255
	WALK	Pag. 256
	DRIVE	Pag. 258
	ONYX	Pag. 260
	SHELBY	Pag. 261
	LYKAN	Pag. 262
	BOLT	Pag. 264
	AKRON	Pag. 265
	KRONOS	Pag. 266

	COSMO	Pag. 267
	SHEGAR	Pag. 268
	VYSOR	Pag. 270
	TITAN	Pag. 272
	KRONOS	Pag. 274
	ELIOS	Pag. 276
	URANO	Pag. 282
	ATLANTIC ST	Pag. 288
	OCEAN	Pag. 289
	FUTURA	Pag. 290
	VISION	Pag. 292
	HELP	Pag. 294
	ETERNA	Pag. 296

	RAYS	Pag. 300
	WALLWASHER	Pag. 301
	IRIDE	Pag. 302
	RAINBOW	Pag. 304
	NEPTUNE	Pag. 307
	PAR 56	Pag. 309
	CONTROLLER	Pag. 310
	SUNLITE	Pag. 312
	SPLITTER	Pag. 315
	DRIVER	Pag. 316

	FIBRA OTTICA	Pag. 320
	TAYLOR	Pag. 321
	SURROUND	Pag. 322
	NEON FLEX	Pag. 324
	KIT STRIP	Pag. 326
	STRIP	Pag. 332
	PROFILI	Pag. 340
	DRIVER	Pag. 342
	SENSORI	Pag. 348
	ADATTATORI	Pag. 349
	PORTALAMPADE	Pag. 350
	REFLEX	Pag. 351



**iNTEC**  
LIGHT



### **SISTEMA A BINARI**

Sistema d'illuminazione flessibile per ambienti commerciali e privati ideali per creare un'esperienza che sappia risaltare e valorizzare in modo confortevole e semplice ogni singolo dettaglio. Con la tecnologia LED potrai salvaguardare l'ambiente e ottenere una notevole riduzione dei consumi di energia.

### **TRACK RAIL SYSTEM**

*Flexible lighting system for commercial and private environments are ideal to create an experience that knows how to stand out and enhance it so comfortable and easy every single detail. With the LED technology will be able to safeguard the environment and obtain a significant reduction of energy consumption.*





## TRAIN

Faro binario con adattatore trifase in alluminio pressofuso rifiniture in bianco o nero goffrato LED COB integrato  
 Track light with three phase adaptor aluminum spotlight finish embossed white or black built-in COB LED



### informazioni tecniche - technical information

NERO	LED-TRAIN-B-40WM 8031440360289	4000K	40W	☀️ 4000 Lumen	40°	PF 0,90	>15 000 on/off	h 25 000	🔌 driver incluso
	LED-TRAIN-B-40WC 8031440360456	3000K	40W	☀️ 4000 Lumen	40°	PF 0,90	>15 000 on/off	h 25 000	🔌 driver incluso
BIANCO	LED-TRAIN-W-40WM 8031440360296	4000K	40W	☀️ 4000 Lumen	40°	PF 0,90	>15 000 on/off	h 25 000	🔌 driver incluso
	LED-TRAIN-W-40WC 8031440360449	3000K	40W	☀️ 4000 Lumen	40°	PF 0,90	>15 000 on/off	h 25 000	🔌 driver incluso

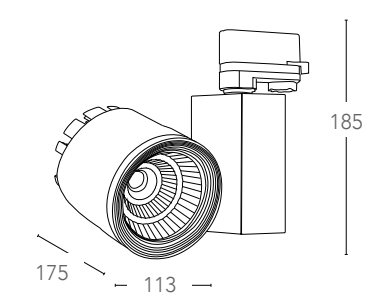


## EAGLE

Faro binario con adattatore trifase in alluminio pressofuso rifiniture in bianco o nero goffrato LED COB integrato  
Track light with three phase adaptor aluminum spotlight finish embossed white or black built-in COB LED




informazioni tecniche - technical information

	<b>LED-EAGLE-B-10WM</b> 8031440358774	4000K	<b>10W</b>	☀️ 1000 Lumen	40°	<b>PF 0,90</b>	⏻ >15 000 on/off	🕒 h 25 000	🔌 driver incluso
	<b>LED-EAGLE-B-10WC</b> 8031440358712	3000K	<b>10W</b>	☀️ 1000 Lumen	40°	<b>PF 0,90</b>	⏻ >15 000 on/off	🕒 h 25 000	🔌 driver incluso
	<b>LED-EAGLE-W-10WM</b> 8031440358750	4000K	<b>10W</b>	☀️ 1000 Lumen	40°	<b>PF 0,90</b>	⏻ >15 000 on/off	🕒 h 25 000	🔌 driver incluso
	<b>LED-EAGLE-W-10WC</b> 8031440358743	3000K	<b>10W</b>	☀️ 1000 Lumen	40°	<b>PF 0,90</b>	⏻ >15 000 on/off	🕒 h 25 000	🔌 driver incluso

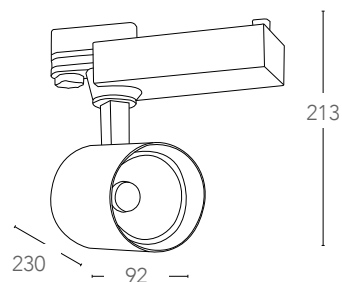


## EAGLE

Faro binario con adattatore trifase in alluminio pressofuso rifiniture in bianco o nero goffrato LED COB integrato  
Track light with three phase adaptor aluminum spotlight finish embossed white or black built-in COB LED

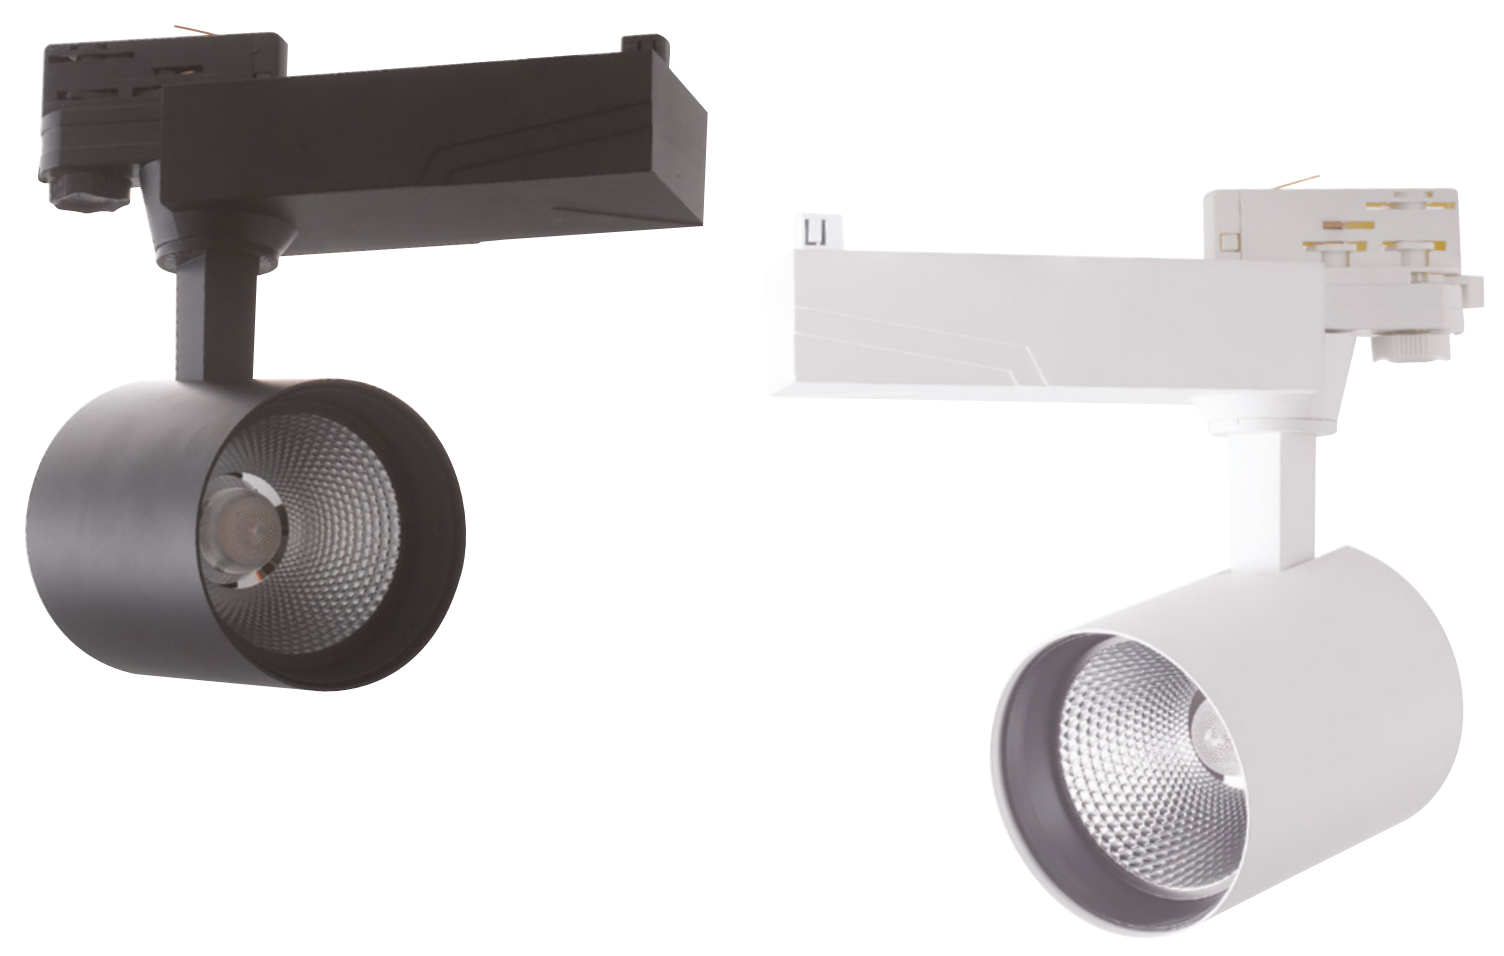

informazioni tecniche - technical information

	<b>LED-EAGLE-B-20WM</b> 8031440358767	4000K	<b>20W</b>	☀️ 2000 Lumen	40°	<b>PF 0,90</b>	⏻ >15 000 on/off	🕒 h 25 000	🔌 driver incluso
	<b>LED-EAGLE-B-20WC</b> 8031440358798	3000K	<b>20W</b>	☀️ 2000 Lumen	40°	<b>PF 0,90</b>	⏻ >15 000 on/off	🕒 h 25 000	🔌 driver incluso
	<b>LED-EAGLE-W-20WM</b> 8031440358736	4000K	<b>20W</b>	☀️ 2000 Lumen	40°	<b>PF 0,90</b>	⏻ >15 000 on/off	🕒 h 25 000	🔌 driver incluso
	<b>LED-EAGLE-W-20WC</b> 8031440358729	3000K	<b>20W</b>	☀️ 2000 Lumen	40°	<b>PF 0,90</b>	⏻ >15 000 on/off	🕒 h 25 000	🔌 driver incluso

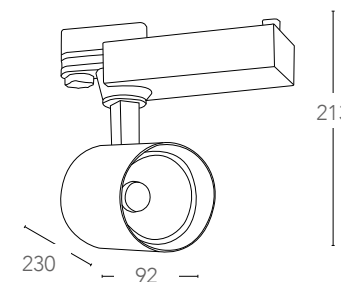


## EAGLE

Faro binario con adattatore trifase in alluminio pressofuso rifiniture in bianco o nero goffrato LED COB integrato  
Track light with three phase adaptor aluminum spotlight finish embossed white or black built-in COB LED




informazioni tecniche - technical information

NERO	LED-EAGLE-B-40WM 8031440358651	4000K	40W	4000 Lumen	40°	PF 0,90	>15 000 on/off	h 25 000	driver incluso
	LED-EAGLE-B-40WC 8031440358644	3000K	40W	4000 Lumen	40°	PF 0,90	>15 000 on/off	h 25 000	driver incluso
BIANCO	LED-EAGLE-W-40WM 8031440358637	4000K	40W	4000 Lumen	40°	PF 0,90	>15 000 on/off	h 25 000	driver incluso
	LED-EAGLE-W-40WC 8031440358620	3000K	40W	4000 Lumen	40°	PF 0,90	>15 000 on/off	h 25 000	driver incluso

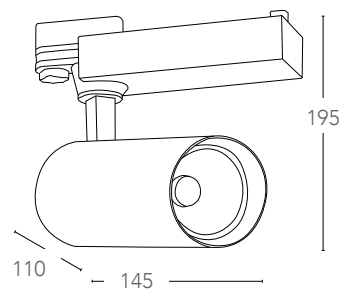

## ARROW

Faro binario con adattatore trifase in alluminio pressofuso rifiniture in bianco o nero goffrato LED COB integrato  
Track light with three phase adaptor aluminum spotlight finish embossed white or black built-in COB LED




LED-ARROW-40W  
8031439211264

3000K 40W 2800 Lumen 24° PF 0,90 >15 000 on/off h 25 000 driver incluso




## EXPRESS

Faro binario con adattatore trifase attacco E27 rifiniture in bianco satinato  
Track light with three phase adaptor with E27 lamp holder finish satin white




LED-EXPRESS  
8031440360470

1xE27 max 42w non include - not included

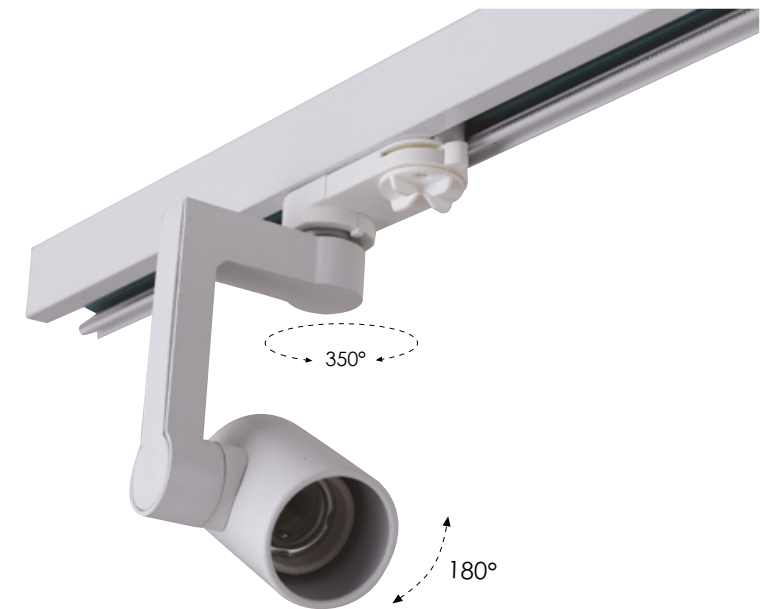

## TRACK

Binari ed accessori  
Track and components

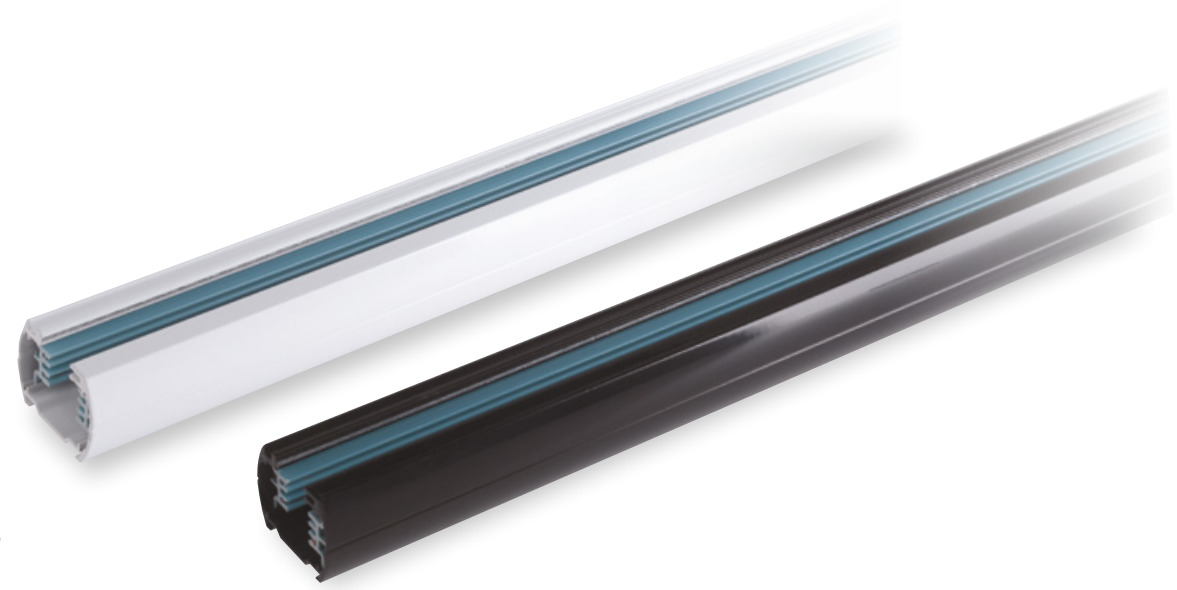

informazioni tecniche - technical information

bianco - white



LED-TRACK-1M  
8031439221263

nero - black



LED-TRACK-1M-NERO  
8031440360425

Binari elettrificati trifasi in alluminio 1 mt (tappi inclusi)  
Track rail in aluminium with threephase adaptor (endcap)

LED-TRACK-2M  
8031440360340


LED-TRACK-2M-NERO  
8031440360364

Binari elettrificati trifasi in alluminio 2 mt (tappi inclusi)  
Track rail in aluminium with threephase adaptor (endcap)

LED-TRACK-3M  
8031440360357

LED-TRACK-3M-NERO  
8031440360371

Binari elettrificati trifasi in alluminio 3 mt (tappi inclusi)  
Track rail in aluminium with threephase adaptor (endcap)

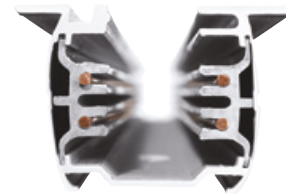

informazioni tecniche - technical information

LED-TRACK-1M-INC  
8031440361804

Binario guida ad incasso trifase 1mt bianco per proiettore led  
Recessed track rail in aluminium with threephase adaptor 1m

LED-TRACK-2M-INC  
8031440361811

Binario guida ad incasso trifase 2mt bianco per proiettore led  
Recessed track rail in aluminium with threephase adaptor 2m



informazioni tecniche - technical information

bianco - white

LED-TRACK-PL  
8031440358668

nero - black

LED-TRACK-PL-NERO  
8031440358699

Kit 2pz. basette per binario guida trifase  
Kit 2p. sourceface mount base for track rail three phase



informazioni tecniche - technical information

bianco - white

LED-TRACK-BASE  
8031440361668

nero - black

LED-TRACK-BASE NERO  
8031440361675

Base tonda per innesto binario trifase ø 120 mm H 25 mm  
Round base for track rail three phase ø 120 mm H 25 mm



informazioni tecniche - technical information



bianco - white

LED-TRACK-S-1,5  
8031440359061



nero - black

LED-TRACK-S-1,5-NERO  
8031440359078

Kit sospensione 1,5 mt per binari  
Suspension kit 1,5 mt for rail track

LED-TRACK-S-3  
8031440359047

LED-TRACK-S-3-NERO  
8031440359054

Kit sospensione 3 mt per binari  
Suspension kit 1,5 mt for rail track

## TRACK

Binari ed accessori  
Track and components



informazioni tecniche - technical information


bianco - white

LED-TRACK-MINI  
8031440358705

nero - black

LED-TRACK-MINI-NERO  
8031440357845

Connettore lineare mini per binari guida per circuito tre fasi  
Mini straight extension for three phase

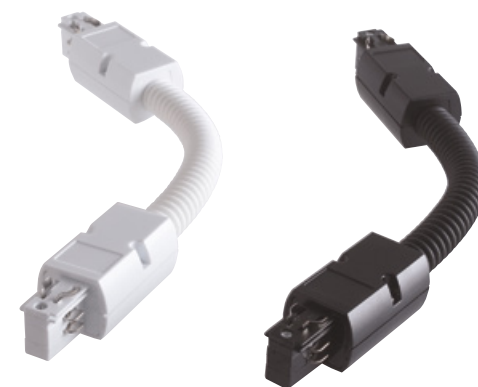

informazioni tecniche - technical information


bianco - white

LED-TRACK-FLEX  
8031440359085

nero - black

LED-TRACK-FLEX-NERO  
8031440359030

Connettore track flessibile per binari guida trifase  
Flexible power connector for three phase track rail

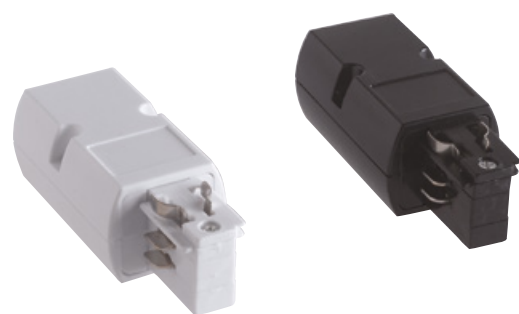

informazioni tecniche - technical information

bianco - white

LED-TRACK-NEST  
8031440311564

nero - black


LED-TRACK-NEST-NERO  
8031440360418

Innesto **sinistro** per binari guida entrata L N + cavo di terra per circuito a 3 fasi  
Power connector left side for three phase track rail

LED-TRACK-NEST-R  
8031440359009

LED-TRACK-NEST-R NERO  
8031440359016

Innesto **destra** per binari guida entrata L N + cavo di terra per circuito a 3 fasi  
Power connector right side for three phase track rail

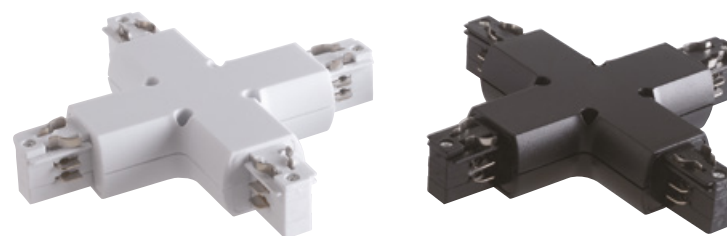

informazioni tecniche - technical information


bianco - white

LED-TRACK-X  
8031439231262

nero - black

LED-TRACK-X-NERO  
8031440360395

Connettore a croce per binari guida per circuito 3 fasi  
Extension X shape for three phase track rail

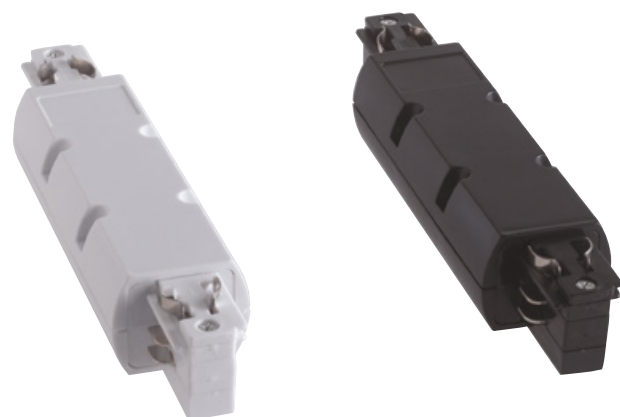

informazioni tecniche - technical information

bianco - white

LED-TRACK-I  
8031440311526

nero - black

LED-TRACK-I-NERO  
8031440360432

Connettore lineare per binari guida a 3 fasi  
Straight extension for three phase track rail



informazioni tecniche - technical information

bianco - white

LED-TRACK-L-R  
8031440358972

nero - black

LED-TRACK-L-R-NERO  
8031440359023

Connettore track **destra** a L per binari guida trifase  
L connector right side for three phase track rail


LED-TRACK-L  
8031439241261

LED-TRACK-L NERO  
8031440360401

Connettore track **sinistra** a L per binari guida trifase  
L connector left side for three phase track rail

## TRACK


Binari ed accessori  
Track and components

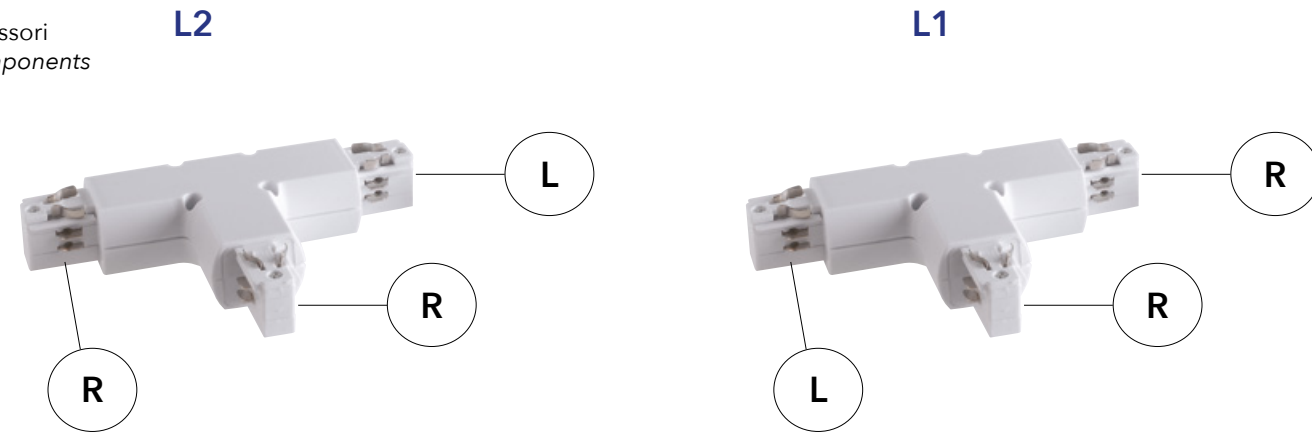

informazioni tecniche - technical information

bianco - white

<b>L2</b>	<b>LED-TRACK-T</b> 8031440311571	Connettore <b>destro</b> a T per binari guida entrata L N + cavo di terra per circuito a 3 fasi <i>T connector right side for three phase track rail</i>
<b>L1</b>	<b>LED-TRACK-T-L1</b> 8031440358989	Connettore <b>sinistro</b> a T per binari guida entrata L N + cavo di terra per circuito a 3 fasi <i>T connector left side for three phase track rail</i>

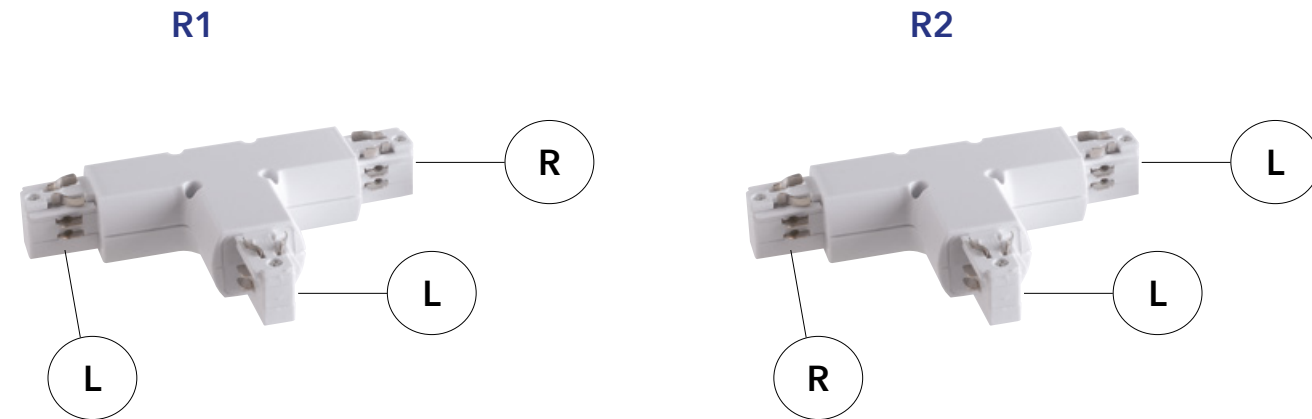


informazioni tecniche - technical information

bianco - white

<b>R1</b>	<b>LED-TRACK-T-R1</b> 8031440357449	Connettore <b>destro</b> a T per binari guida entrata L N + cavo di terra per circuito a 3 fasi <i>T connector right side for three phase track rail</i>
<b>R2</b>	<b>LED-TRACK-T-R2</b> 8031440357487	Connettore <b>sinistro</b> a T per binari guida entrata L N + cavo di terra per circuito a 3 fasi <i>T connector left side for three phase track rail</i>


**R: RIGHT (DESTRO)**  
**L: LEFT (SINISTRO)**

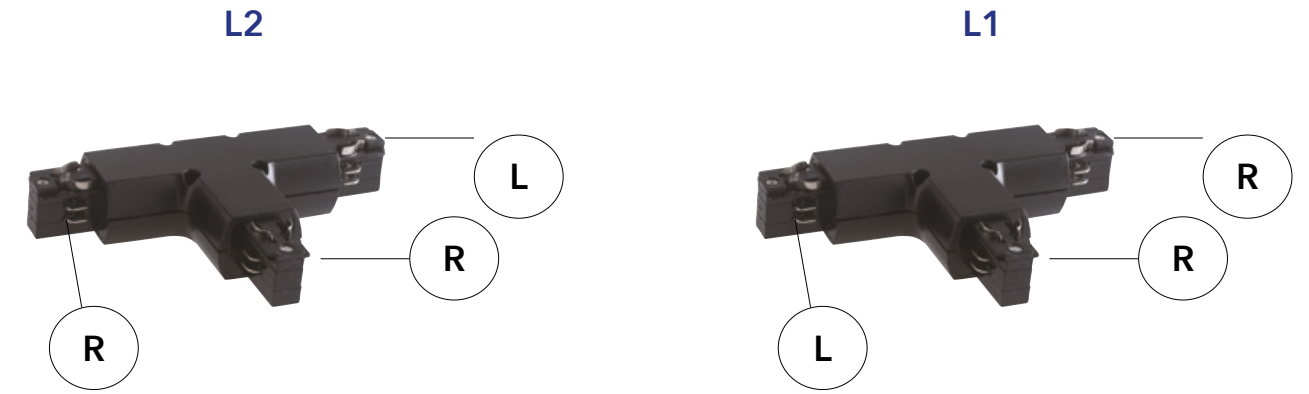

informazioni tecniche - technical information

nero - black

<b>L2</b>	<b>LED-TRACK-T NERO</b> 8031440360388	Connettore <b>destro</b> a T per binari guida entrata L N + cavo di terra per circuito a 3 fasi <i>T connector right side for three phase track rail</i>
<b>L1</b>	<b>LED-TRACK-T-L1-NERO</b> 8031440358996	Connettore <b>sinistro</b> a T per binari guida entrata L N + cavo di terra per circuito a 3 fasi <i>T connector left side for three phase track rail</i>

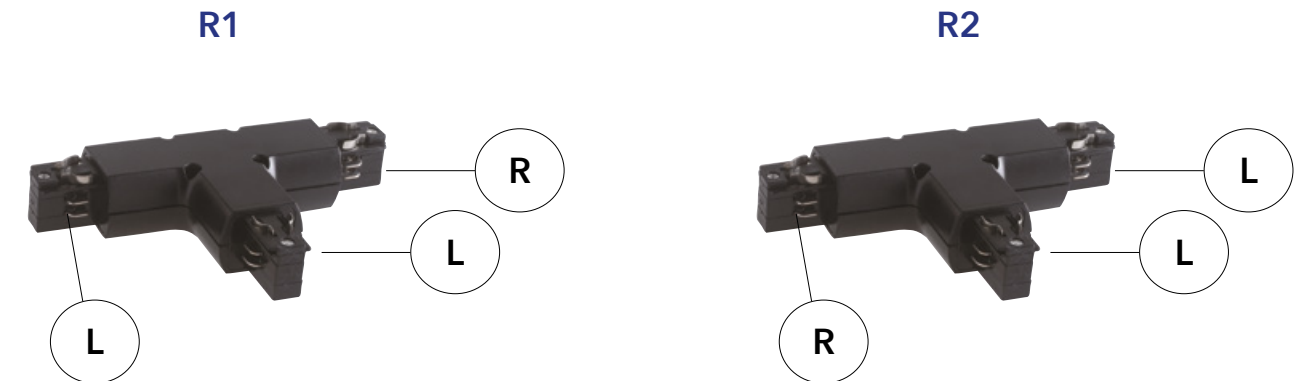

informazioni tecniche - technical information

nero - black

<b>R1</b>	<b>LED-TRACK-T-R1 NERO</b> 8031440357456	Connettore <b>destro</b> a T per binari guida entrata L N + cavo di terra per circuito a 3 fasi <i>T connector right side for three phase track rail</i>
<b>R2</b>	<b>LED-TRACK-T-R2 NERO</b> 8031440357661	Connettore <b>sinistro</b> a T per binari guida entrata L N + cavo di terra per circuito a 3 fasi <i>T connector left side for three phase track rail</i>

**R: RIGHT (DESTRO)**  
**L: LEFT (SINISTRO)**



### **INCASSI**

Incassi a LED per tutti gli ambienti commerciali e privati che necessitano di un preciso progetto di illuminazione diffusa o direzionale valorizzando in modo confortevole ed efficace ogni dettaglio richiesto.

### **RECESSED**

*Recessed LED fixtures for all commercial and private environments that need a precise project of diffuse or directional lighting enhancing comfortably and effectively every detail required.*



## APOLLO

Incasso orientabile in 4 direzioni con modulo LED COB. Bordo bianco con interno nero satinato  
 Down light adjustable 4 directions built-in COB LED. Satin white frame with satin black inside





### informazioni tecniche - technical information

INC-APOLLO-1X10C 8031440360623	3000K	10W	800 Lumen	40°	>10 000 on/off	h 25 000	driver incluso
INC-APOLLO-1X10M 8031440360630	4000K	10W	800 Lumen	40°	>10 000 on/off	h 25 000	driver incluso
INC-APOLLO-1X20C 8031440360692	3000K	20W	1600 Lumen	40°	>10 000 on/off	h 25 000	driver incluso
INC-APOLLO-1X20M 8031440360708	4000K	20W	1600 Lumen	40°	>10 000 on/off	h 25 000	driver incluso

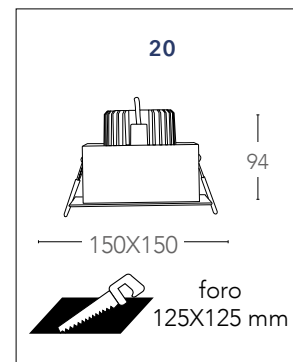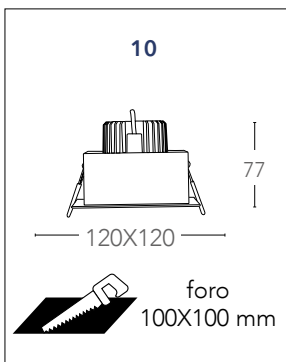

### informazioni tecniche - technical information

INC-APOLLO-1X30C 8031440360753	3000K	30W	2400 Lumen	40°	>10 000 on/off	h 25 000	PF 0,90 driver incluso
INC-APOLLO-1X30M 8031440360760	4000K	30W	2400 Lumen	40°	>10 000 on/off	h 25 000	PF 0,90 driver incluso
INC-APOLLO-1X45C 8031440360777	3000K	45W	4000 Lumen	40°	>10 000 on/off	h 25 000	PF 0,90 driver incluso
INC-APOLLO-1X45M 8031440360784	4000K	45W	4000 Lumen	40°	>10 000 on/off	h 25 000	PF 0,90 driver incluso

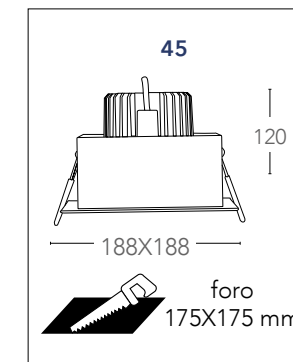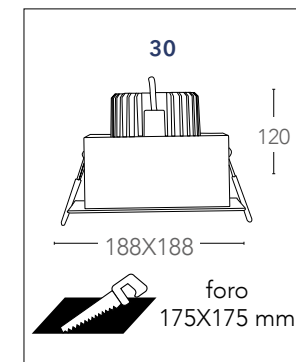




## APOLLO

Incasso orientabile in 4 direzioni con modulo LED COB. Bordo bianco con interno nero satinato  
 Down light adjustable 4 directions built-in COB LED. Satin white frame with satin black inside





### informazioni tecniche - technical information

INC-APOLLO-2X10C 8031440360647	3000K	2X10W	1600 Lumen	40°	>10 000 on/off	h 25 000	driver incluso
INC-APOLLO-2X10M 8031440360654	4000K	2X10W	1600 Lumen	40°	>10 000 on/off	h 25 000	driver incluso
INC-APOLLO-2X20C 8031440360715	3000K	2X20W	3200 Lumen	40°	>10 000 on/off	h 25 000	driver incluso
INC-APOLLO-2X20M 8031440360722	4000K	2X20W	3200 Lumen	40°	>10 000 on/off	h 25 000	driver incluso

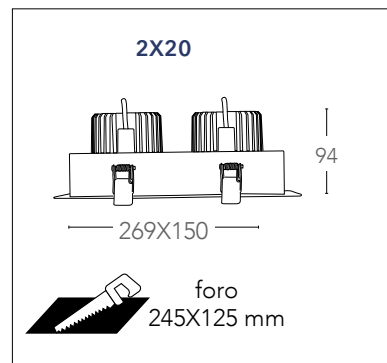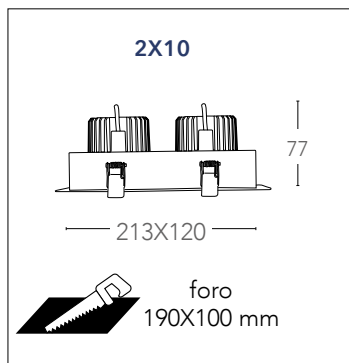

### informazioni tecniche - technical information

INC-APOLLO-2X30C 8031440360791	3000K	2X30W	4800 Lumen	40°	PF 0,90	>10 000 on/off	h 25 000	driver incluso
INC-APOLLO-2X30M 8031440360807	4000K	2X30W	4800 Lumen	40°	PF 0,90	>10 000 on/off	h 25 000	driver incluso
INC-APOLLO-2X45C 8031440360814	3000K	2X45W	8000 Lumen	40°	PF 0,90	>10 000 on/off	h 25 000	driver incluso
INC-APOLLO-2X45M 8031440360821	4000K	2X45W	8000 Lumen	40°	PF 0,90	>10 000 on/off	h 25 000	driver incluso

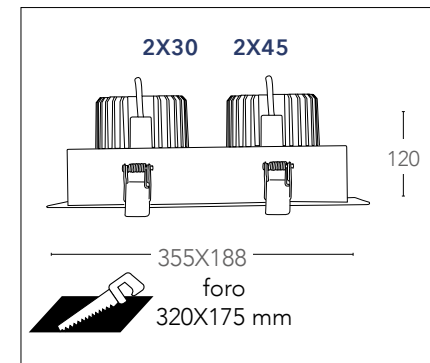



## APOLLO

Incasso orientabile in 4 direzioni con modulo LED COB.  
Bordo bianco con interno nero satinato  
Down light adjustable 4 directions built-in COB LED.  
Satin white frame with satin black inside





### informazioni tecniche - technical information

INC-APOLLO-3X10C 8031440360661	3000K	3X10W	2400 Lumen	40°	>10 000 on/off	h 25 000	driver incluso
INC-APOLLO-3X10M 8031440360678	4000K	3X10W	2400 Lumen	40°	>10 000 on/off	h 25 000	driver incluso
INC-APOLLO-3X20C 8031440360746	3000K	3X20W	4800 Lumen	40°	>10 000 on/off	h 25 000	driver incluso
INC-APOLLO-3X20M 8031440360739	4000K	3X20W	4800 Lumen	40°	>10 000 on/off	h 25 000	driver incluso

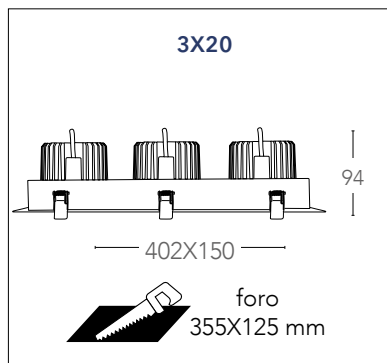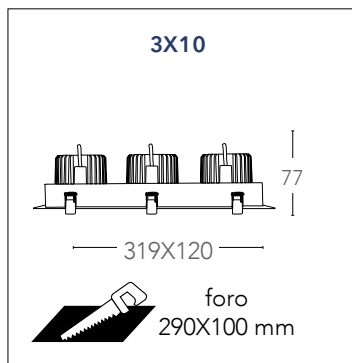


### informazioni tecniche - technical information

INC-APOLLO-3X30C 8031440360845	3000K	3X30W	7200 Lumen	40°	PF 0,90	>10 000 on/off	h 25 000	driver incluso
INC-APOLLO-3X30M 8031440360838	4000K	3X30W	7200 Lumen	40°	PF 0,90	>10 000 on/off	h 25 000	driver incluso
INC-APOLLO-3X45C 8031440360852	3000K	3X45W	12000 Lm	40°	PF 0,90	>10 000 on/off	h 25 000	driver incluso
INC-APOLLO-3X45M 8031440360869	4000K	3X45W	12000 Lm	40°	PF 0,90	>10 000 on/off	h 25 000	driver incluso

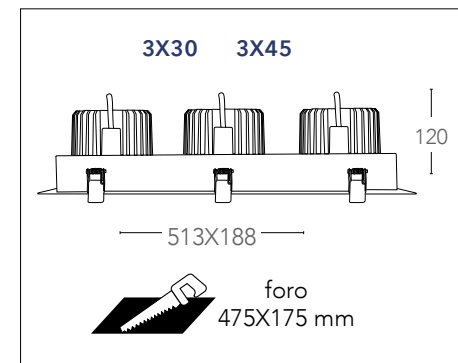

## ELITE

Incasso in alluminio orientabile con modulo LED COB bianco  
White aluminium down light adjustable built-in COB LED


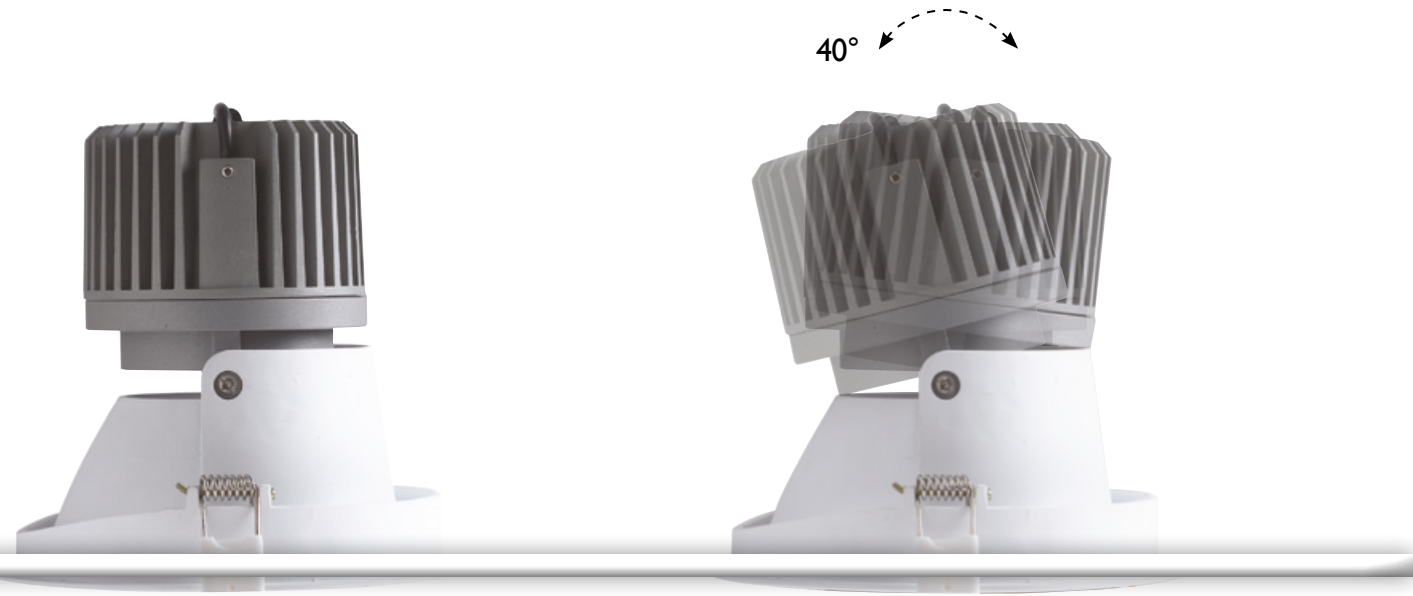


### informazioni tecniche - technical information

INC-ELITE-1X10C 8031440363396	3000K	10W	800 Lumen	40°	>10 000 on/off	h 25 000	driver incluso
INC-ELITE-1X10M 8031440363365	4000K	10W	800 Lumen	40°	>10 000 on/off	h 25 000	driver incluso
INC-ELITE-1X20C 8031440363372	3000K	20W	1600 Lumen	40°	>10 000 on/off	h 25 000	driver incluso
INC-ELITE-1X20M 8031440363341	4000K	20W	1600 Lumen	40°	>10 000 on/off	h 25 000	driver incluso

### informazioni tecniche - technical information

INC-ELITE-1X30C 8031440363358	3000K	30W	2400 Lumen	40°	PF 0,90	>10 000 on/off	h 25 000	driver incluso
INC-ELITE-1X30M 8031440363327	4000K	30W	2400 Lumen	40°	PF 0,90	>10 000 on/off	h 25 000	driver incluso
INC-ELITE-1X45C 8031440363334	3000K	45W	4000 Lm	40°	PF 0,90	>10 000 on/off	h 25 000	driver incluso
INC-ELITE-1X45M 8031440363303	4000K	45W	4000 Lm	40°	PF 0,90	>10 000 on/off	h 25 000	driver incluso

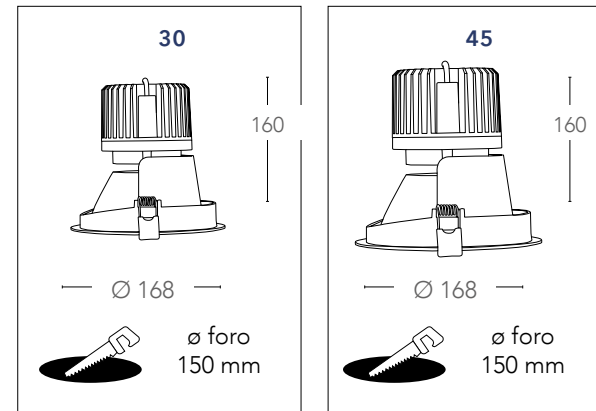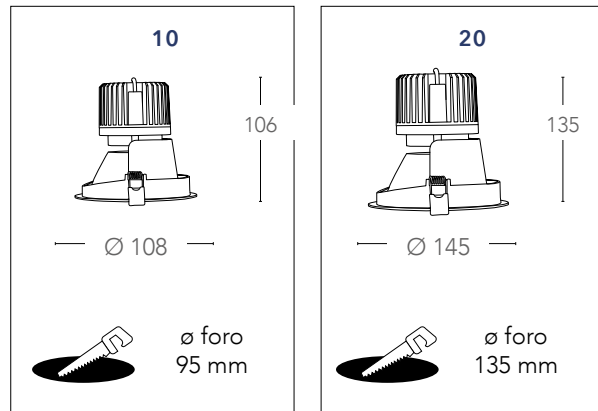

## SINKRO


Incasso con modulo LED COB. Bordo bianco con interno nero lucido  
Down light built-in COB LED. Satin white frame with glossy black inside



### informazioni tecniche - technical information

**INC-SINKRO-2M**  
8031440360876

4000K 2W 160 Lumen 45° >10 000 on/off h 25 000 driver incluso

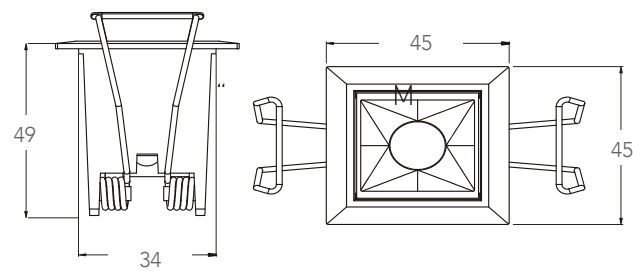



### informazioni tecniche - technical information

**INC-SINKRO-10M**  
8031440360890

4000K 5X2W 800 Lumen 45° >10 000 on/off h 25 000 driver incluso

**INC-SINKRO-20M**  
8031440360906

4000K 10X2W 1600 Lumen 45° >10 000 on/off h 25 000 driver incluso

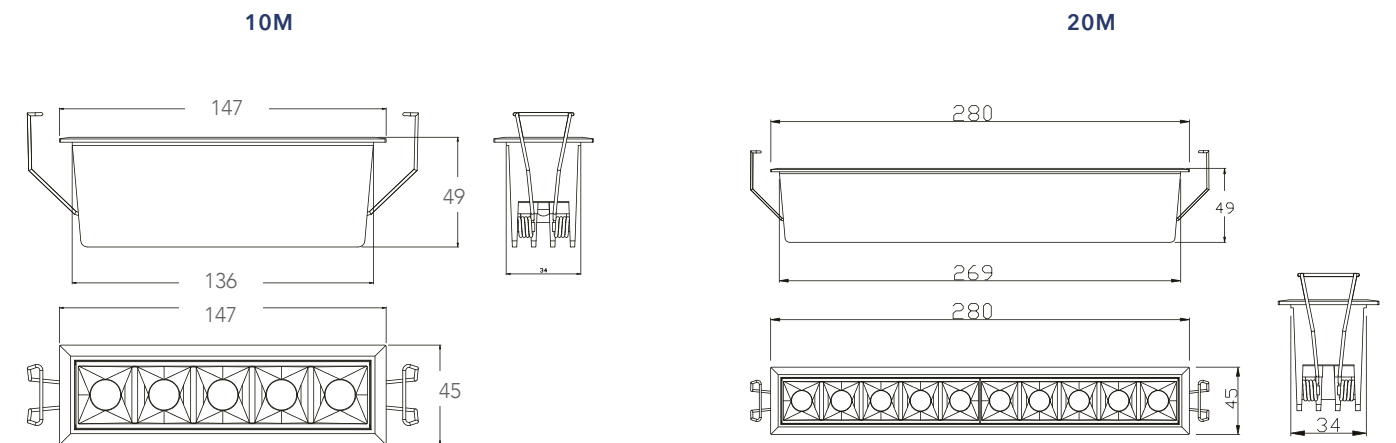

## STARLIGHT

Faretto a incasso bianco per luci decorative  
White downlight for decorative light



informazioni tecniche - technical information




1pz

**LED-STARLIGHT-W**  
8031440361699

4000K 0,2W 12V DC 1A >15 000 on/off h 20 000

**LED-STARLIGHT-BLU**  
8031434901221

Blu 0,2W 12V DC 1A >15 000 on/off h 20 000



Kit  
30pz

**LED-STARLIGHT-30-W**  
8031440357692

4000K 30X0,2W 12V DC 1A >15 000 on/off h 20 000 driver incluso





**LED-STARLIGHT-NEX**  
8031440364430

Scatola connessione per 10 teste 12V DC 1A incl. cavo 1 mt.  
Box connection for 10 pcs 12V DC 1A with 1mt. cable



**LED-STARLIGHT-DR**  
8031440364447

Driver 12V DC 100mA 6W







# LYRA

Incasso in alluminio pressofuso colore bianco satinato LED COB integrato  
Diecast aluminium in satin white color built-in COB LED




## informazioni tecniche - technical information

INC-LYRA-10C 8031434851212	3200K	10W	800 Lumen	99°	>15 000 on/off	h 25 000	driver incluso
INC-LYRA-10F 8031434861211	5500K	10W	800 Lumen	99°	>15 000 on/off	h 25 000	driver incluso
INC-LYRA-20C 8031434871210	3200K	20W	1600 Lumen	99°	>15 000 on/off	h 25 000	driver incluso
INC-LYRA-20F 8031434891225	5500K	20W	1600 Lumen	99°	>15 000 on/off	h 25 000	driver incluso
INC-LYRA-30C 8031434901221	3200K	30W	2400 Lumen	99°	>15 000 on/off	h 25 000	driver incluso
INC-LYRA-30F 8031434911220	5500K	30W	2400 Lumen	99°	>15 000 on/off	h 25 000	driver incluso

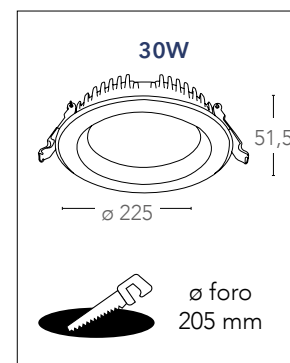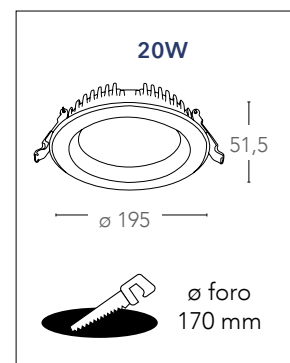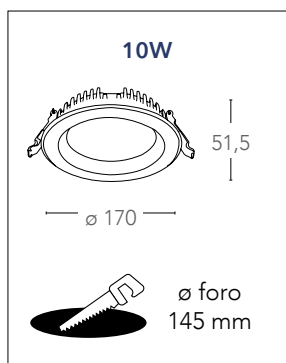


## informazioni tecniche - technical information

INC-LYRA-60C 8031440357166	3200K	60W	5100 Lumen	99°	>10 000 on/off	h 25 000	driver incluso
INC-LYRA-60F 8031440357173	5500K	60W	5100 Lumen	99°	>10 000 on/off	h 25 000	driver incluso

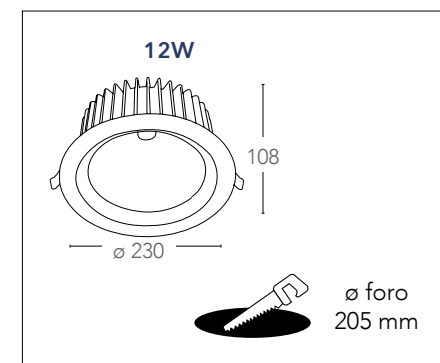




## MARK

Incasso in alluminio pressofuso colore bianco satinato LED COB integrato  
Diecast aluminium in satin white color built-in COB LED

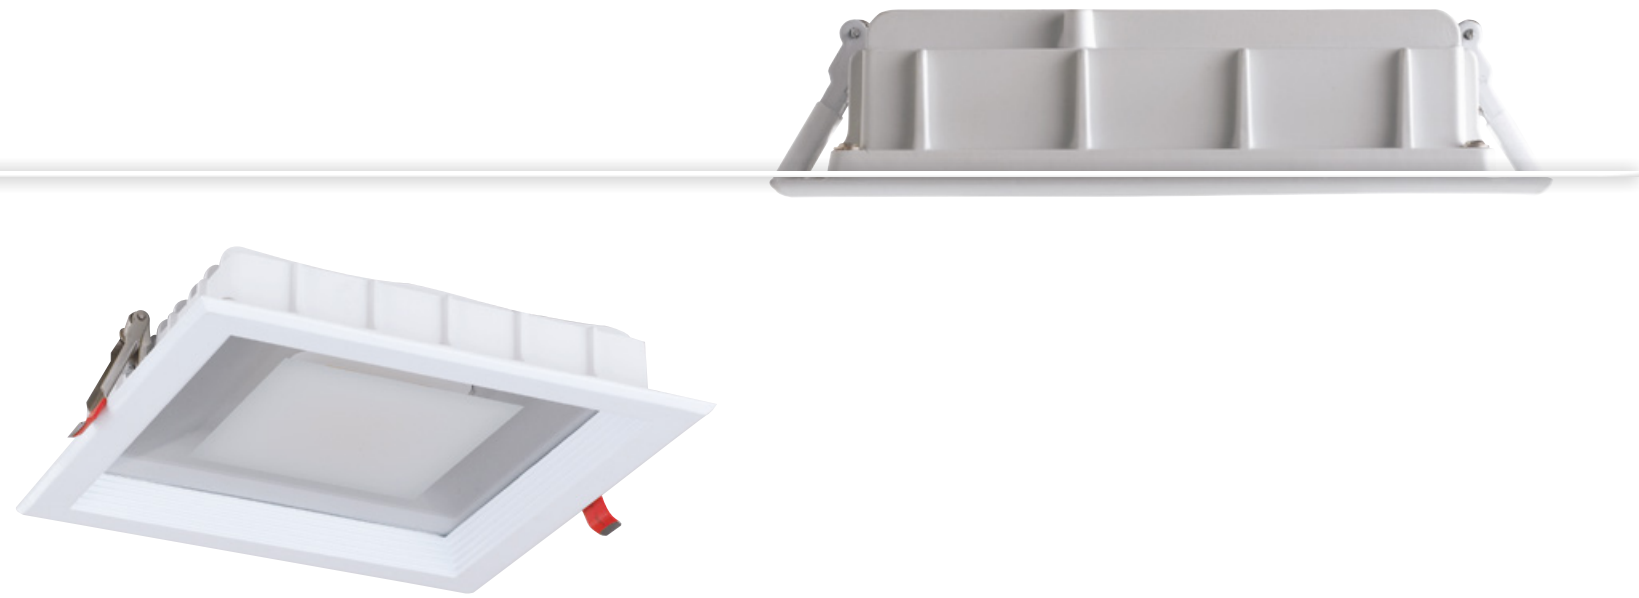


### informazioni tecniche - technical information

INC-MARK-10C 8031435061221	3200K	10W	800 Lumen	98°	>15 000 on/off	h 25 000	driver incluso
INC-MARK-10F 8031435071220	5500K	10W	800 Lumen	98°	>15 000 on/off	h 25 000	driver incluso
INC-MARK-20C 8031435081229	3200K	20W	1600 Lumen	98°	>15 000 on/off	h 25 000	driver incluso
INC-MARK-20F 8031435091228	5500K	20W	1600 Lumen	98°	>15 000 on/off	h 25 000	driver incluso
INC-MARK-30C 8031435101224	3200K	30W	2400 Lumen	98°	>15 000 on/off	h 25 000	driver incluso
INC-MARK-30F 8031435111223	5500K	30W	2400 Lumen	98°	>15 000 on/off	h 25 000	driver incluso

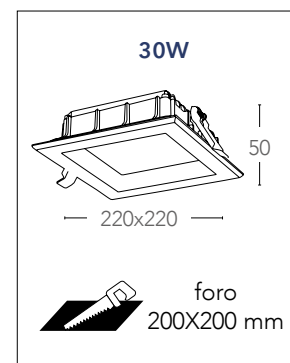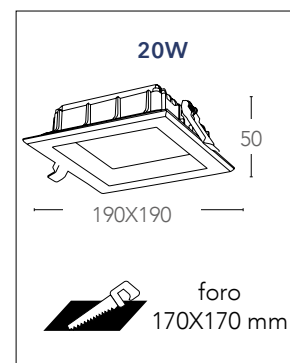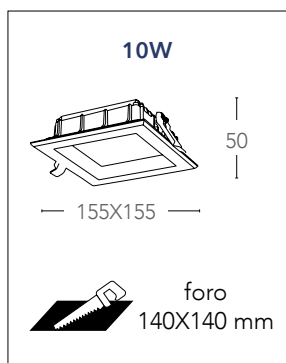





## DELTA

Incasso orientabile Snooker bianco satinato riflettore silver LED COB integrato  
Diecast aluminium adjustable down light in satin white color built-in COB LED

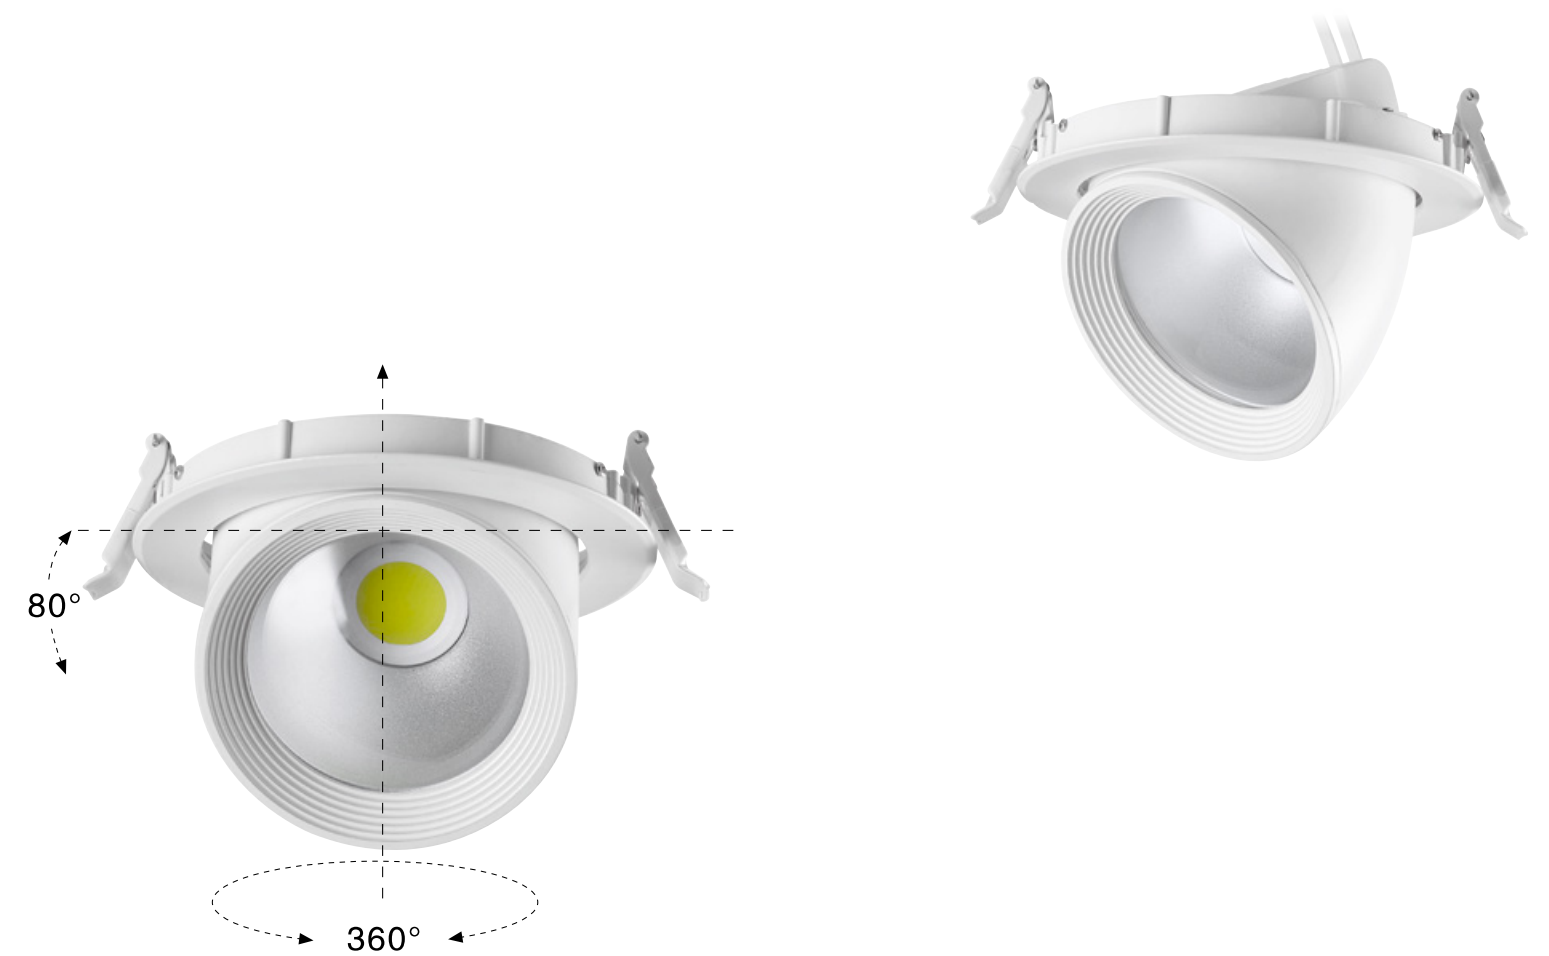

### informazioni tecniche - technical information

INC-DELTA-8 8031434921229	3200K	8W	500 Lumen	68°	>15 000 on/off	h 25 000	driver incluso
INC-DELTA-20 8031434931228	3200K	20W	1100 Lumen	68°	>15 000 on/off	h 25 000	driver incluso
INC-DELTA-30 8031434941227	3200K	30W	1550 Lumen	68°	>15 000 on/off	h 25 000	driver incluso

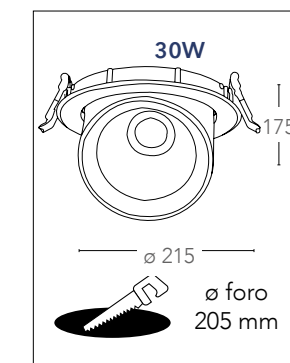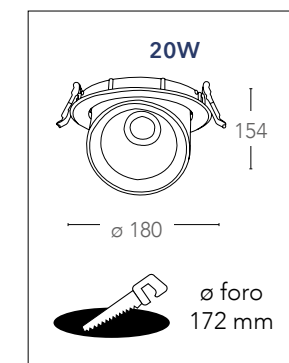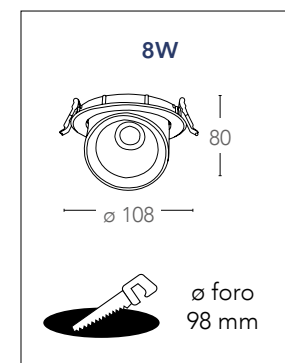

## LYBRA



Incasso orientabile Snooker bianco satinato riflettore silver LED COB integrato  
Diecast aluminium adjustable down light in satin white color built-in COB LED




### informazioni tecniche - technical information

**INC-LYBRA-30**  
8031434951226

3200K 30W 1600 Lumen 99° PF 0,90 >15 000 on/off h 25 000 driver incluso

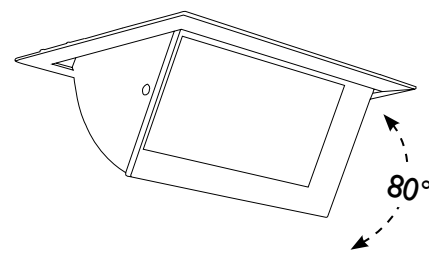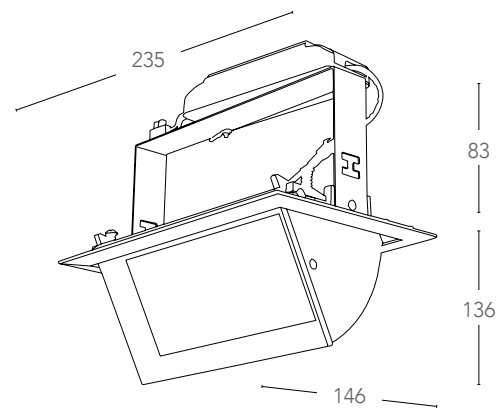

foro  
220x132 mm





## HORUS

Incasso in termoplastica bianco LED integrato  
Thermo plastic down light built-in LED




### informazioni tecniche - technical information

<b>INC-HORUS-10W</b> 8031440363501	4000K	10W	750 Lumen	100°	>15 000 on/off	h 25 000	driver integrato
<b>INC-HORUS-15W</b> 8031440363518	4000K	15W	1100 Lumen	100°	>15 000 on/off	h 25 000	driver integrato
<b>INC-HORUS-20W</b> 8031440363464	4000K	20W	1800 Lumen	100°	>15 000 on/off	h 25 000	driver integrato
<b>INC-HORUS-25W</b> 8031440363495	4000K	25W	2200 Lumen	100°	>15 000 on/off	h 25 000	driver integrato

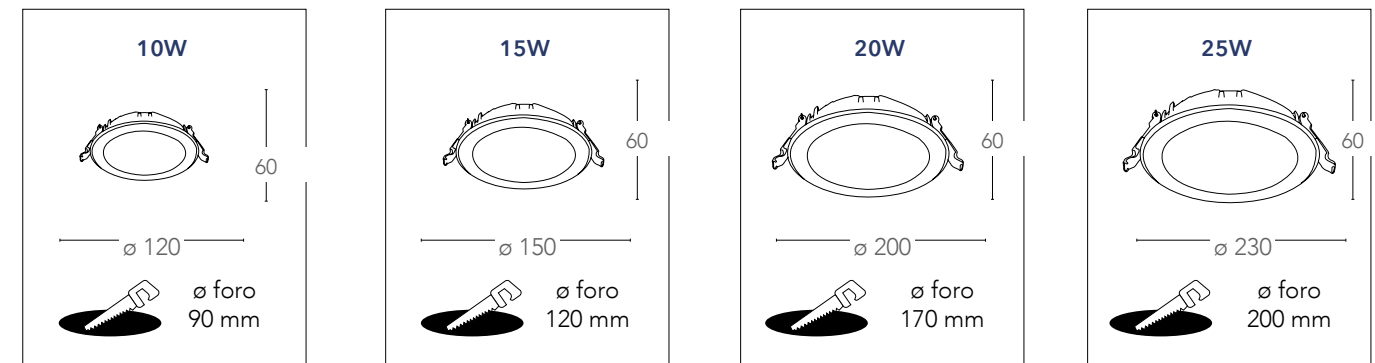



## SLIM

Incasso in alluminio pressofuso LED integrato  
Diecast aluminium down light built-in LED

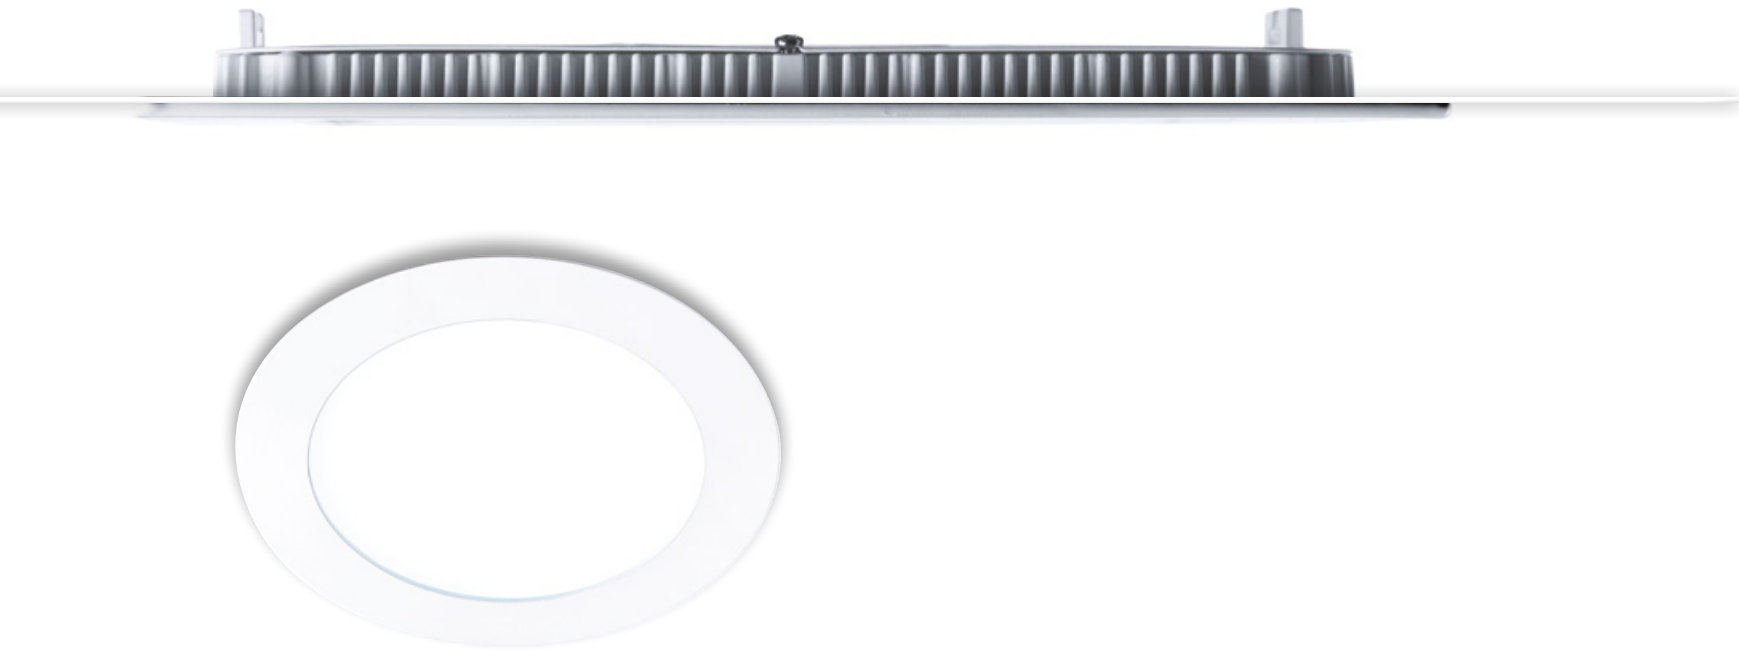


### informazioni tecniche - technical information


	<b>INC-SLIM/8W BCO</b> 8031440357203	4000K	8W	640 Lumen	120°	IP23	>15 000 on/off	h 25 000	driver incluso
	<b>INC-SLIM/8WF BCO</b> 8031440357197	5500K	8W	640 Lumen	120°	IP23	>15 000 on/off	h 25 000	driver incluso
	<b>INC-SLIM/8WC BCO</b> 8031440357180	3000K	8W	640 Lumen	120°	IP23	>15 000 on/off	h 25 000	driver incluso



ø foro  
120




ø foro  
105 mm




22

CLASSE  
**A**





SMD




Ra  
**>80**


CE






### informazioni tecniche - technical information


	<b>INC-SLIM/12W BCO</b> 8031431491183	4000K	12W	860 Lumen	120°	IP23	>15 000 on/off	h 25 000	driver incluso
	<b>INC-SLIM/12WF BCO</b> 8031440357234	5500K	12W	860 Lumen	120°	IP23	>15 000 on/off	h 25 000	driver incluso
	<b>INC-SLIM/12WC BCO</b> 8031440357258	3000K	12W	860 Lumen	120°	IP23	>15 000 on/off	h 25 000	driver incluso
	<b>INC-SLIM/12W NIK</b> 8031431501189	4000K	12W	860 Lumen	120°	IP23	>15 000 on/off	h 25 000	driver incluso



ø 180




ø foro  
165 mm




22

CLASSE  
**A**





SMD




Ra  
**>80**


CE






### informazioni tecniche - technical information


	<b>INC-SLIM/18W BCO</b> 8031431511188	4000K	18W	1350 Lumen	120°	IP23	>15 000 on/off	h 25 000	driver incluso
	<b>INC-SLIM/18WF BCO</b> 8031440357210	5500K	18W	1350 Lumen	120°	IP23	>15 000 on/off	h 25 000	driver incluso
	<b>INC-SLIM/18WC BCO</b> 8031440357227	3000K	18W	1350 Lumen	120°	IP23	>15 000 on/off	h 25 000	driver incluso
	<b>INC-SLIM/18W NIK</b> 8031431521187	4000K	18W	1350 Lumen	120°	IP23	>15 000 on/off	h 25 000	driver incluso



ø 240




ø foro  
225 mm




22

CLASSE  
**A**





SMD



Ra  
**>80**

CE








## PLASMA

Incasso in alluminio pressofuso con bordo in vetro trasparente temperato con anello cromato LED integrato  
 Diecast aluminium down light with clear tempered glass edge whit chrome metal ring built-in LED




### informazioni tecniche - technical information

<b>INC-PLASMA-18W</b> 8031440091275	4000K	<b>18W</b>	☀️ 1100 Lumen	120°	IP23	>15 000 on/off	h 25 000	driver incluso
<b>INC-PLASMA-12W</b> 8031440081276	4000K	<b>12W</b>	☀️ 740 Lumen	120°	IP23	>15 000 on/off	h 25 000	driver incluso

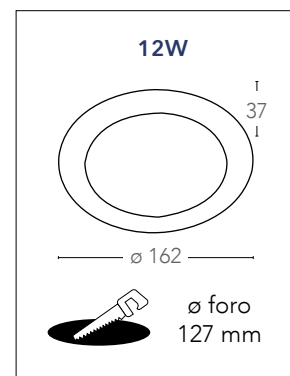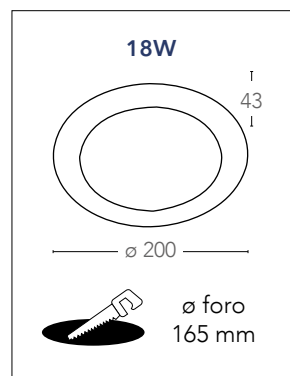



## FLAP RT

Incasso in alluminio pressofuso LED integrato colore bianco opaco  
 Diecast aluminium down light built-in LED satin white color

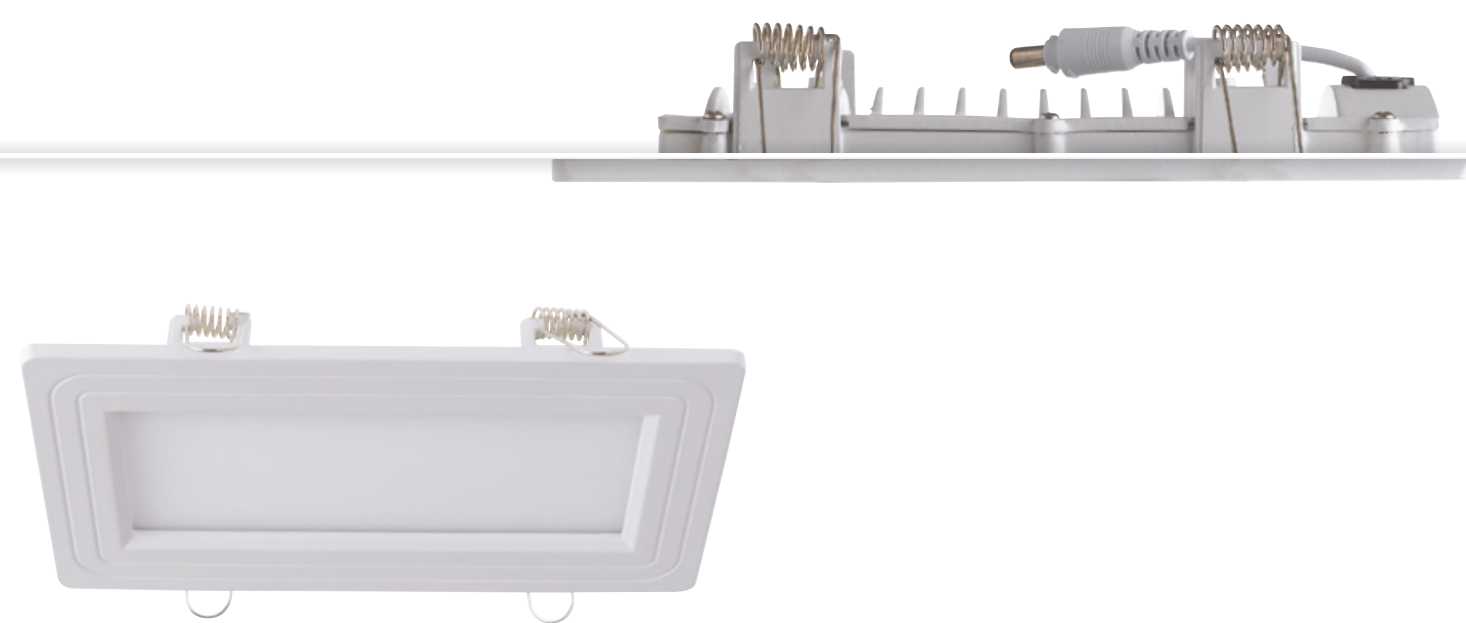

### informazioni tecniche - technical information

<b>INC-FLAP-RT/12W</b> 8031431461186	4000K	<b>12W</b>	☀️ 960 Lumen	120°	IP23	>15 000 on/off	h 25 000	driver incluso
---	-------	------------	--------------	------	------	----------------	----------	----------------

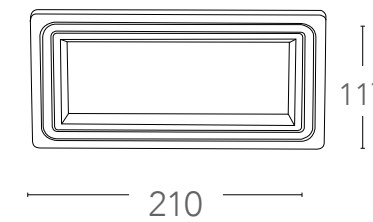

## FLAP

Incasso in alluminio pressofuso LED integrato colore bianco opaco  
Diecast aluminium down light built-in LED satin white color





## FLAP

Incasso in alluminio pressofuso LED integrato colore bianco opaco  
Diecast aluminium down light built-in LED satin white color





### informazioni tecniche - technical information

INC-FLAP/8WM 8031440363402	4000K	8W	640 Lumen	120°	IP23	>15 000 on/off	h 25 000	driver incluso
INC-FLAP/8WF 8031440363389	5500K	8W	640 Lumen	120°	IP23	>15 000 on/off	h 25 000	driver incluso
INC-FLAP/8WC 8031440363419	3200K	8W	640 Lumen	120°	IP23	>15 000 on/off	h 25 000	driver incluso

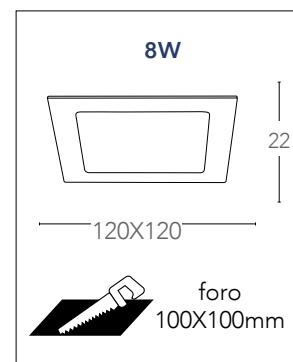


### informazioni tecniche - technical information

INC-FLAP/12W 8031431441188	4000K	12W	960 Lumen	120°	IP23	>15 000 on/off	h 25 000	driver incluso
INC-FLAP/12WF 8031440357265	5500K	12W	960 Lumen	120°	IP23	>15 000 on/off	h 25 000	driver incluso
INC-FLAP/12WC 8031440354615	3200K	12W	960 Lumen	120°	IP23	>15 000 on/off	h 25 000	driver incluso
INC-FLAP/18W 8031431451187	4000K	18W	1440 Lumen	120°	IP23	>15 000 on/off	h 25 000	driver incluso
INC-FLAP/18WF 8031440357241	5500K	18W	1440 Lumen	120°	IP23	>15 000 on/off	h 25 000	driver incluso
INC-FLAP/18WC 8031440357272	3200K	18W	1440 Lumen	120°	IP23	>15 000 on/off	h 25 000	driver incluso

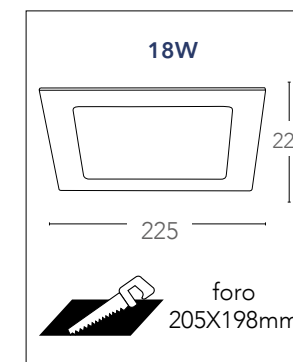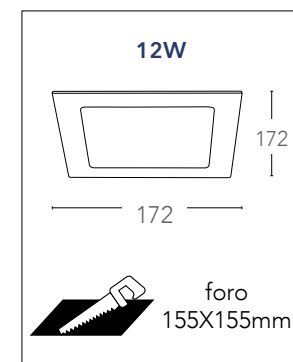


## PANEL

Pannello da controsoffitto in alluminio rifiniture bianco LED integrato  
Panel light for dropped ceiling in aluminium white color built-in LED

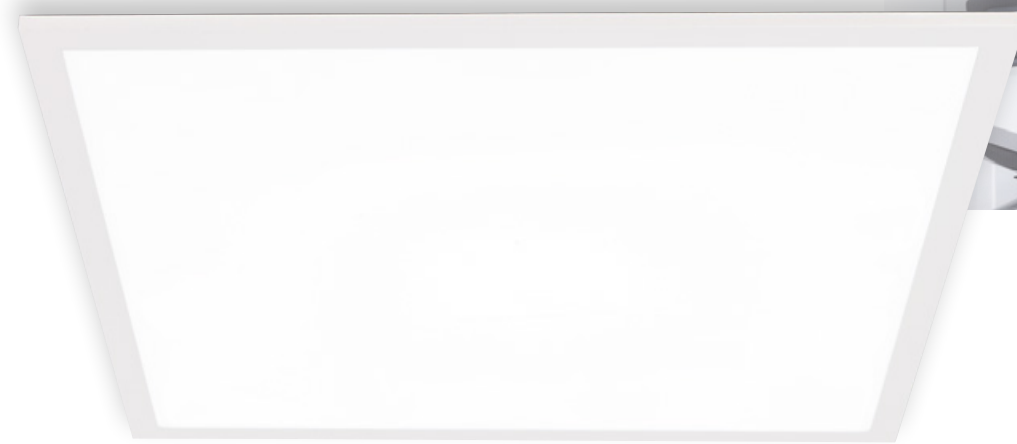


### informazioni tecniche - technical information

LED-PANEL-60X60-M-UGR19 8031440361835	4000K	40W	3600 Lumen	UGR<19 multiposition	120°	>10 000 on/off	h 20 000	driver incluso
LED-PANEL-60X60-UGR19 8031440357524	4000K	40W	3600 Lumen	UGR<19 single position	120°	>10 000 on/off	h 20 000	driver incluso
LED-PANEL-60X60 8031440352444	4000K	40W	3600 Lumen		120°	>10 000 on/off	h 20 000	driver incluso
LED-PANEL-C-60X60 8031440354868	3000K	40W	3600 Lumen		120°	>10 000 on/off	h 20 000	driver incluso
LED-PANEL-F-60X60 8031440354929	5000K	40W	3600 Lumen		120°	>10 000 on/off	h 20 000	driver incluso

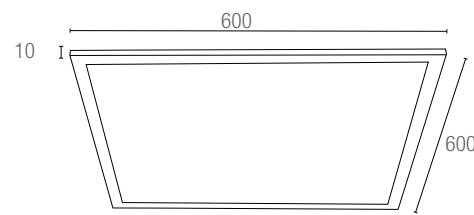

foro  
602x602 mm




## PANEL

Pannello da controsoffitto in alluminio rifiniture bianco LED integrato  
Panel light for dropped ceiling in aluminium white color built-in LED





### informazioni tecniche - technical information

LED-PANEL-30X120 8031440352468	4000K	40W	3600 Lumen		120°	>10 000 on/off	h 20 000	driver incluso
LED-PANEL-F-30X120 8031440354912	5000K	40W	3600 Lumen		120°	>10 000 on/off	h 20 000	driver incluso

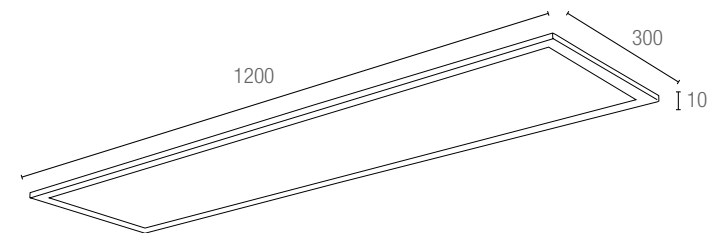

foro  
302x1202 mm

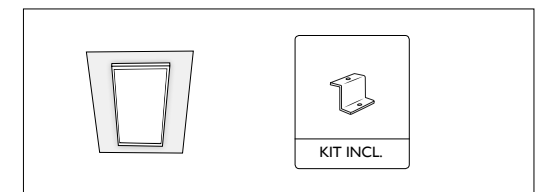




## PANEL

Pannello da controsoffitto in alluminio rifiniture bianco LED integrato  
Panel light for dropped ceiling in aluminium white color built-in LED



informazioni tecniche - technical information

LED-PANEL-60X120 8031440361897	4000K	60W	4800 Lumen	120°	>10 000 on/off	h 20 000	driver incluso
LED-PANEL-F-60X120 8031440361873	5000K	60W	4800 Lumen	120°	>10 000 on/off	h 20 000	driver incluso

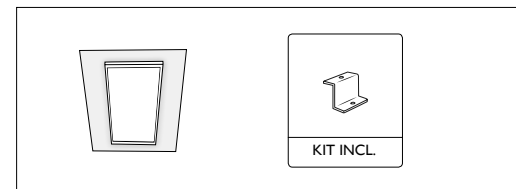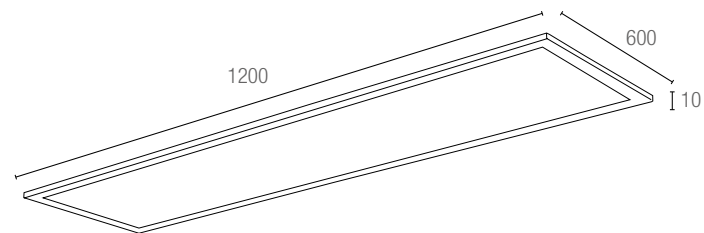


## PANEL STRUTTURA

Struttura in metallo bianco per montaggio a plafoniera per panel  
White metal structure for panel light surface mount



informazioni tecniche - technical information


LED-PANEL-30X120-PL 8031440361828	Struttura in metallo bianco per pannello led 30X120CM White metal frame for LED panel 30x120 cm
LED-PANEL-60X120-PL 8031440363723	Struttura in metallo per pannello led a 60X120CM Metal frame for LED panel 60x120 cm
LED-PANEL-60X60-PL 8031440361859	Struttura in metallo bianco per pannello led 60x60cm White metal frame for LED panel 60x60 cm

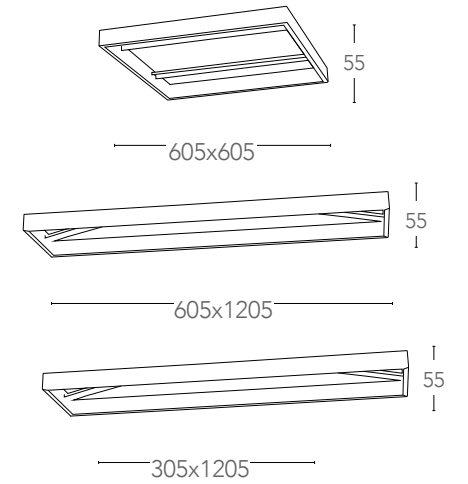


## PANEL KIT



LED-PANEL-KIT  
8031440352451  
Kit cavi in acciaio per sospensione  
Steel cable kit for suspension



LED-PANEL-GANCI  
8031440361903  
Kit molle 4pz.  
Metal spring kit 4pcs.



LED-PANEL-SOSP  
8031440361781  
Kit sospensione pannello cavo 1,5 mt. + scatola di connessione elettrica a soffitto  
kit for suspension with 1,5 mt. cable + metal canopi with electric connection


## KLIO

Plafoniera in alluminio pressofuso finitura bianco goffrato LED integrato  
Aluminium surface mount ceiling lamp embossed white built-in LED



### informazioni tecniche - technical information

LED-KLIO-Q11 8031440363563	4000K	16W	1300Lumen	120°	>10 000 on/off	h 25 000	driver incluso
LED-KLIO-Q17 8031440363570	4000K	22W	2000 Lumen	120°	>10 000 on/off	h 25 000	driver incluso
LED-KLIO-Q21 8031440363549	4000K	36W	2900 Lumen	120°	>10 000 on/off	h 25 000	driver incluso

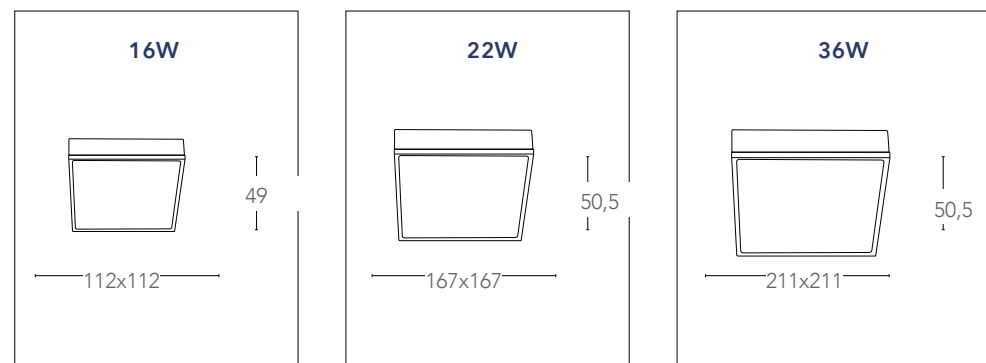


## KLIO

Plafoniera in alluminio pressofuso finitura bianco goffrato LED integrato  
Aluminium surface mount ceiling lamp embossed white built-in LED



### informazioni tecniche - technical information

LED-KLIO-R11 8031440358675	4000K	16W	1300Lumen	120°	>10 000 on/off	h 25 000	driver incluso
LED-KLIO-R17 8031440363587	4000K	22W	2000 Lumen	120°	>10 000 on/off	h 25 000	driver incluso
LED-KLIO-R21 8031440363594	4000K	36W	2900 Lumen	120°	>10 000 on/off	h 25 000	driver incluso

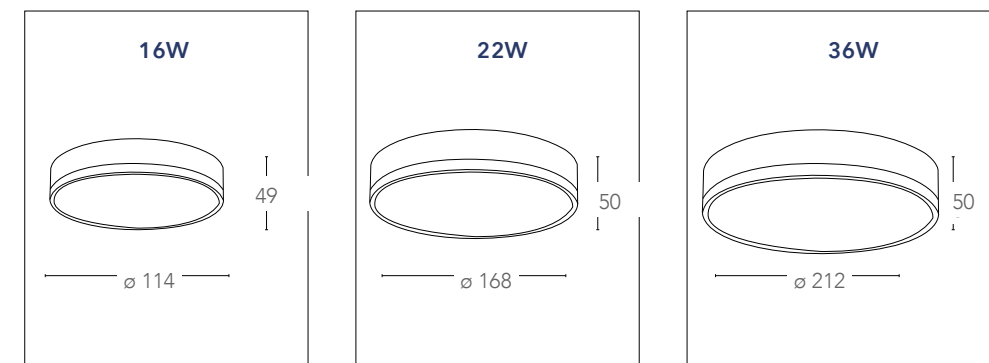

## GENESIS

Faretto in alluminio pressofuso orientabile, rifiniture in bianco goffrato LED COB integrato  
Spotlight diecast aluminium adjustable in embossed white color built-in COB LED








informazioni tecniche - technical information

LED-GENESIS-15W  
8031436721230



15W

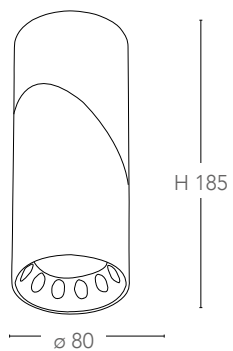

## ZENIT



Incasso struttura in policarbonato LED integrato  
Polycarbonate frame down light built-in LED



### informazioni tecniche - technical information



NIK	INC-ZENIT-5W NIK 8031439901271	3000K	5W	400 Lumen	120°	25°	IP44	>10 000 on/off	h 25 000	230V DRIVER FREE
BCO	INC-ZENIT-5W BCO 8031439881276	3000K	5W	400 Lumen	120°	25°	IP44	>10 000 on/off	h 25 000	230V DRIVER FREE
CR	INC-ZENIT-5W CR 8031439891275	3000K	5W	400 Lumen	120°	25°	IP44	>10 000 on/off	h 25 000	230V DRIVER FREE
ORO	INC-ZENIT-5W ORO 8031439911270	3000K	5W	400 Lumen	120°	25°	IP44	>10 000 on/off	h 25 000	230V DRIVER FREE

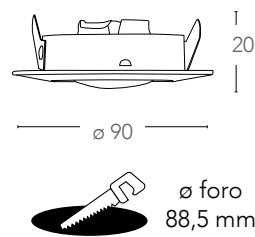

## POLARIS

Incasso orientabile in alluminio pressofuso LED COB integrato  
Die cast adjustable down light built-in COB LED




### informazioni tecniche - technical information

silver	INC-POLARIS-R3 8031432041196	4000K	3W	190 Lumen	24°	25°	>10 000 on/off	h 25 000	driver incluso
bianco white	INC-POLARIS-R3 BCO 8031429681169	4000K	3W	190 Lumen	24°	25°	>10 000 on/off	h 25 000	driver incluso
silver	INC-POLARIS-Q3 8031432051195	4000K	3W	190 Lumen	24°	25°	>10 000 on/off	h 25 000	driver incluso
bianco white	INC-POLARIS-Q3 BCO 8031429761168	4000K	3W	190 Lumen	24°	25°	>10 000 on/off	h 25 000	driver incluso



finitura silver goffrato  
embossed silver finish

finitura bianco goffrato  
embossed white finish

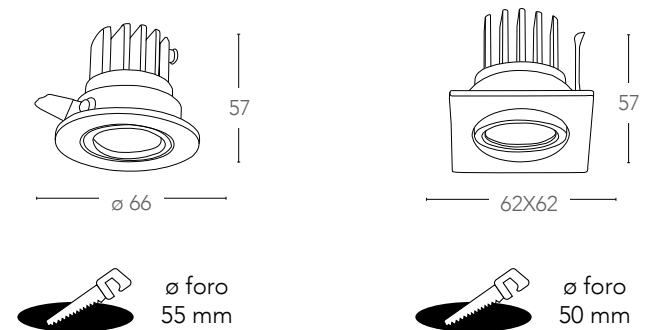





## ORIONE

Incasso orientabile in alluminio pressofuso LED COB integrato  
Die cast adjustable down light built-in COB LED




### informazioni tecniche - technical information


	silver	INC-ORIONE-R6 8031432021198	4000K	6W	380 Lumen	87°	25°	>10 000 on/off	h 25 000	driver incluso
	bianco white	INC-ORIONE-R6 BCO 8031429771167	4000K	6W	380 Lumen	87°	25°	>10 000 on/off	h 25 000	driver incluso
	silver	INC-ORIONE-Q6 8031432031197	4000K	6W	380 Lumen	87°	25°	>10 000 on/off	h 25 000	driver incluso
	bianco white	INC-ORIONE-Q6 BCO 8031434361216	4000K	6W	380 Lumen	87°	25°	>10 000 on/off	h 25 000	driver incluso



finitura silver goffrato  
embossed silver finish

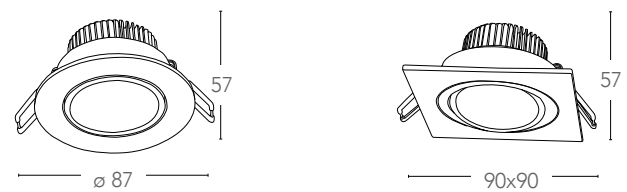

finitura bianco goffrato  
embossed white finish





## GEMINI

Incasso orientabile in alluminio pressofuso LED COB integrato  
Die cast adjustable down light built-in COB LED




### informazioni tecniche - technical information


	INC-GEMINI-PL6 8031432011199	4000K	2x5W	630 Lumen	87°	25°	>10 000 on/off	h 25 000	driver incluso
	INC-GEMINI-PL6 BCO 8031439191269	4000K	2x5W	630 Lumen	87°	25°	>10 000 on/off	h 25 000	driver incluso



finitura silver goffrato  
embossed silver finish

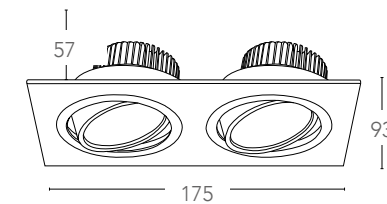

finitura bianco goffrato  
embossed white finish






## POUND

Incasso orientabile in alluminio pressofuso LED COB integrato  
Die cast adjustable down light built-in COB LED



### informazioni tecniche - technical information

	<b>INC-POUND-5C BCO</b> 8031435001227	3200K	5W	320 Lumen	87°	15°	>10 000 on/off	h 25 000	driver incluso
<b>BCO</b>	<b>INC-POUND-5F BCO</b> 8031435011226	5500K	5W	380 Lumen	87°	15°	>10 000 on/off	h 25 000	driver incluso
	<b>INC-POUND-5C NIK</b> 8031435021225	3200K	5W	320 Lumen	87°	15°	>10 000 on/off	h 25 000	driver incluso
<b>NIK</b>	<b>INC-POUND-5F NIK</b> 8031435031224	5500K	5W	380 Lumen	87°	15°	>10 000 on/off	h 25 000	driver incluso

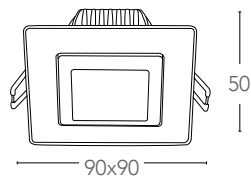




## KRONE

Incasso orientabile in alluminio pressofuso LED COB integrato  
Die cast adjustable down light built-in COB LED



### informazioni tecniche - technical information

	<b>INC-KRONE-5C BCO</b> 8031434961225	3200K	5W	320 Lumen	87°	15°	>10 000 on/off	h 25 000	driver incluso
<b>BCO</b>	<b>INC-KRONE-5F BCO</b> 8031434971224	5500K	5W	380 Lumen	87°	15°	>10 000 on/off	h 25 000	driver incluso
	<b>INC-KRONE-5C NIK</b> 8031434981223	3200K	5W	320 Lumen	87°	15°	>10 000 on/off	h 25 000	driver incluso
<b>NIK</b>	<b>INC-KRONE-5F NIK</b> 8031434991222	5500K	5W	380 Lumen	87°	15°	>10 000 on/off	h 25 000	driver incluso


































## NADIR

Incasso in alluminio pressofuso finitura bianco gofrato LED COB integrato  
Aluminium die cast embossed white built-in COB LED



informazioni tecniche - technical information

	<b>INC-NADIR-R6C</b> 8031439671266	<b>3200K</b>	<b>6W</b>	 390 Lumen	 21°	 IP44	 >10 000 on/off	 h 25 000	 driver incluso
	<b>INC-NADIR-R6F</b> 8031439641269	<b>5500K</b>	<b>6W</b>	 420 Lumen	 21°	 IP44	 >10 000 on/off	 h 25 000	 driver incluso
	<b>INC-NADIR-Q6C</b> 8031439691264	<b>3200K</b>	<b>6W</b>	 390 Lumen	 21°	 IP44	 >10 000 on/off	 h 25 000	 driver incluso
	<b>INC-NADIR-Q6F</b> 8031439661267	<b>5500K</b>	<b>6W</b>	 420 Lumen	 21°	 IP44	 >10 000 on/off	 h 25 000	 driver incluso

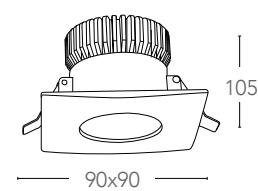















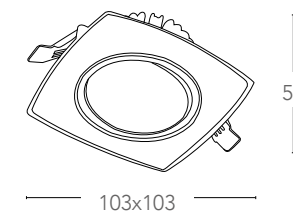
## KLIPPE

Incasso orientabile in 4 direzioni in alluminio pressofuso finitura bianco gofrato LED COB integrato  
Aluminium die cast down light adjustable in 4 direction embossed white finish built-in COB LED





informazioni tecniche - technical information

	<b>INC-KLIPPE-8C</b> 8031435041223	<b>3200K</b>	<b>8W</b>	 480 Lumen	 24°	 15°	 >10 000 on/off	 h 25 000	 driver incluso
	<b>INC-KLIPPE-8F</b> 8031435051222	<b>5500K</b>	<b>8W</b>	 550 Lumen	 24°	 15°	 >10 000 on/off	 h 25 000	 driver incluso



## SIRIO

Kit 3pz incasso in alluminio pressofuso finitura nickel spazzolato LED integrato  
 Kit 3 pcs diecast aluminium down light brush nickel color built-in LED

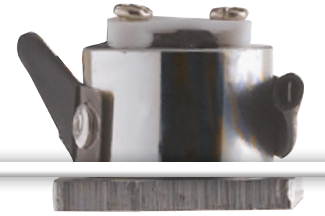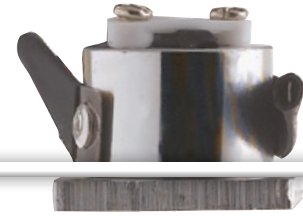

## SIRIO

Incasso in alluminio pressofuso finitura nickel spazzolato LED integrato  
 Diecast aluminium down light brush nickel color built-in LED



### informazioni tecniche - technical information








<b>INC-SIRIO-R3</b> 8031432071193	4000K	3x1W	3x50 Lumen	30°	>15 000 on/off	h 25 000	driver incluso
<b>INC-SIRIO-Q3</b> 8031432061194	4000K	3x1W	3x50 Lumen	30°	>15 000 on/off	h 25 000	driver incluso

### informazioni tecniche - technical information




<b>INC-SIRIO-R1</b> 8031433991216	4000K	1W	50 Lumen	30°	>15 000 on/off	h 25 000	350mA>12V
<b>INC-SIRIO-Q1</b> 8031433961219	4000K	1W	50 Lumen	30°	>15 000 on/off	h 25 000	350mA>12V

Connessione in serie  
 Serie connection sistem  
 Driver page 343  
 I-DRIVER/3W IP67  
 I-DRIVER/18W

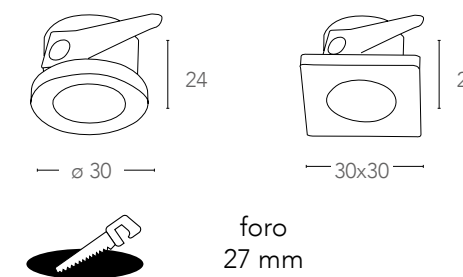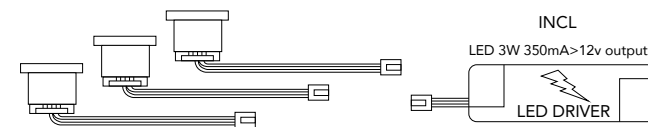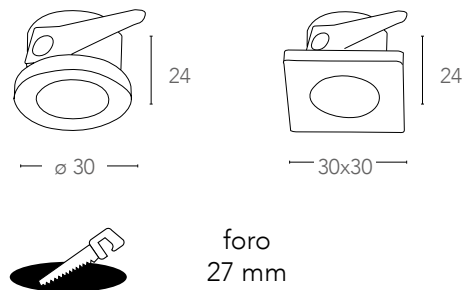


## FUSION

Incasso in alluminio nelle finiture nikel, bianco satinato o oro satinato LED integrato  
Aluminium down light nikel, satin white or satin gold finish built-in LED

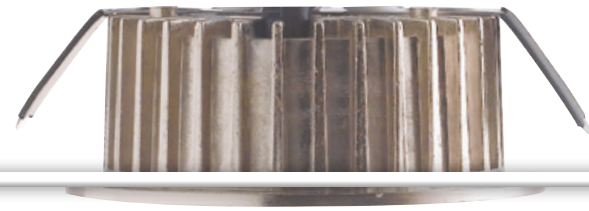

informazioni tecniche - technical information

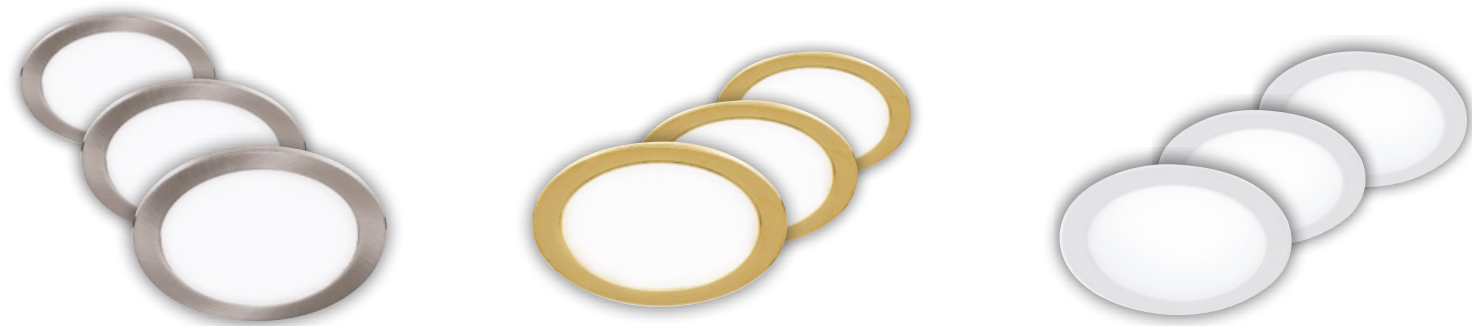

INC-FUSION-3X5W NIK 8031440353342	4000K	3x5W	3x230 Lumen	120°	>10 000 on/off	h 25 000	230V DRIVER FREE
INC-FUSION-3X5W BCO 8031440353335	4000K	3x5W	3x230 Lumen	120°	>10 000 on/off	h 25 000	230V DRIVER FREE
INC-FUSION-3X5W ORO 8031440353359	4000K	3x5W	3x230 Lumen	120°	>10 000 on/off	h 25 000	230V DRIVER FREE



NIK

BCO

ORO



INC-FUSION-5W NIK 8031440361705	4000K	5W	230 Lumen	120°	>10 000 on/off	h 25 000	230V DRIVER FREE
INC-FUSION-5W BCO 8031440361736	4000K	5W	230 Lumen	120°	>10 000 on/off	h 25 000	230V DRIVER FREE
INC-FUSION-5W ORO 8031440361712	4000K	5W	230 Lumen	120°	>10 000 on/off	h 25 000	230V DRIVER FREE

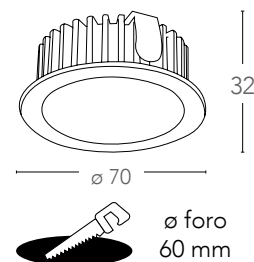




## BLIZ

Kit faretto 3 pz. in alluminio bianco opaco con struttura esterna  
Kit 3 p. surface mount aluminium matt white down light



informazioni tecniche - technical information

LED-BLITZ-R3 8031440353274	4000K	3x5W	3x300 Lumen	105°	>10 000 on/off	h 25 000	driver incluso
-------------------------------	-------	------	-------------	------	----------------	----------	----------------

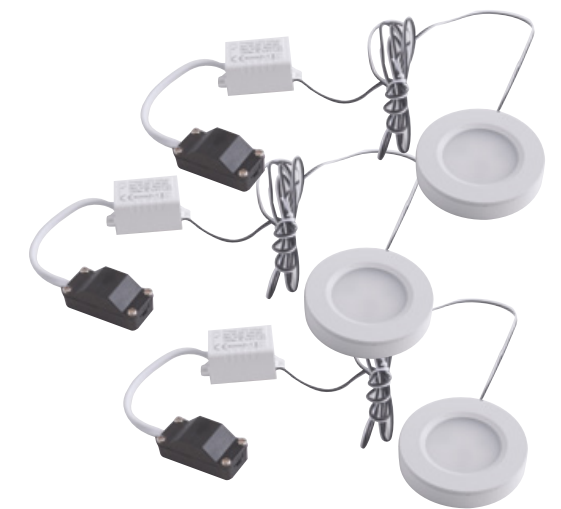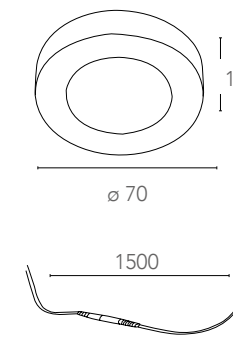




## MATRIX

Kit 3 pz. incasso in metallo nelle finiture bianco o nikel lampade LED incluse  
 Kit 3 p metal down lights white or nikel finish with LED bulbs included





### informazioni tecniche - technical information

	INC-MATRIX-LEDF3 NIK 8031440359337	3000K	3x6W	3x345Lumen	100°	>10 000 on/off	h 15 000
	INC-MATRIX-LEDF3 BCO 8031440359320	3000K	3x6W	3x345 Lumen	100°	>10 000 on/off	h 15 000
							

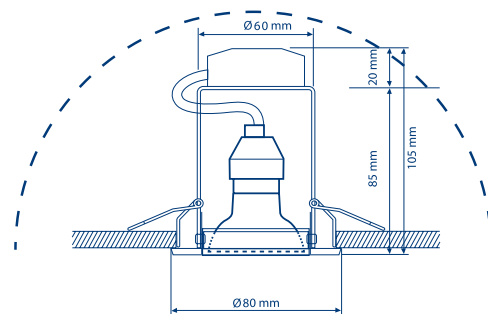

Ø foro  
60 mm

	<b>3X</b>
3xGUI0 - 6W LED 230V~ 50Hz INCL	
	<b>INCL</b>








## MATRIX

Incasso in metallo nelle finiture nikel, cromo, oro lucido o bianco orientabili lampade LED incluse  
 Metal down lights adjustable nikel, chrome, gold or white finish with LED bulbs included






### informazioni tecniche - technical information

	INC-MATRIX-LEDM1 NIK 8031440313049	3000K	6W	345 Lumen	100°	15°	>10 000 on/off	h 15 000
	INC-MATRIX-LEDM1 BCO 8031440313063	3000K	6W	345 Lumen	100°	15°	>10 000 on/off	h 15 000
	INC-MATRIX-LEDM1 CR 8031440313056	3000K	6W	345 Lumen	100°	15°	>10 000 on/off	h 15 000
	INC-MATRIX-LEDM1 ORO 8031440313070	3000K	6W	345 Lumen	100°	15°	>10 000 on/off	h 15 000
								
								
								

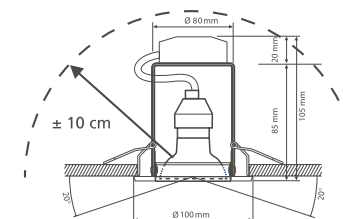

Ø foro  
80 mm

	<b>1X</b>
1xGUI0 - 6W LED 230V~ 50Hz INCL	
	<b>INCL</b>




## MATRIX

3 Kit incasso in metallo nelle finiture nikel, cromo, oro lucido o bianco orientabili lampade LED incluse  
 3 Kit metal down lights nikel, chrome, gold or white finish adjustable with LED bulbs included



informazioni tecniche - technical information

	INC-MATRIX-LEDM3 NIK 8031431571182	3000K	3X6W	3X345 Lumen	100°	15°	>10 000 on/off	h 15 000
	INC-MATRIX-LEDM3 BCO 8031429651162	3000K	3X6W	3X345 Lumen	100°	15°	>10 000 on/off	h 15 000
	INC-MATRIX-LEDM3 CR 8031440313032	3000K	3X6W	3X345 Lumen	100°	15°	>10 000 on/off	h 15 000
	INC-MATRIX-LEDM3 ORO 8031440313025	3000K	3X6W	3X345 Lumen	100°	15°	>10 000 on/off	h 15 000

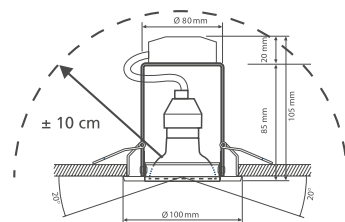

ø foro 80 mm

3xGUI10 - 6W  
LED  
230V~ 50Hz  
INCL

3X



INCL




## ALAN

Incasso in metallo con gemme in acrilico  
 Metal down light with acrylic beads



informazioni tecniche - technical information

INC-ALAN-CR  
8031440311915



103x103



foro ø 70 mm




MR16

INCL


## GEMMA

Incasso in metallo con gemme in acrilico  
 Metal down light with acrylic beads

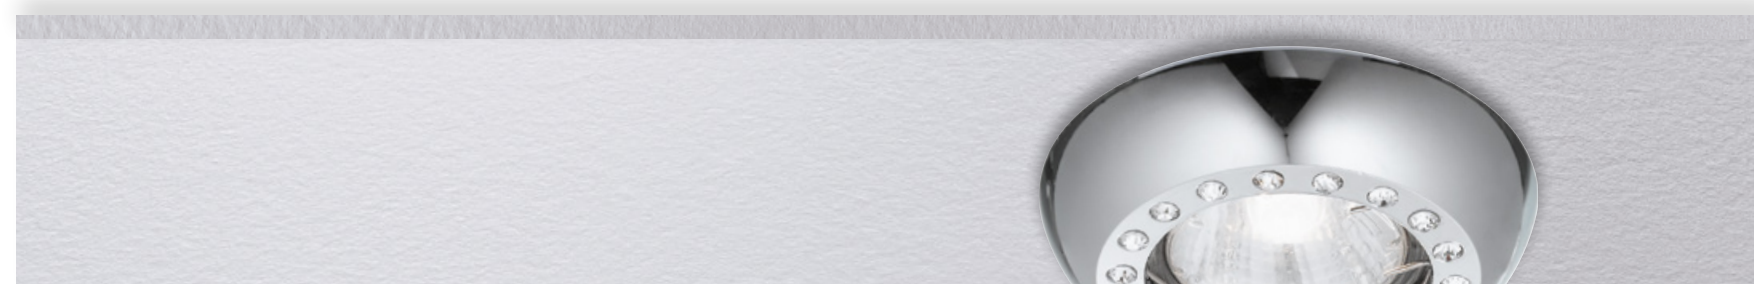

informazioni tecniche - technical information

INC-GEMMA-CR  
8031439951276



ø 90



foro ø 77 mm



MR16

INCL


## ADAM

Incasso in metallo diffusore in vetro trasparente  
Metal down light with transparent glass diffusor




informazioni tecniche - technical information


INCASSO-ADAM-Q2  
8031433971218

 2xE27 max 60w  
non include - not included


INCASSO-ADAM-R2  
8031433921213





 2xE27 max 60w  
non include - not included

INCASSO-ADAM-Q1  
8031433941211

 1xE27 max 60w  
non include - not included

INCASSO-ADAM-R1  
8031433951210

 1xE27 max 60w  
non include - not included

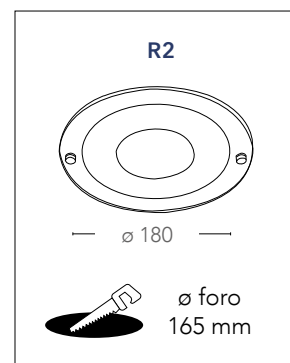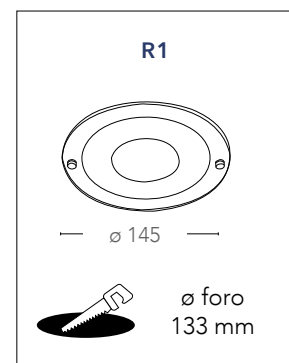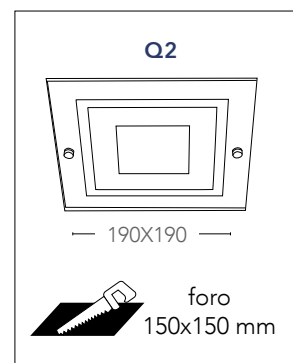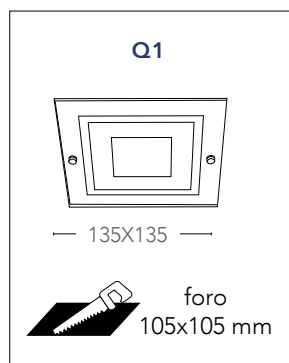


## UP

Incasso in metallo con diffusore in vetro trasparente  
Metal down light with clear glass diffusor




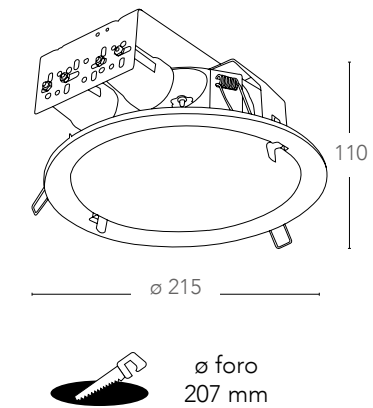
informazioni tecniche - technical information

INCASSO-UP-L-BCO  
8031440351737

 max 15,5 cm  
2xE27 max 60w  
non include - not included

INCASSO-UP-L-NIK  
8031440351744

 max 15,5 cm  
2xE27 max 60w  
non include - not included





**Verniciabile**



### **GESSO**

Le collezioni in gesso offrono la più ampia libertà di scelta, ideate per creare e valorizzare ogni tipo di ambiente, offrono la migliore soluzione di esigenza estetica, creando effetti di luce puri e funzionali

### **GYPSUM**

*The Gypsum collections offer the widest freedom of choice, designed to create and enhance for every type of environment, offer the best solution appearance requirements, creating pure lighting effects and functional*

## PHANTOM

Incassi in gesso verniciabili esterni  
Gypsun down light paintable



## SPETTRO

Incassi in gesso verniciabili esterni con scalini  
Gypsun down light paintable



informazioni tecniche - technical information

INC-PHANTOM-R1  
8031431551184

1xGU10 max 35w  
non include - not included



INC-PHANTOM-Q1  
8031431561183

1xGU10 max 35w  
non include - not included



informazioni tecniche - technical information





INC-SPETTRO-R1  
8031431531186

1xGU10 max 35w  
non include - not included



INC-SPETTRO-Q1  
8031431541185

1xGU10 max 35w  
non include - not included

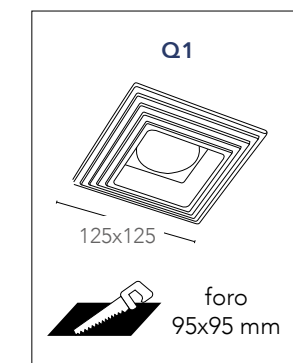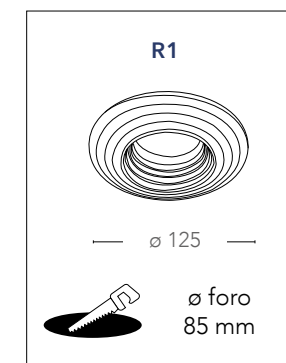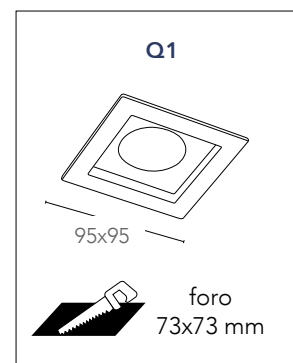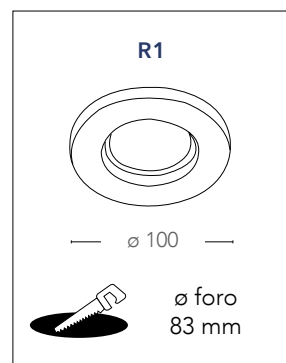

## GHOST

Incassi in gesso verniciabili a scomparsa  
Recess gypsun down light paintable



informazioni tecniche - technical information

**INC-GHOST-Q1**  
8031434261219

1xGU10 max 35w  
non include - not included





**INC-GHOST-Q1D**  
8031433941211

1xGU10 max 35w  
non include - not included



emissione luce laterale  
side light diffusion

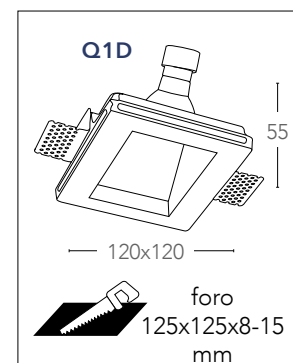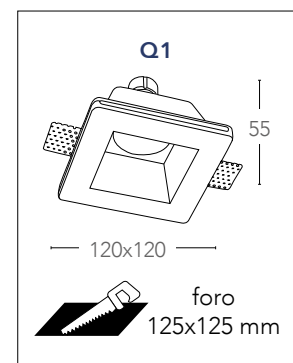

## GHOST


Doppio incasso in gesso verniciabili a scomparsa  
Double recess gypsun down light paintable



informazioni tecniche - technical information

**INC-GHOST-Q2**  
8031434301212

2xGU10 max 35w  
non include - not included

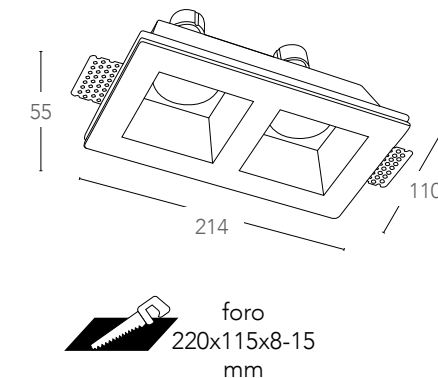

## SENSO


Incassi in gesso verniciabili a scomparsa  
Recess gypsun down light paintable



informazioni tecniche - technical information


**INC-SENSO-1**  
8031434221213

1xGU10 max 35w  
non include - not included

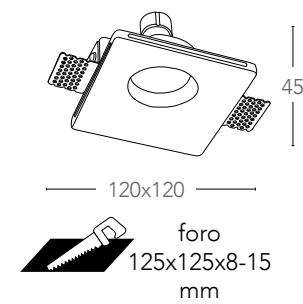

## SPIRIT

Incassi in gesso verniciabili a scomparsa  
Recess gypsun down light paintable

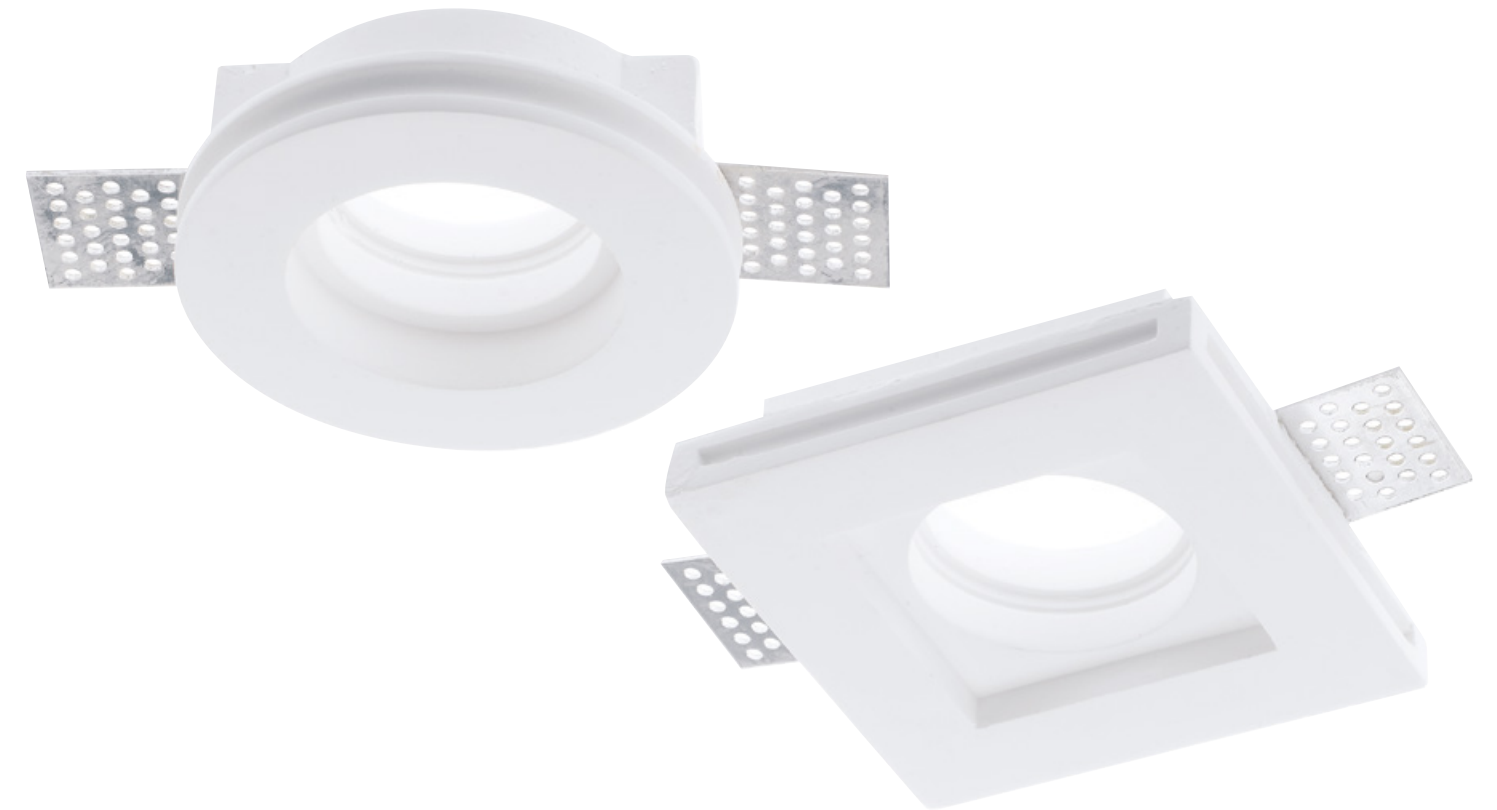

informazioni tecniche - technical information


**INC-SPIRIT-Q1**  
8031440362160

1xGU10 max 35w  
non include - not included



**INC-SPIRIT-R1**  
8031440362177

1xGU10 max 35w  
non include - not included

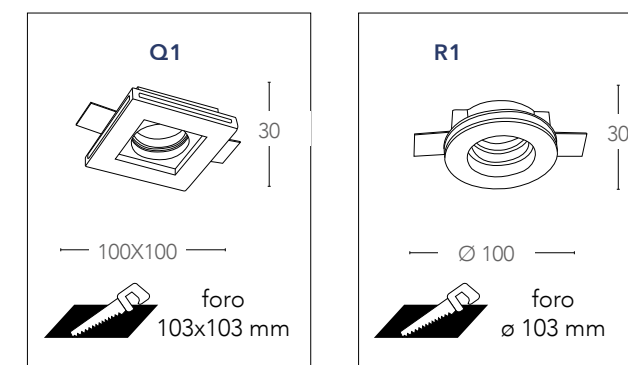

## SNOW

Incassi in gesso verniciabili a scomparsa con vetro  
Recess gypsun down light paintable with glass



informazioni tecniche - technical information



**INC-SNOW-R**  
8031440351607

1xGU10 max 35w  
non include - not included



**INC-SNOW-Q**  
8031440351577

1xGU10 max 35w  
non include - not included

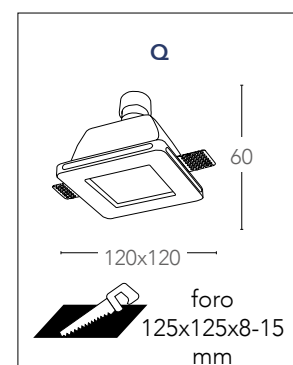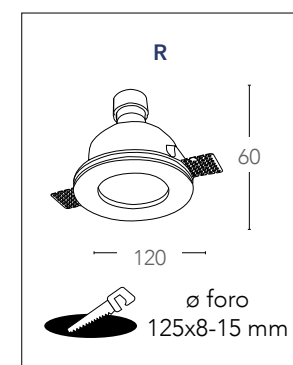

## MORGANA

Incassi in gesso verniciabili a scomparsa orientabile  
Recess gypsun down light paintable adjustable



informazioni tecniche - technical information



**INC-MORGANA-Q1**  
8031434231212

1xGU10 max 35w  
non include - not included



**INC-MORGANA-R1**  
8031434211214

1xGU10 max 35w  
non include - not included

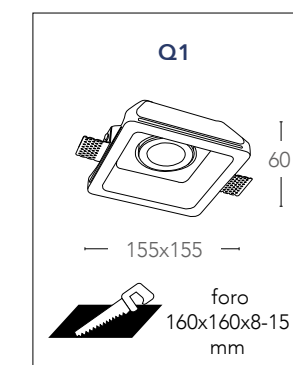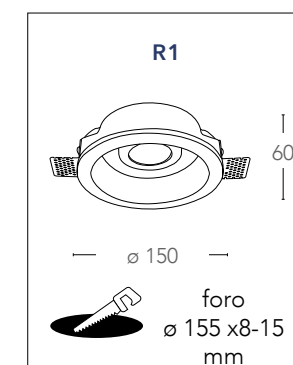

## MORGANA


Doppio incasso orientabile in gesso verniciabili a scomparsa  
Double recess gypsun down light paintable adjustable



informazioni tecniche - technical information

INC-MORGANA-Q2  
8031434201215

2xGU10 max 35w  
non include - not included

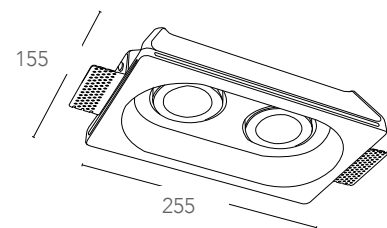

## ARIEL


Incasso a parete in gesso verniciabile a scomparsa  
Recess gypsun wall lamp paintable



informazioni tecniche - technical information

I-ARIEL-QL1  
8031434151213

1xGU10 MINI max 35W  
non include - not included

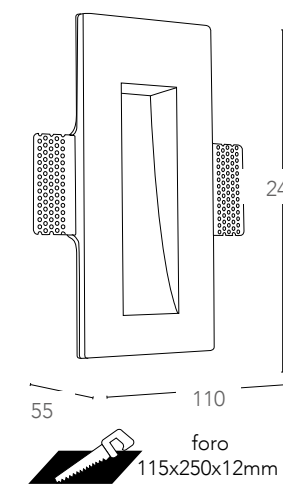

## ARIEL

Segnapassi in gesso verniciabili a scomparsa  
Recess gypsun wall lamp paintable



informazioni tecniche - technical information



I-ARIEL-RS1  
8031434131215

1xGU10 MINI max 35W  
non include - not included



I-ARIEL-RM1  
8031434121216

1xGU10 MINI max 35W  
non include - not included

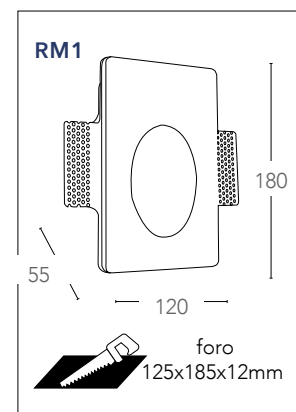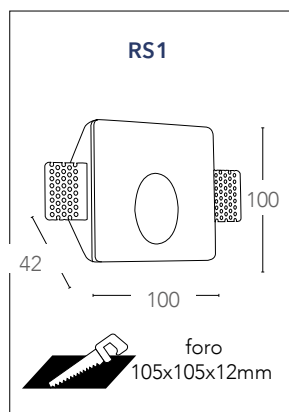


## PROFY

Profilo in gesso verniciabile a scomparsa  
Recess gypsun profile paintable




informazioni tecniche - technical information

I-PROFY-100  
8031434081213

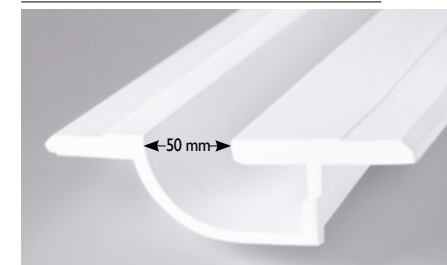

foro  
1005x180x60 mm

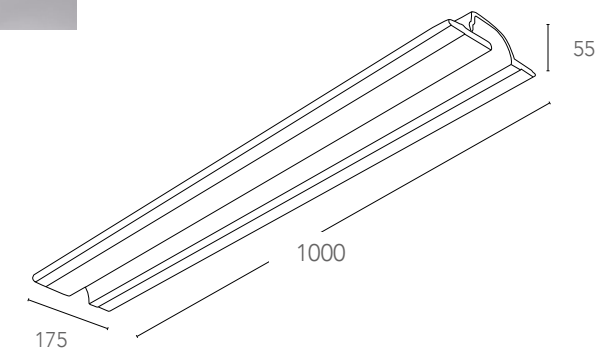

## SPACE

Faro struttura esterna in gesso verniciabile  
Surface mount gypsun lamp paintable



## SPACE

Faro struttura esterna in gesso verniciabile orientabile  
Surface mount gypsun lamp paintable adjustable



informazioni tecniche - technical information

I-SPACE-S-Q1  
8031439521264

1xGU10 max 35w  
non include - not included



I-SPACE-S-R1  
8031439531263

1xGU10 max 35w  
non include - not included



informazioni tecniche - technical information





I-SPACE-Q1  
8031434171211

1xGU10 max 35w  
non include - not included



I-SPACE-R1  
8031434141214

1xGU10 max 35w  
non include - not included

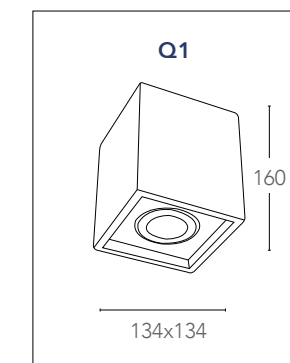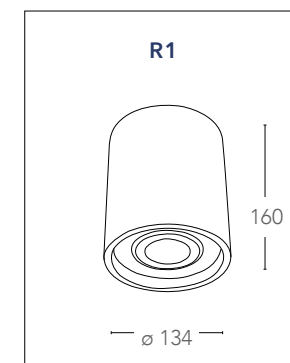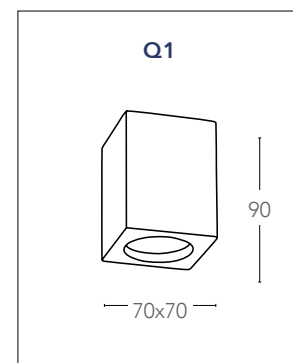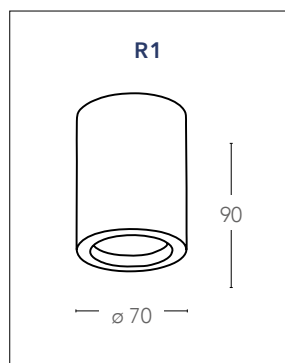

## GABRIEL

Plafoniera in gesso verniciabile con diffusore in vetro  
Gypsun ceiling paintable with glass diffuser





informazioni tecniche - technical information

I-GABRIEL/PL25Q  
8031434101218

2xE27 max 42w  
non include - not included

I-GABRIEL/PL30R  
8031434111217

2xE27 max 42w  
non include - not included

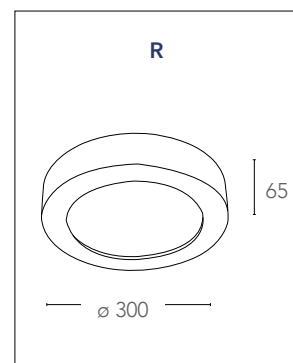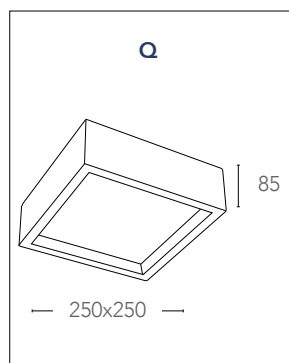

## ANIMA


Incasso a parete in gesso verniciabile a scomparsa  
Recess gypsun wall lamp paintable



informazioni tecniche - technical information

I-ANIMA-AP  
8031434161212

1xE14 max 40w  
non include - not included

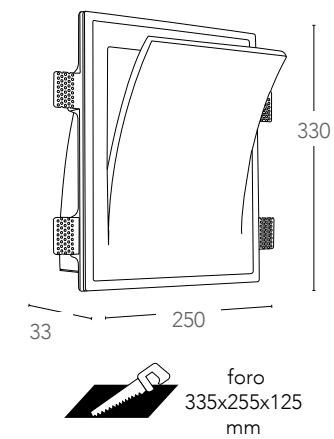

## SHINE


Applique a parete in gesso verniciabile  
Gypsun wall lamp paintable



informazioni tecniche - technical information

I-SHINE-AP  
8031434191219

1xG9 max 28W  
non include - not included



## RUBIK


Applique a parete in gesso verniciabile  
Gypsun wall lamp paintable



informazioni tecniche - technical information

I-RUBIK-AP  
8031440362146

1xG9 max 28W  
non include - not included



## MOSES


Applique a parete in gesso verniciabile  
Gypsun wall lamp paintable



informazioni tecniche - technical information

I-MOSES-AP  
8031434181210

1xG9 max 28W  
non include - not included

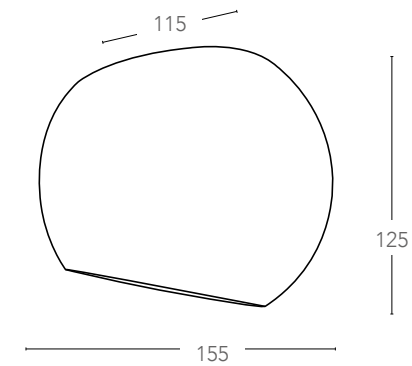

## CANDIDA


Applique a parete in gesso verniciabile  
Gypsun wall lamp paintable



informazioni tecniche - technical information

I-CANDIDA-AP  
8031436751237

2xE14 max 28W  
non include - not included

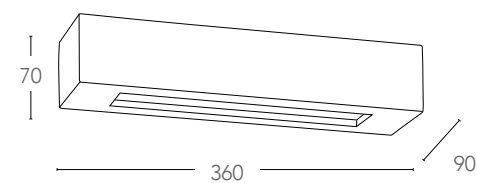

## LEIRON


Applique a parete in gesso verniciabile  
Gypsun wall lamp paintable



informazioni tecniche - technical information

I-LEIRON-AP  
8031436741238

1xG9 max 28W  
non include - not included

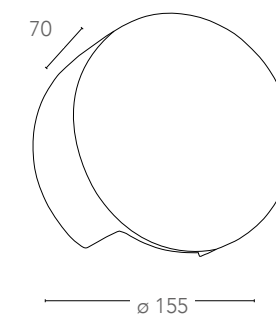

## ABEL


Applique a parete in gesso verniciabile  
Gypsun wall lamp paintable



informazioni tecniche - technical information

I-ABEL-AP  
8031440362153

2xE14 max 40W  
non include - not included

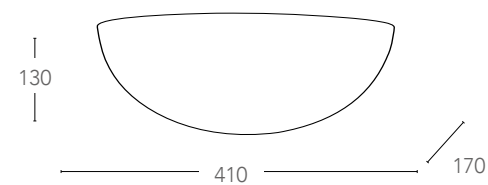

## SANTORINI


Applique in gesso a parete angolare verniciabile con diffusione luminosa verso l'alto  
Angular gypsun wall lamp paintable with light diffusion upward



informazioni tecniche - technical information

I-SANTORINI-AP  
8031440351553

1xE14 max 28W  
non include - not included

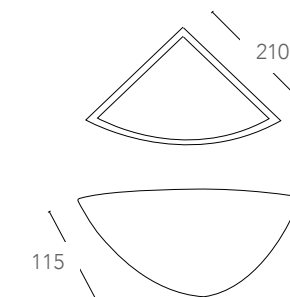

## MYKONOS

Applique in gesso a parete angolare verniciabile con doppia emissione di luce  
Angular gypsun wall lamp paintable with light diffusion upward




informazioni tecniche - technical information

I-MYKONOS-AP  
8031440351584

1xE14 max 28W  
non include - not included

100°  
100°

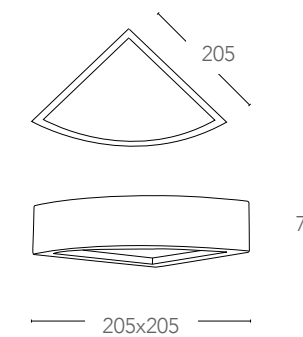

## LELLA


Applique a parete in ceramica verniciabile con diffusione luminosa verso l'alto  
Ceramic wall lamp paintable with light diffusion upward



informazioni tecniche - technical information


164/00200  
8031414052516

max 78 mm



1xR7s max 120w

non include - not included



## PAULA


Applique a parete in ceramica verniciabile diffusione luminosa superiore e inferiore  
Ceramic wall lamp paintable with light diffusion up and down



informazioni tecniche - technical information


166/01200  
8031414056583

max 78 mm



1xR7s max 120w

non include - not included



## STEFAN

Applique a parete in ceramica verniciabile diffusore in vetro emissione luce superiore e inferiore  
Ceramic wall lamp paintable with glass diffuser up and down emission lighting




informazioni tecniche - technical information

166/00100  
8031414034260

1xE27 max 42w

non include - not included

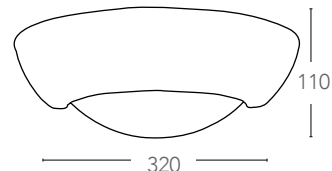



## ANTHEA

Incasso in porcellana lavorato a mano  
Hand made porcelain down light



informazioni tecniche - technical information

INC-ANTHEA-BCO  
8031439791261



— ø 122 —



foro  
ø 65 mm



## ZARAH

Incasso in porcellana lavorato a mano decoro oro  
Hand made porcelain down light with gold decoration



informazioni tecniche - technical information

INC-ZARAH-ORO  
8031440121279



— ø 130 —



foro  
ø 80 mm

## BLUMA

Incasso in porcellana lavorato a mano decoro blu  
Hand made porcelain down light with blue decoration



informazioni tecniche - technical information

INC-BLUMA-BLU  
8031439731267



— ø 115 —



foro  
ø 70 mm

## FLORENZA

Incasso in porcellana lavorato a mano  
Hand made porcelain down light



informazioni tecniche - technical information

INC-FLORENZA-BCO  
8031439771263



— ø 142 —



foro  
ø 80 mm



### LAMPADE DA MURO

Le nostre collezioni hanno un design moderno e ricercato, per ambienti indoor e outdoor, utilizzano il know-how innovativo LED adatto ad illuminare pareti in modo efficiente e suggestivo.

### WALL LAMP

*Our collections have a modern and sophisticated design, for indoor and outdoor environments, using the know-how Innovative LED suitable for illuminating walls efficiently and suggestive.*

## HYDRA

Applique a LED in alluminio cromato con diffusore in acrilico  
Aluminium LED wall lamp with acrylic diffuser



informazioni tecniche - technical information

LED-W-HYDRA/3W  
8031432951204

3500K

3W



240 Lumen

120°

>10 000 on/off

h 25 000

driver incluso

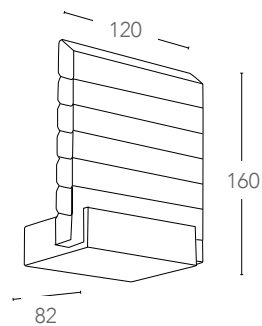

## RIGEL

Applique a LED in alluminio cromato con diffusore in acrilico  
Aluminium LED wall lamp with acrylic diffuser



informazioni tecniche - technical information

LED-W-RIGEL/6W  
8031433041201

3500K

6W

400 Lumen

120°

>10 000 on/off

h 25 000

driver incluso

LED-W-RIGEL/3W  
8031433021203

3500K

3W




200 Lumen

120°

>10 000 on/off

h 25 000

driver incluso

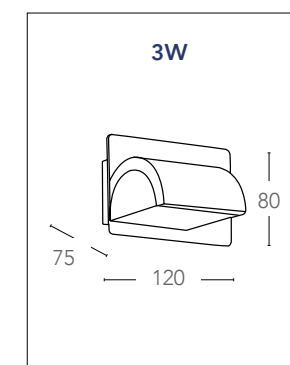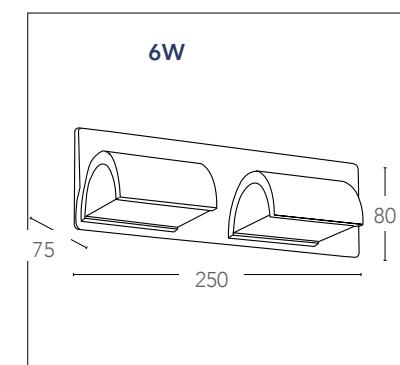

## VEGA

Applique a LED in alluminio cromato con diffusore in acrilico  
Aluminium LED wall lamp with acrylic diffuser






informazioni tecniche - technical information

LED-W-VEGA/6W  
8031432991200

3500K 6W 400Lumen 180° >10 000 on/off h 25 000 driver incluso

LED-W-VEGA/3W  
8031432961203

3500K 3W 200 Lumen 180° >10 000 on/off h 25 000 driver incluso

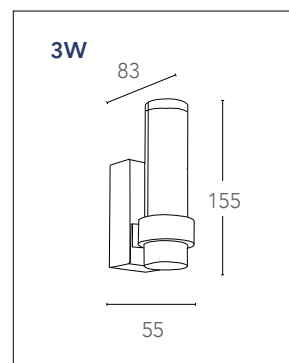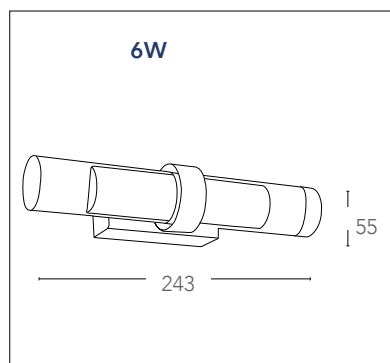

## ANDROMEDA



Applique a LED in metallo cromato  
Metal LED wall lamp



informazioni tecniche - technical information

LED-W-ANDROMEDA/4W  
8031432941205

3500K 4W 280 Lumen 120° >10 000 on/off h 25 000 driver incluso

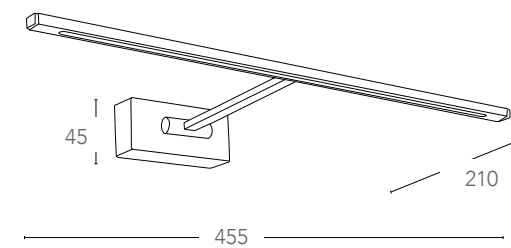

# ANTARES

Applique a LED in alluminio con diffusore in acrilic cromato o bainco  
*Aluminium LED wall lamp with acrylic diffuser*



## informazioni tecniche - technical information



**LED-W-ANTARES/8W CR**  
8031433081207

3500K

8W

620Lumen

120°

>10 000 on/off

h 25 000

driver incluso



CR

**LED-W-ANTARES/8W BCO**  
8031433091206

3500K

8W

620 Lumen



120°

>10 000 on/off

h 25 000

driver incluso

BCO

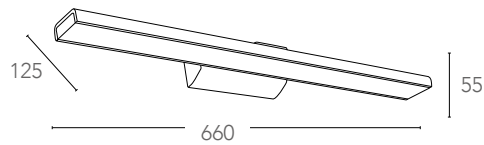

CLASSE  
**A**



SMD



Ra  
>80

CE



RoHS  
WEEE COMPLIANT

# SIGMA

Applique a LED in metallo cromo o oro satinato con diffusore in acrilico  
Metal LED wall lamp



## informazioni tecniche - technical information



**LED-W-SIGMA/4W**  
8031432971202

3500K

4W

☀️ 320Lumen

120°



>10 000 on/off



h 25 000

🔌 driver incluso

CR



**LED-W-SIGMA/4W ORO**  
8031440362306

3500K

4W

☀️ 320 Lumen

120°




>10 000 on/off



h 25 000

🔌 driver incluso

ORO

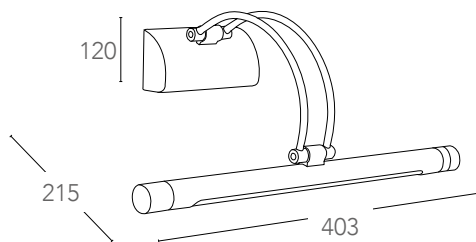

CLASSE <b>A</b>		<b>SMD</b> 		<b>Ra</b> <b>&gt;80</b>	<b>CE</b>		<b>RoHS</b> WEEE COMPLIANT
--------------------	--	----------------	--	----------------------------	-----------	--	-------------------------------



## EPSILON

Applique a LED in metallo cromato con diffusore in acrilico  
Metal LED wall lamp



informazioni tecniche - technical information

LED-W-EPSILON/4W 8031433061209 **3500K** **4W** 320 Lumen 120° >10 000 on/off h 25 000 driver incluso

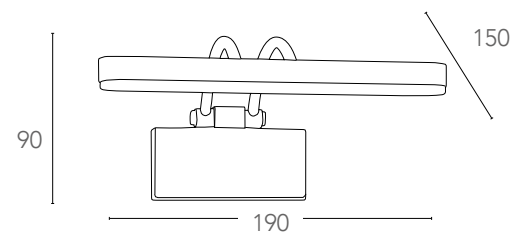



## OMICRON

Applique a LED in alluminio cromato con diffusore in acrilico  
Aluminium LED wall lamp with acrylic diffuser



informazioni tecniche - technical information

LED-W-OMICRON/6W 8031433031202 **3500K** **6W** 400 Lumen 120° >10 000 on/off h 25 000 driver incluso

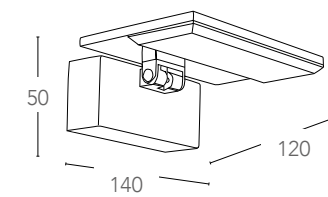

## PHOENIX

Applique a LED in alluminio con diffusore in acrilico  
Aluminium LED wall lamp with acrylic diffuser



informazioni tecniche - technical information

LED-W-PHOENIX/6W  
8031433051200



6W



400 Lumen





>10 000 on/off



h 25 000

driver incluso

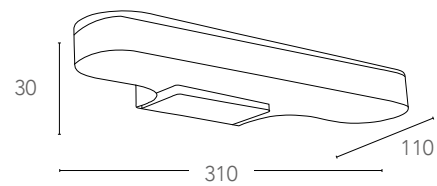

## ALCOR

Applique a LED in alluminio bianco gofrato o silver gofrato  
Aluminium LED wall lamp



informazioni tecniche - technical information



LED-W-ALCOR/5W BCO  
8031440355186



5W



500 Lumen



>10 000 on/off



h 25 000

driver incluso



LED-W-ALCOR/5W SIL  
8031440355148



5W



500 Lumen





>10 000 on/off





h 25 000

driver incluso

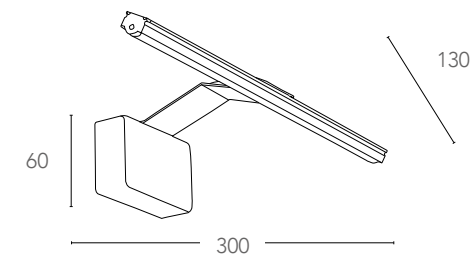

## ATLAS

Applique a LED in alluminio bianco gofrato  
Aluminium LED wall lamp

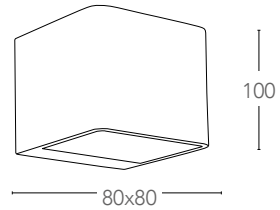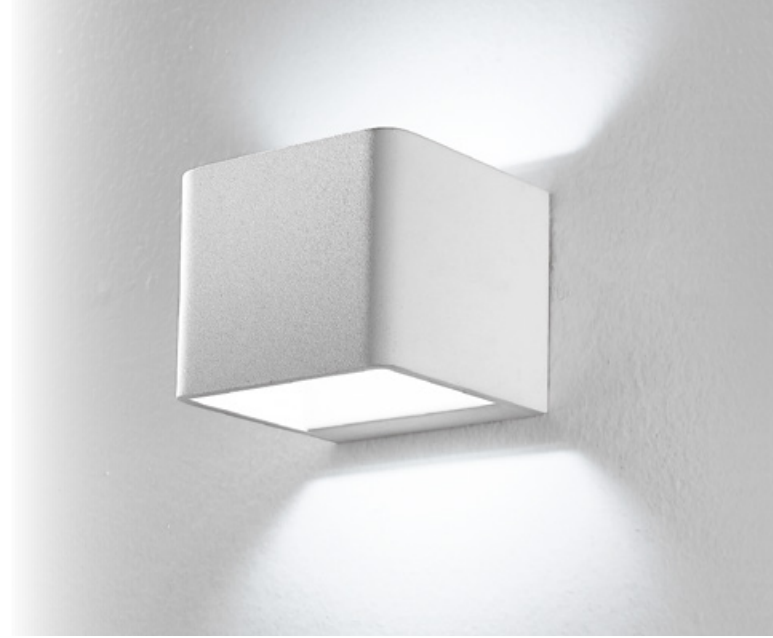



informazioni tecniche - technical information

LED-W-ATLAS/6W  
8031433071208



## LAMBDA

Applique a LED in alluminio bianco gofrato  
Aluminium LED wall lamp

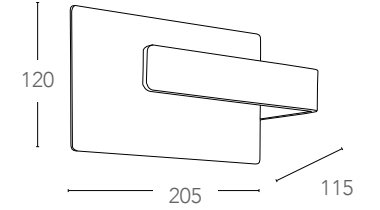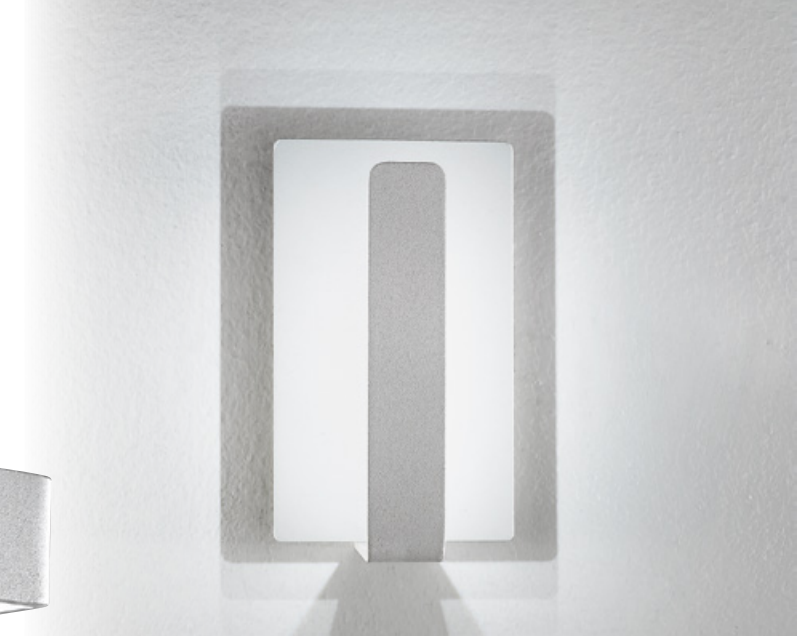


informazioni tecniche - technical information

LED-W-LAMBDA/4W  
8031433001205



## OMEGA

Applique a LED in alluminio bianco gofrato  
Aluminium LED wall lamp

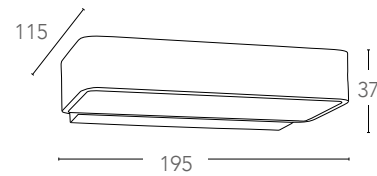


informazioni tecniche - technical information

LED-W-OMEGA/4W  
8031433011204




## PEGASO

Applique a LED in alluminio bianco gofrato  
Aluminium LED wall lamp

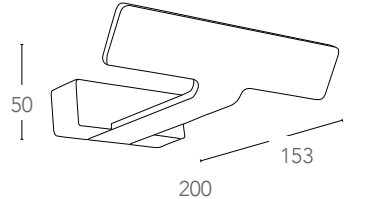

informazioni tecniche - technical information

LED-W-PEGASO/4W  
8031432981201



## MERCURY

Applique a LED in alluminio bianco goffrato  
Aluminium LED wall lamp



informazioni tecniche - technical information

LED-W-MERCURY/5W  
8031434091212

3000K

6W

630 Lumen



120°  
120°

IP54

>10 000 on/off

h 25 000

driver incluso

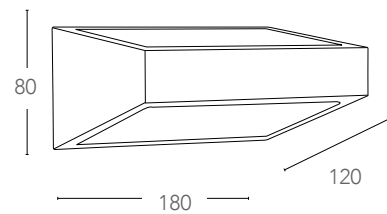

## GAMMA

Applique a LED in alluminio con diffusore di luce superiore e inferiore  
Aluminium LED wall lamp with up and down light diffuser



informazioni tecniche - technical information

LED-W-GAMMA/10W  
8031434041217

3000K

2X5W

1080 Lumen


120°  
120°

IP54

>10 000 on/off

h 25 000

driver incluso

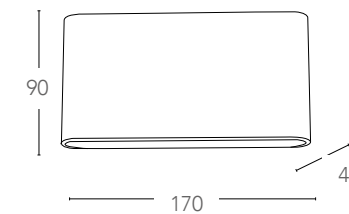

## OMNIA

Faro a LED dimmerabile in alluminio, orientabile  
Dimmable aluminium LED lamp adjustable



informazioni tecniche - technical information

LED-W-OMNIA/15W  
8031440351423



15W



1300 Lumen



>10 000 on/off

h 25 000

driver incluso

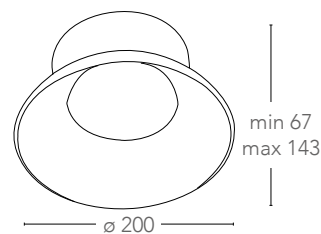

## MIURA

Applique a LED dimmerabile in alluminio bianco gofrato con diffusore di luce superiore ed inferiore  
Dimmable aluminium LED wall lamp with up and down diffuser



informazioni tecniche - technical information

LED-W-MIURA/6W  
8031440351447



2X3W



520 Lumen



>10 000 on/off

h 25 000

driver incluso





## TWILIGHT

Applique LED in alluminio bianco matto con diffusore mobile  
 Matt white aluminium wall lamp with adjustable diffuser




informazioni tecniche - technical information

LED-W-TWILIGHT  
 8031440361088

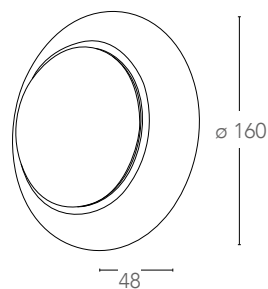

## MUSTANG

Applique a LED in alluminio  
 Aluminium LED wall lamp


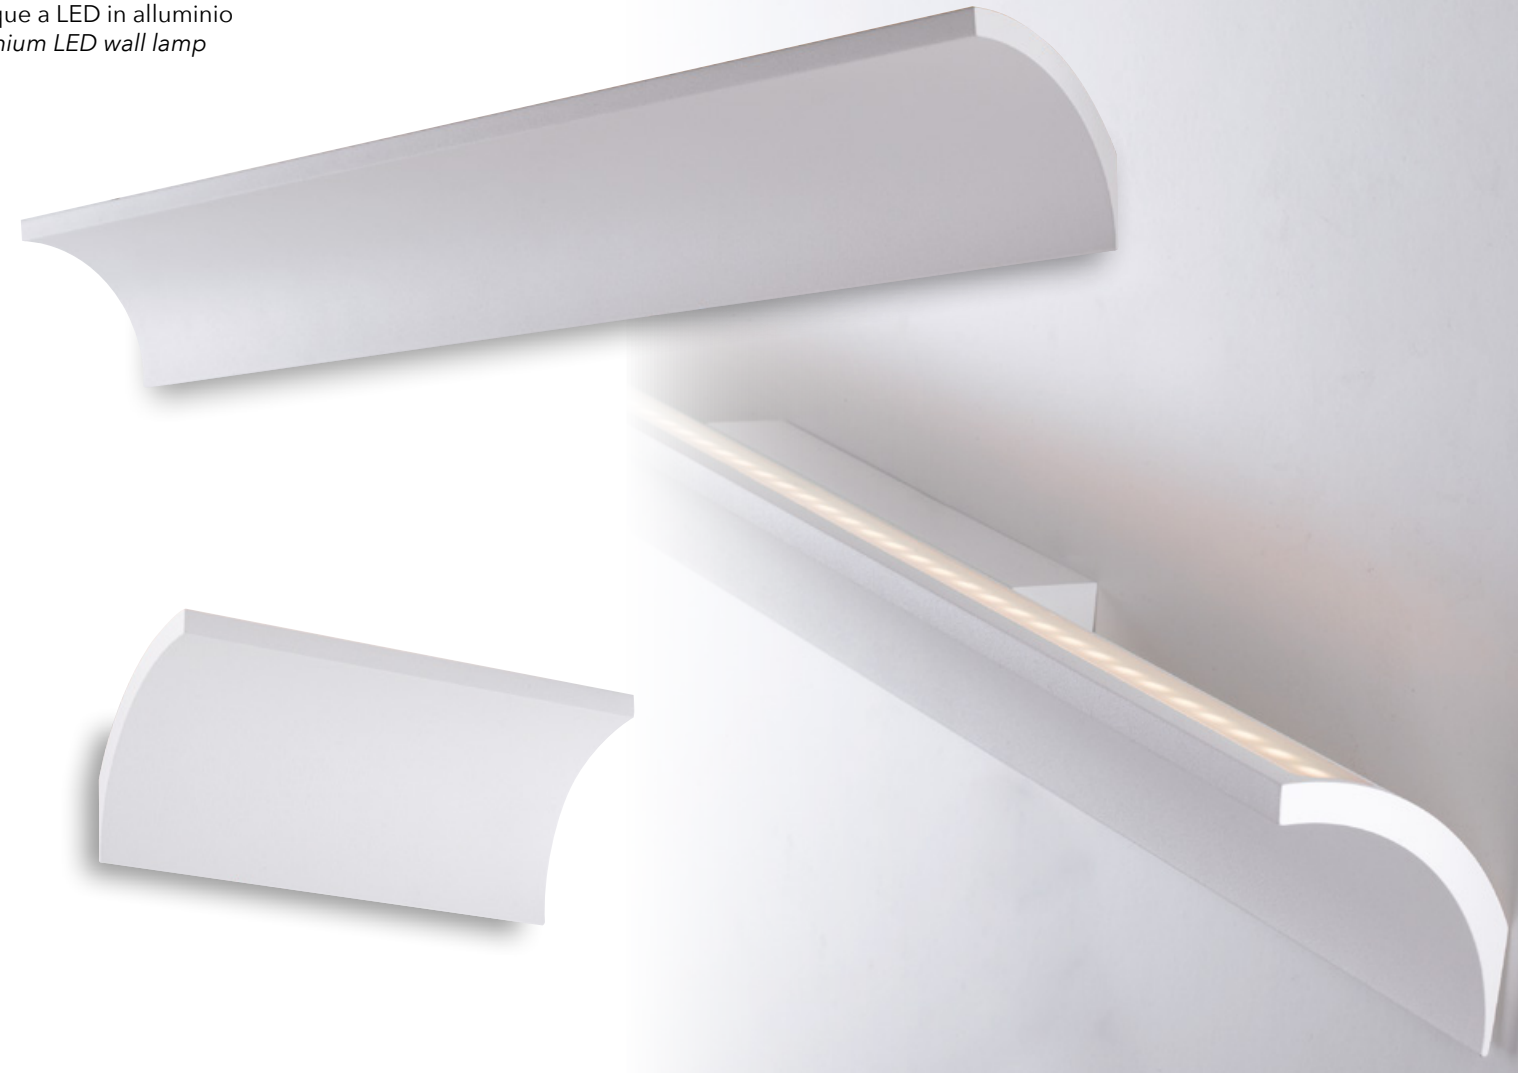


informazioni tecniche - technical information

LED-W-MUSTANG 200  
 8031440361156



LED-W-MUSTANG 600  
 8031440361149

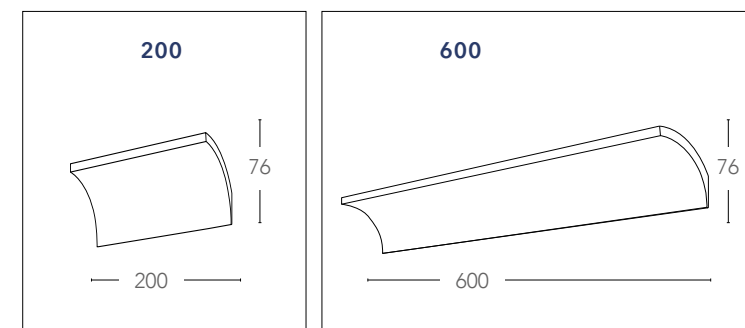




# LANCER

Appliche a LED in alluminio  
Aluminium LED wall lamp



## informazioni tecniche - technical information

	<b>LED-W-LANCER NERO</b> 8031440361217	4000K	17W	☀️ 1360Lumen	⚠️ 120°	💧 IP54	🔌 >10 000 on/off	🕒 h 25 000	🔌 driver incluso
NERO	<b>LED-W-LANCER BCO</b> 8031440361200	4000K	17W	☀️ 1360 Lumen	⚠️ 120°	💧 IP54	🔌 >10 000 on/off	🕒 h 25 000	🔌 driver incluso
	BCO								

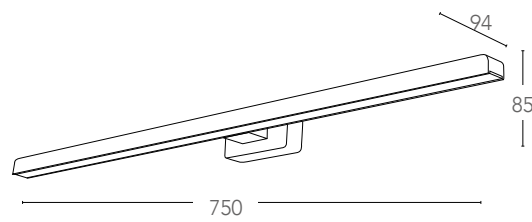

CLASSE **A**

**SMD**

**Ra >80**
**CE**



**RoHS**  
WEEE COMPLIANT



## VEYRON

Applique a LED in alluminio  
Aluminium LED wall lamp



### informazioni tecniche - technical information

 NERO	<b>LED-W-VEYRON NERO</b> 8031440361095	4000K	2X7W	680 Lumen	120° 120°	IP54	>15 000 on/off	h 25 000	driver incluso
 BCO	<b>LED-W-VEYRON BCO</b> 8031440361163	4000K	2X7W	680 Lumen	120° 120°	IP54	>15 000 on/off	h 25 000	driver incluso






## BIOME

Applique a LED in alluminio  
Aluminium LED wall lamp




### informazioni tecniche - technical information

 NERO	<b>LED-W-BIOME NERO</b> 8031440361132	4000K	2X7W	630 Lumen	120° 120°	IP54	>15 000 on/off	h 25 000	driver incluso
 BCO	<b>LED-W-BIOME BCO</b> 8031440361125	4000K	2X7W	630 Lumen	120° 120°	IP54	>15 000 on/off	h 25 000	driver incluso



110X110






## GOLF

Applique a LED in alluminio  
Aluminium LED wall lamp



### informazioni tecniche - technical information

	<b>LED-W-GOLF NERO</b> 80314403610118	4000K	2X7W	630 Lumen	120° 120°	IP54	>15 000 on/off	h 25 000	driver incluso
	<b>LED-W-GOLF BCO</b> 8031440361101	4000K	2X7W	630 Lumen	120° 120°	IP54	>15 000 on/off	h 25 000	driver incluso







## AGERA

Applique a LED in alluminio  
Aluminium LED wall lamp



### informazioni tecniche - technical information

	<b>LED-W-AGERA-90</b> 8031440360951	4000K	6W	340 Lumen	120° 120°	IP54	>10 000 on/off	h 25 000	driver incluso
	<b>LED-W-AGERA-180</b> 8031440360975	4000K	2X8W	550 Lumen	120° 120°	IP54	>10 000 on/off	h 25 000	driver incluso

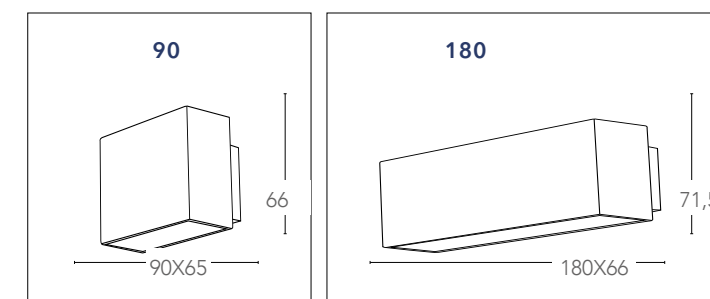

## GRADO


Applique a LED in alluminio  
Aluminium LED wall lamp



informazioni tecniche - technical information


LED-W-GRADO  
8031440361194

4000K 10W 800 Lumen 120° >15 000 on/off h 25 000 driver incluso

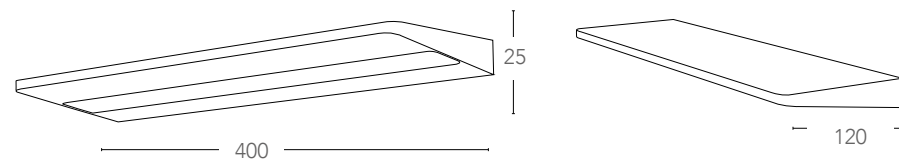

## KITE

Applique a LED in alluminio  
Aluminium LED wall lamp

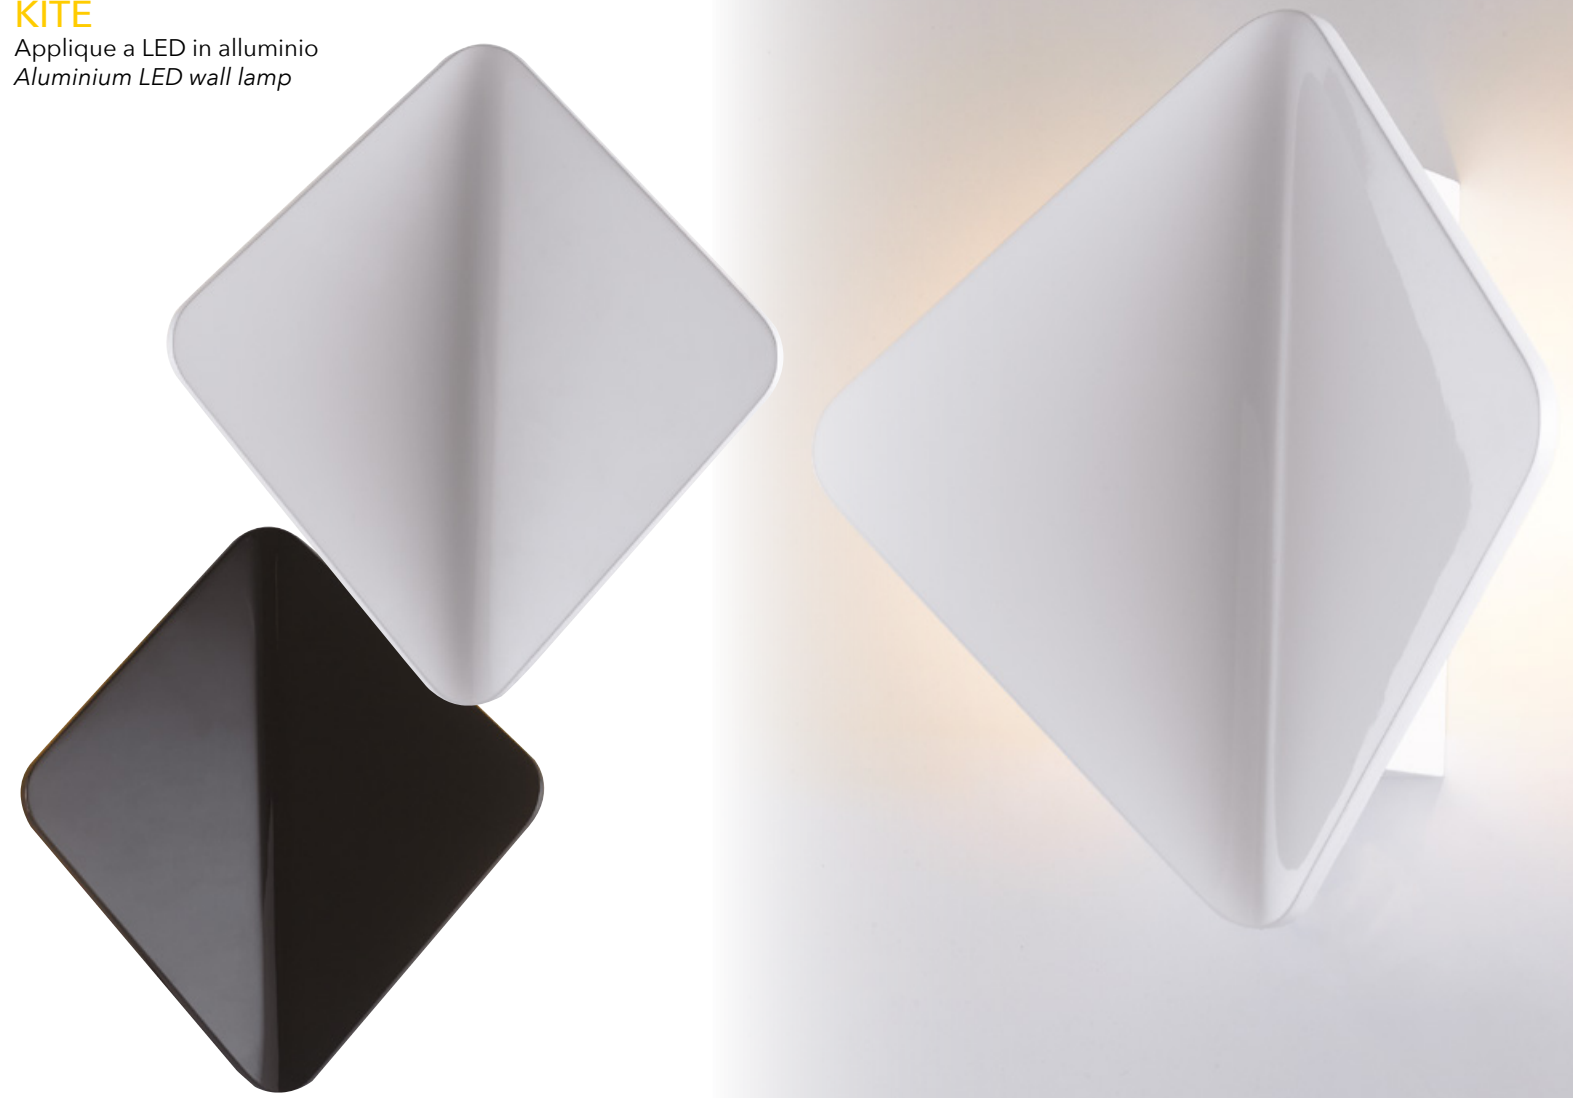

informazioni tecniche - technical information





LED-W-KITE NERO  
8031440361187

4000K 2X3W 540 Lumen 120° >15 000 on/off h 25 000 driver incluso

LED-W-KITE BCO  
8031440361170

4000K 2X3W 540 Lumen 120° >15 000 on/off h 25 000 driver incluso

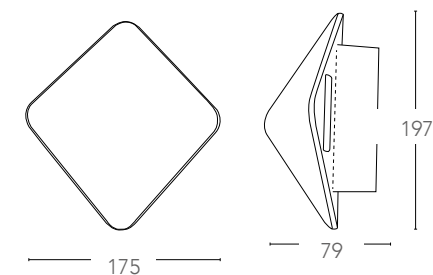



## DEZIR

Applique a LED in alluminio  
Aluminium LED wall lamp



informazioni tecniche - technical information

LED-W-DEZIR  
8031440360999





## ZONDA

Applique a LED in alluminio  
Aluminium LED wall lamp



informazioni tecniche - technical information

LED-W-ZONDA  
8031440360982





## HURACAN


Applique in alluminio pressofuso antracite gofrato  
Alluminium die-cast wall lamp embossed anthracite finish



informazioni tecniche - technical information


I-HURACAN-AP  
8031440361026

1xGU10 max 42W  
non include - not included



## ALFA

Appliche a LED in alluminio con diffusori di fascio di luce regolabili  
Aluminium LED wall lamp with adjustable light flood diffusers

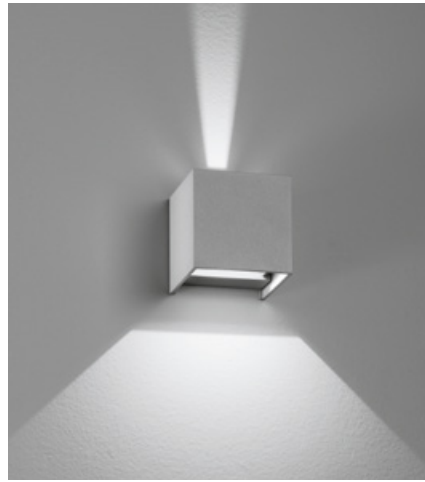

informazioni tecniche - technical information



SILVER



BIANCO

LED-W-ALFA/2W  
8031433981217



2X2W

360Lumen



>10 000 on/off

h 25 000

driver incl.

LED-W-ALFA/6W  
8031439551261



2X3W

500 Lumen



>10 000 on/off

h 25 000

driver incl.

LED-W-ALFA/2W BCO  
8031439541262



2X2W

360Lumen



>10 000 on/off

h 25 000

driver incl.

LED-W-ALFA/6W BCO  
8031439651268



2X3W



500 Lumen



>10 000 on/off

h 25 000

driver incl.



CLASSE  
**A**



SMD



Ra  
>80

CE



RoHS  
WEEE COMPLIANT

## DELTA

Appliche a LED in alluminio con diffusori di fascio di luce regolabili  
Aluminium LED wall lamp with adjustable light flood diffusers



informazioni tecniche - technical information



SILVER



BIANCO

LED-W-DELTA/6W  
8031440341271



2X3W

500Lumen



>10 000 on/off

h 25 000

driver incl.

LED-W-DELTA/6W BCO  
8031440351270



2X3W


500 Lumen



>10 000 on/off

h 25 000

driver incl.



CLASSE  
**A**



SMD



Ra  
>80

CE



RoHS  
WEEE COMPLIANT

## GHIBLI

Applique a LED in alluminio con 4 fasci luminosi  
Aluminium LED lamp with 4 light flood



### informazioni tecniche - technical information



SILVER

BIANCO

LED-W-GHIBLI/8W  
8031440351430



8W

520 Lumen



>10 000 on/off

h 25 000

driver incluso

LED-W-GHIBLI/8W BCO  
8031440360593



8W



520 Lumen



>10 000 on/off

h 25 000

driver incluso





### **FARETTI**

Le nostre collezioni offrono le principali forme moderno-decorativo, dalla singola alla multipla luce , con la possibilità di orientare il fascio di luce nella direzione ideale per creare la soluzione per ogni tipologia di ambiente .

### **SPOT LIGHT**

*Our collections offer the main modern-decorative forms, from single to multiple light, with the ability to direct the beam of light in the ideal direction to create the solution for any type of environment.*








## FOREVER

Spot led integrato diffusore in policarbonato e metallo finitura cromo  
Built in LED spot light with polycarbonatee diffuser and metal chrome finish



### informazioni tecniche - technical information

SPOT-FOREVER-1 8031440358606	4000K	4W	☀️ 320 Lumen	⚡	🔌 >10 000 on/off	🕒 h 25 000	🔋 driver incluso
SPOT-FOREVER-2 8031440358613	4000K	2X4W	☀️ 640 Lumen	⚡	🔌 >10 000 on/off	🕒 h 25 000	🔋 driver incluso
SPOT-FOREVER-3 8031440358583	4000K	3X4W	☀️ 960 Lumen	⚡	🔌 >10 000 on/off	🕒 h 25 000	🔋 driver incluso
SPOT-FOREVER-4 8031440358590	4000K	4X4W	☀️ 1280 Lumen	⚡	🔌 >10 000 on/off	🕒 h 25 000	🔋 driver incluso
SPOT-FOREVER-6 8031440358569	4000K	6X4W	☀️ 1920 Lumen	⚡	🔌 >10 000 on/off	🕒 h 25 000	🔋 driver incluso
SPOT-FOREVER-C 8031440358576	4000K	4W	☀️ 320 Lumen	⚡	🔌 >10 000 on/off	🕒 h 25 000	🔋 driver incluso

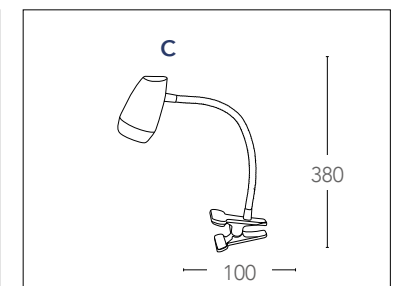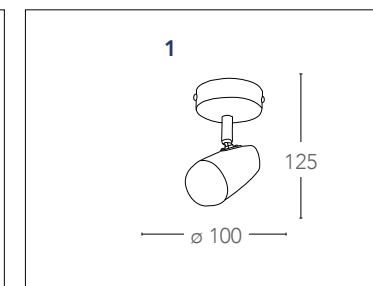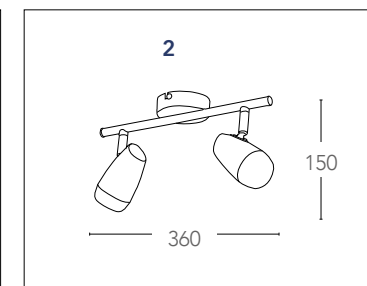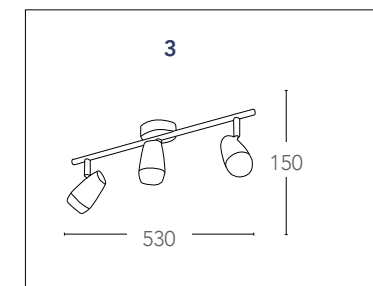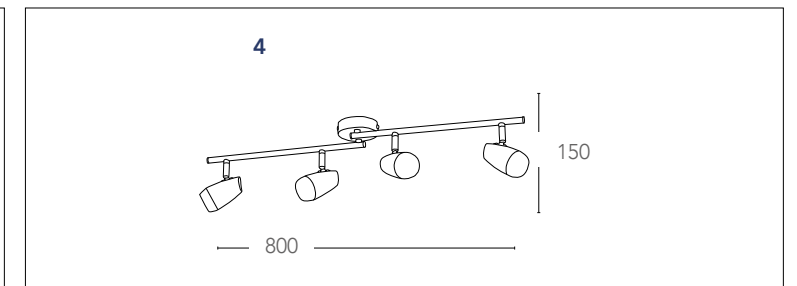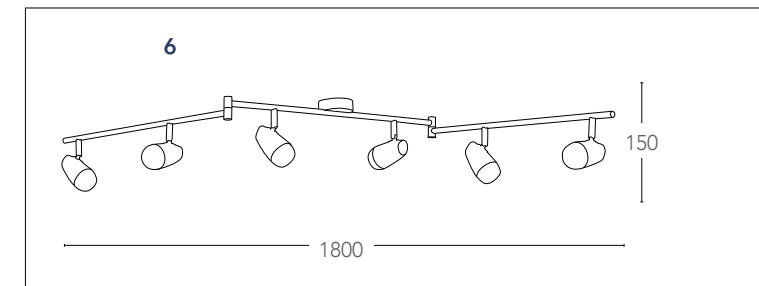



# CAYENNE

Spot led integrato in policarbonato e metallo finitura cromo  
 Built in LED spot light in polycarbonate and metal chrome finish



## informazioni tecniche - technical information

SPOT-CAYENNE-1 8031440241274	4000K	5W	400 Lumen	⏻	>10 000 on/off	h 25 000	🔌 driver incluso
SPOT-CAYENNE-2 8031440251273	4000K	2X5W	800 Lumen	⏻	>10 000 on/off	h 25 000	🔌 driver incluso
SPOT-CAYENNE-S3 8031440261272	4000K	3X5W	1200 Lumen	⏻	>10 000 on/off	h 25 000	🔌 driver incluso
SPOT-CAYENNE-PL4 8031440271271	4000K	4X5W	1600 Lumen	⏻	>10 000 on/off	h 25 000	🔌 driver incluso
SPOT-CAYENNE-6 8031440281270	4000K	6X5W	2400 Lumen	⏻	>10 000 on/off	h 25 000	🔌 driver incluso
SPOT-CAYENNE-C 8031440301275	4000K	5W	400 Lumen	⏻	>10 000 on/off	h 25 000	🔌 driver incluso
SPOT-CAYENNE-L1 8031440291279	4000K	5W	400 Lumen	⏻	>10 000 on/off	h 25 000	🔌 driver incluso

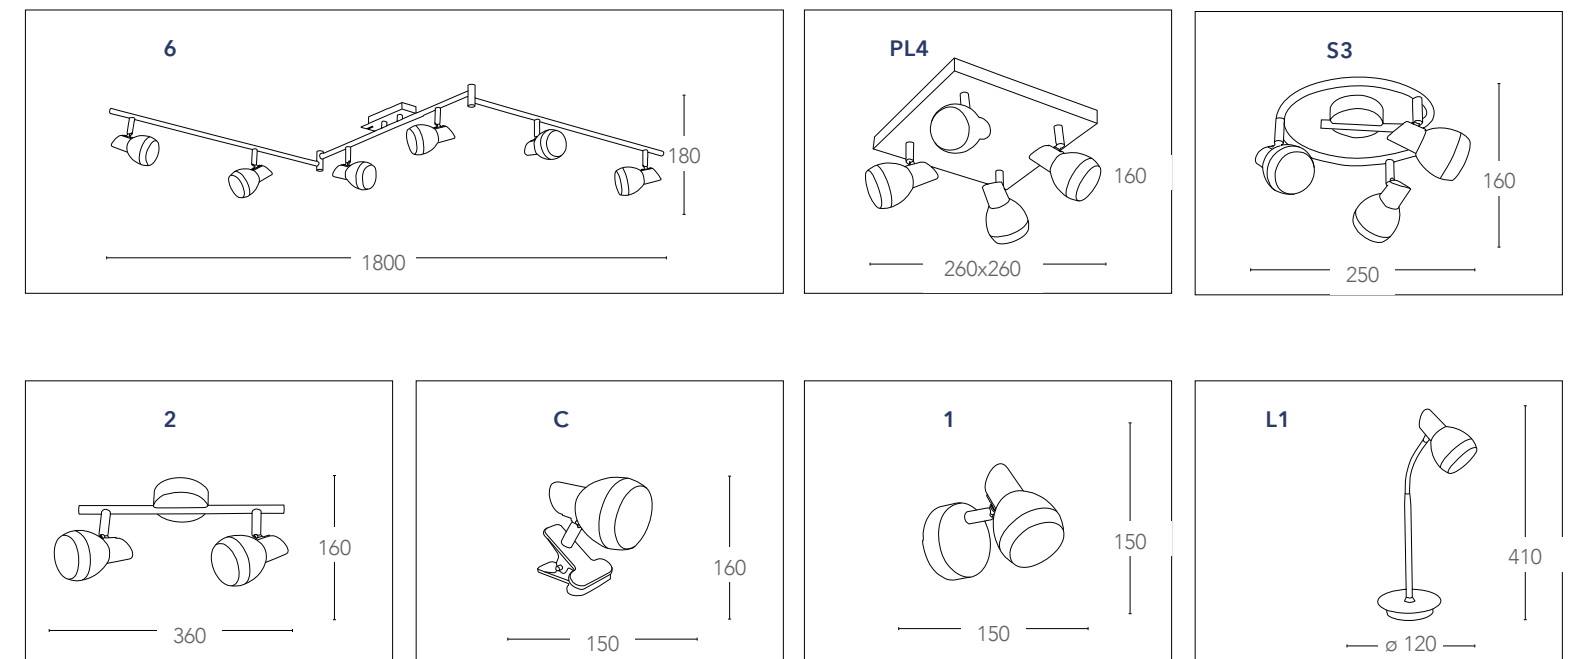






# TECHNO

Spot in metallo finitura cromo satinato  
Metal spot light satin chrome finish



## informazioni tecniche - technical information

<b>SPOT-TECHNO-1</b> 8031422881108	1xGU10 3W LED include - included	3000K	<b>1X3W</b>	250 Lumen	100°	>10 000 on/off	h 25 000
<b>SPOT-TECHNO-2</b> 8031422891107	2xGU10 3W LED include - included	3000K	<b>2X3W</b>	500 Lumen	100°	>10 000 on/off	h 25 000
<b>SPOT-TECHNO-3</b> 8031423041105	3xGU10 3W LED include - included	3000K	<b>3X3W</b>	750 Lumen	100°	>10 000 on/off	h 25 000
<b>SPOT-TECHNO-PL4</b> 8031423051104	4xGU10 3W LED include - included	3000K	<b>4X3W</b>	1000 Lumen	100°	>10 000 on/off	h 25 000

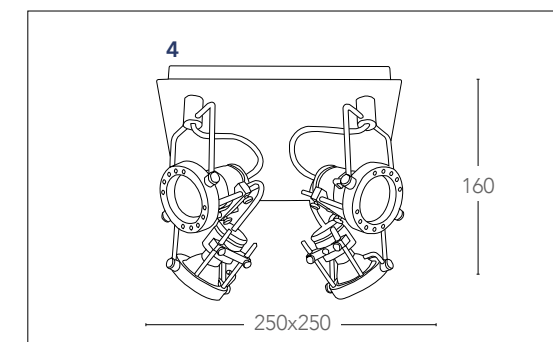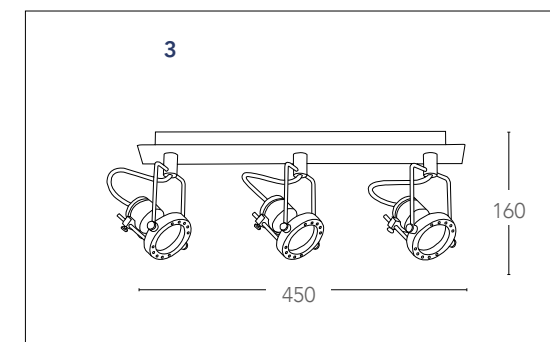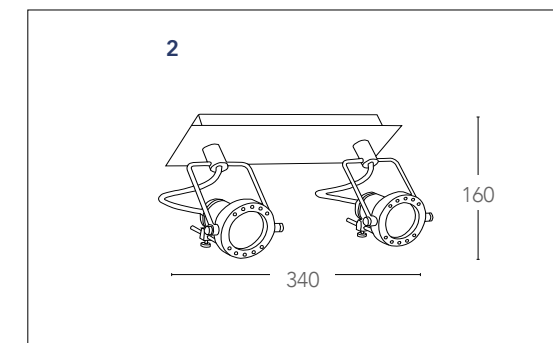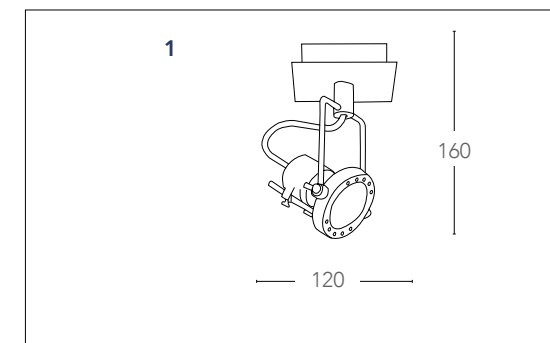





## MIAMI

Spot in metallo finitura nikel spazzolato con vetro  
Metal spot light satin nikel finish with glass



### informazioni tecniche - technical information

<b>SPOT-MIAMI 01</b> 8031414076772	1xGU10 3W LED include - included	3000K	<b>1X3W</b>	250 Lumen	100°	>10 000 on/off	h 25 000
<b>SPOT-MIAMI 02</b> 8031414076796	2xGU10 3W LED include - included	3000K	<b>2X3W</b>	500 Lumen	100°	>10 000 on/off	h 25 000
<b>SPOT-MIAMI 03</b> 8031414076802	3xGU10 3W LED include - included	3000K	<b>3X3W</b>	750 Lumen	100°	>10 000 on/off	h 25 000
<b>SPOT-MIAMI PL4</b> 8031414076819	4xGU10 3W LED include - included	3000K	<b>4X3W</b>	1000 Lumen	100°	>10 000 on/off	h 25 000

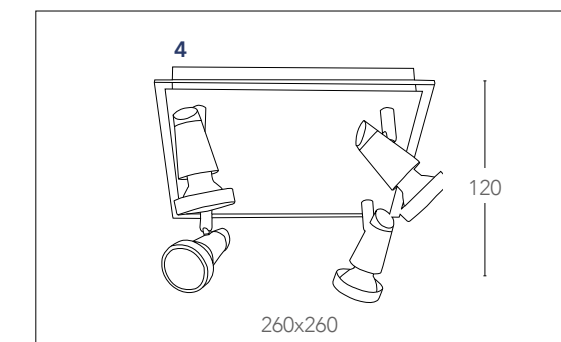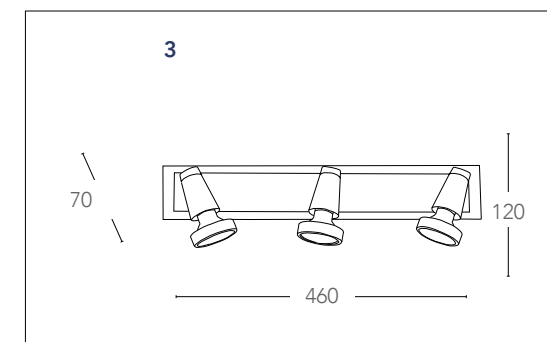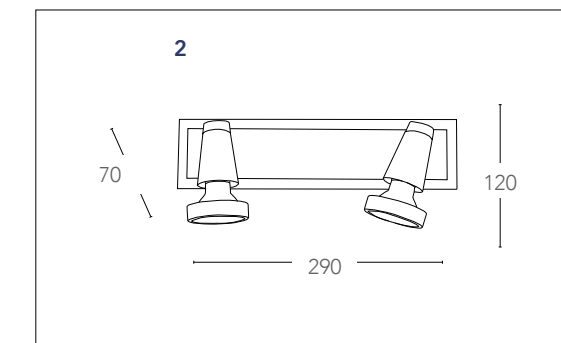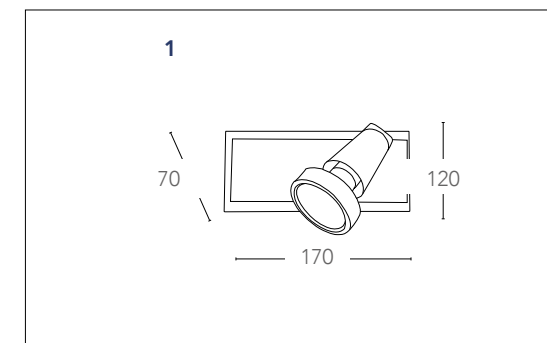





# SUNNY

Spot in metallo finitura nikel  
Metal spot light nikel finish



## informazioni tecniche - technical information

<b>SPOT-SUNNY-1</b> 8031431831187	1xGU10 3W LED include - included	3000K	<b>1X3W</b>	250 Lumen	100°	>10 000 on/off	h 25 000
<b>SPOT-SUNNY-2</b> 8031431841186	2xGU10 3W LED include - included	3000K	<b>2X3W</b>	500 Lumen	100°	>10 000 on/off	h 25 000
<b>SPOT-SUNNY-S3</b> 8031431861184	3xGU10 3W LED include - included	3000K	<b>3X3W</b>	750 Lumen	100°	>10 000 on/off	h 25 000
<b>SPOT-SUNNY-4</b> 8031431851185	4xGU10 3W LED include - included	3000K	<b>4X3W</b>	1000 Lumen	100°	>10 000 on/off	h 25 000

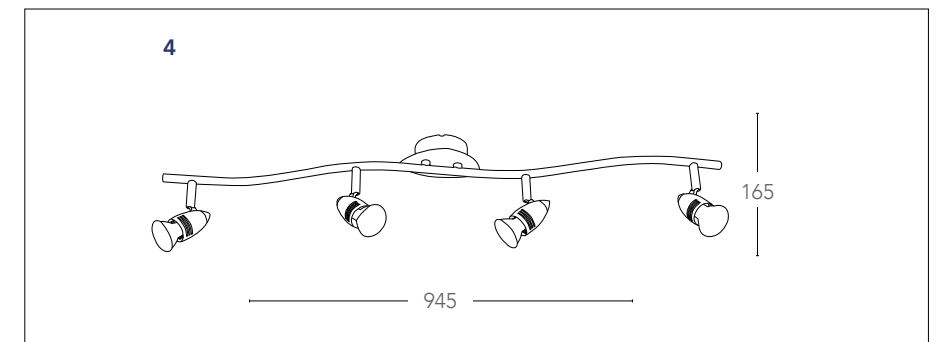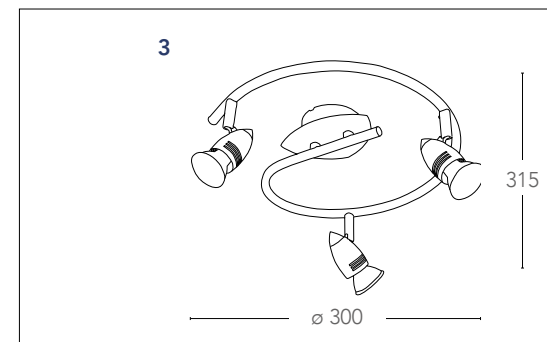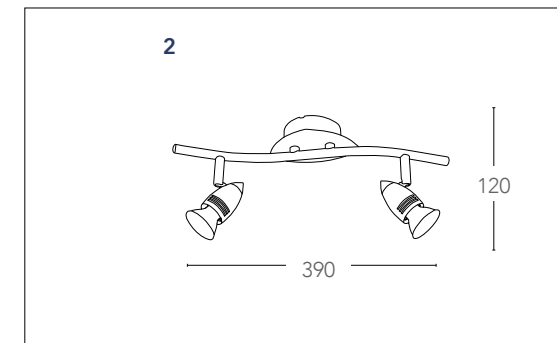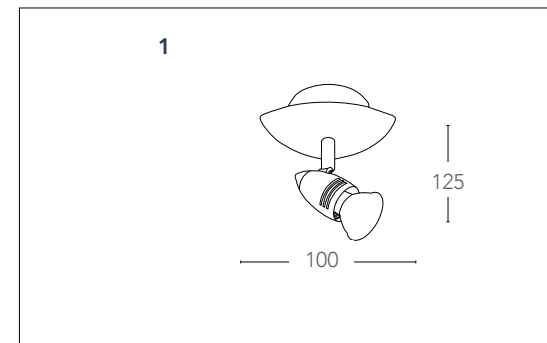





# COOPER

Spot in metallo finitura silver  
Metal spot light silver finish



## informazioni tecniche - technical information

<b>SPOT-COOPER-1</b> 8031440360913	1xGU10 3W LED include - included	4000K	<b>1X3W</b>	250 Lumen	100°	>10 000 on/off	h 25 000
<b>SPOT-COOPER-2</b> 8031440360920	2xGU10 3W LED include - included	4000K	<b>2X3W</b>	500 Lumen	100°	>10 000 on/off	h 25 000
<b>SPOT-COOPER-3</b> 8031440360937	3xGU10 3W LED include - included	4000K	<b>3X3W</b>	750 Lumen	100°	>10 000 on/off	h 25 000
<b>SPOT-COOPER-4</b> 8031440360944	4xGU10 3W LED include - included	4000K	<b>4X3W</b>	1000 Lumen	100°	>10 000 on/off	h 25 000

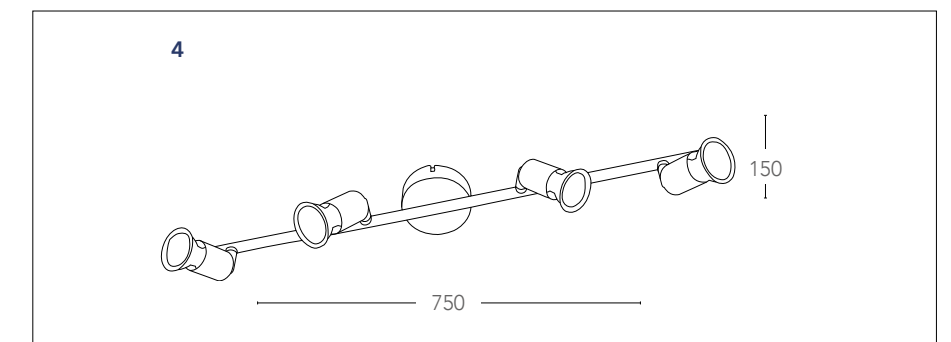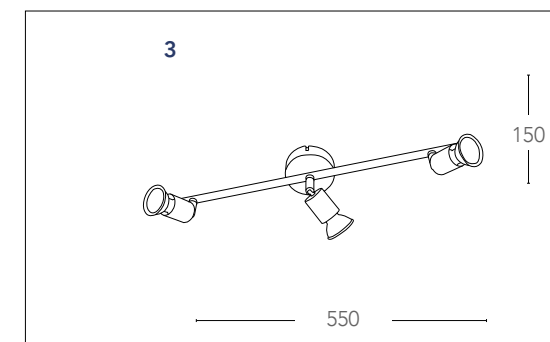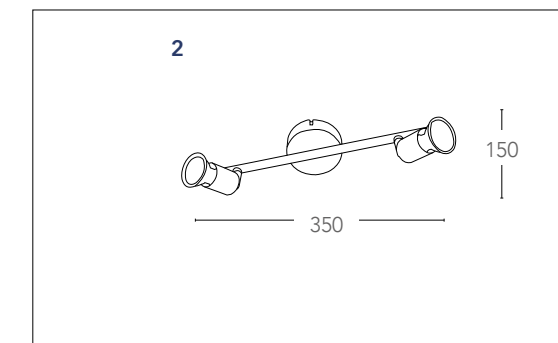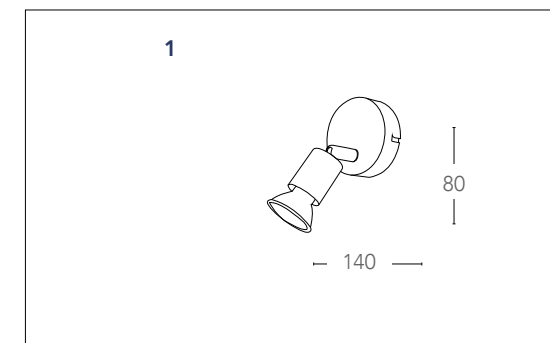


## CADILLAC

Spot in metallo finitura cromo  
Metal chrome spot light




informazioni tecniche - technical information


**SPOT-CADILLAC-1**  
8031438541256

 1xE14 max 40w  
non include - not included


**SPOT-CADILLAC-2**  
8031438551255





 2xE14 max 40w  
non include - not included

**SPOT-CADILLAC-3**  
8031414076918

 3xE14 max 40w  
non include - not included

**SPOT-CADILLAC-PL4**  
8031438521258

 4xE14 max 40w  
non include - not included

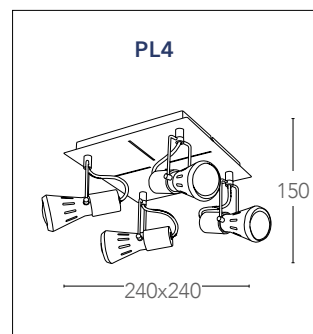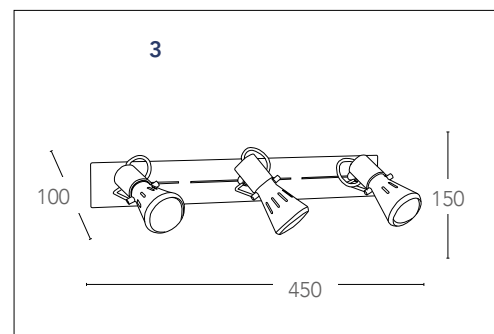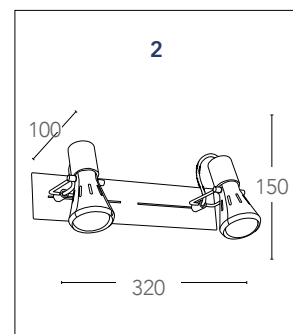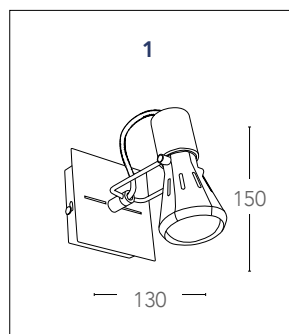


## LIMOGES

Spot in ceramica  
Ceramic spot light




informazioni tecniche - technical information


**SPOT-LIMOGES-1**  
8031438531257




 1xG9 max 33w  
non include - not included

**SPOT-LIMOGES-2**  
8031438501250

 2xG9 max 33w  
non include - not included

**SPOT-LIMOGES-PL3**  
8031438511259

 3xG9 max 33w  
non include - not included

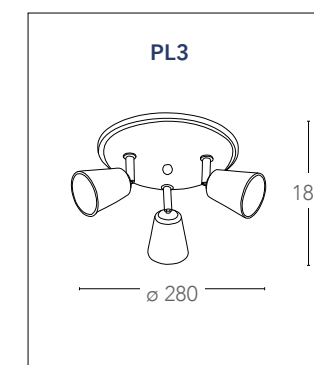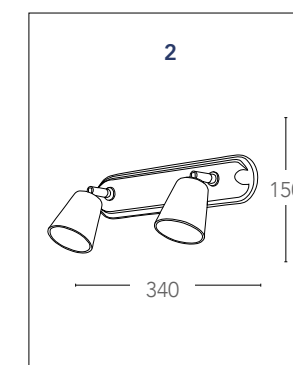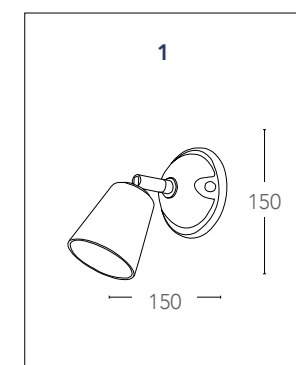

## MITO

Spot in metallo finitura cromo satinato con diffusore in vetro  
Metal spot light satin chrome finish with glass shade







### informazioni tecniche - technical information

**SPOT-MITO-1**  
8031431791184  
1xE14 max 40W  
non include - not included

**SPOT-MITO-PL3**  
8031431801180  
3xE14 max 40W  
non include - not included

**SPOT-MITO-S3**  
8031431811189  
3xE14 max 40W  
non include - not included

**SPOT-MITO-S4**  
8031431821188  
4xE14 max 40W  
non include - not included

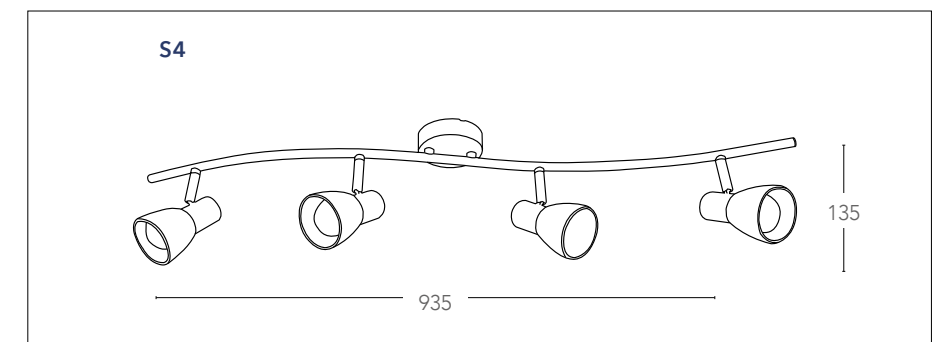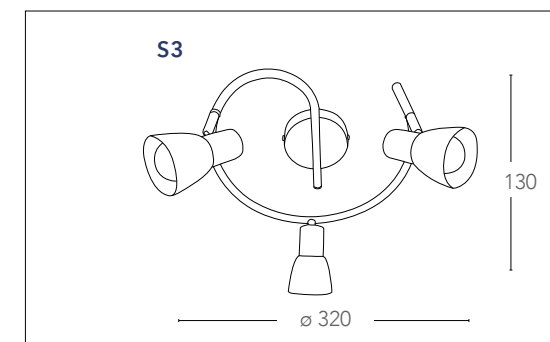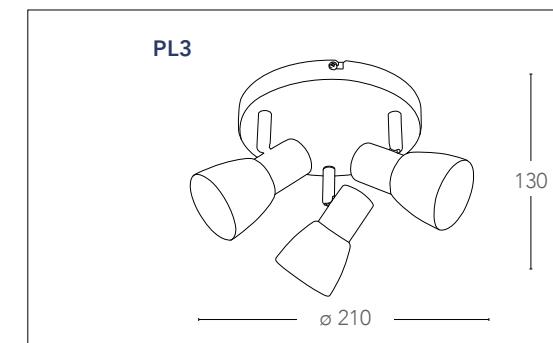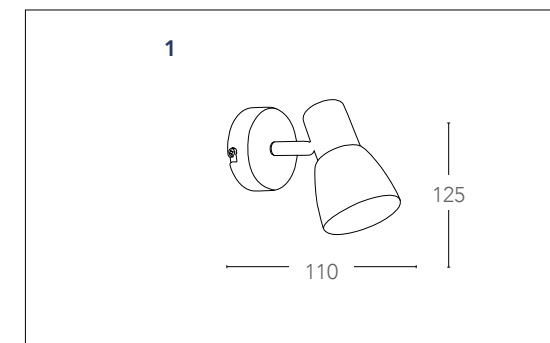






## CARRERA

Spot in metallo finitura bianca  
Metal spot light white finish



### informazioni tecniche - technical information

SPOT-CARRERA-1 8031431701183	1xE27 max 42w non include - not included	
SPOT-CARRERA-C 8031431731180	1xE27 max 42w non include - not included	
SPOT-CARRERA-2 8031431711182	2xE27 max 42w non include - not included	
SPOT-CARRERA-3 8031431721181	3xE27 max 42w non include - not included	
SPOT-CARRERA-PL3 8031431741189	3xE27 max 42w non include - not included	

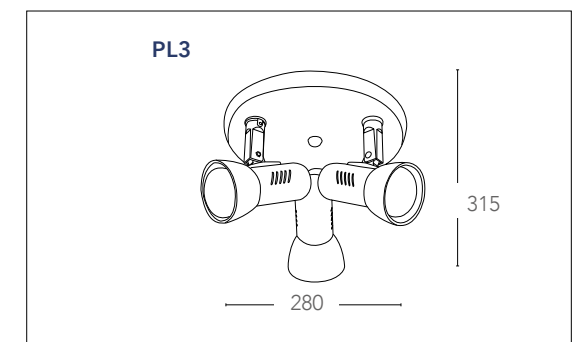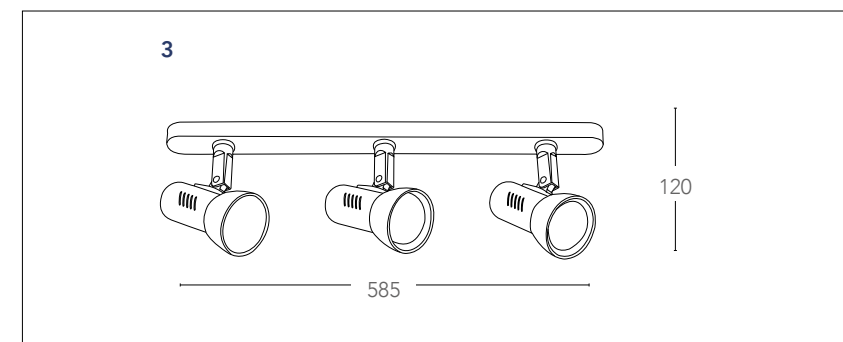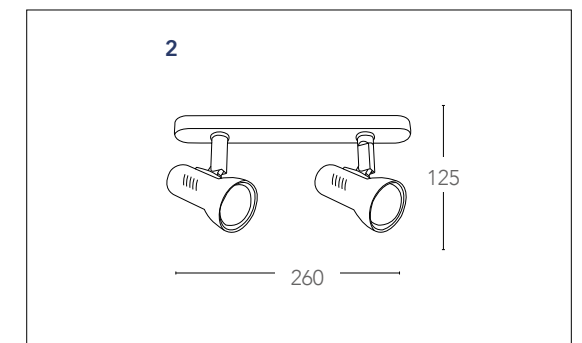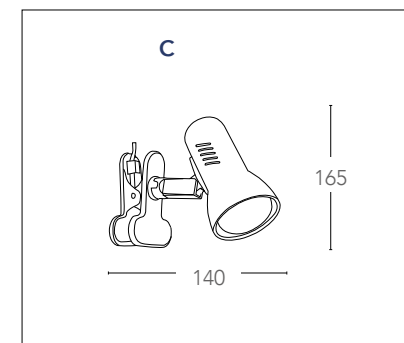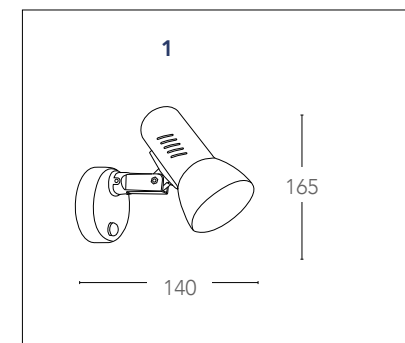



### **APPLIQUE DA BAGNO**

La nostra gamma è stata creata con un design elegante, moderno, semplice e funzionale, per applicazioni sia a parete che a specchio.

offre un'illuminazione direzionale o omogenea, per le molteplici esigenze per l'ambiente più personale della casa

### **BATHROOM WALL LAMP**

*Our range has been created with a design, modern, simple and functional, for application on the wall or mirror.*

*They offer a directional or even lighting for the many needs, for the most personal room in the house.*

## CRUISE


Applique a LED in termoplastica finitura cromo  
 Cabinet LED thermoplastic finish chrome



informazioni tecniche - technical information

SPOT-B-CRUISE  
 8031440363426

4000K
5,2W
☀️ 430 Lumen
📐 120°
💧 IP44
🕒 >15 000 on/off
🕒 h 25 000
🔌 driver incluso

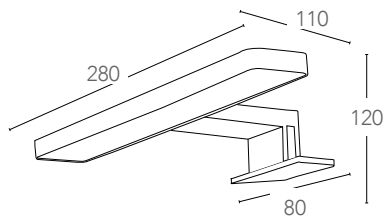

CLASSE A
🚫
SMD
⚡
Ra >80
CE
EMC
RoHS WEEE COMPLIANT

## SCARAB


Applique a LED in alluminio finitura cromo  
 Cabinet LED aluminium finish chrome



informazioni tecniche - technical information

SPOT-B-SCARAB  
 8031440363440

4000K
3W
☀️ 280 Lumen
📐 120°
💧 IP44
🕒 >15 000 on/off
🕒 h 25 000
🔌 driver incluso

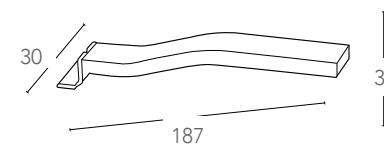

CLASSE A
🚫
SMD
⚡
Ra >80
CE
EMC
RoHS WEEE COMPLIANT

## RIVA

Applique a LED in alluminio finitura cromo  
Cabinet LED aluminium finish chrome



informazioni tecniche - technical information

SPOT-B-RIVA  
8031440363457

4000K

8W

740 Lumen


120°

IP44

>15 000 on/off

h 25 000

230V  
DRIVER FREE

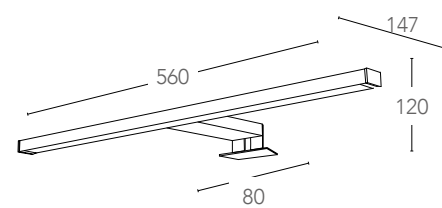

## WALLY

Applique a LED in alluminio finitura cromo  
Cabinet LED aluminium finish chrome



informazioni tecniche - technical information

SPOT-B-WALLY  
8031440363471

4000K

8W

650 Lumen


120°

IP44

>15 000 on/off

h 25 000

230V  
DRIVER FREE

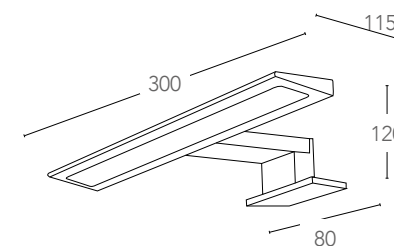

## GAIA


Applique da specchio in metallo finitura nickel  
Mirror lamp in metal nickel finish



informazioni tecniche - technical information

SPOT-B-GAIA  
8031431951199

1xGU10 max 42W  
non include - not included



## DADO


Applique da specchio in metallo con diffusore in vetro finitura cromo  
Mirror lamp in metal with glass shade chrome finish



informazioni tecniche - technical information


SPOT-B-DADO  
8031431931191

1xG9 max 28w  
non include - not included



## KRISS


Applique da specchio in metallo con diffusore in vetro finitura nikel  
Mirror lamp in metal with glass shade nikel finish

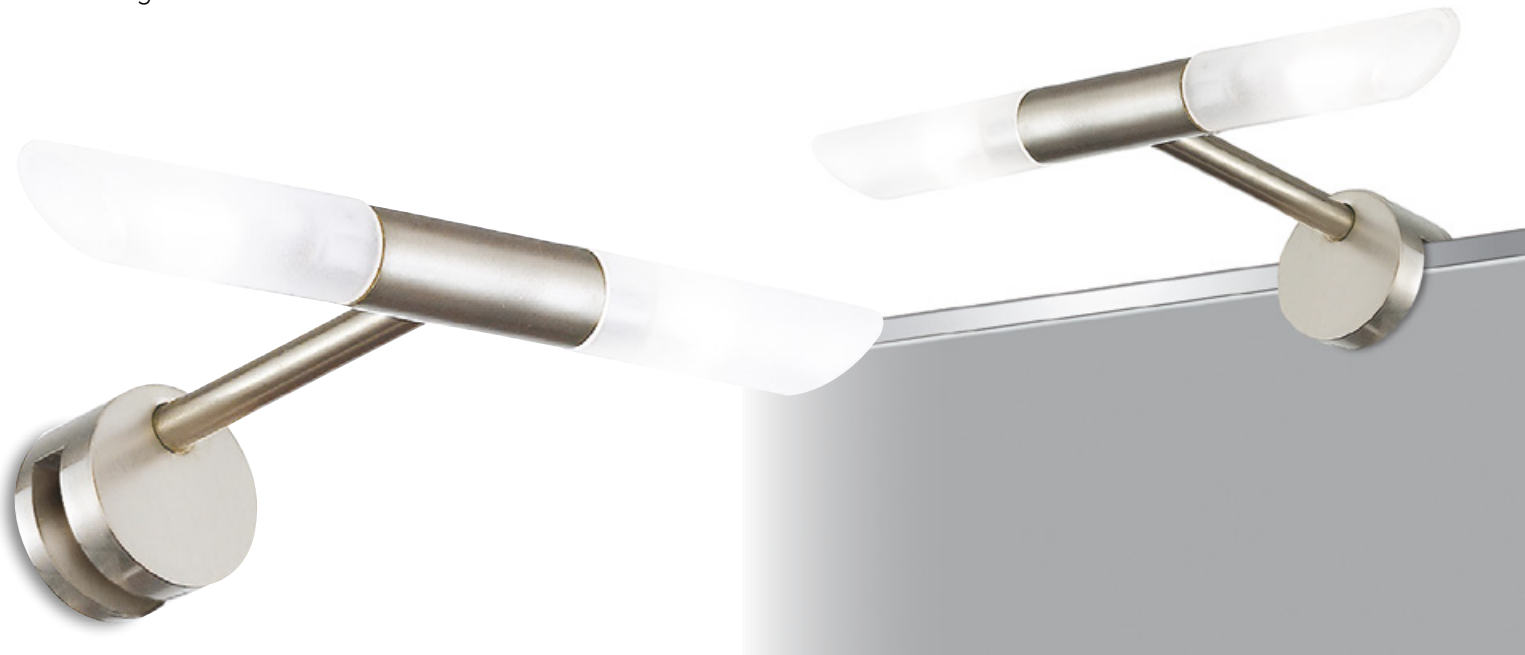

informazioni tecniche - technical information

SPOT-B-KRISS  
8031431971197

2xG4 max 7w  
non include - not included

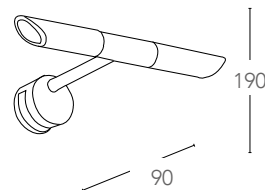

## LELE


Applique da specchio in metallo con diffusore in vetro finitura cromo  
Mirror lamp in metal with glass shade chrome finish



informazioni tecniche - technical information

SPOT-B-LELE  
8031431981196

2xG9 max 28w  
non include - not included



## ROBY


Appliche da specchio in metallo con diffusore in vetro finitura cromo  
Mirror lamp in metal with glass shade chrome finish



informazioni tecniche - technical information

SPOT-B-ROBY-CP  
8031440312349

2xG9 max 28w  
non include - not included

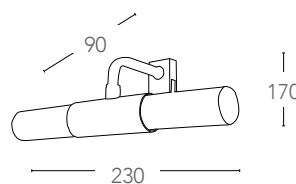

## ROBY


Appliche da parete in metallo con diffusore in vetro finitura cromo  
Wall lamp in metal with glass shade chrome finish



informazioni tecniche - technical information

SPOT-B-ROBY  
8031440312356

2xG9 max 28w  
non include - not included

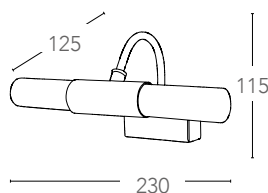

## ENDY


Appliche in metallo con diffusore in vetro finitura nikel  
Wall lamp in metal with glass shade nikel finish



informazioni tecniche - technical information


SPOT-B-ENDY  
8031431941190

1xE14 max 40W  
non include - not included

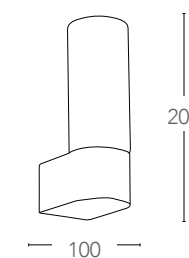

## JOY


Appliche in metallo con diffusore in vetro finitura nikel  
Wall lamp in metal with glass shade nikel finish

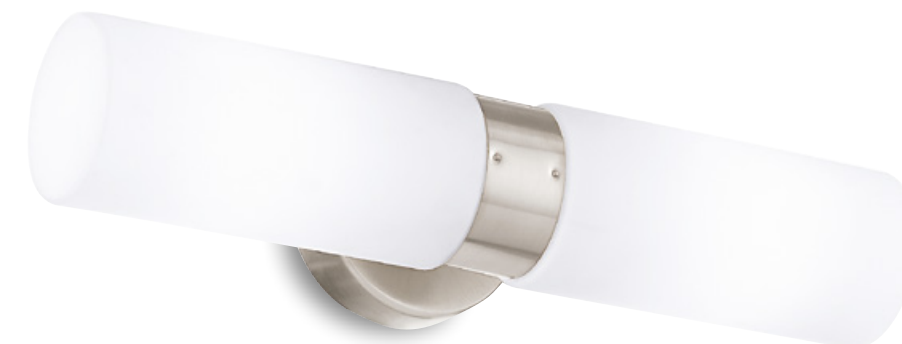

informazioni tecniche - technical information


SPOT-B-JOY  
8031431961198

2xE14 max 40W  
non include - not included

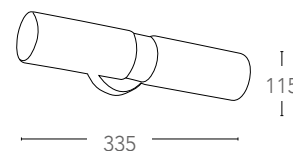


## SHON

Applique in vetro con rifiniture in metallo cromo  
Glass wall lamp and metal with metal chrome finish

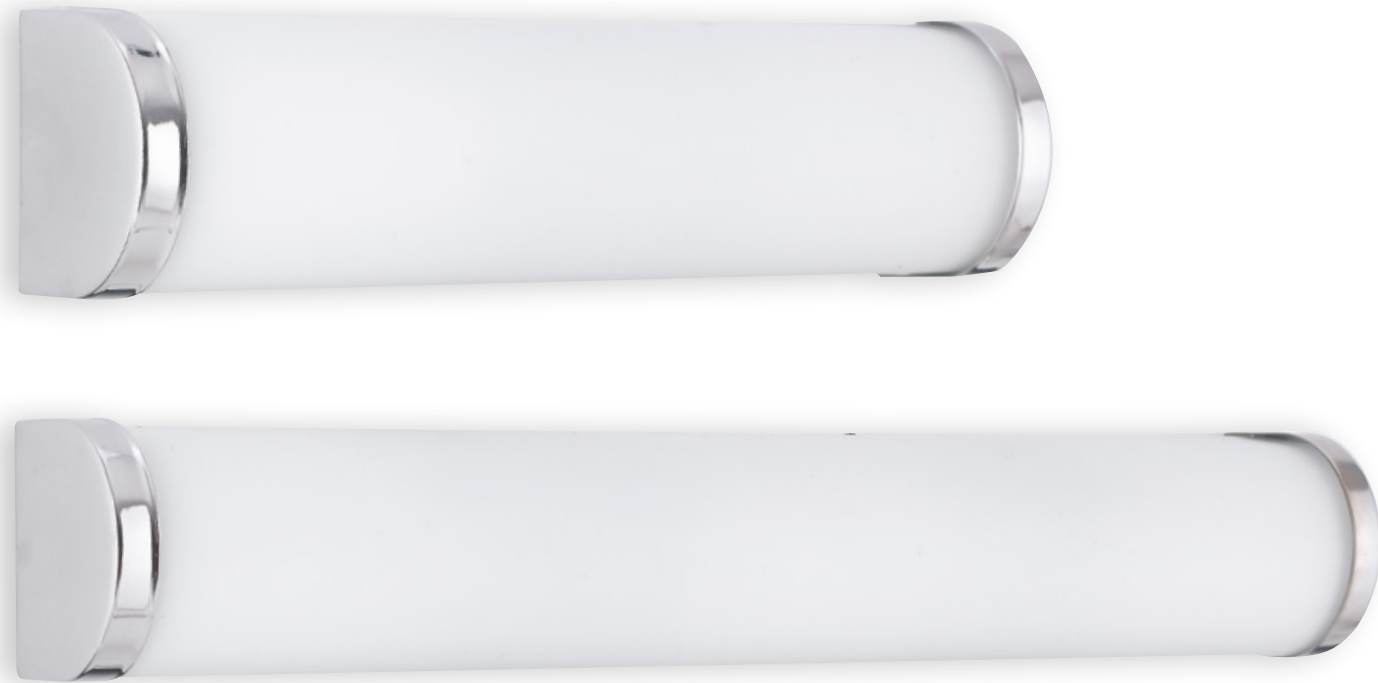


informazioni tecniche - technical information

SPOT-B-SHON/M  
8031432001190



 2xE14 max 40W  
non include - not included

**IP20**

SPOT-B-SHON/L  
8031431991195

 2xE14 max 40W  
non include - not included

**IP20**

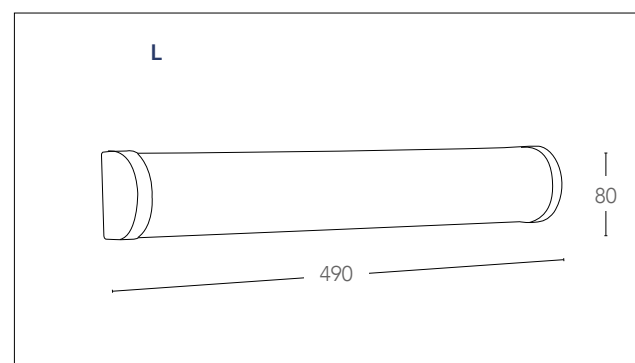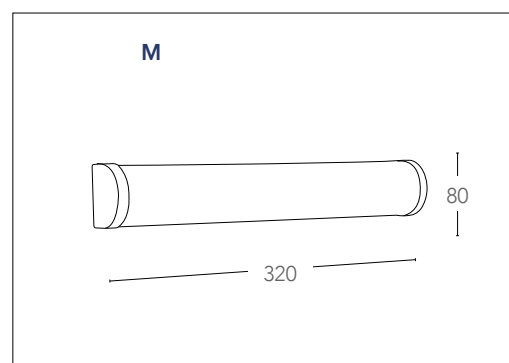


CE




## STEFANY

Applique in vetro con rifiniture in metallo cromo  
Glass wall lamp and metal with metal chrome finish

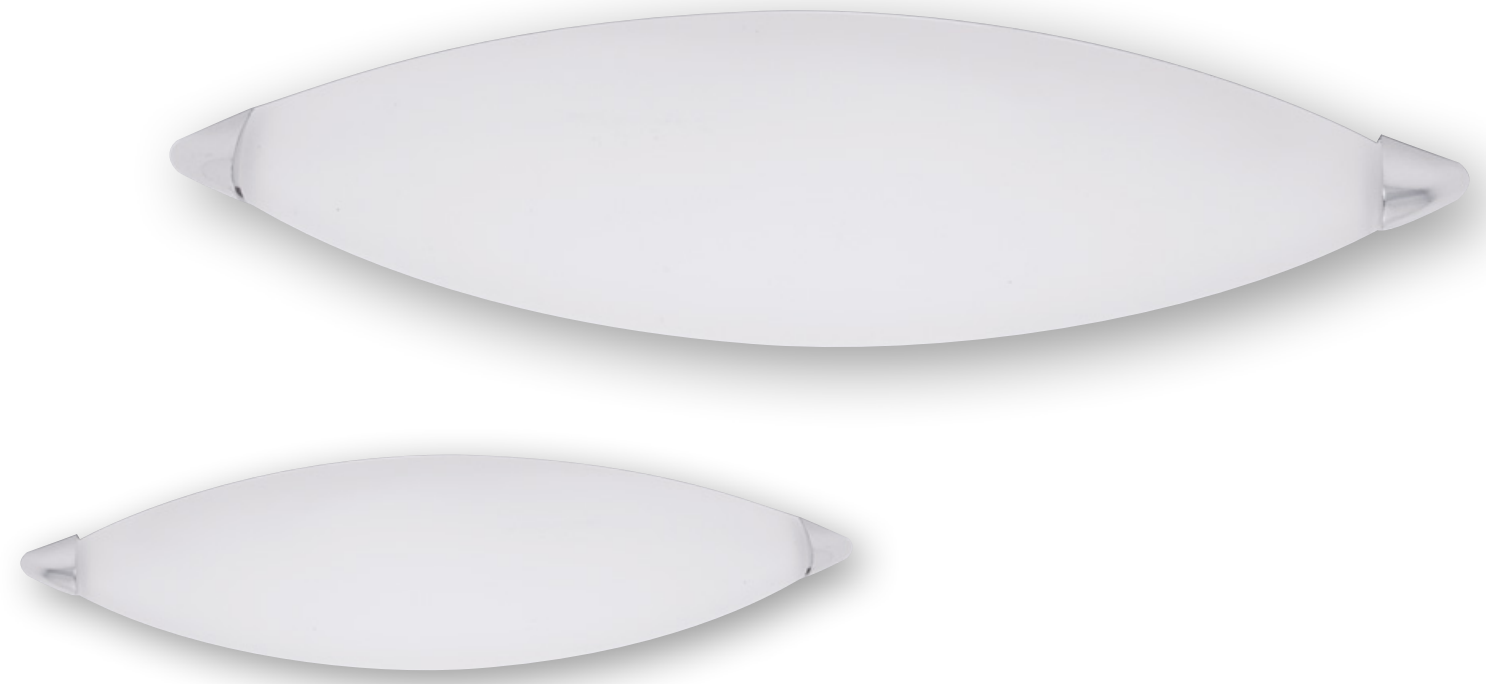


informazioni tecniche - technical information

15/02400  
8031425791121



 2xE14 max 40W  
non include - not included

**IP20**

15/02300  
8031422751098

 1xE14 max 40W  
non include - not included

**IP20**

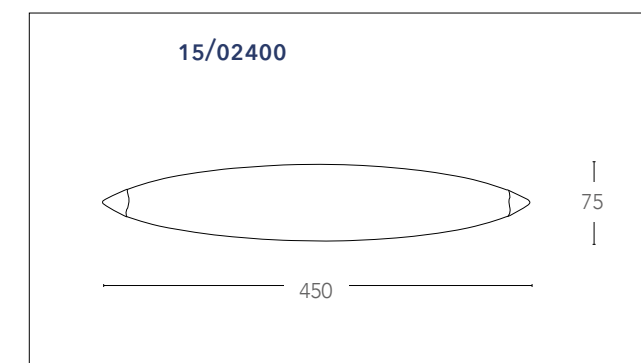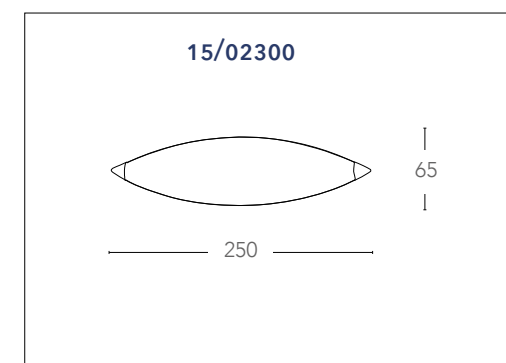

CE



## RAIN

Plafoniera a LED con diffusore in PC cornice silver bordo trasparente  
LED ceiling lamp with PC diffuser silver frame and transparent edge



informazioni tecniche - technical information

I-RAIN-PL33  
8031440361866

4000K

12W

1160 Lumen



120°

IP44

> 15 000 on/off

h 25 000

230V  
DRIVER FREE

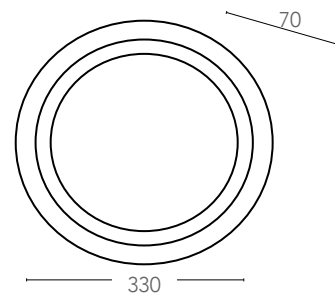

## F1/F2

Applique metallo flessibile con diffusore in vetro  
Metal wall lamp with glass shade



informazioni tecniche - technical information



CROMO

SPOT-F1  
8031414076956


1xG9 max 28w  
non include - not included



BRUNITO

SPOT-F2  
8031414076963

1xG9 max 28w  
non include - not included

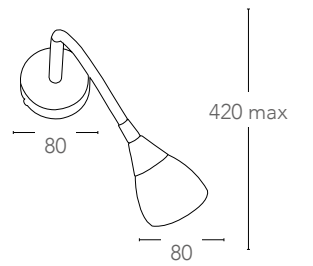

## Q1/Q2

Applique in metallo orientabile con diffusore in vetro  
Metal wall lamp adjustable with glass shade



informazioni tecniche - technical information



NIKEL

SPOT-Q1  
8031414076932


2xG9 max 28w  
non include - not included



ORO

SPOT-Q2  
8031414076949

2xG9 max 28w  
non include - not included

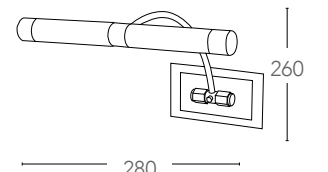

## ET


Applique orientabile in metallo con diffusore in vetro finitura cromo  
Metal wall lamp adjustable with glass shape chrome finish



informazioni tecniche - technical information

I-YHS7014/WB  
8031414043590

max 78 mm  
1xR7s max 120w  
non include - not included

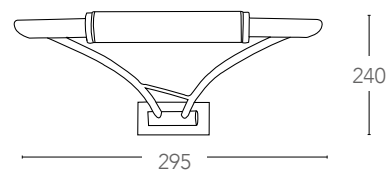

## SOTTOPENSILI

Collezione di barre sottopensili, armadi e illuminazione di cortesia a LED, sia con alimentazione a normale corrente o batteria adattabili per ogni esigenza di illuminazione decorativa

## LED CABINETS

Collection of LED cabinets and courtesy lighting, power supply at normal current or battery adaptable for every need for decorative lighting

## VISTA



Lampada a LED con sensore alimentata a batterie  
LED lamp with sensor battery powered



### informazioni tecniche - technical information

	<b>LED-VISTA-M-AP</b> 8031440031271		3X0,075W	18 Lumen	68° 88°	>10 000 on/off	h 25 000	3x1,5V AAA	non include - not included
	<b>LED-VISTA-AP</b> 8031439991272		3X0,075W	20 Lumen	68°	>10 000 on/off	h 25 000	3x1,5V AAA	non include - not included

10LUX  
 15sec.- 45sec.  
 3m

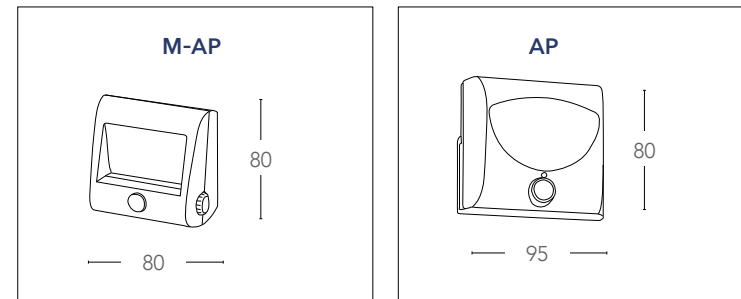



## SONAR

Barra sotto pensile orientabile a LED in alluminio con sensore alimentata a batterie  
Cabinet ledbar adjustable in aluminium with sensor battery powered




### informazioni tecniche - technical information

<b>LED-SONAR-AP</b> 8031440021272		6X0,075W	35 Lumen	45°	10LUX 15sec.- 45sec. 3m	>10 000 on/off	h 25 000	3x1,5V AAA
--------------------------------------	--	----------	----------	-----	-------------------------------	----------------	----------	------------

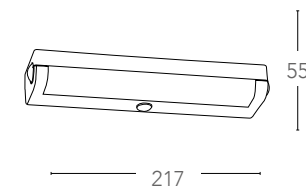


## ODIC

Barra sotto pensile a LED in alluminio con sensore alimentata a batterie  
Cabinet ledbar in aluminium with sensor battery powered

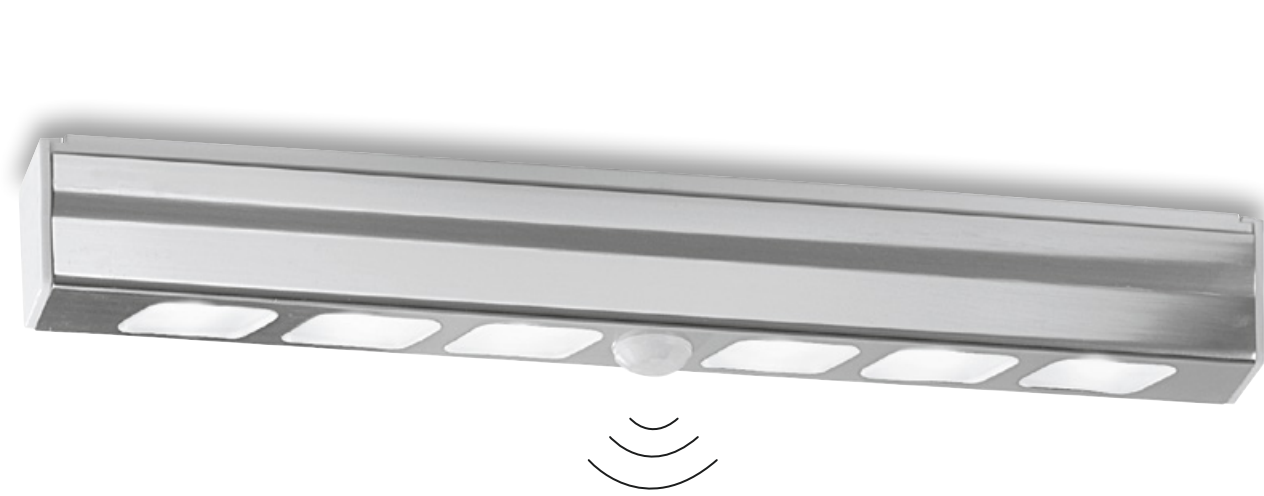

## YOUNG

Barra sotto pensile a LED in alluminio con interruttore ottico  
Cabinet ledbar in aluminium with optical switch

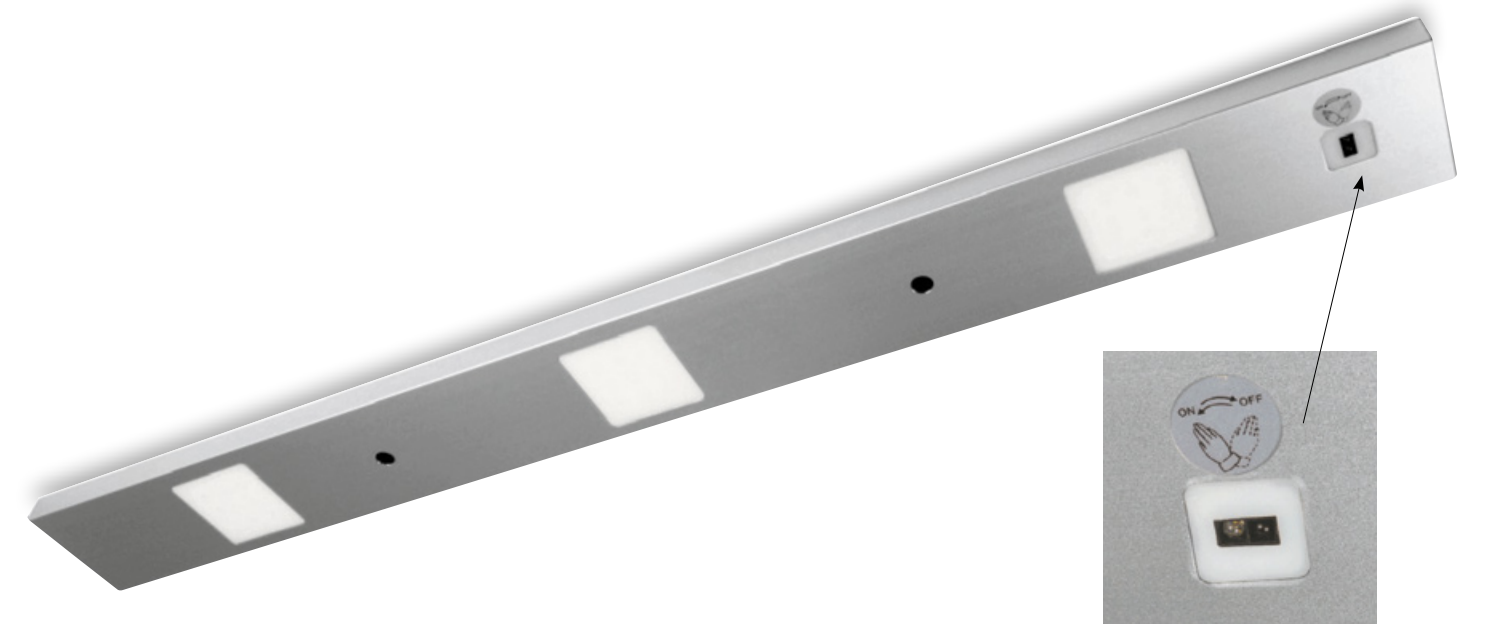

### informazioni tecniche - technical information

LED-ODIC-3W  
8031440041270

4500K

6X0,16W

60 Lumen

120°

90°

10LUX


15sec.- 45sec.

3m

>10 000 on/off

h 25 000

3x1,5V  
AAA

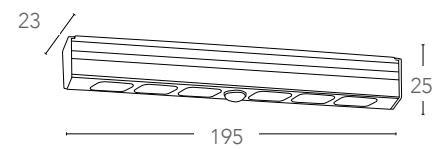

CLASSE A

SMD

Ra >80

CE

EMC

RoHS WEEE COMPLIANT

### informazioni tecniche - technical information

LED-YOUNG-5W  
8031440071277

4000K

4,9W


330 Lumen

120°

>10 000 on/off

h 25 000

driver incluso

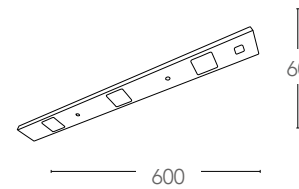

CLASSE A

SMD

Ra >80

CE

EMC

RoHS WEEE COMPLIANT




## SOTTOPENSILE

Barra sotto pensile a LED in alluminio con diffusore in policarbonato riflettente  
 Cabinet ledbar in aluminium with polycarbonatee reflective diffuser



### informazioni tecniche - technical information

<b>LEDBAR-100CM</b> 8031433121200	4000K	15W 12V	1200Lumen	120°	>10 000 on/off	h 25 000	AC/DC 15W INPUT: 230V ~ 50Hz OUTPUT: 12V --- 1,2A non include - not included	touch
<b>LEDBAR-60CM</b> 8031433131209	4000K	10W 12V	750 Lumen	120°	>10 000 on/off	h 25 000	AC/DC 10W INPUT: 230V ~ 50Hz OUTPUT: 12V --- 0,8A non include - not included	touch
<b>LEDBAR-100CM-C</b> 8031440359313	3000K	15W 12V	1200Lumen	120°	>10 000 on/off	h 25 000	AC/DC 15W INPUT: 230V ~ 50Hz OUTPUT: 12V --- 1,2A non include - not included	touch
<b>LEDBAR-60CM-C</b> 8031440359290	3000K	10W 12V	750 Lumen	120°	>10 000 on/off	h 25 000	AC/DC 10W INPUT: 230V ~ 50Hz OUTPUT: 12V --- 0,8A non include - not included	touch

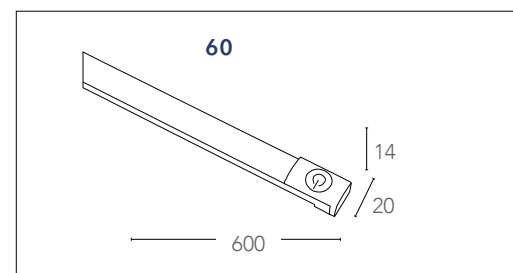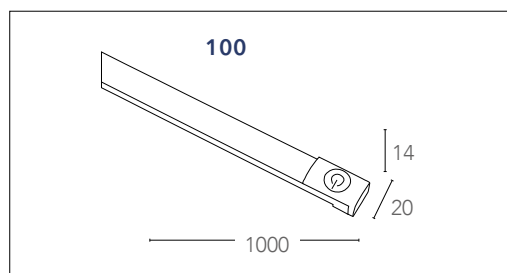


## T5

Barre sottopensile a LED in policarbonato  
 Cabinet LED bar in polycarbonatee




### informazioni tecniche - technical information

<b>LEDBAR-T5-30</b> 8031440354691	4000K	4W	370 Lumen	135°	>10 000 on/off	h 25 000	230V DRIVER FREE
<b>LEDBAR-T5-60</b> 8031440354707	4000K	8W	700 Lumen	135°	>10 000 on/off	h 25 000	230V DRIVER FREE
<b>LEDBAR-T5-90</b> 8031440354677	4000K	10W	900 Lumen	135°	>10 000 on/off	h 25 000	230V DRIVER FREE
<b>LEDBAR-T5-120</b> 8031440354684	4000K	14W	1300 Lumen	135°	>10 000 on/off	h 25 000	230V DRIVER FREE

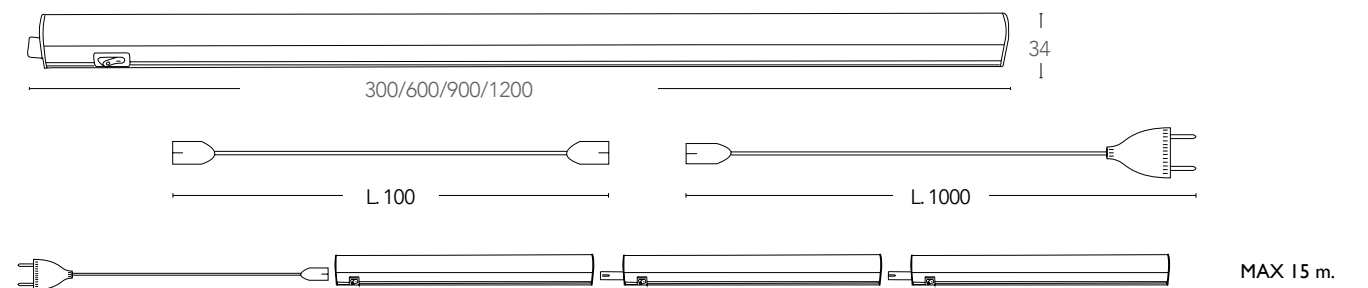

AC230V  
 MULTI-CONNECT





## BATTEN

Applique a LED in alluminio  
Aluminium LED wall lamp



### informazioni tecniche - technical information

LED-BATTEN-150 8031440357753	4000K	45W	3820 Lumen	120°	IP20	>15 000 on/off	h 25 000	230V DRIVER FREE
LED-BATTEN-120 8031440357746	4000K	36W	3060 Lumen	120°	IP20	>15 000 on/off	h 25 000	230V DRIVER FREE
LED-BATTEN-60 8031440357739	4000K	18W	1530 Lm	120°	IP20	>15 000 on/off	h 25 000	230V DRIVER FREE
LED-BATTEN-30 8031440357722	4000K	9W	765 Lm	120°	IP20	>15 000 on/off	h 25 000	230V DRIVER FREE

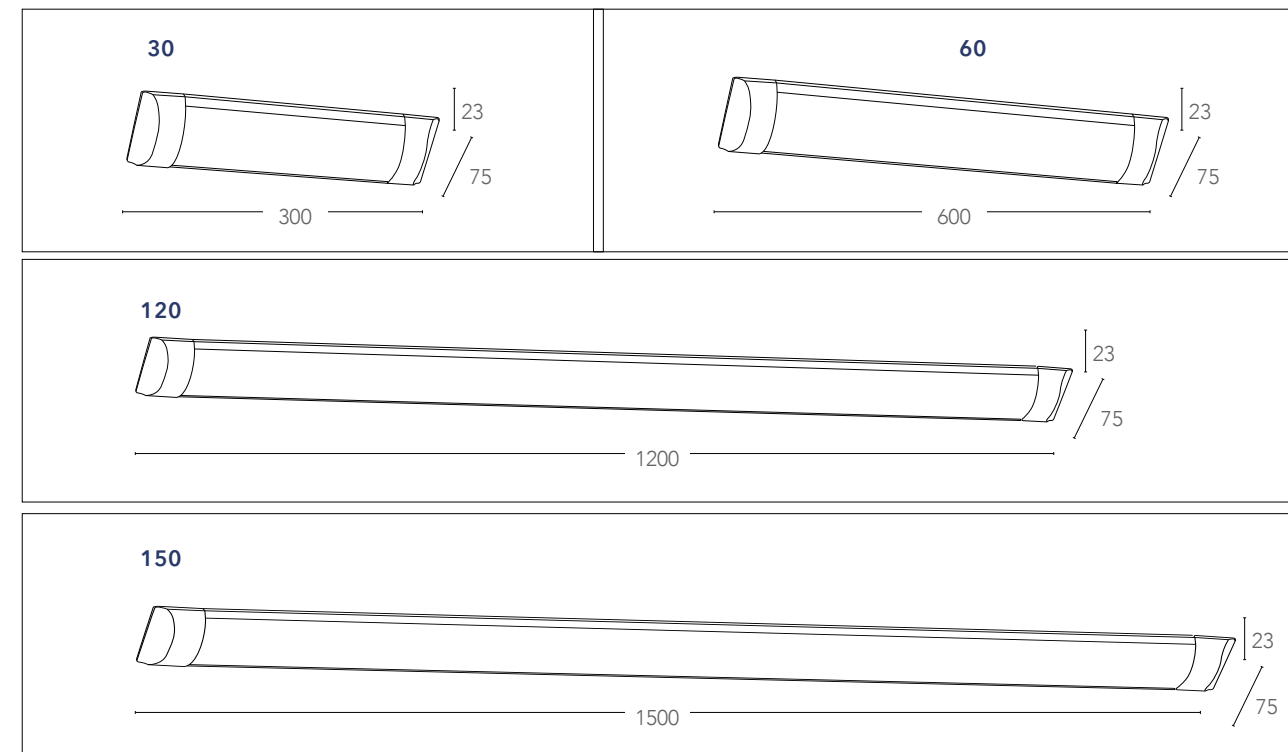



### ESTERNI

Le nostre collezioni offrono una vasta gamma di prodotti dal design moderno o decorativo, resistenti agli agenti atmosferici per illuminare e creare il migliore ambiente per pareti, balconi, giardini. Costruiti in alluminio o in composito plastico, a tecnologia a Led o tradizionale.

### OUTDOOR

*Our collections offer a wide range of products with modern or decorative design, weather-resistant to illuminate and create the best environment for walls, balconies, gardens. built in aluminum or plastic composite, with LED or traditional technology.*


## EROS

Lampada in alluminio a LED integrato finitura silver  
Built in aluminium LED lamp silver finish




informazioni tecniche - technical information

LED-EROS-AP 8031434061215	3000K	7W	630Lumen	120°	IP54	>10 000 on/off	h 25 000	driver incluso
LED-EROS-P1 8031434071214	3000K	7W	630Lumen	120°	IP54	>10 000 on/off	h 25 000	driver incluso

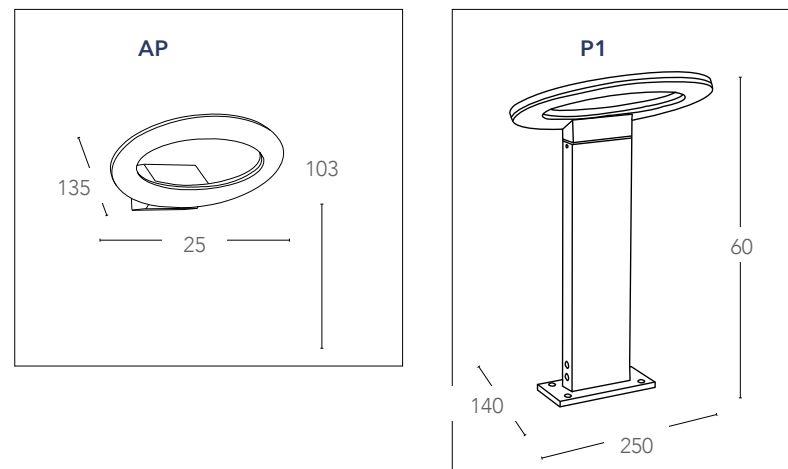


## NISMO

Lampada in alluminio a LED integrato finitura bianco goffrato  
Built in aluminium LED lamp white embossed finish

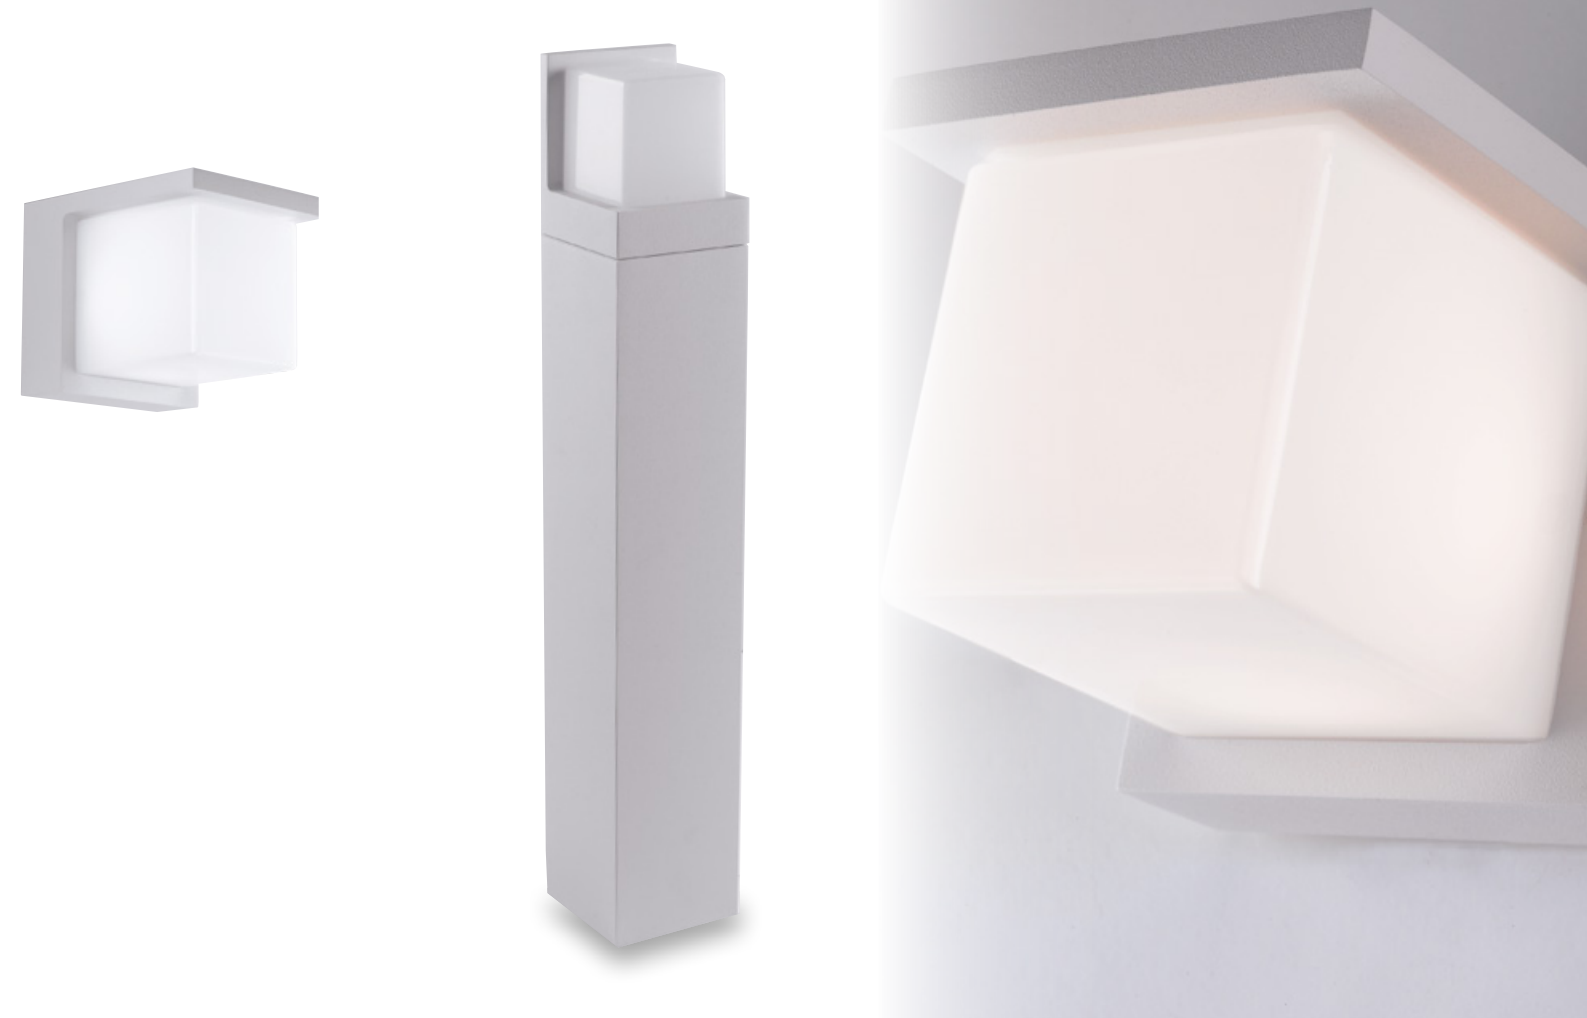


informazioni tecniche - technical information

LED-NISMO-AP 8031440361224	3000K	10W	1100 Lumen	120°	IP54	>10 000 on/off	h 25 000	driver incluso
LED-NISMO-P60 8031440361231	3000K	10W	1100 Lumen	120°	IP54	>10 000 on/off	h 25 000	driver incluso

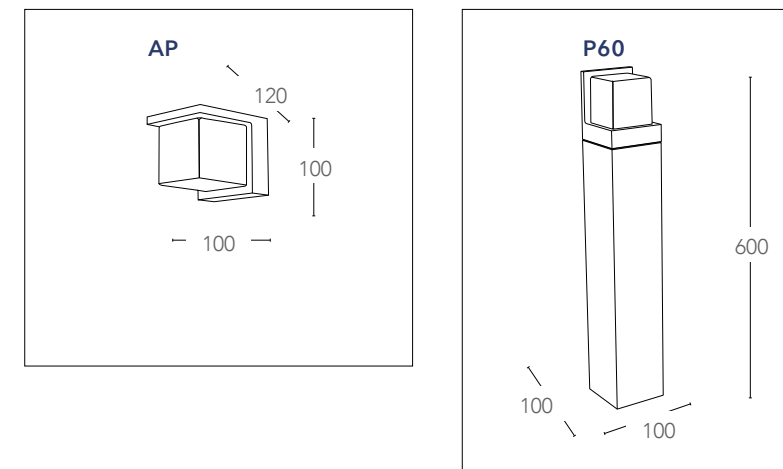


## BETA

Collezione in alluminio a LED integrato finitura silver  
Built-in LED aluminium collection silver finish



informazioni tecniche - technical information

LED-BETA-AP2  
8031434021219

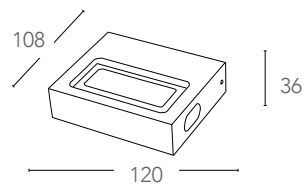

informazioni tecniche - technical information

LED-BETA-AP1  
8031434051216





## BETA

Collezione in alluminio a LED integrato finitura silver  
Built-in LED aluminium collection silver finish



informazioni tecniche - technical information

LED-BETA-P1  
8031434031218

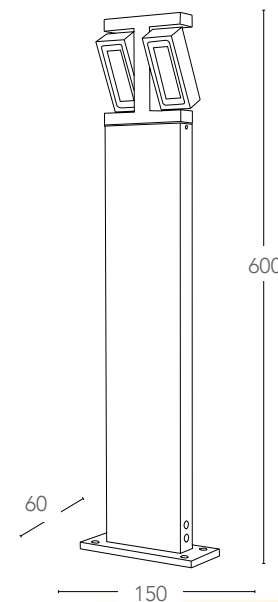




## LADY

Lanterna in alluminio pressofuso colore nero goffrato diffusore in policarbonato LED integrato  
 Die cast aluminium lantern black embossed finish with polycarbonate diffuser built-in LED



### informazioni tecniche - technical information

LANT-LADY/AP1A 8031440361316	4000K	12W	800 Lumen	IP43	>10 000 on/off	h 15 000	230V DRIVER FREE
LANT-LADY/AP1A-S 8031440361323	4000K	12W	800 Lumen	IP43	>10 000 on/off	h 15 000	230V DRIVER FREE 90° 10LUX 5sec.- 5 min. 1-8 m
LANT-LADY/AP1B 8031440352130	4000K	12W	800Lumen	IP43	>10 000 on/off	h 15 000	230V DRIVER FREE

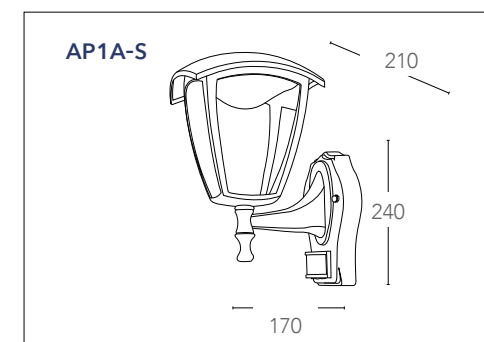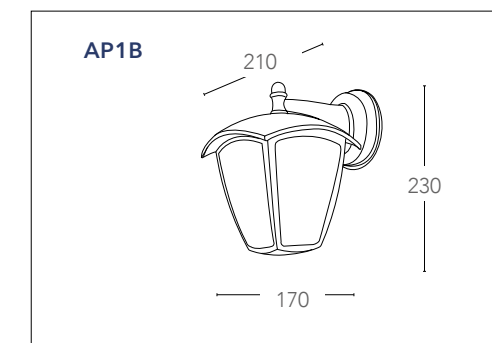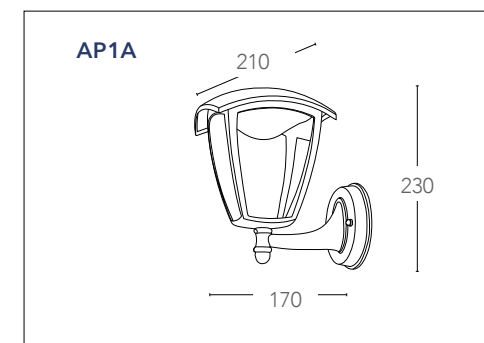


## LADY

Lantern in alluminio pressofuso colore nero gofrato diffusore in policarbonato LED integrato  
Die cast aluminium lantern black embossed finish with polycarbonate diffuser built-in LED



### informazioni tecniche - technical information

LANT-LADY/L1 8031440361330	4000K	12W	800 Lumen	IP43	>10 000 on/off	h 15 000	230V DRIVER FREE
LANT-LADY/P1 8031440361347	4000K	12W	800 Lumen	IP43	>10 000 on/off	h 15 000	230V DRIVER FREE
LANT-LADY/S1 8031440352147	4000K	12W	800 Lumen	IP43	>10 000 on/off	h 15 000	230V DRIVER FREE
LANT-LADY/P3 8031440352116	4000K	3X12W	2400 Lumen	IP43	>10 000 on/off	h 15 000	230V DRIVER FREE

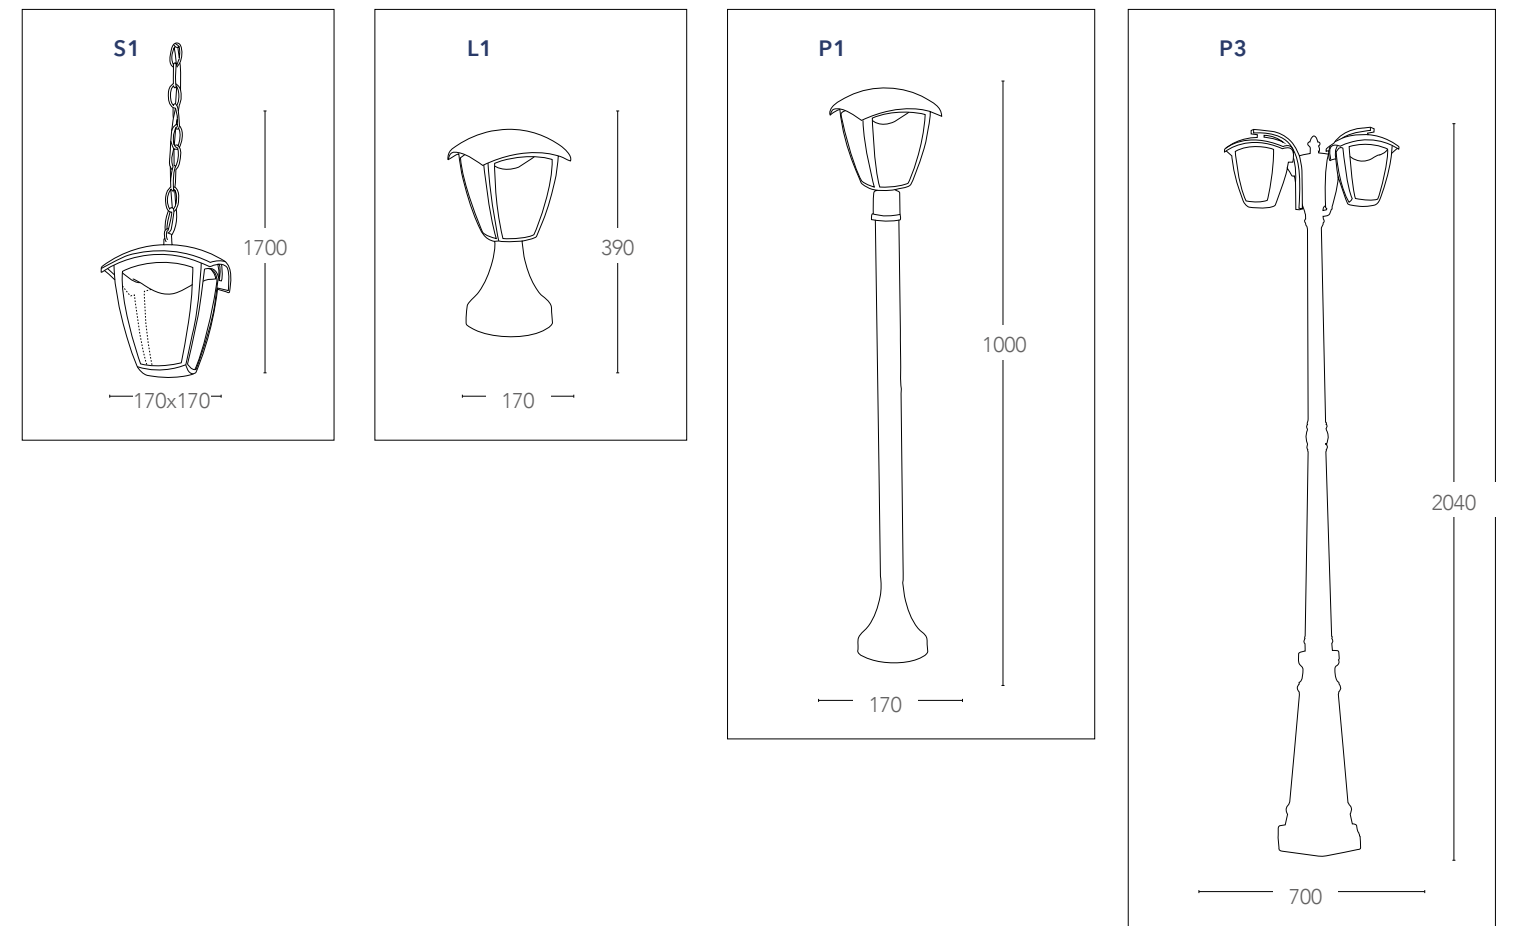



## CLOE

Lanterna in alluminio pressofuso colore nero gofrato diffusore in policarbonato LED integrato  
Die cast aluminium lantern black embossed finish with polycarbonate diffuser built-in LED



### informazioni tecniche - technical information

LANT-CLOE/AP1A 8031440361385	4000K	12W	800 Lumen	IP43	>10 000 on/off	h 15 000	230V DRIVER FREE
LANT-CLOE/AP1A-S 8031440361408	4000K	12W	800 Lumen	IP43	>10 000 on/off	h 15 000	230V DRIVER FREE 90° 10LUX 5sec - 5 min. 1-8 m
LANT-CLOE/AP1B 8031440361392	4000K	12W	800 Lumen	IP43	>10 000 on/off	h 15 000	230V DRIVER FREE
LANT-CLOE/S1 8031440361422	4000K	12W	800 Lumen	IP43	>10 000 on/off	h 15 000	230V DRIVER FREE

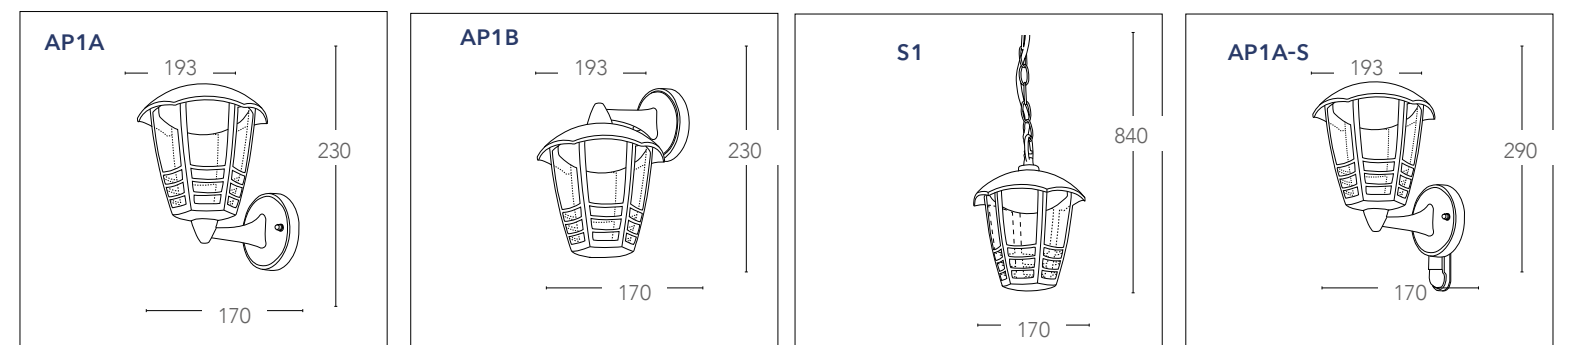




# CLOE

Lantern in alluminio pressofuso colore nero gofrato diffusore in policarbonato LED integrato  
Die cast aluminium lantern black embossed finish with polycarbonate diffuser built-in LED



## informazioni tecniche - technical information

LANT-CLOE/L1 8031440361415	4000K	12W	800 Lumen	IP43	>10 000 on/off	h 15 000	230V DRIVER FREE
LANT-CLOE/P1 8031440361439	4000K	12W	800 Lumen	IP43	>10 000 on/off	h 15 000	230V DRIVER FREE
LANT-CLOE/P3 8031440361446	4000K	3X12W	2400 Lumen	IP43	>10 000 on/off	h 15 000	230V DRIVER FREE

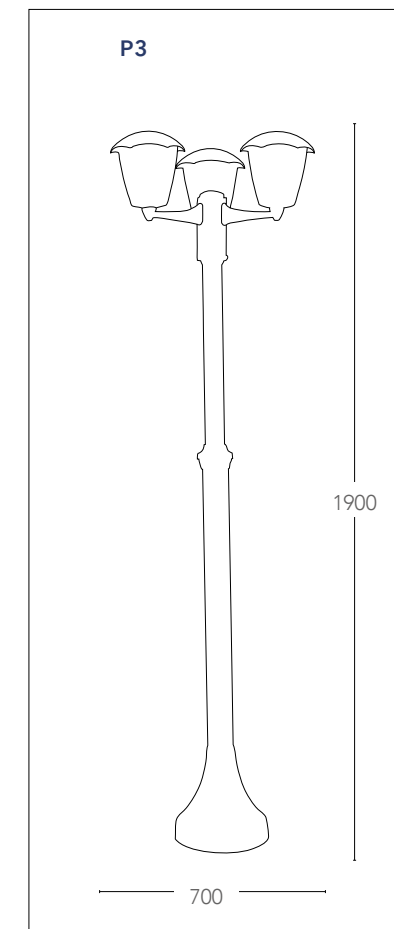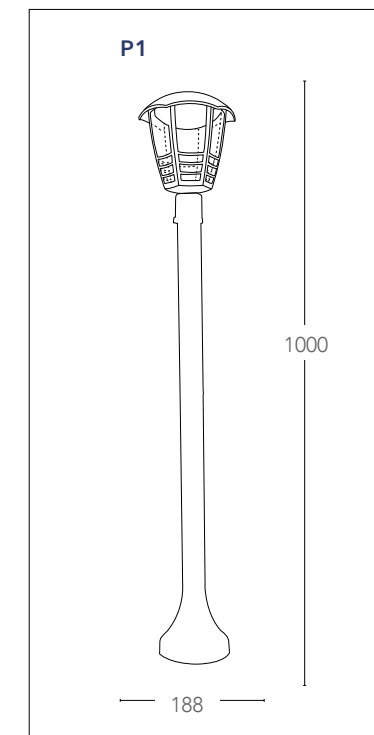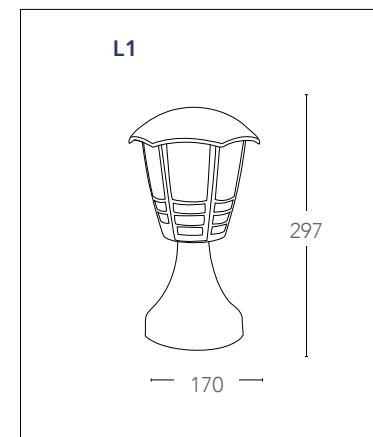





## MEGAN

Lanterna in alluminio pressofuso colore nero gofrato diffusore in policarbonato LED integrato  
Die cast aluminium lantern black embossed finish with polycarbonate diffuser built-in LED



### informazioni tecniche - technical information

LANT-MEGAN/AP1A 8031440361453	4000K	12W	800 Lumen	IP43	>10 000 on/off	h 15 000	230V DRIVER FREE
LANT-MEGAN/AP1A-S 8031440361460	4000K	12W	800 Lumen	IP43	>10 000 on/off	h 15 000	230V DRIVER FREE 90° 10LUX 5sec.- 5 min. 1-8 m
LANT-MEGAN/AP1B 8031440361477	4000K	12W	800 Lumen	IP43	>10 000 on/off	h 15 000	230V DRIVER FREE
LANT-MEGAN/S1 8031440361507	4000K	12W	800 Lumen	IP43	>10 000 on/off	h 15 000	230V DRIVER FREE

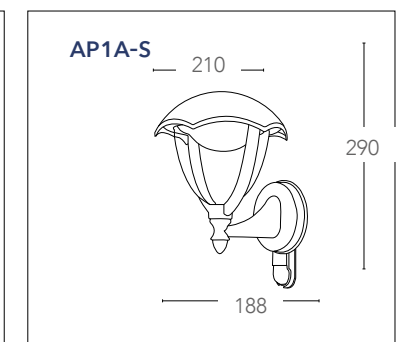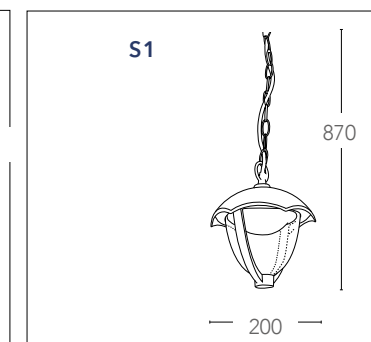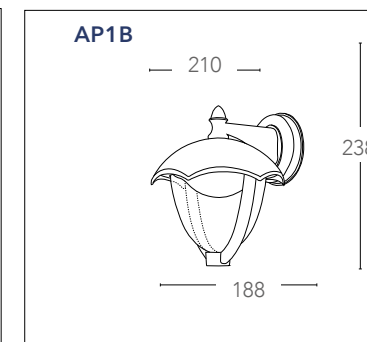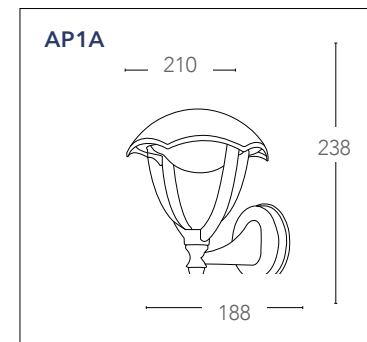




## MEGAN

Lanterna in alluminio pressofuso colore nero gofrato diffusore in policarbonato LED integrato  
*Die cast aluminium lantern black embossed finish with polycarbonate diffuser built-in LED*



### informazioni tecniche - technical information

LANT-MEGAN/L1 8031440361484	4000K	12W	800 Lumen	IP43	>10 000 on/off	h 15 000	230V DRIVER FREE
LANT-MEGAN/P1 8031440361491	4000K	12W	800 Lumen	IP43	>10 000 on/off	h 15 000	230V DRIVER FREE
LANT-MEGAN/P3 8031440361606	4000K	3X12W	2400 Lumen	IP43	>10 000 on/off	h 15 000	230V DRIVER FREE

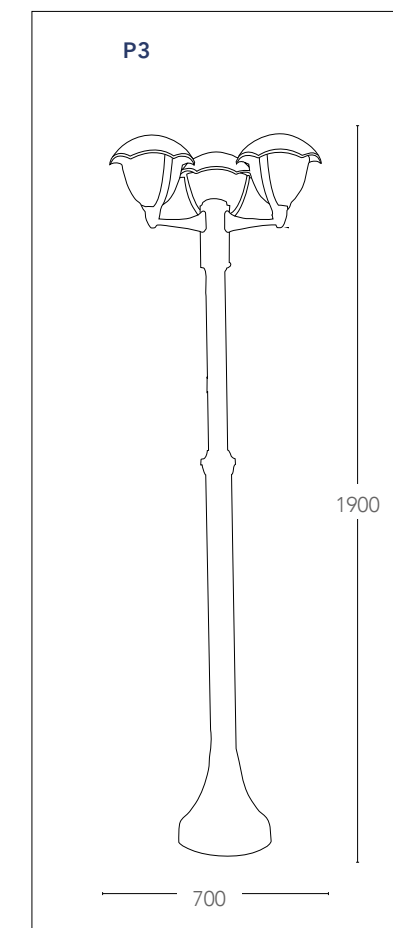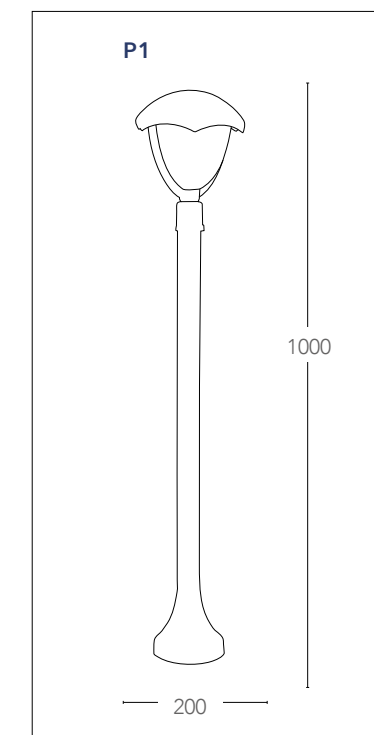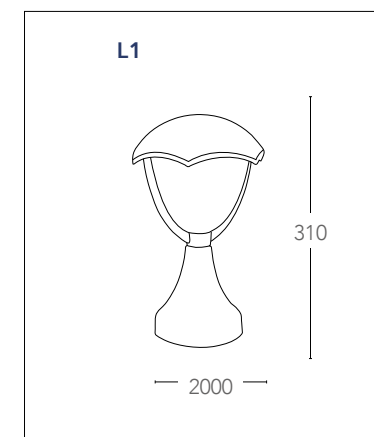



## ALYSON

Lantern in alluminio pressofuso colore nero o bianco goffrato diffusore in policarbonato LED integrato  
 Die cast aluminium lantern black or white embossed finish with polycarbonate diffuser built-in LED



### informazioni tecniche - technical information

LANT-ALYSON/AP 8031440361552	4000K	12W	800 Lumen	120°	IP54	>10 000 on/off	h 25 000	driver incluso
LANT-ALYSON/AP BCO 8031440361514								
LANT-ALYSON/P1 8031440361569	4000K	12W	800 Lumen	120°	IP54	>10 000 on/off	h 25 000	driver incluso
LANT-ALYSON/P1 BCO 8031440361538								

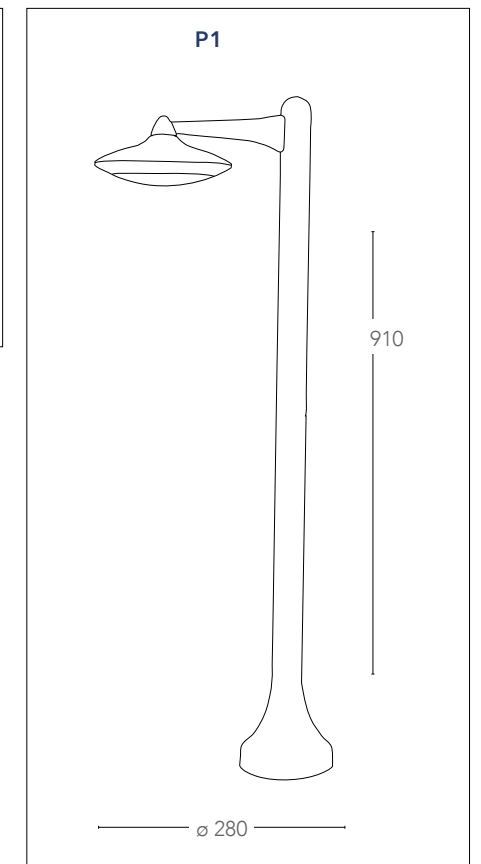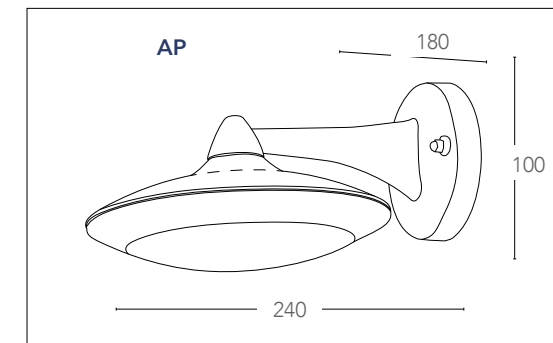

## OSLO

Lampada in alluminio pressofuso finitura nero  
Die cast aluminium lamp black finish



informazioni tecniche - technical information

I-OSLO-AP  
8031440151276

2xGX53  
non include - not included





120°

120°

I-OSLO-P1  
8031440131278

1xGX53  
non include - not included

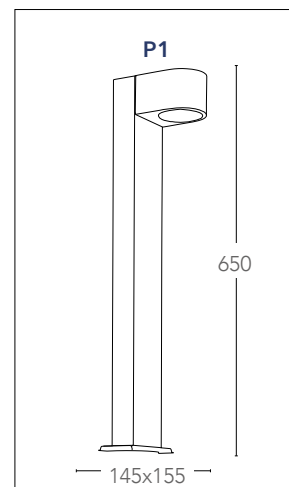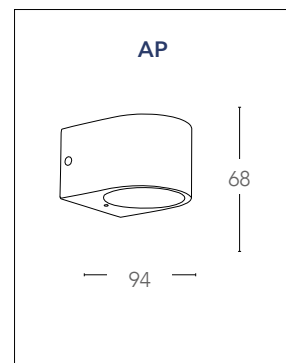


CE



RoHS  
WEEE COMPLIANT

## BOSTON


Applique in alluminio con diffusore opale in policarbonato finitura antracite  
Aluminium wall lamp with polycarbonate opal diffuser anthracite finish

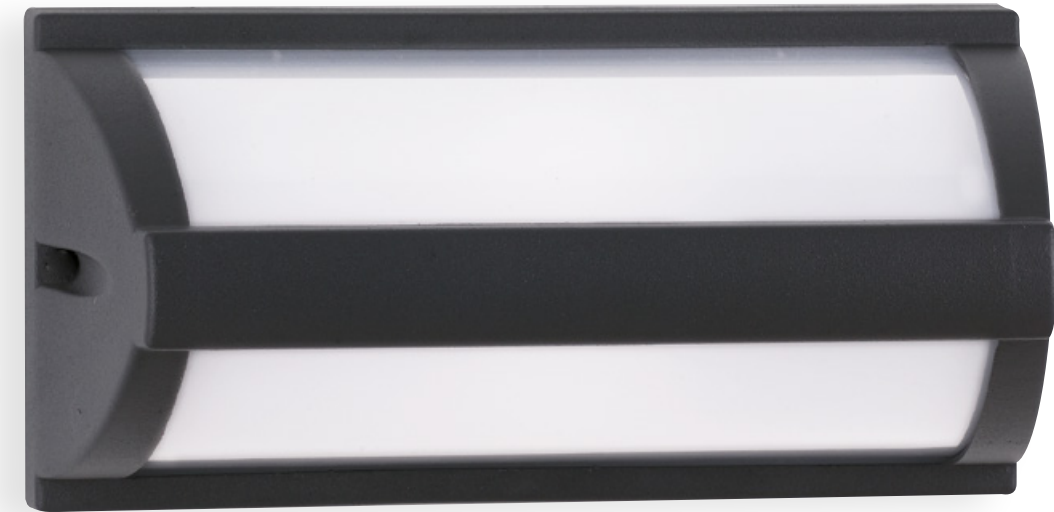

informazioni tecniche - technical information

I-BOSTON-AP  
8031440312240

1xE27 max 42w  
non include - not included

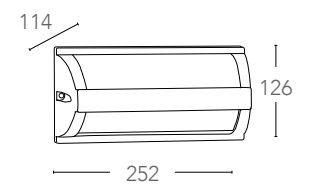

CE



RoHS  
WEEE COMPLIANT

## ATLANTA


Applique in alluminio con diffusore opale in policarbonato finitura antracite  
Aluminium wall lamp with polycarbonate opal diffuser anthracite finish



informazioni tecniche - technical information

I-ATLANTA-AP  
8031440312257

1xE27 max 42w  
non include - not included

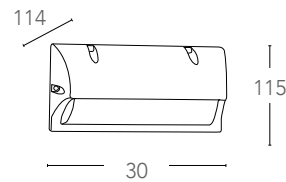

## MEMPHIS


Applique in alluminio con diffusore opale in policarbonato finitura antracite  
Aluminium wall lamp with polycarbonate opal diffuser anthracite finish



informazioni tecniche - technical information

I-MEMPHIS-AP  
8031440312226

1xE27 max 42w  
non include - not included

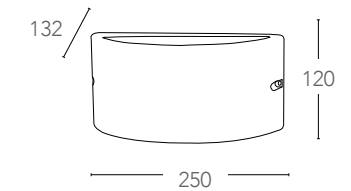

## DENVER


Applique in alluminio con diffusore opale in policarbonato finitura antracite  
Aluminium wall lamp with polycarbonate opal diffuser anthracite finish



informazioni tecniche - technical information

I-DENVER-AP  
8031440312264

1xE27 max 42w  
non include - not included

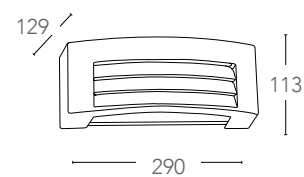

## ORLANDO


Applique in alluminio con diffusore opale in policarbonato finitura antracite  
Aluminium wall lamp with polycarbonate opal diffuser anthracite finish



informazioni tecniche - technical information

I-ORLANDO-AP  
8031440312271

1xE27 max 42w  
non include - not included

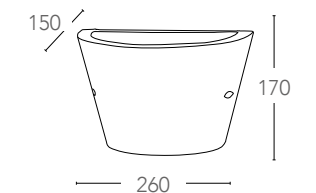

## LIONE


Applique in alluminio con diffusore opale in policarbonato finitura antracite  
Aluminium wall lamp with polycarbonate opal diffuser anthracite finish



informazioni tecniche - technical information

I-1842/ANTRACITE  
8031420231073

1xE27 max 42w  
non include - not included



## SEATTLE


Applique in alluminio con diffusore opale in policarbonato finitura antracite  
Aluminium wall lamp with polycarbonate opal diffuser anthracite finish



informazioni tecniche - technical information

I-SEATTLE-AP  
8031440312233

1xE27 max 42w  
non include - not included

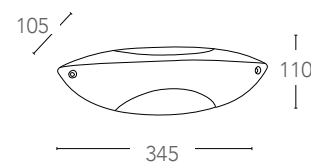

## AUSTIN

Applique in alluminio bronzo, bianco o nero con diffusore in policarbonato  
Aluminium wall lamp bronze, white or black polycarbonate diffuser



informazioni tecniche - technical information

I-AUSTIN-AP BCO  
8031440362122

1xE27 max 42w  
non include - not included




I-AUSTIN-AP BRO  
8031440362108

1xE27 max 42w  
non include - not included



I-AUSTIN-AP NER  
8031440362139


1xE27 max 42w  
non include - not included

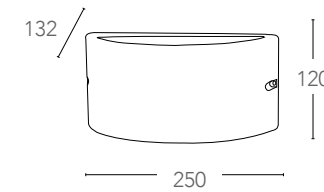



## FOCUS

Lampada in alluminio pressofuso  
Die cast aluminium lamp

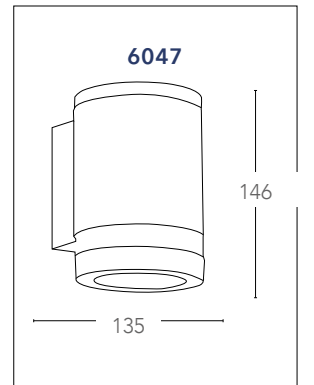

informazioni tecniche - technical information

I-6047/SILVER  
8031420171072



1xGX53 max 25w  
include - included



informazioni tecniche - technical information

I-6041/NERO  
8031420511076





1xGU10 max 35w  
include - included



I-6048/SILVER  
8031420181071




1xGU10 max 35w  
include - included

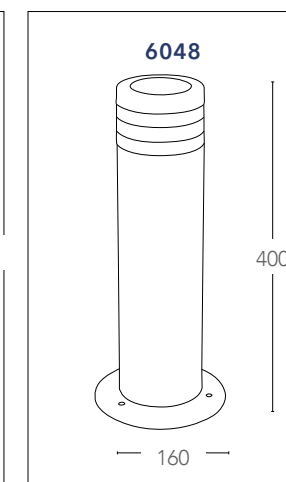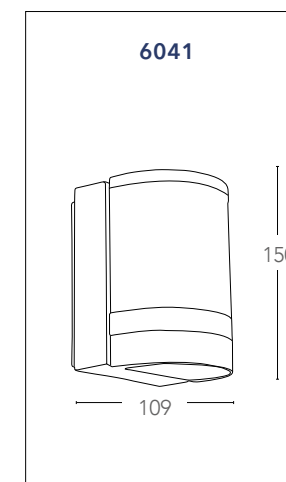

## BONN

Lampada in acciaio inox diffusore trasparente  
Stainless steel lamp with clear diffuser

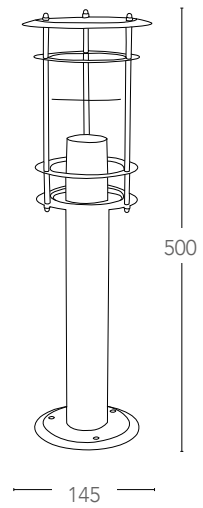

informazioni tecniche - technical information


I-ST004S-500  
8031421441082

1xE27 max 60w  
non include - not included



## TOKYO

Lampada in acciaio inox diffusore in policarbonato  
Stainless steel lamp with diffuser in polycarbonate

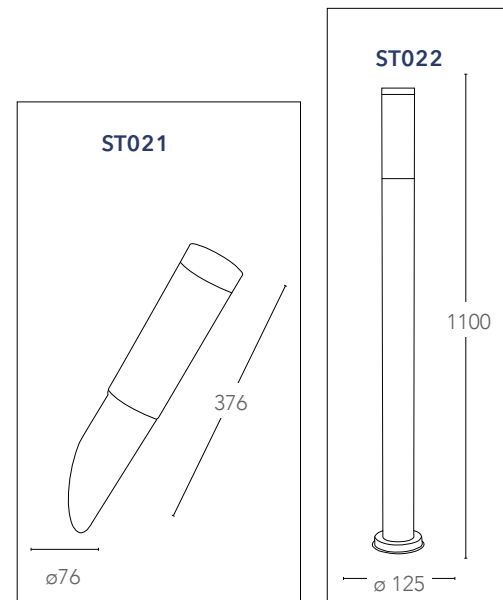

informazioni tecniche - technical information

I-ST021  
8031421451081

1xE27 max 60w  
non include - not included



I-ST022-1100  
8031421661084

1xE27 max 60w  
non include - not included



## ROMA

Lanterne in alluminio pressofuso con diffusore in vetro  
Diecast aluminium lantern with glass diffuser



informazioni tecniche - technical information



**LANT-ROMA/AP1A**

8031430751172

1xE27 max 60w  
non include - not included



**LANT-ROMA/AP1A BCO**

8031434661217



**LANT-ROMA/AP1B**

8031430761171

1xE27 max 60w  
non include - not included



**LANT-ROMA/AP1B BCO**

8031434671216



**LANT-ROMA/S1**

8031430791178

1xE27 max 60w  
non include - not included



**LANT-ROMA/S1 BCO**

8031434681215



**LANT-ROMA/AP1A-S**

8031435921235





1xE27 max 60w  
non include - not included



10LUX

5sec.- 5 min.

1-8 m

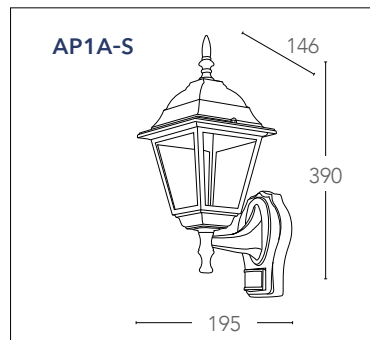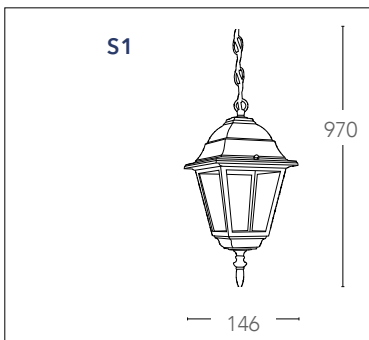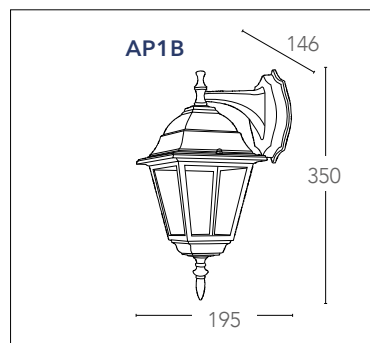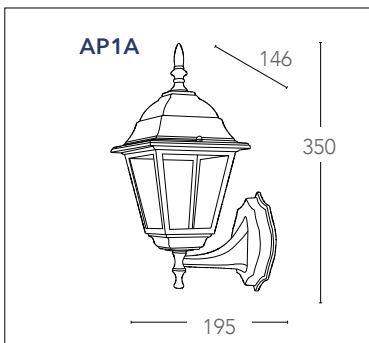

## ROMA

Lanterne in alluminio pressofuso con diffusore in vetro  
Diecast aluminium lantern with glass diffuser



informazioni tecniche - technical information

### LANT-PALETTO

8031414042203

1xE27 max 60w  
non include - not included



### LANT-ROMA/L1 BCO

8031436951248

### LANT-ROMA/P1

8031430771170

1xE27 max 60w  
non include - not included






### LANT-ROMA/P1 BCO

8031436941249

### LANT-ROMA/P3

8031430781179

3xE27 max 60w  
non include - not included

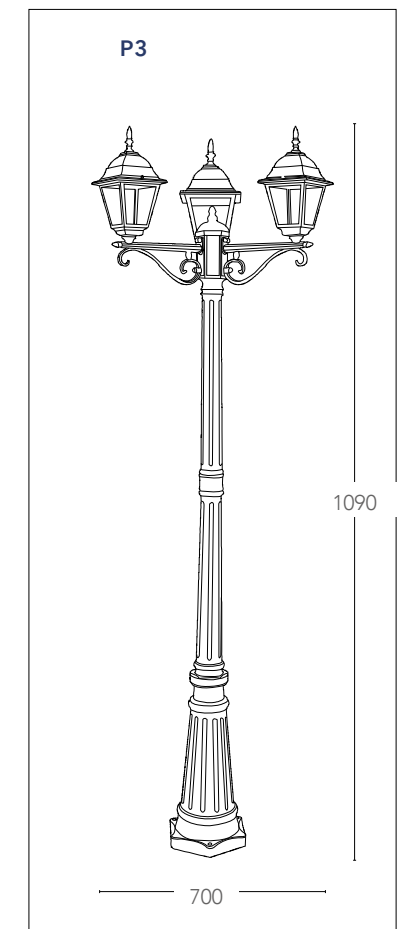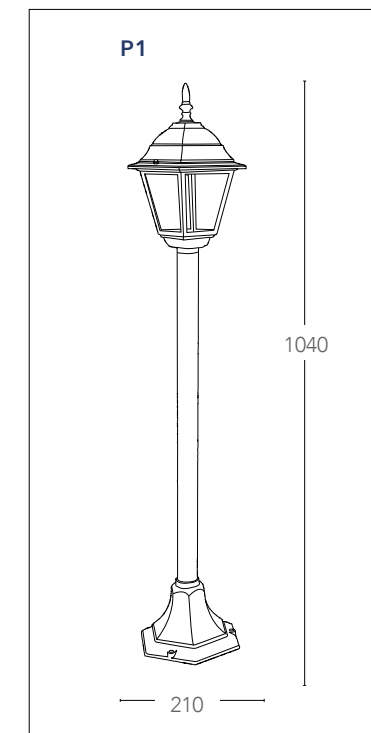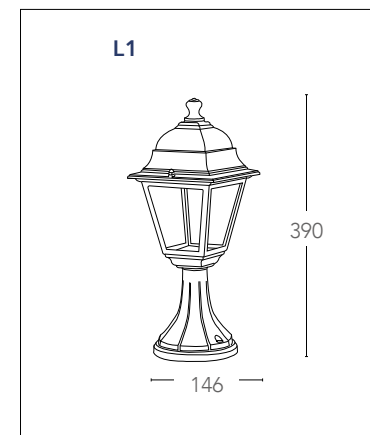


## MILANO

Lanterne in alluminio pressofuso con diffusore in vetro  
Diecast aluminium lantern with glass diffuser



informazioni tecniche - technical information

LANT-MILANO/AP1A 8031436921241	1xE27 max 60w non include - not included	⏚	IP43
LANT-MILANO/AP1A BCO 8031436931240			
LANT-MILANO/AP1B 8031436901243	1xE27 max 60w non include - not included	⏚	IP43
LANT-MILANO/AP1B BCO 8031436911242			
LANT-MILANO/S1 8031436841235	1xE27 max 60w non include - not included	⏚	IP43
LANT-MILANO/S1 BCO 8031436851234			
LANT-MILANO/L1 8031436881248	1xE27 max 60w non include - not included	⏚	IP43
LANT-MILANO/L1 BCO 8031436891247			
LANT-MILANO/P1 8031436971246	1xE27 max 60w non include - not included	⏚	IP43
LANT-MILANO/P1 BCO 8031436871232			

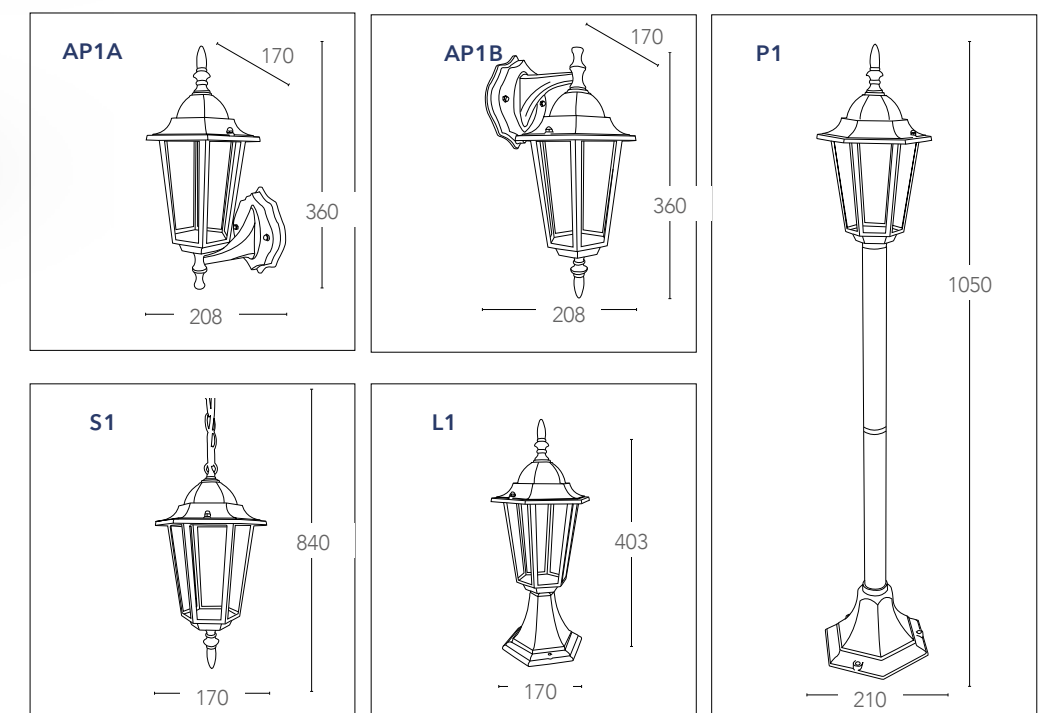


## PISA

Lanterne in alluminio pressofuso nero pennellato oro con diffusore in vetro cattedrale  
Diecast aluminium lantern black brush gold finish with glass diffuser





### informazioni tecniche - technical information

LANT-PISA/AP1A 8031435561226	1xE27 max 60w non include - not included		
LANT-PISA/AP1B 8031435571225	1xE27 max 60w non include - not included		
LANT-PISA/L1 8031435551227	1xE27 max 60w non include - not included		
LANT-PISA/S1 8031435541228	1xE27 max 60w non include - not included		
LANT-PISA/P1 8031435531229	1xE27 max 60w non include - not included		

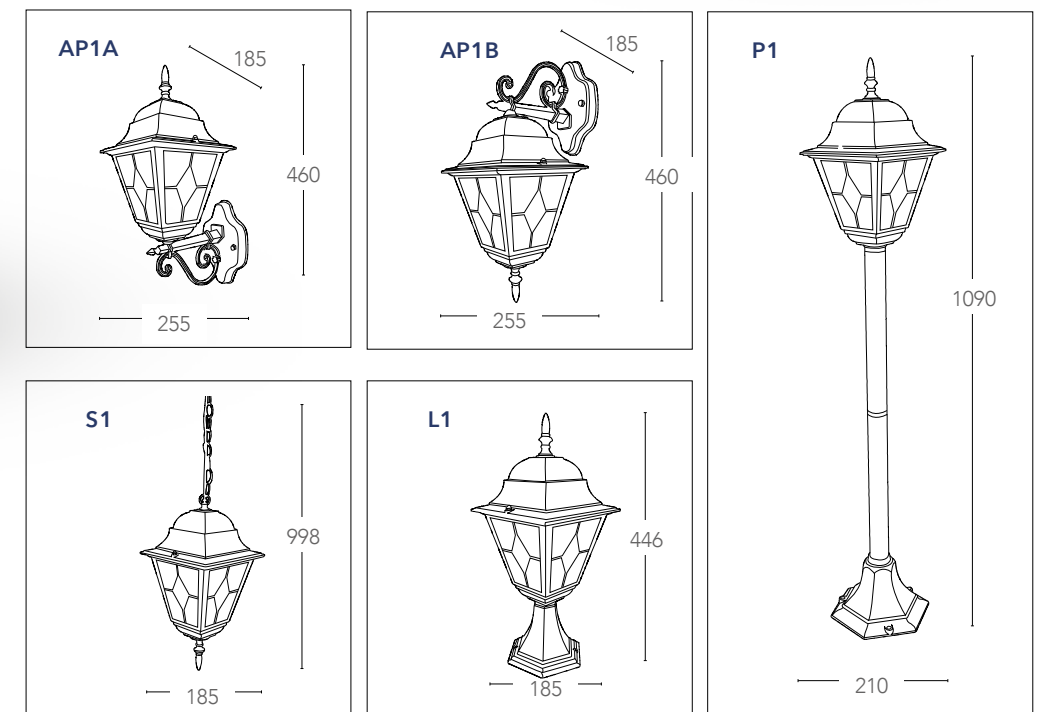






## FIRENZE

Lanterne in alluminio pressofuso nero pennelato argento con diffusore in vetro  
Diecast aluminium lantern black brush silver with glass diffuser

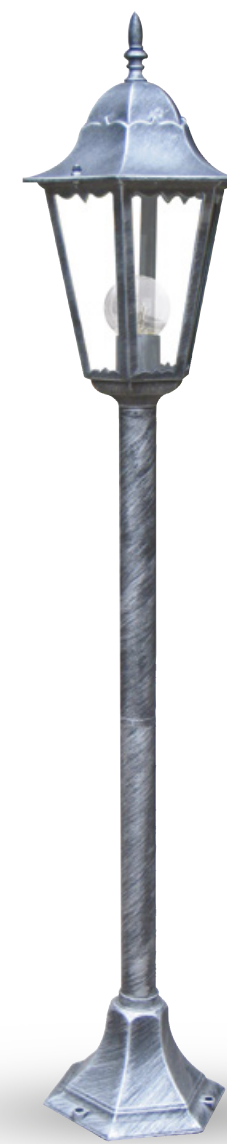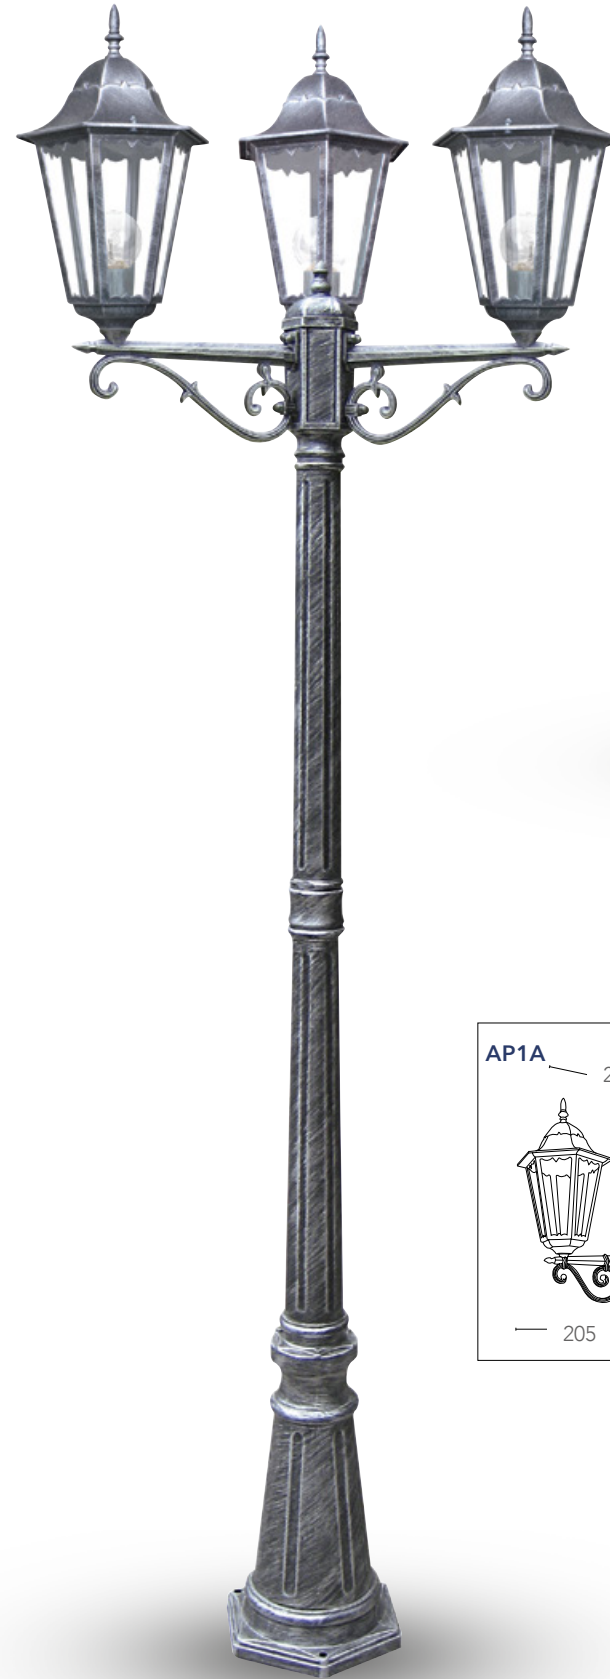

informazioni tecniche - technical information

LANT-FIRENZE/AP1A 8031430701177	1xE27 max 60w non include - not included	⏚	IP43
LANT-FIRENZE/AP1B 8031430711176	1xE27 max 60w non include - not included	⏚	IP43
LANT-FIRENZE/P1 8031430721175	1xE27 max 60w non include - not included	⏚	IP43
LANT-FIRENZE/S1 8031430741173	1xE27 max 60w non include - not included	⏚	IP43
LANT-FIRENZE/P3 8031430731174	3xE27 max 60w non include - not included	⏚	IP43

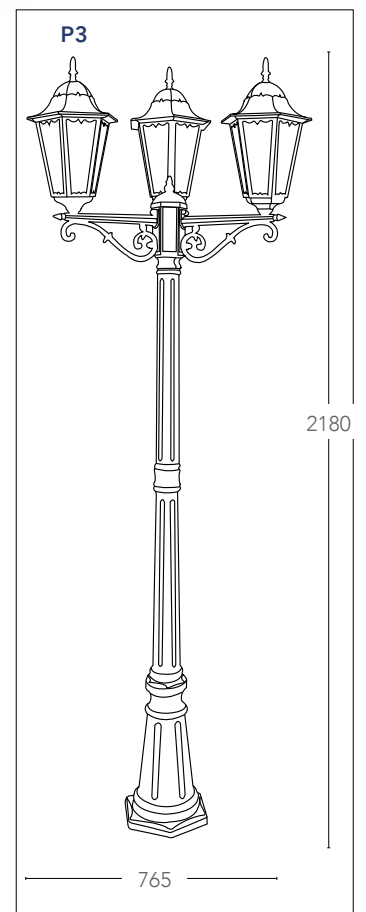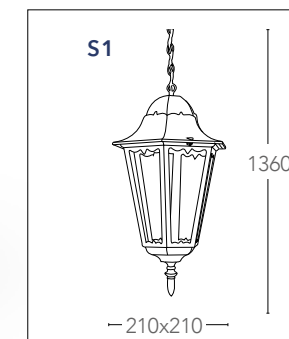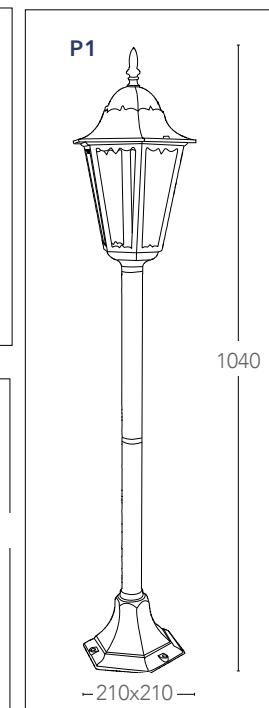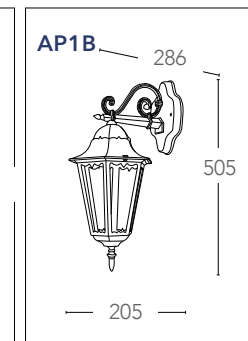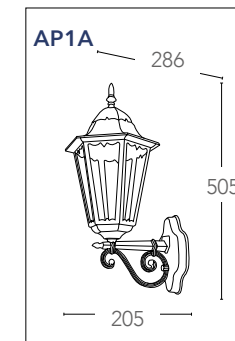


## SANTIAGO

Lanterne in alluminio pressofuso nero pennellato verde con diffusore in vetro  
Diecast aluminium lantern black brush green with glass diffuser



informazioni tecniche - technical information

LANT-SANTIAGO/AP1A 8031430801174	1xE27 max 60w non include - not included	⊕	IP43
LANT-SANTIAGO/AP1B 8031430811173	1xE27 max 60w non include - not included	⊕	IP43
LANT-SANTIAGO/P1 8031430821172	1xE27 max 60w non include - not included	⊕	IP43
LANT-SANTIAGO/S1 8031430841170	1xE27 max 60w non include - not included	⊕	IP43
LANT-SANTIAGO/P3 8031430831171	3xE27 max 60w non include - not included	⊕	IP43

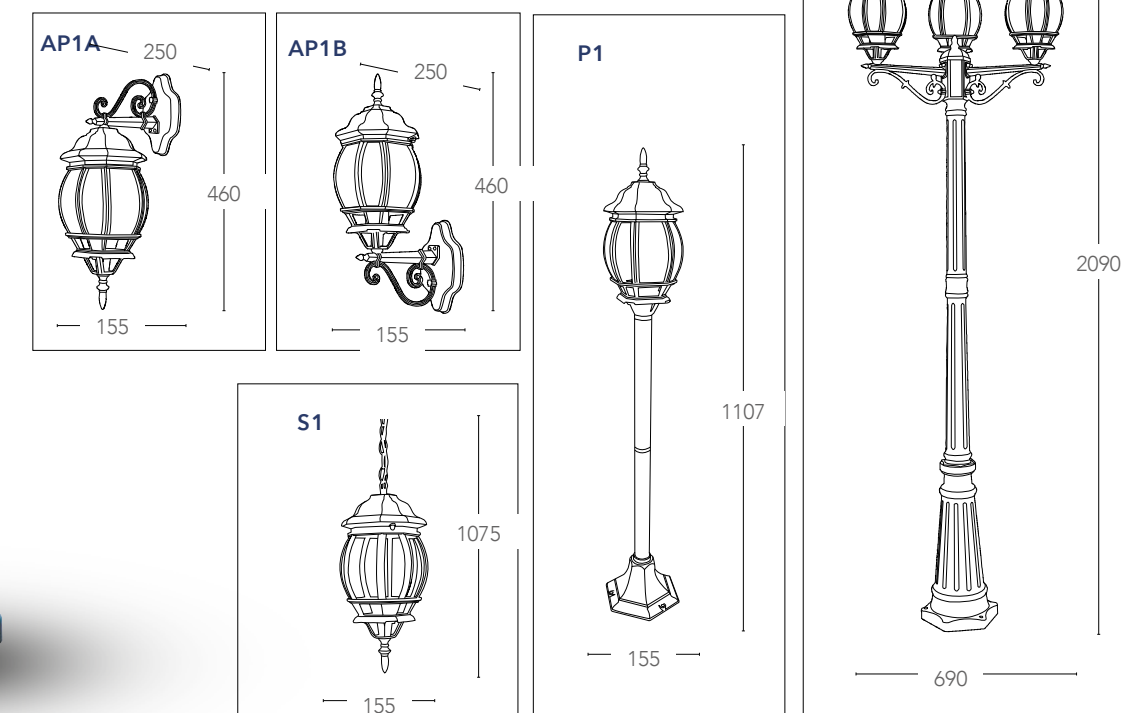


## VENEZIA

Lanterne in alluminio pressofuso con diffusore in vetro  
Diecast aluminium lantern with glass diffuser



informazioni tecniche - technical information

LANT-VENEZIA-AP1B 8031440311991	1xE27 max 60w non include - not included	⏏	IP43
LANT-VENEZIA-AP1A 8031440312004	1xE27 max 60w non include - not included	⏏	IP43
LANT-VENEZIA-L1 8031440311984	1xE27 max 60w non include - not included	⏏	IP43
LANT-VENEZIA-S1 8031440313285	1xE27 max 60w non include - not included	⏏	IP43
LANT-VENEZIA-P1 8031440313308	1xE27 max 60w non include - not included	⏏	IP43
LANT-VENEZIA-P3 8031440313292	3xE27 max 60w non include - not included	⏏	IP43

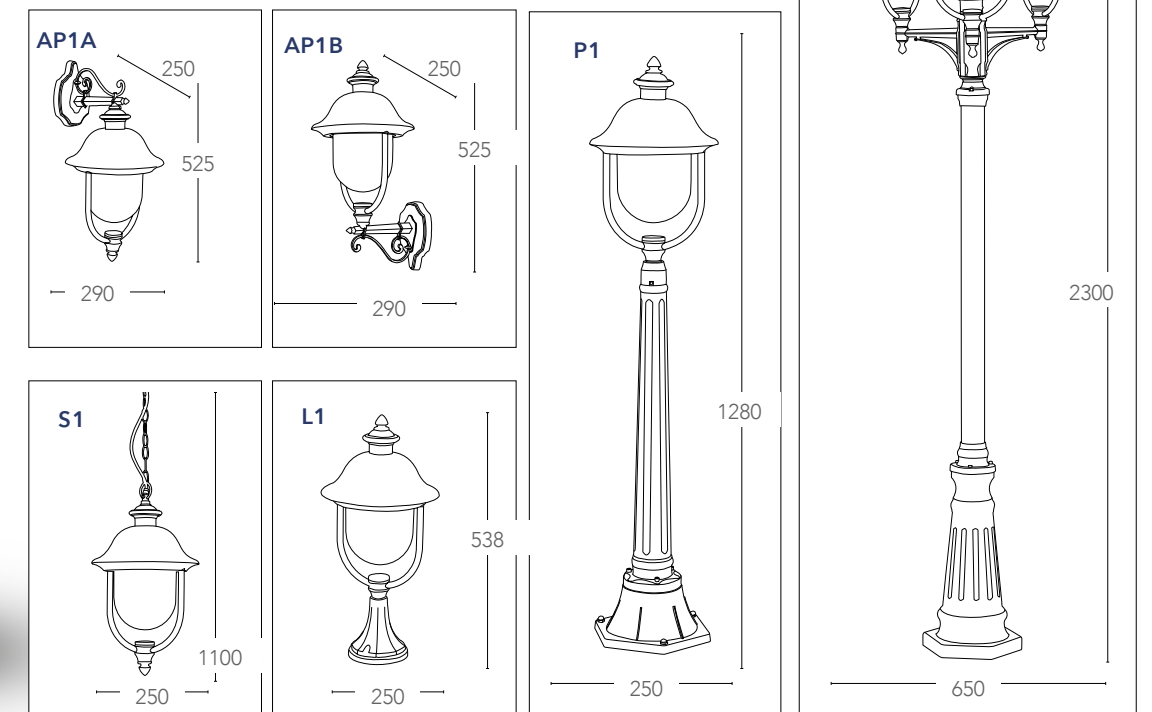


## PAVIA

Lanterne in alluminio pressofuso con diffusore in vetro  
Diecast aluminium lantern with glass diffuser



### informazioni tecniche - technical information

LANT-PAVIA-AP1 8031440312028	1xE27 max 60w non include - not included	⏚	IP43
LANT-PAVIA-S1 8031440312042	1xE27 max 60w non include - not included	⏚	IP43
LANT-PAVIA-P1 8031440312035	1xE27 max 60w non include - not included	⏚	IP43
LANT-PAVIA-P3 8031440312011	3xE27 max 60w non include - not included	⏚	IP43

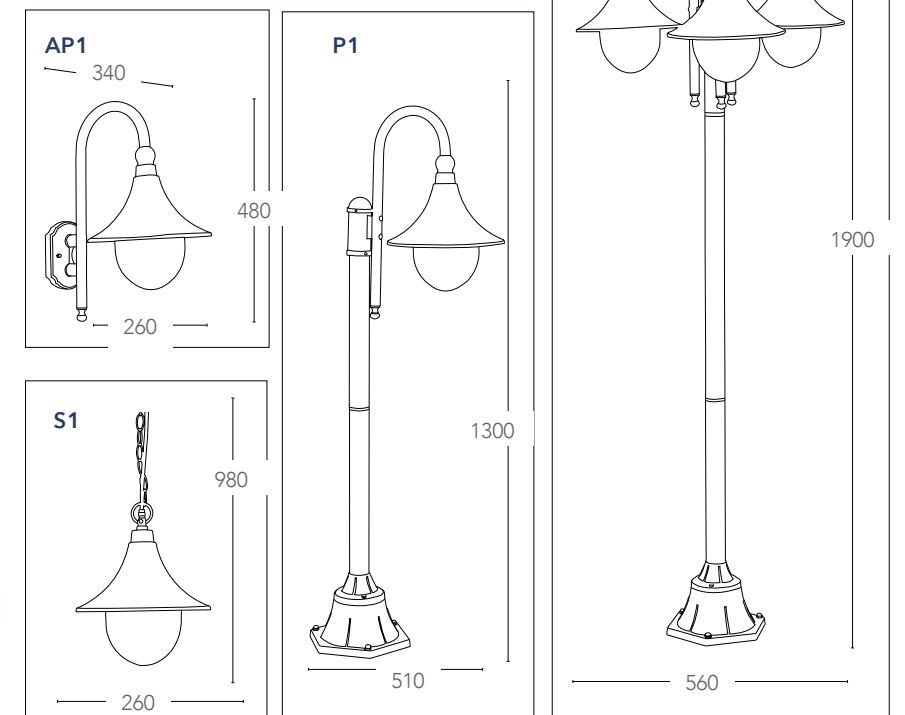

## GAETA


Lanterne in alluminio finitura nero-oro pressofuso con diffusore in vetro  
Diecast aluminium black-gold finish lantern with glass



informazioni tecniche - technical information

LANT-GAETA-AP1  
8031440313278

1xE27 max 60w  
non include - not included







## BABILON

Lampada da giardino diffusore in materiale polivinilico finitura moka e sfera opale in PMMA  
 Garden lamp with shade in polyvinil moka finish and sphere opal in PMMA



### informazioni tecniche - technical information

I-BABILON-S 8031440356329	1xE27 max 25w non include - not included		
I-BABILON-L 8031440356305	1xE27 max 25w non include - not included		
I-BABILON-AP 8031440356336	1xE27 max 25w non include - not included		
I-BABILON-PT 8031440356312	1xE27 max 25w non include - not included		

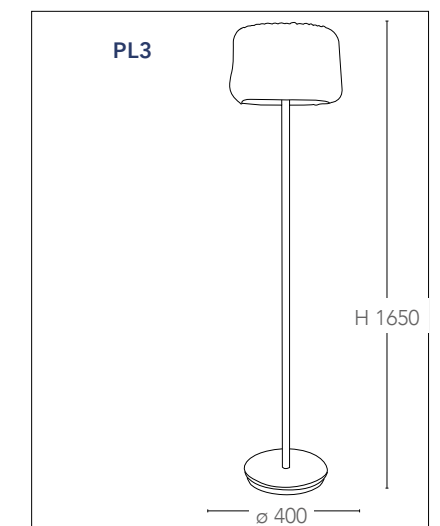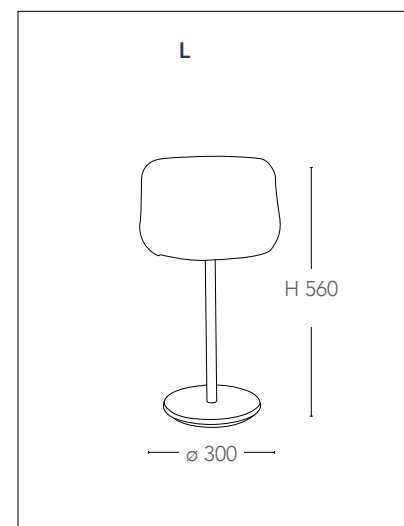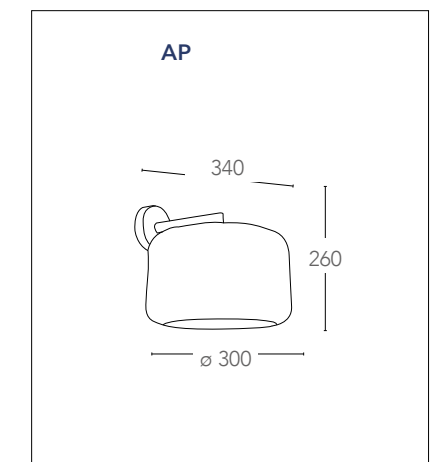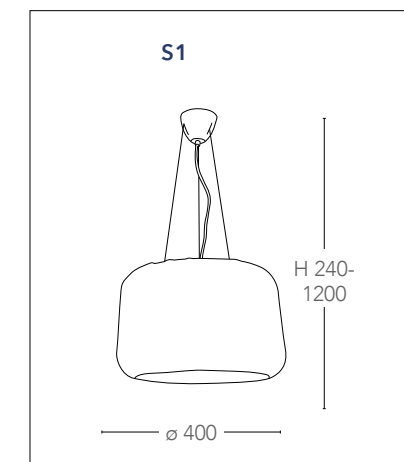



#### **PLAFONIERE E APPLIQUE DA ESTERNO**

Le nostre plafoniere da esterno offrono una vasta gamma di prodotti dal design moderno , resistenti agli agenti atmosferici ideali per illuminare e creare il migliore ambiente a parete e a soffitto  
Costruiti in alluminio o in composito plastico , a tecnologia a Led o tradizionale.

#### **OUTDOOR CEILING LAMP**

*Our outdoor ceiling lights offer a wide range of products with modern design, weather resistant ideal for illuminating and create the best environment wall and ceiling  
built in aluminum or plastic composite, in LED or traditional technology.*

## EXTRA

Plafoniera LED integrato materiale base PP bianco o antracite con diffusore opale PC  
 PLYCARBONATE built-in LED ceiling lamp PP base white or anthracite with opal PC diffuser




informazioni tecniche - technical information



LED-EXTRA-BCO  
8031440361071

LED-EXTRA-ANT  
8031440361064



## SENSITIVE



Plafoniera LED integrato materiale base PP bianco o antracite con diffusore opale PC con sensore  
 PLYCARBONATE built-in LED ceiling lamp PP base white or anthracite with opal PC diffuser with sensor



informazioni tecniche - technical information

LED-SENSITIVE-BCO  
8031440361750

LED-SENSITIVE-ANT  
8031440361743

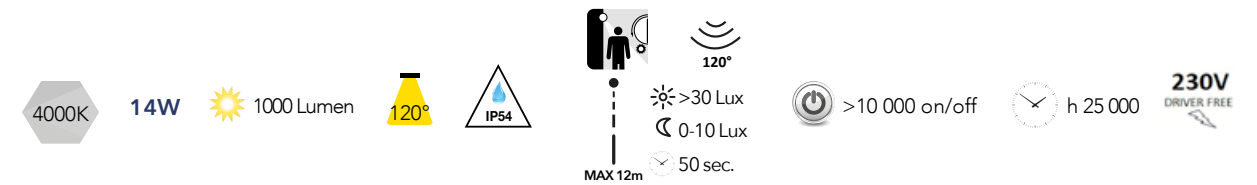




## SHELLY

Plafoniera LED integrato materiale policarbonato con diffusore opale  
 Polycarbonate built-in LED ceiling lamp with opal diffuser



informazioni tecniche - technical information

	BCO	LED-SHELLY-L BCO 8031440351713	4000K	20W	1600 Lumen	120°	IP65	>10 000 on/off	h 25 000	230V DRIVER FREE
		LED-SHELLY-S BCO 8031440351720	4000K	15W	1200 Lumen	120°	IP65	>10 000 on/off	h 25 000	230V DRIVER FREE
	ANT	LED-SHELLY-L ANT 8031440351690	4000K	20W	1600 Lumen	120°	IP65	>10 000 on/off	h 25 000	230V DRIVER FREE
		LED-SHELLY-S ANT 8031440351706	4000K	15W	1200 Lumen	120°	IP65	>10 000 on/off	h 25 000	230V DRIVER FREE

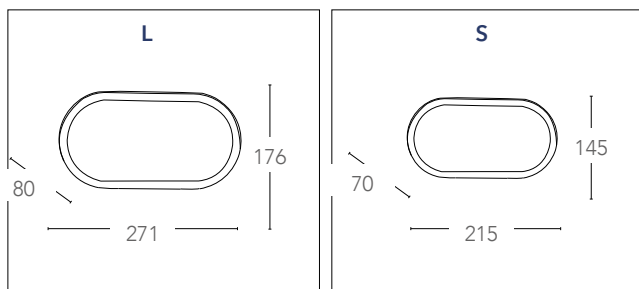




## EVER

Plafoniera LED integrato materiale policarbonato con diffusore opale  
 Polycarbonate built-in LED ceiling lamp with opal diffuser



informazioni tecniche - technical information

	BCO	LED-EVER-L BCO 8031440351676	4000K	20W	1600 Lumen	120°	IP65	>10 000 on/off	h 25 000	230V DRIVER FREE
		LED-EVER-S BCO 8031440351683	4000K	15W	1200 Lumen	120°	IP65	>10 000 on/off	h 25 000	230V DRIVER FREE
	ANT	LED-EVER-L ANT 8031440351645	4000K	20W	1600 Lumen	120°	IP65	>10 000 on/off	h 25 000	230V DRIVER FREE
		LED-EVER-S ANT 8031440351638	4000K	15W	1200 Lumen	120°	IP65	>10 000 on/off	h 25 000	230V DRIVER FREE

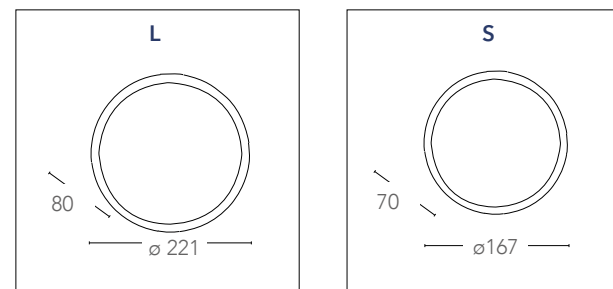

## EVER


Plafoniera LED integrato materiale policarbonato con diffusore opale  
 Polycarbonate built-in LED ceiling lamp with opal diffuser



informazioni tecniche - technical information



	<b>LED-EVER-XL-SIL</b> 8031440355605	4000K	30W	2400 Lumen	120°	IP65	>10 000 on/off	h 25 000	PF 0,90
SIL	<b>LED-EVER-XL-BCO</b> 8031440355612	4000K	30W	2400 Lumen	120°	IP65	>10 000 on/off	h 25 000	PF 0,90

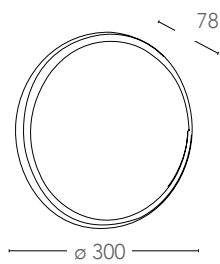

## EVER




Plafoniera LED integrato materiale policarbonato con diffusore opale  
 Polycarbonate built-in LED ceiling lamp with opal diffuser



informazioni tecniche - technical information



	<b>LED-EVER-XLP-BCO</b> 8031440355636	4000K	30W	2300 Lumen	120°	IP65	>10 000 on/off	h 25 000	230V DRIVER FREE
BCO	<b>LED-EVER-LP-BCO</b> 8031440355650	4000K	20W	1600 Lumen	120°	IP65	>10 000 on/off	h 25 000	230V DRIVER FREE
	<b>LED-EVER-XLP-ANT</b> 8031440355629	4000K	30W	2300 Lumen	120°	IP65	>10 000 on/off	h 25 000	230V DRIVER FREE
ANT	<b>LED-EVER-LP-ANT</b> 8031440355643	4000K	20W	1600 Lumen	120°	IP65	>10 000 on/off	h 25 000	230V DRIVER FREE

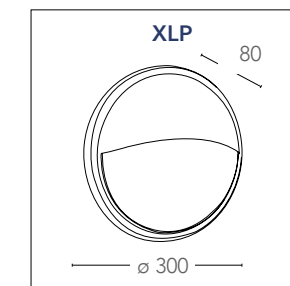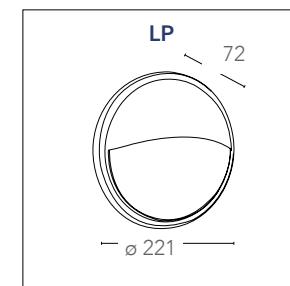

## EASY

Plafoniera in poliammide con diffusore in vetro  
Polyamide plastic ceiling lamp with glass diffuser



informazioni tecniche - technical information



NERO

BCO


**I-EASY-S-NERO**  
8031440357890

1xE27 max 42w  
non include - not included




**I-EASY-S-BCO**  
8031440357883

1xE27 max 42w  
non include - not included

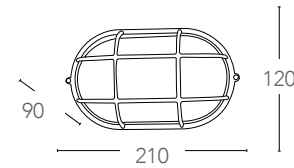

## SMART

Plafoniera in poliammide con diffusore in vetro  
Polyamide plastic ceiling lamp with glass diffuser

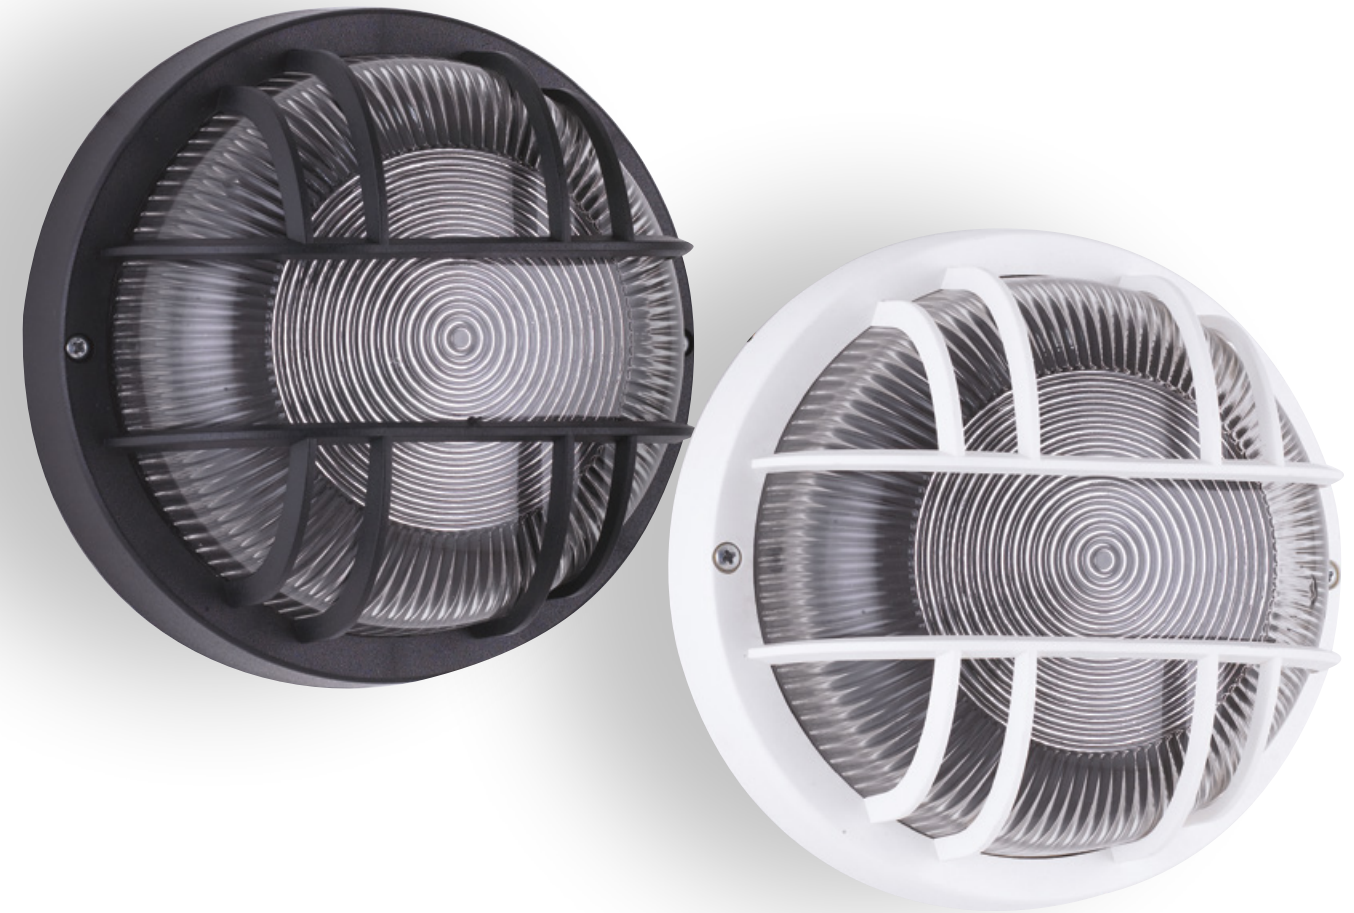

informazioni tecniche - technical information



NERO

BCO


**I-SMART-S-NERO**  
8031440357876

1xE27 max 42w  
non include - not included



**I-SMART-S-BCO**  
8031440357869

1xE27 max 42w  
non include - not included



## TOLEDO


Plafoniera in poliammide con diffusore in vetro  
Polyamide plastic ceiling lamp with glass diffuser



informazioni tecniche - technical information

**I-TOLEDO-BCO**  
8031440312073

1xE27 max 25w  
non include - not included














## IBIZA

Plafoniera in vetro con struttura in alluminio pressofuso  
Glass ceiling lamp with aluminium die-cast frame



### informazioni tecniche - technical information

	<b>I-IBIZA-LD-NERO</b> 8031440312172	1xE27 max 42w non include - not included		
<b>NERO</b>	<b>I-IBIZA-SD-NERO</b> 8031440312158	1xE27 max 42w non include - not included		
	<b>I-IBIZA-LD-BCO</b> 8031440312127	1xE27 max 42w non include - not included		
<b>BCO</b>	<b>I-IBIZA-SD-BCO</b> 8031440312097	1xE27 max 42w non include - not included		

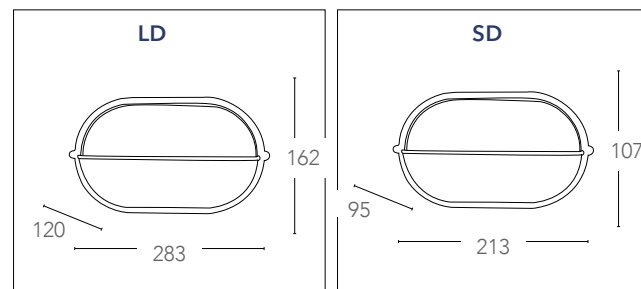




## IBIZA

Plafoniera in vetro con struttura in alluminio pressofuso  
Glass ceiling lamp with aluminium die-cast frame




### informazioni tecniche - technical information

	<b>I-IBIZA-L-NERO</b> 8031440312189	1xE27 max 42w non include - not included		
<b>NERO</b>	<b>I-IBIZA-S-NERO</b> 8031440312165	1xE27 max 42w non include - not included		
	<b>I-IBIZA-L-BCO</b> 8031440312134	1xE27 max 42w non include - not included		
<b>BCO</b>	<b>I-IBIZA-S-BCO</b> 8031440312103	1xE27 max 42w non include - not included		

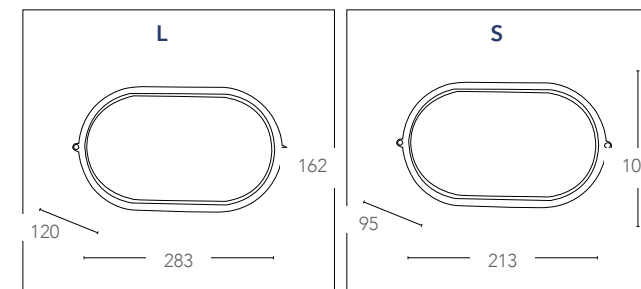

## IBIZA

Plafoniera in vetro con struttura in alluminio pressofuso  
Glass ceiling lamp with aluminium die-cast frame

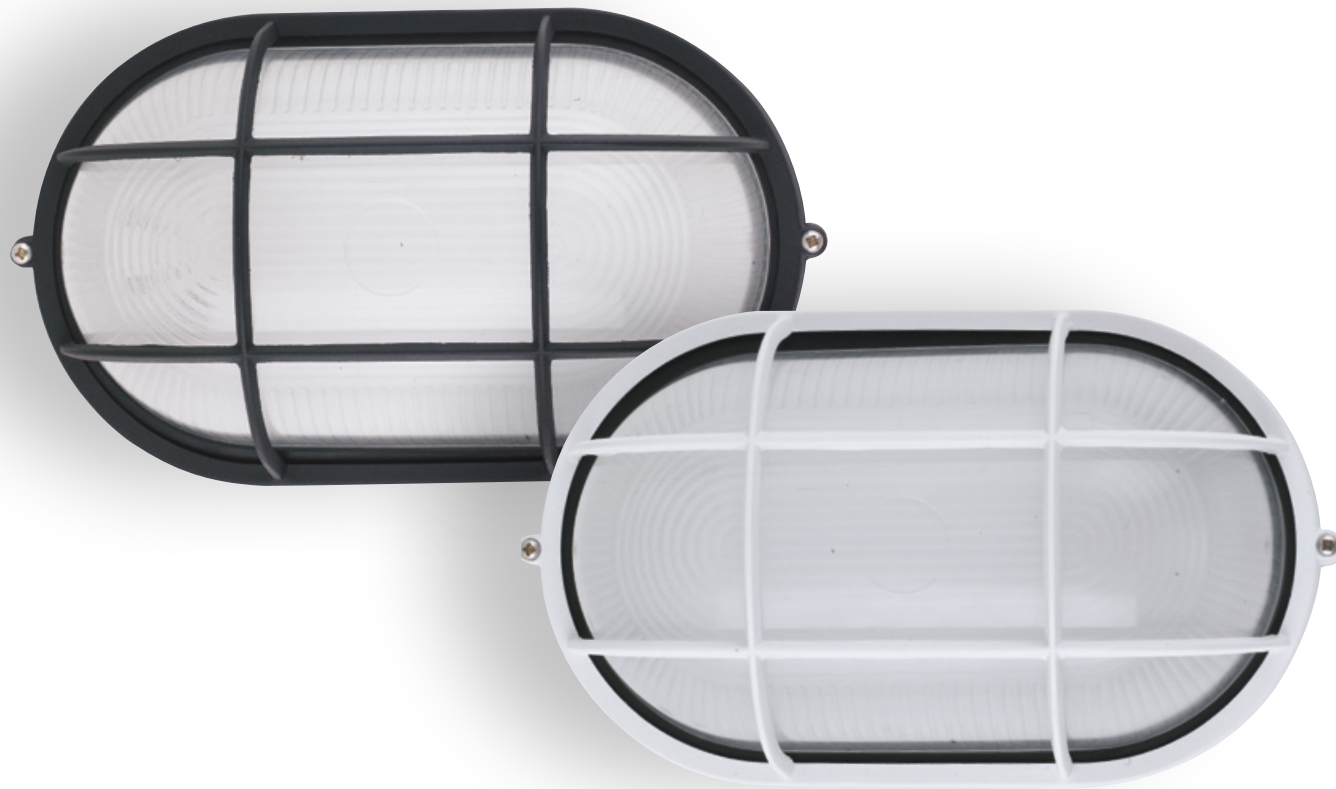

### informazioni tecniche - technical information



NERO

BCO

I-IBIZA-LP-NERO  
8031440312196

1xE27 max 42w  
non include - not included



I-IBIZA-SP-NERO  
8031440312141

1xE27 max 42w  
non include - not included




I-IBIZA-LP-BCO  
8031440312110

1xE27 max 42w  
non include - not included



I-IBIZA-SP-BCO  
8031440312080

1xE27 max 42w  
non include - not included

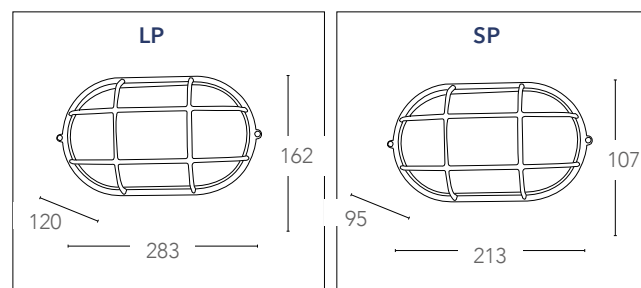

## BARCELONA

Plafoniera in alluminio con diffusore in vetro  
Diecast ceiling lamp with glass diffuser



### informazioni tecniche - technical information



I-3072L/NERO  
8031421501083

1xE27 max 42w  
non include



I-3072S/NERO  
8031421521081

not included

I-3074L/NERO  
8031421461080

1xE27 max 42w  
non include



I-3074S/NERO  
8031421481088

not included



I-3072L/SILVER  
8031421531080

1xE27 max 42w  
non include - not included



I-3072S/SILVER  
8031421551088

included




I-3074L/SILVER  
8031421491087

1xE27 max 42w  
non include - not included



I-3074S/SILVER  
8031421511082

included

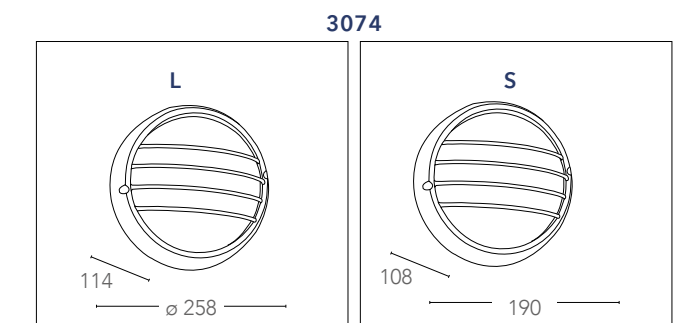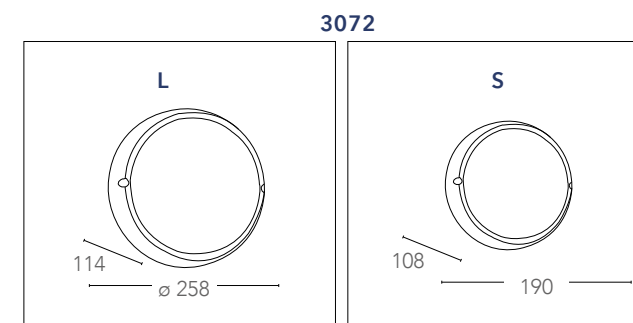



## BARRET

Segnapassi in alluminio incasso a pavimento o parete LED integrato finitura nickel  
 LED built-in aluminium in ground or wall spot light nickel finish



informazioni tecniche - technical information

### CALPESTABILI

La nostra serie di faretti segnapassi, calpestabili e carrabili da esterno, si integrano perfettamente in ambienti classici e moderni, possono avere una illuminazione diretta dal suolo o semplicemente diffusa, che valorizza con effetto la vostra casa o contesti architettonici. costruiti in acciaio o alluminio resistenti agli agenti atmosferici.

### LED IN-GROUND

Series of inground spotlights, walkable and driveways for outdoor, are perfectly integrated into both classic and modern environments, can have a direct illumination from the ground or simply widespread, with effect that enhances your home or architectural settings. made of steel or aluminum, weather resistant.

LED-BARRET-R24  
8031440364416

4000K

1W 3,5V  
DC

80 Lumen

40°

>10 000 on/off




driver output min.  
1w 3,5V 350mA  
non include - not included


h 25 000

Connessione in serie  
Serie connection sistem

Driver page 343  
I-DRIVER/3W IP67  
I-DRIVER/18W

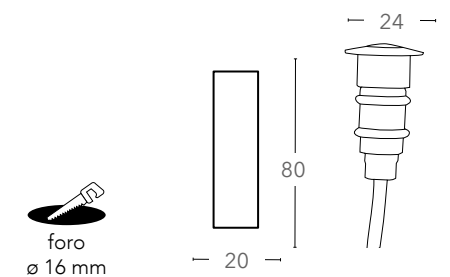

foro  
ø 16 mm



## RIDER


Kit segnapassi in alluminio incasso a pavimento o parete LED integrato finitura nickel  
LED built-in aluminium in ground or wall spot light nickel finish




informazioni tecniche - technical information

LED-RIDER-R6-DIR  
8031439921279

4000K 6X0,6W 100 Lumen 105° >10 000 on/off h 25 000 driver incluso

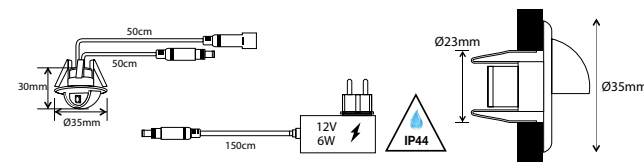

foro  
ø 23 mm



## RIDER



Kit segnapassi in alluminio incasso a pavimento o parete LED integrato finitura nickel  
LED built-in aluminium in ground or wall spot light nickel finish




informazioni tecniche - technical information

LED-RIDER-R6  
8031436141236

4000K 6X0,6W 100 Lumen 120° >10 000 on/off

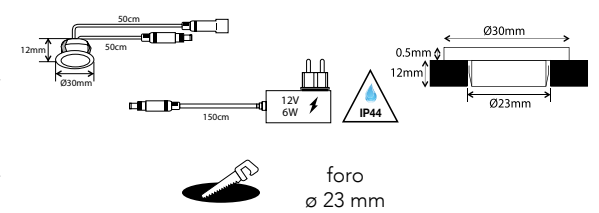


foro  
ø 23 mm

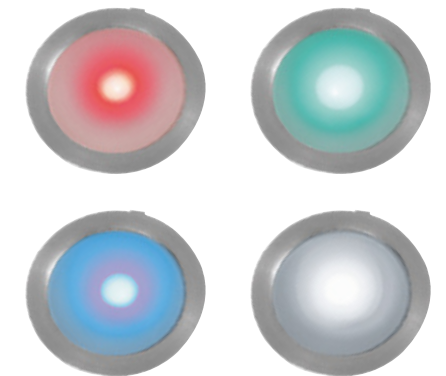


informazioni tecniche - technical information

LED-RIDER-R6-RGB  
8031439871260

4000K 6X0,6W 100 Lumen 120° >10 000 on/off

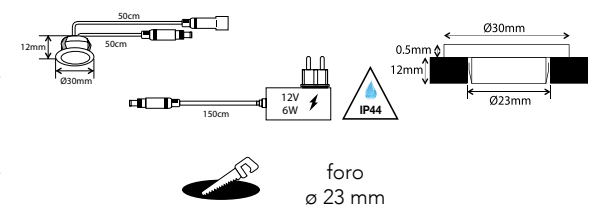

foro  
ø 23 mm



## STEP

Kit segnapassi in alluminio incasso a pavimento o parete LED integrato finitura nickel  
LED built-in aluminium in ground or wall spot light nickel finish



informazioni tecniche - technical information



LED-STEP-R-4  
8031434011210



1W 3,5V DC



driver output min.  
1w 3,5V 350mA  
non include - not included



foro  
ø 35 mm

Connessione in serie  
Serie connection sistem

Driver page 343  
I-DRIVER/3W IP67  
I-DRIVER/18W





informazioni tecniche - technical information




LED-STEP-R-1  
8031434001211



1W 3,5V DC




driver output min.  
1w 3,5V 350mA  
non include - not included



foro  
ø 35 mm

Connessione in serie  
Serie connection sistem

Driver page 343  
I-DRIVER/3W IP67  
I-DRIVER/18W



## IMPACT

Kit segnapassi in alluminio incasso a pavimento o parete LED integrato finitura nickel  
LED built-in aluminium in ground or wall spot light nickel finish




informazioni tecniche - technical information




LED-IMPACT-Q-1W  
803143440331272



1W 3,5V DC



driver output min.  
1w 3,5V 350mA  
non include - not included



foro  
ø 35 mm

Connessione in serie  
Serie connection sistem

Driver page 343  
I-DRIVER/3W IP67  
I-DRIVER/18W





informazioni tecniche - technical information




LED-IMPACT-R-1W  
8031440321273



1W 3,5V DC




driver output min.  
1w 3,5V 350mA  
non include - not included



foro  
ø 35 mm

Connessione in serie  
Serie connection sistem

Driver page 343  
I-DRIVER/3W IP67  
I-DRIVER/18W





## WALK

Faro calpestabile da incasso a pavimento LED integrato acciaio inox  
Walkable stainless steel built-in LED light



informazioni tecniche - technical information

LED-WALK-Q7 8031440355599	4000K	3W	240 Lumen	30°			>10 000 on/off		h 25 000	230V DRIVER FREE
LED-WALK-Q11 8031440355575	4000K	10W	800 Lumen	30°			>10 000 on/off		h 25 000	230V DRIVER FREE
LED-WALK-Q14 8031440355551	4000K	15W	1200 Lumen	30°			>10 000 on/off		h 25 000	230V DRIVER FREE

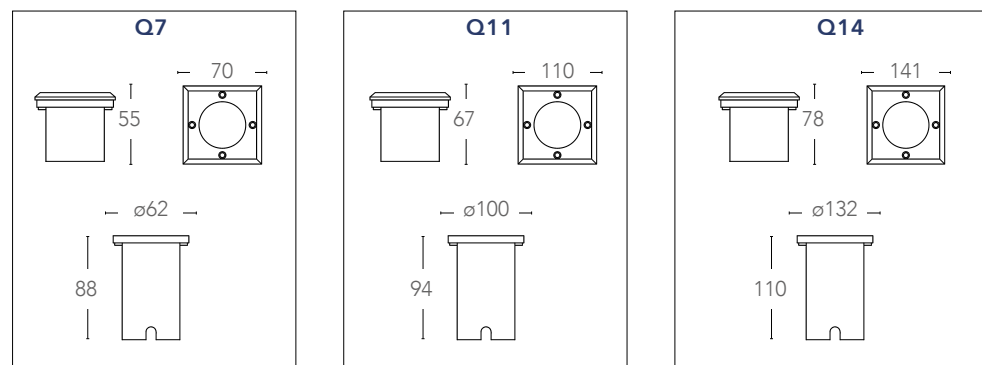



## WALK

Faro calpestabile da incasso a pavimento LED integrato acciaio inox  
Walkable stainless steel built-in LED light



informazioni tecniche - technical information

LED-WALK-R7 8031440355582	4000K	3W	240 Lumen	30°			>10 000 on/off		h 25 000	230V DRIVER FREE
LED-WALK-R11 8031440355568	4000K	10W	800 Lumen	30°			>10 000 on/off		h 25 000	230V DRIVER FREE
LED-WALK-R14 8031440355544	4000K	15W	1200 Lumen	30°			>10 000 on/off		h 25 000	230V DRIVER FREE

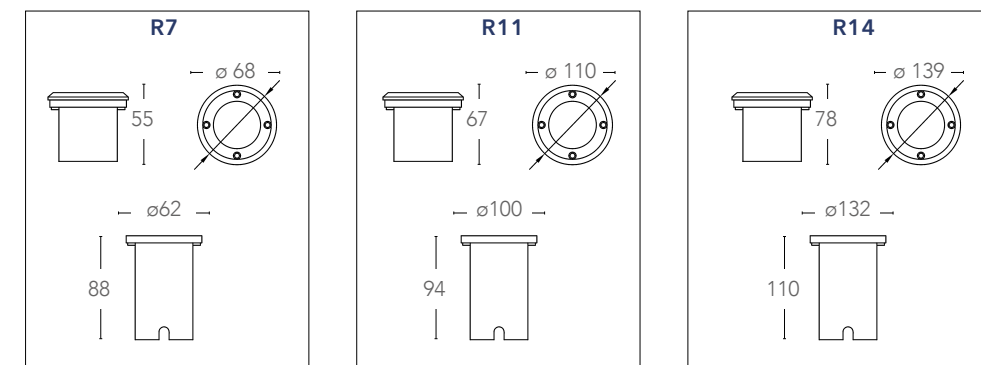

## DRIVE


Faro calpestabile da incasso a pavimento acciaio inox  
Walkable stainless steel built-in



informazioni tecniche - technical information

I-DRIVE-R1  
8031440313261


1xGU10 max 42w  
non include - not included

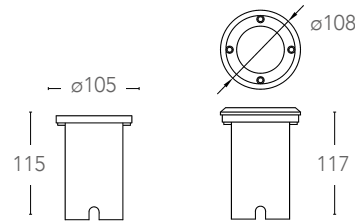

informazioni tecniche - technical information

I-DRIVE-M-R1  
8031440313247


1xGU10 max 42w  
non include - not included

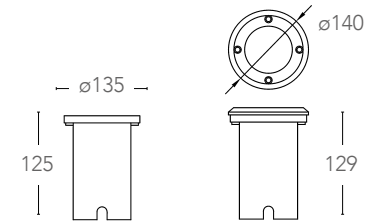

informazioni tecniche - technical information

I-DRIVE-Q1  
8031440313254


1xGU10 max 42w  
non include - not included

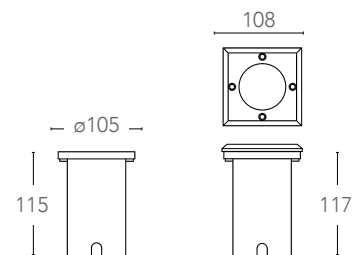

informazioni tecniche - technical information

I-DRIVE-E27  
8031440313230

1xE27 max 60w  
non include - not included

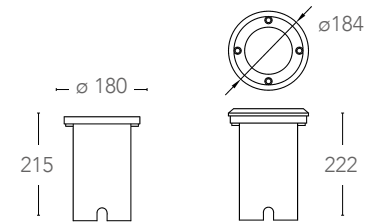

## ONYX

Incasso a parete segnapassi in alluminio LED integrato finitura gofrato nero o bianco  
LED built-in aluminium in ground or wall spot light nickel finish



informazioni tecniche - technical information

INC-ONYX-Q1 NERO  
8031440361262



2W

144 Lumen



45°



>10 000 on/off

h 25 000

230V  
DRIVER FREE

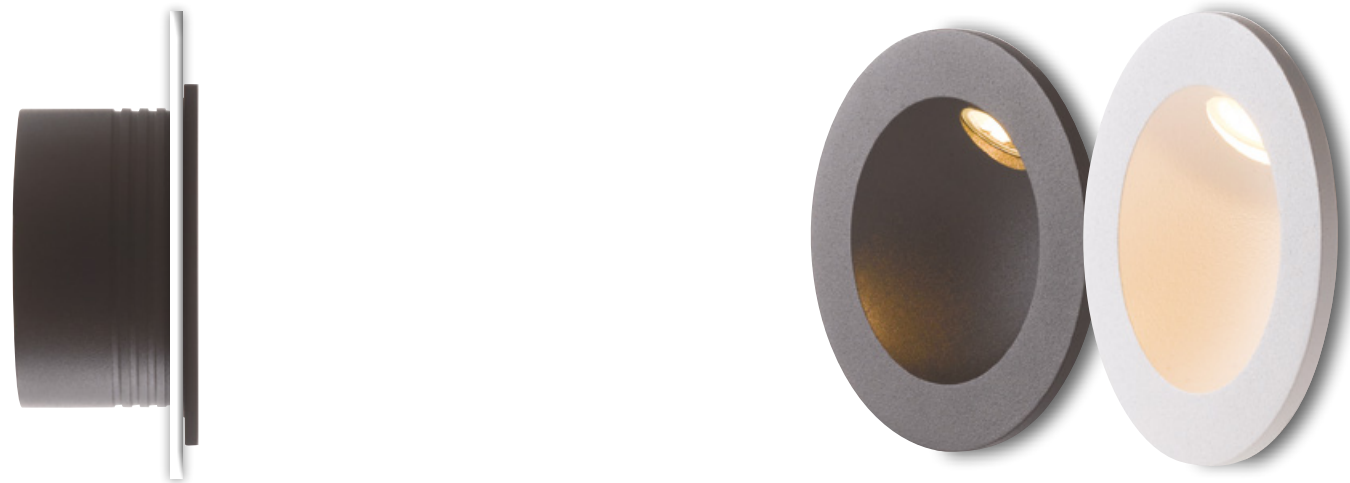

informazioni tecniche - technical information

INC-ONYX-R1 NERO  
8031440361225



2W

144 Lumen

45°



>10 000 on/off

h 25 000

230V  
DRIVER FREE

INC-ONYX-R1 BCO  
8031440361248



2W

144 Lumen



45°



>10 000 on/off

h 25 000

230V  
DRIVER FREE



## SHELBY

Applique a LED in alluminio  
Aluminium LED wall lamp



informazioni tecniche - technical information

LED-W-SHELBY-130  
8031440361002



4W

120Lumen



>10 000 on/off

h 25 000

driver incluso

LED-W-SHELBY-170  
8031440361019



6W



240 Lumen



>10 000 on/off

h 25 000

driver incluso

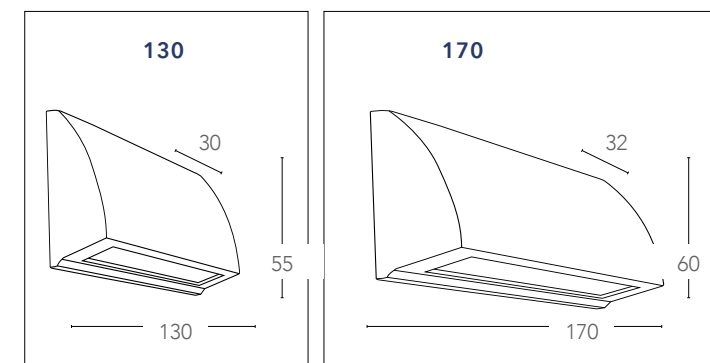



## LYKAN

Kit segnapassi in alluminio incasso a pavimento o parete LED integrato finitura nickel  
LED built-in aluminium in ground or wall spot light nickel finish



informazioni tecniche - technical information

INC-LYKAN-RT  
8031440361057



## LYKAN

Kit segnapassi in alluminio incasso a pavimento o parete LED integrato finitura nickel  
LED built-in aluminium in ground or wall spot light nickel finish






informazioni tecniche - technical information

INC-LYKAN-Q90  
8031440361033



INC-LYKAN-Q140  
8031440361040

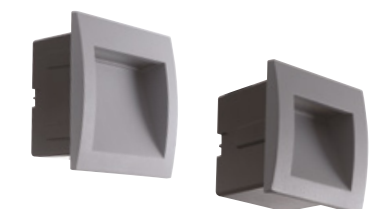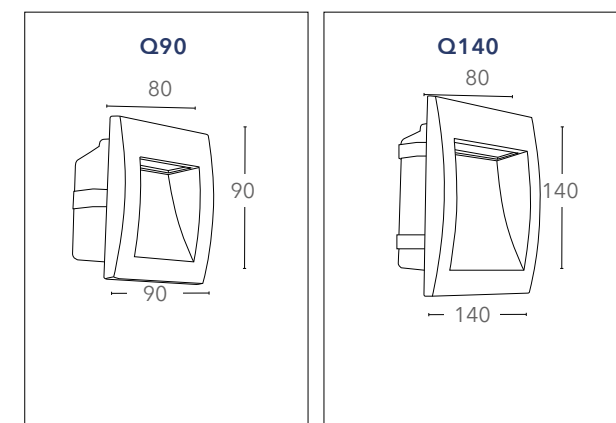

## BOLT

Kit segnapassi in alluminio incasso a pavimento o parete LED integrato finitura nickel  
LED built-in aluminium in ground or wall spot light nickel finish



informazioni tecniche - technical information

INC-BOLT-GRILL  
8031440363532

4000K 6W 480 Lumen 120° IP54 >15 000 on/off h 25 000 driver incluso





informazioni tecniche - technical information

INC-BOLT-Q71  
8031440363556

4000K 3W 240 Lumen 120° IP54 >15 000 on/off h 25 000 driver incluso

INC-BOLT-RT170  
8031440363525

4000K 6W 480 Lumen 120° IP54 >15 000 on/off h 25 000 driver incluso

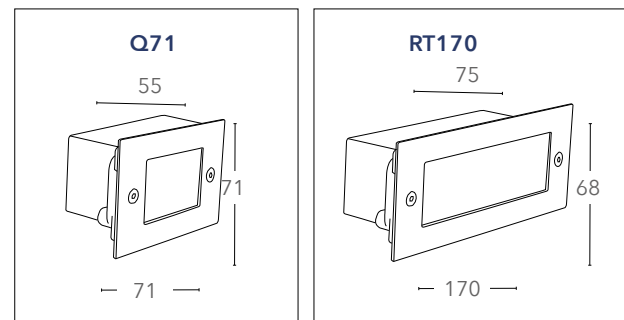

## AKRON


Faro in alluminio con picchetto incluso  
Aluminium flood light with spike included



informazioni tecniche - technical information


I-AKRON-PR  
8031440312219

1xGU10 max 42w non include - not included IP44

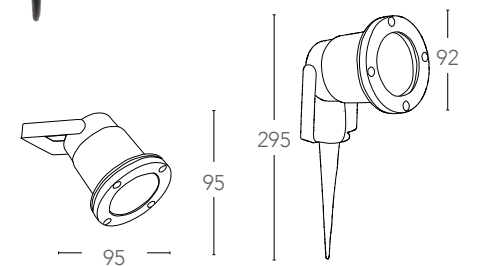

## KRONOS


Proiettore LED integrato con picchetto finitura silver  
LED built-in LED flood light with spike silver finish

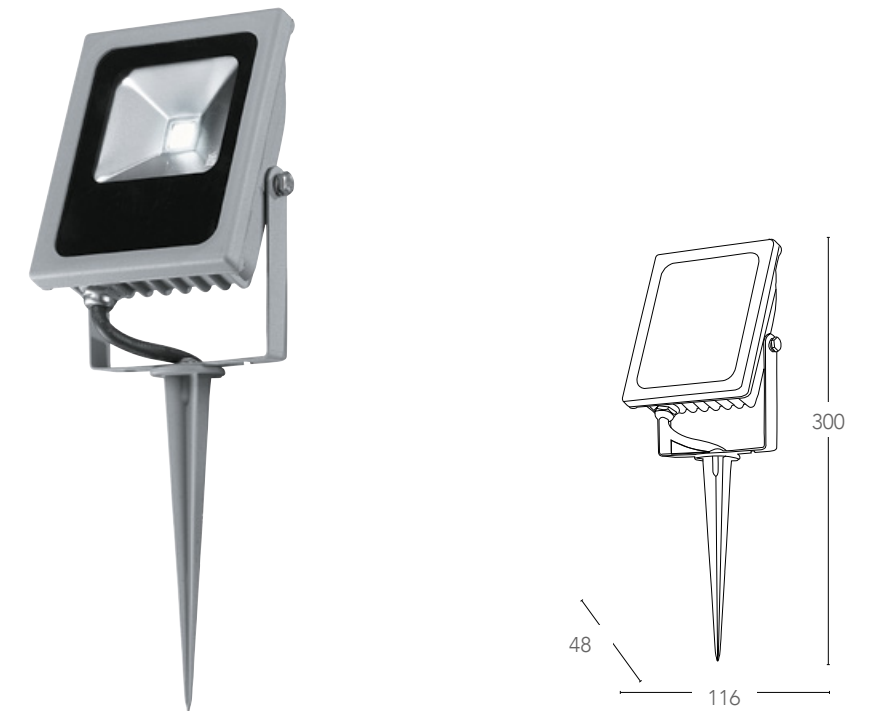

informazioni tecniche - technical information

LED-KRONOS/SPK-10W  
8031435991238

4000K 10W 800 Lumen 120° IP65 >10 000 on/off h 20 000 driver incluso





### PROIETTORI

la nostra gamma di fari a LED e alogeni , adatti per illuminare sia i dettagli che i più ampi spazi esterni con sensore di movimento , telecamera e connessione WIFI costruiti in pressofusione di alluminio , resistenti agli agenti atmosferici

### FLOOD LIGHT

Our range of LED and halogen flood lamps , suitable for illuminating both the details that the most wide open spaces with motion sensor, camera and WIFI connection made of die-cast aluminum, weather resistant

### COSMO

Proiettore LED con sensore in policarbonato alimentato a batteria colore nero  
LED flood light in polycarbonate material powered by battery black color



informazioni tecniche - technical information

LED-COSMO/S  
8031439821265

4000K 2X0,5W 80 Lumen 120°

IP44 10-2000LUX 5sec.- 5Min. 1-12m

140° >10 000 on/off 3x1,2V AAA h 25 000

185 93

### COSMO

Proiettore LED con sensore ricaricabile tramite pannello solare colore nero  
LED flood light with sensor rechargeble by solar panel black color



informazioni tecniche - technical information

LED-COSMO/S-FV  
8031439841263

4000K 2X0,5W 80 Lumen 120°

IP44 10-2000LUX 5sec.- 5Min. 1-12m

140° >10 000 on/off 3x1,2V AAA include included h 25 000

185 93 60 91 3400





## SHEDAR

Proiettore orientabile LED integrato con sensore colore nero  
LED built-in adjustable flood lamp with sensor black color



### informazioni tecniche - technical information

LED-SHEDAR-S/10W 8031439971274	4000K	10W	720 Lumen	120°	10-2000LUX 10sec.- 60Sec.	120°	>10 000 on/off	driver incluso
	IP44				8m			
LED-SHEDAR-S/20W 8031439981273	4000K	20W	1440 Lumen	120°	10-2000LUX 5sec.- 5Min.	140°	>10 000 on/off	driver incluso
	IP44				1-12m			

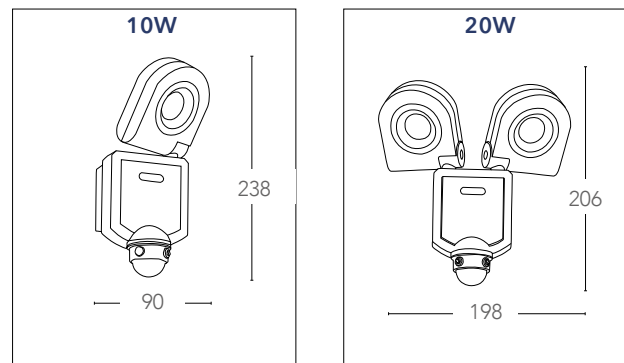


## SHEDAR

Proiettore orientabile LED integrato colore bianco  
LED Built-in adjustable flood lamp white color



### informazioni tecniche - technical information

LED-SHEDAR/10W 8031440001274	4000K	10W	720 Lumen	120°	10-2000LUX 10sec.- 60Sec.	120°	>10 000 on/off	h 25 000	driver incluso
	IP44								
LED-SHEDAR/20W 8031440011273	4000K	20W	1440 Lumen	120°	10-2000LUX 5sec.- 5Min.	140°	>10 000 on/off	h 25 000	driver incluso
	IP44								

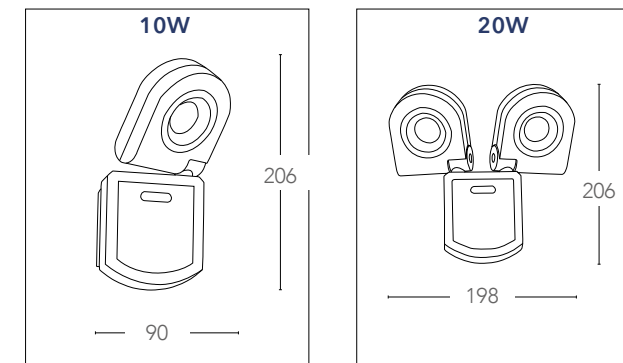

# VYSOR

Proiettore LED 2 teste con sensore e video camera collegamento ad app  
Built-in LED aluminium flood lamp silver finish



Angolo di rilevazione sensore Sensor detection degree	180 Degree
Rilevazione sensore Sensor detection range	Max.12M
Lux crepuscolare LUX control Level	10±10LUX- daylight
Regolazione tempo accensione Delay time	From 10±5Seconds to 20±5Minutes
Sensibilità Lux e durata sensore Sensor delay time/Lux /sensitivity	Regolabile dalla APP Can be adjustable by APP
Chiave reset Reset Key	incluso included
Antenna	inclusa/fino a 20 mt in area aperta Build in Antenna(Over 20Meters when in open areas)
Formato compressione video Video Compression Format	H.264
Risoluzione Resolution	1280*720
Numero frame frame number	20fps
Max supporto SD card Max supported SD Card	32G
Formato SD SD Card Format	WFS
Registrazione video/foto con sensore attivato, sia di giorno che di notte Video/Photos recording operate when sensor is triggered ,no matter at night or at daylight	Si Yes
Controllo automatico esposizione Automatic exposure control	Si Yes
bilanciamento dei bianchi white balance	Si Yes
luminosità sharpness	Si Yes
Angolo azione camera Camera degreee	120 degree
formato video Video format	H.264
Sistema operativo compatibile con APP APP supported version	iOS7.0 (and later) and Android 4.4. (and later)

## informazioni tecniche - technical information

LED-VYSOR-PRO  
80314403588897

4000K

2X10W

1600 Lumen





180°

>10 000 on/off

230V  
DRIVER FREE

IP44

h 25 000

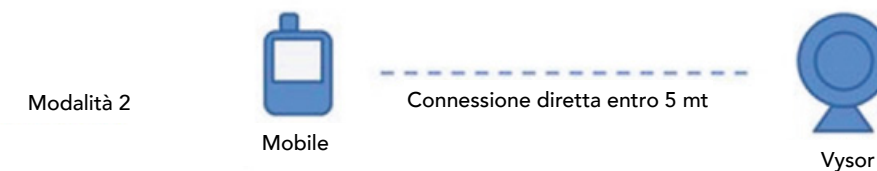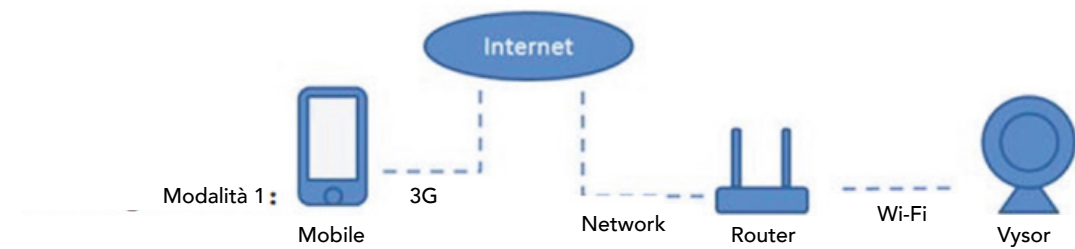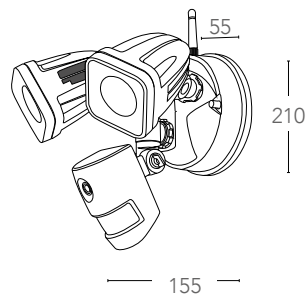



## TITAN

Proiettore in alluminio LED integrato finitura silver  
Built-in LED aluminium flood lamp silver finish



informazioni tecniche - technical information

LED-TITAN/10W 8031437941255	4000K	10W	800 Lumen	120°	IP65	>10 000 on/off	h 25 000	driver incluso	
LED-TITAN/30W 8031437931256	4000K	30W	2400 Lumen	120°	PF 0,90	IP65	>10 000 on/off	h 25 000	driver incluso
LED-TITAN/50W 8031437911258	4000K	50W	4000 Lumen	120°	PF 0,90	IP65	>10 000 on/off	h 25 000	driver incluso

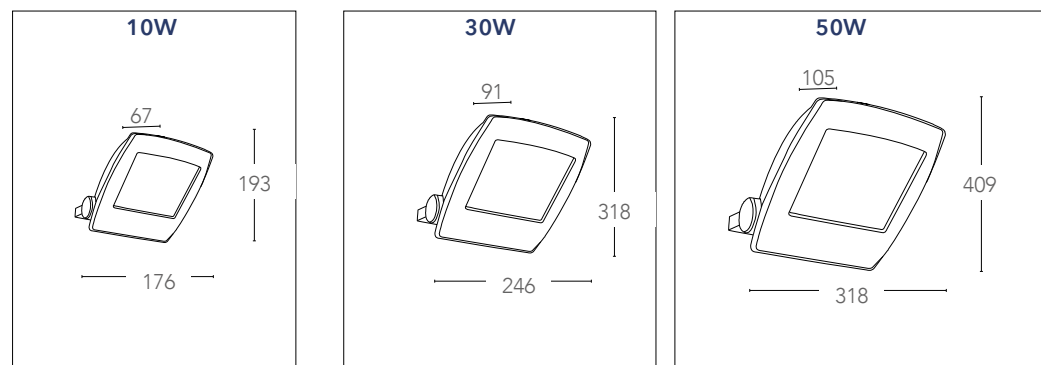


## TITAN

Proiettore in alluminio LED integrato finitura silver con sensore  
Built-in LED aluminium flood lamp silver finish



informazioni tecniche - technical information

LED-TITAN-S/10W 8031440360616	4000K	10W	800 Lumen	120°	IP44	>10 000 on/off	h 25 000	driver incluso





# KRONOS

Proiettore in alluminio LED integrato finitura bianco goffrato  
 Built-in LED aluminium flood lamp embossed white finish



## informazioni tecniche - technical information

LED-KRONOS/10W 8031436031230	4000K	10W	800 Lumen	120°	IP65	>15 000 on/off	h 25 000	driver incluso
LED-KRONOS/20W 8031436001233	4000K	20W	1600 Lumen	120°	IP65	>15 000 on/off	h 25 000	driver incluso
LED-KRONOS/50W 8031436011232	4000K	50W	4000 Lumen	120°	PF 0,90	>15 000 on/off	h 25 000	driver incluso

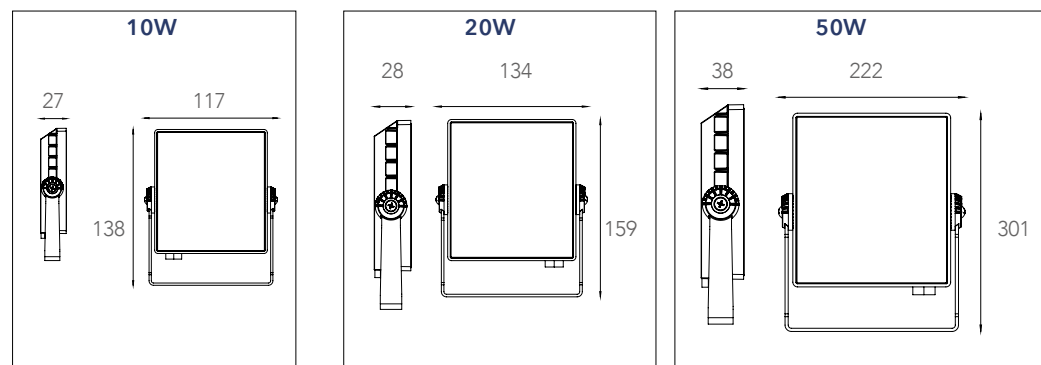



## ELIOS

Proiettore in alluminio finitura silver LED integrato  
Built-in LED aluminium flood lamp silver finish



### informazioni tecniche - technical information

LED-ELIOS/10W 8031431291189	4000K	10W	800 Lumen	120°	IP65	>15 000 on/off	h 25 000	driver incluso
LED-ELIOS/20W 8031431281180	4000K	20W	1600 Lumen	120°	IP65	>15 000 on/off	h 25 000	driver incluso
LED-ELIOS/30W 8031437391241	4000K	30W	2400 Lumen	120°	PF 0,90 IP65	>15 000 on/off	h 25 000	driver incluso
LED-ELIOS/50W 8031432091191	4000K	50W	4000 Lumen	120°	PF 0,90 IP65	>15 000 on/off	h 25 000	driver incluso

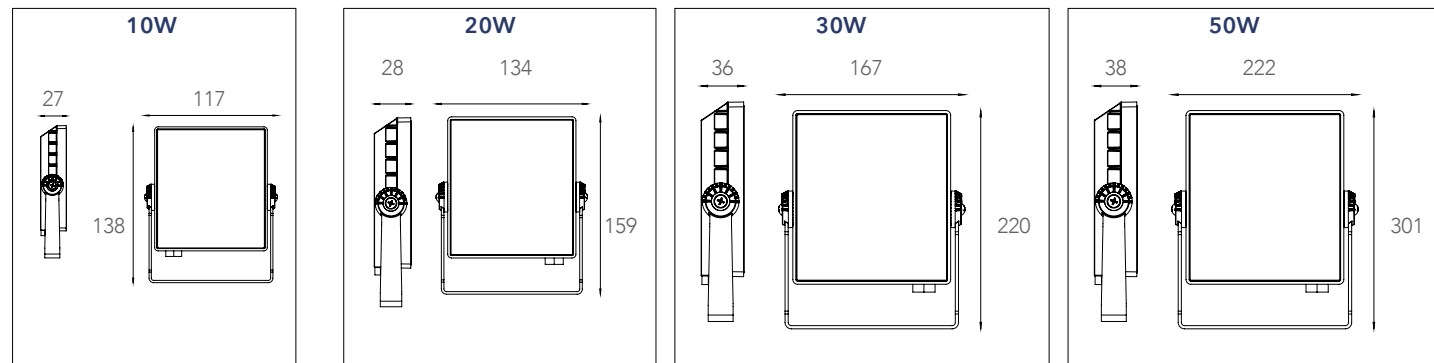



## ELIOS

Proiettore in alluminio finitura silver LED integrato con sensore  
Built-in LED aluminium flood lamp silver finish with sensor



### informazioni tecniche - technical information

LED-ELIOS-S/10W 8031437381242	4000K	10W	800 Lumen	120°	IP44	>10 000 on/off	driver incluso	120° >30 Lux 0-10 Lux 50 sec. MAX 12m
LED-ELIOS-S/30W 8031436391235	4000K	30W	2400 Lumen	120°	IP44	>10 000 on/off	driver incluso	120° >30 Lux 0-10 Lux 50 sec. MAX 12m

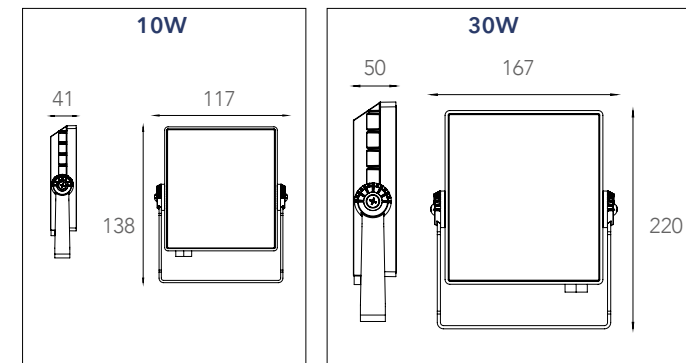

## ELIOS

Proiettore LED con sensore e pannello solare policristallino  
LED flood light with sensor and polycrystalline solar panel



informazioni tecniche - technical information

LED-ELIOS-SOLAR  
8031440355124



9W

620 Lumen



INCL. 120°



>10 000 on/off

driver incluso





LUX 2 - LUX 2000  
10SEC. - 1MIN.



h 25 000

lithium 7,4V 1800 mAh

carica/recharge 12h

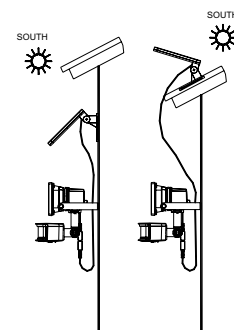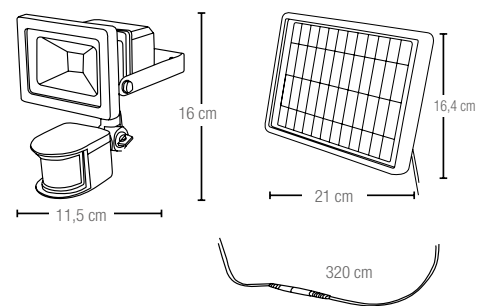

## ELIOS

Proiettore LED portatile  
LED portable flood light



informazioni tecniche - technical information

LED-ELIOS-P/20W  
8031436381236



20W

1600 Lumen



PF 0,90





>15 000 on/off




h 20 000

driver incluso

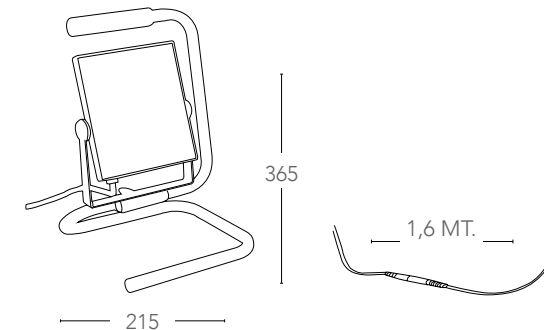

## ELIOS


Proiettore in alluminio finitura silver LED integrato  
Built-in LED aluminium flood lamp silver finish

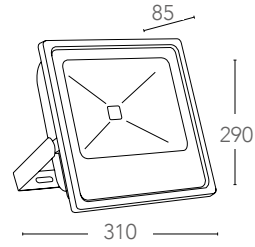

informazioni tecniche - technical information

LED-ELIOS/80W  
8031440357142


6000K 80W 6400 Lumen 120° PF 0,90 IP65 >10 000 on/off h 25 000 driver incluso

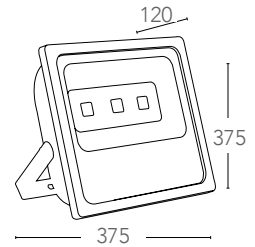

informazioni tecniche - technical information

LED-ELIOS/150W  
8031440357128


6000K 150W 12000 Lumen 120° PF 0,90 IP65 >10 000 on/off h 25 000 driver incluso

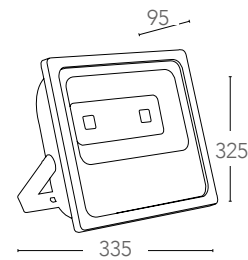

informazioni tecniche - technical information

LED-ELIOS/100W  
8031440357159

6000K 100W 8000 Lumen 120° PF 0,90 IP65 >10 000 on/off h 25 000 driver incluso

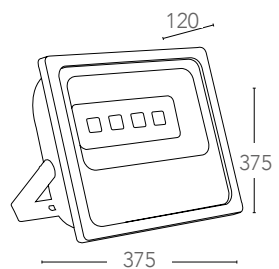

informazioni tecniche - technical information

LED-ELIOS/200W  
8031440357135

6000K 200W 16000 Lumen 120° PF 0,90 IP65 >10 000 on/off h 25 000 driver incluso




## URANO

Proiettore alogeno in alluminio  
Halogen flood lamp

### informazioni tecniche - technical information



**I-URANO-S/120W**  
8031438451258

1xR7s max 120w  
non include - not included

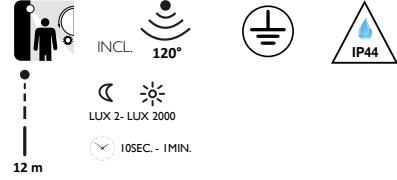

**I-URANO-S/400W**  
8031438401253

1xR7s max 400w  
non include - not included

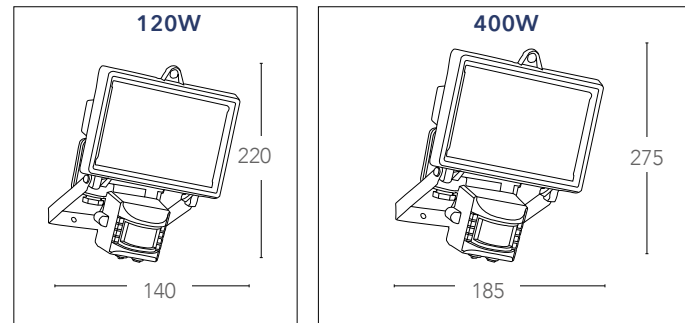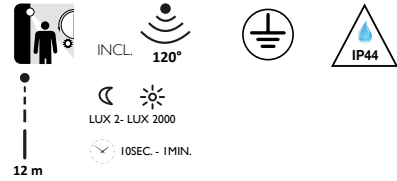

## URANO

Proiettore alogeno in alluminio  
Halogen flood lamp

### informazioni tecniche - technical information

**I-URANO-P/120W**  
8031438421251

1xR7s max 120w  
non include - not included



**I-URANO-P/400W**  
8031438361250

1xR7s max 400w  
non include - not included



### informazioni tecniche - technical information

### informazioni tecniche - technical information

**I-URANO/120W**  
8031438441259

1xR7s max 120w  
non include - not included





**I-URANO/400W**  
8031438681259

1xR7s max 400w  
non include - not included



**I-URANO/1000W**  
8031438371259

1xR7s max 1000w  
non include - not included

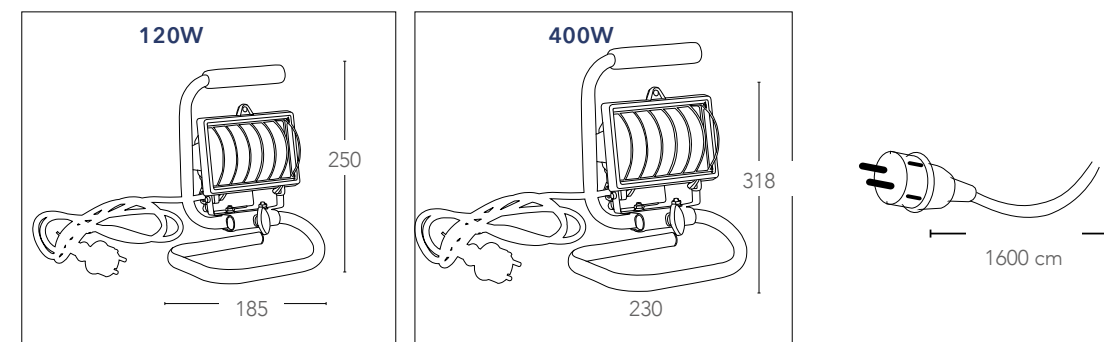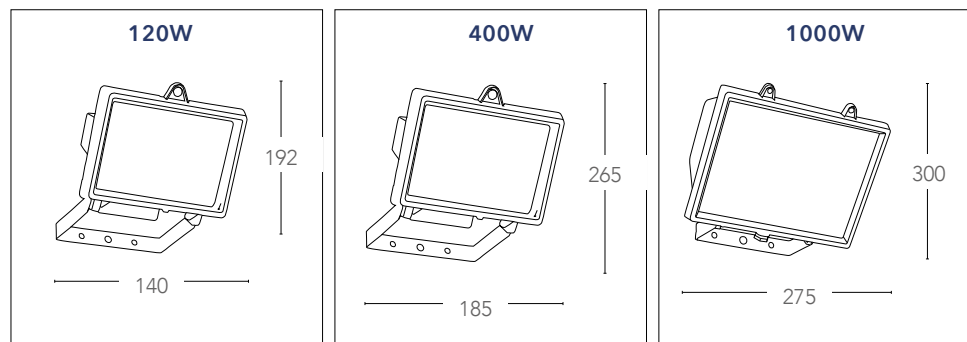

## URANO

Proiettore alogeno in alluminio  
Halogen flood lamp



## TRIPOD - FRAME

Accessori per proiettori  
Flood light accessories




informazioni tecniche - technical information


I-TRIPOD  
8031440361729



Sistema di fissaggio singolo e doppio  
Single and double connection system

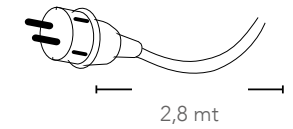

2,8 mt

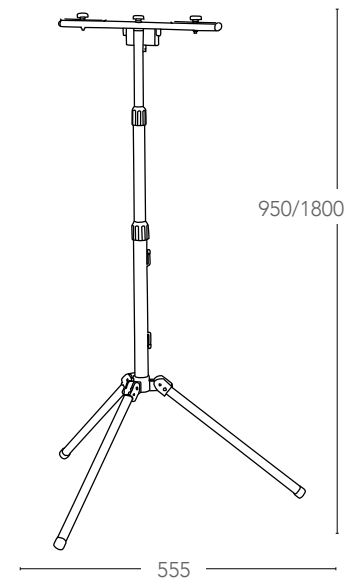

informazioni tecniche - technical information


I-URANO-T1/400W  
8031438391257

1xR7s max 400w  
non include - not included



I-URANO-T2/800W  
8031438381258

2xR7s max 400w  
non include - not included

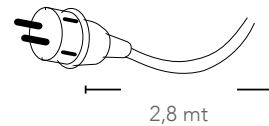

2,8 mt



I-FRAME-V-GR

8031440364584

Staffa V mobile 30° fissaggio  
parete colore **grigio**  
Metal wall arms orientable 30°  
**gray** color



I-FRAME-L-GR

8031440361880

Staffa fissaggio angolare  
colore **grigio**  
Metal corner wall arms **gray**  
color



I-FRAME-V-BCO

8031440364553

Staffa V mobile 30° fissaggio  
parete colore **bianco**  
Metal wall arms orientable 30°  
**white** color



I-FRAME-L-GR

8031440364577

Staffa fissaggio angolare  
colore **bianco**  
Metal corner wall arms **white**  
color

CE



RoHS  
WEEE COMPLIANT

CE



RoHS  
WEEE COMPLIANT



### LAMPADE INDUSTRIALI

La nostra gamma di prodotti industriali a LED appositamente disegnati per l'illuminazione di strade , capannoni , zone di lavoro , ampi spazi , emergenza , dispongono delle ultime tecnologie illuminotecniche a lunga durata che ottimizzano e premettono un grande risparmio del consumo energetico

### HIGHT BAY

*Our range of LED industrial products specially designed for the streets lighting , buildings, work areas, large spaces, emergency, have the latest long-life lighting technologies that optimize and preliminary matter a great saving of energy consumption*


## ATLANTIC ST

Armature stagne per tubi a LED bilampada in policarbonato  
Waterproof lamp for double LED tube in polycarbonate



### informazioni tecniche - technical information

LED-ATLANTIC-ST-60 88031440355315	2xT8 230V non include - not included		
LED-ATLANTIC-ST-120 8031440355322	2xT8 230V non include - not included		
LED-ATLANTIC-ST-150 8031440355292	2xT8 230V non include - not included		

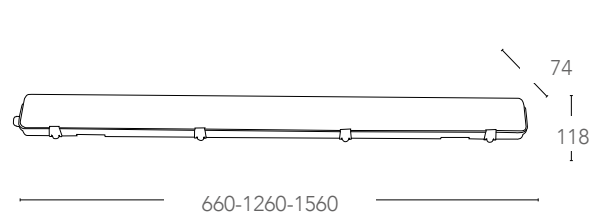



## OCEAN

Plafoniere stagno LED integrato in policarbonato  
Built-in LED waterproof ceiling lamps in polycarbonate



### informazioni tecniche - technical information

LED-OCEAN-150 8031440357791	4000K	45W	3820 Lumen			>15 000 on/off	h 25 000	driver incluso
LED-OCEAN-120 8031440357784	4000K	36W	3060 Lumen			>15 000 on/off	h 25 000	driver incluso
LED-OCEAN-60 8031440357777	4000K	18W	1530 Lm			>15 000 on/off	h 25 000	driver incluso
LED-OCEAN-30 8031440357760	4000K	9W	765 Lm			>15 000 on/off	h 25 000	driver incluso

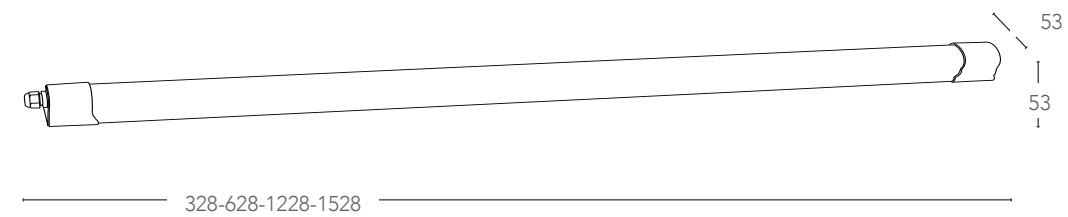


## FUTURA

Lampada LED high bay in alluminio  
Aluminium high bay LED lamp



### informazioni tecniche - technical information

LED-FUTURA-NR-100W 8031440358910	4000K	100W	9500Lumen	55°	IP40	>15 000 on/off	h 25 000	driver incluso
LED-FUTURA-NR-150W 8031440358880	4000K	150W	14500 Lumen	55°	IP40	>15 000 on/off	h 25 000	driver incluso
LED-FUTURA-NR-200W 8031440358897	4000K	200W	19500 Lumen	55°	IP40	>15 000 on/off	h 25 000	driver incluso

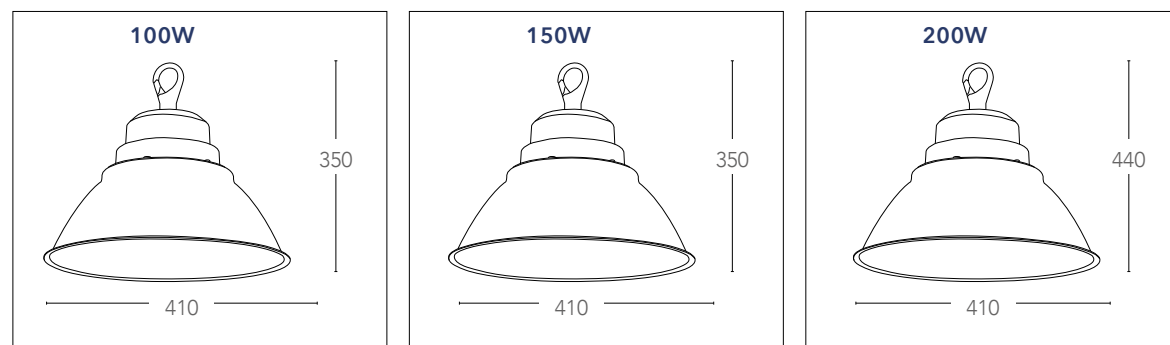



## FUTURA

Lampada LED high bay in alluminio  
Aluminium high bay LED lamp




### informazioni tecniche - technical information

LED-FUTURA-100W 8031440355254	4000K	100W	9500 Lumen	100°	IP40	>15 000 on/off	h 25 000	driver incluso
LED-FUTURA-150W 8031440355247	4000K	150W	14500 Lumen	100°	IP40	>15 000 on/off	h 25 000	driver incluso
LED-FUTURA-200W 8031440355230	4000K	200W	19500 Lumen	100°	IP40	>15 000 on/off	h 25 000	driver incluso

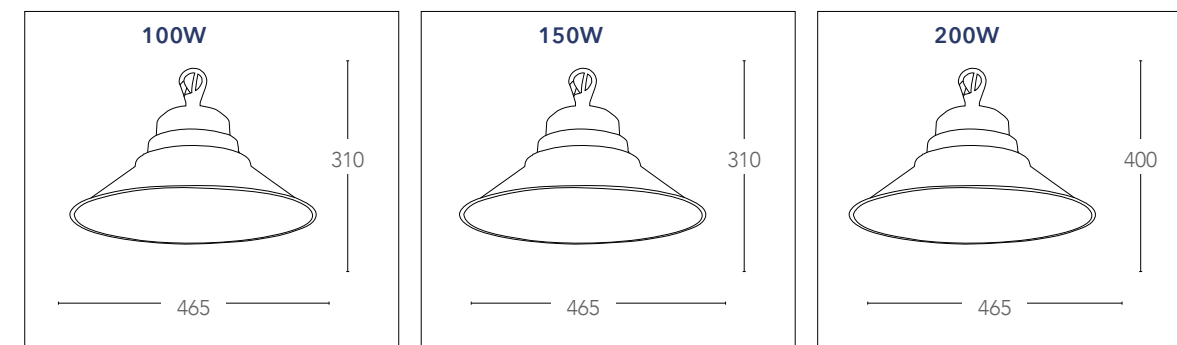



## VISION

Apparecchio stradale LED in alluminio  
Aluminium LED street light

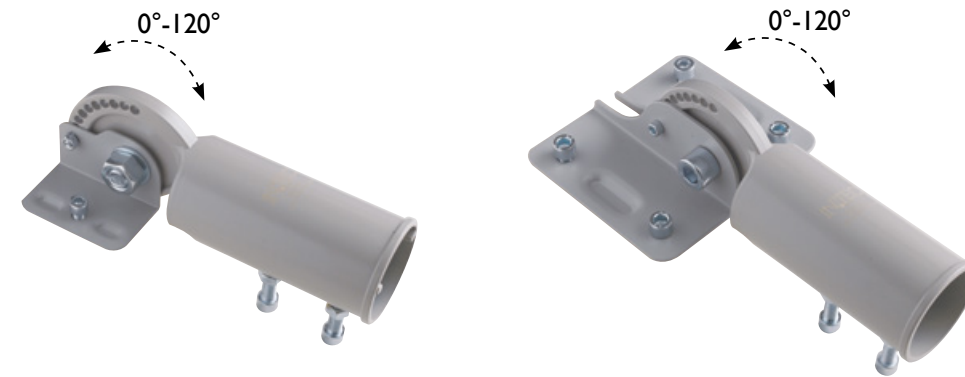

### informazioni tecniche - technical information

LED-VISION-20 8031440358866	4000K	20W	☀️ 2000 Lumen	📐 150x90°	💧 IP65	🔌 >15 000 on/off	🕒 h 40 000	🔧 driver incluso
LED-VISION-60 8031440358873	4000K	60W	☀️ 6000 Lumen	📐 150x90°	💧 IP65	🔌 >15 000 on/off	🕒 h 40 000	🔧 driver incluso
LED-VISION-100 8031440358842	4000K	100W	☀️ 10000 Lm	📐 150x90°	💧 IP65	🔌 >15 000 on/off	🕒 h 40 000	🔧 driver incluso
LED-VISION-150 8031440358859	4000K	150W	☀️ 15000 Lm	📐 150x90°	💧 IP65	🔌 >15 000 on/off	🕒 h 40 000	🔧 driver incluso
LED-VISION-ADAT50 8031440358828	Adattatore per 20W e 60W							
LED-VISION-ADAT60 8031440358835	Adattatore per 100W e 150W							

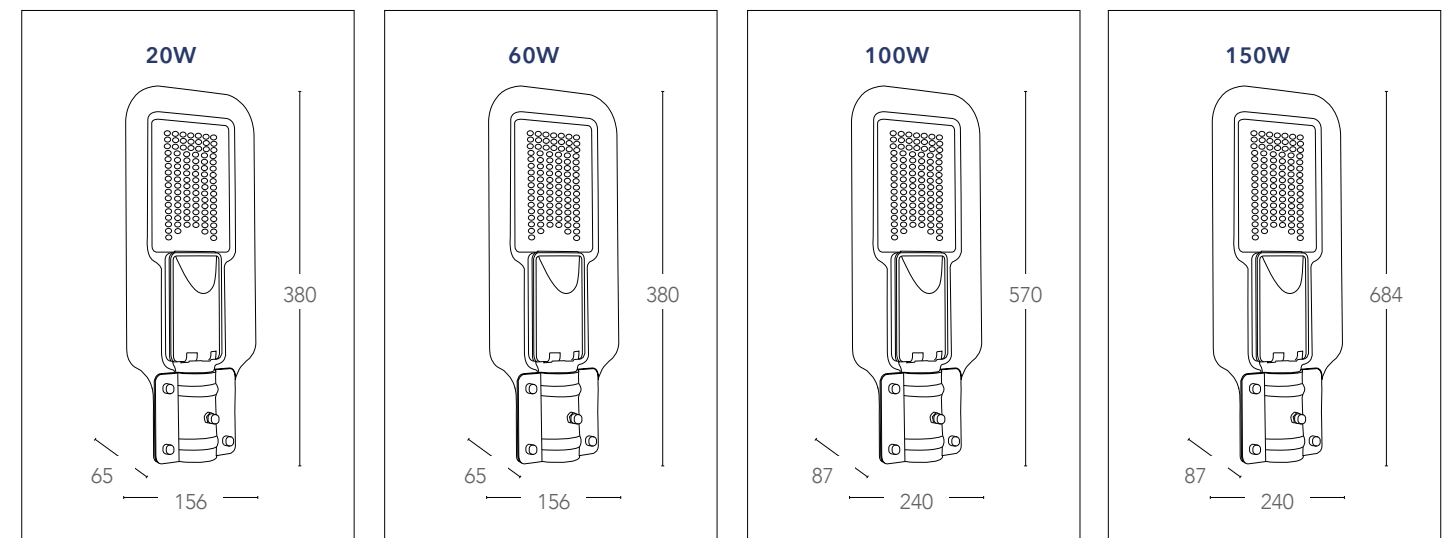

## HELP

Lampade di emergenza LED in policarbonato batteria Ni-Cd  
Emergency LED lamp in polycarbonate with Ni-Cd battery



informazioni tecniche - technical information

LED-HELP-30  
8031440354837

4000K

4W

195 Lumen

>10 000 on/off

Ni-Cd 4,8V 900 mAh



carica/recharge 12h

h 30 000

life time 4 years

3h full emergency light

adesivi inclusi - labels included

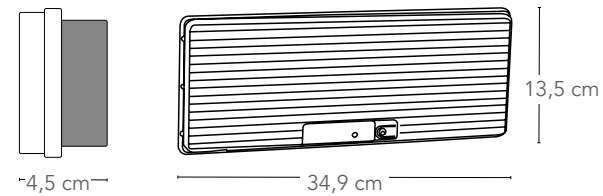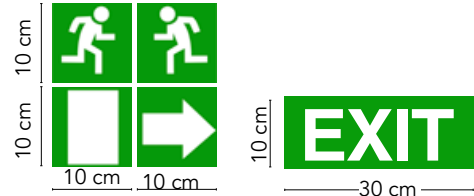

X	1	****	180
---	---	------	-----

CLASSE A



SMD



Ra >80

CE



RoHS WEEE COMPLIANT

## HELP

Lampade di emergenza LED in policarbonato batteria Ni-Cd  
Emergency LED lamp in polycarbonate with Ni-Cd battery



informazioni tecniche - technical information

LED-HELP-12  
8031440353496

4000K

3W

170 Lumen

>10 000 on/off

Ni-Cd 4,8V 900 mAh


carica/recharge 12h

h 30 000

life time 4 years

3h full emergency light

adesivo incluso - label included

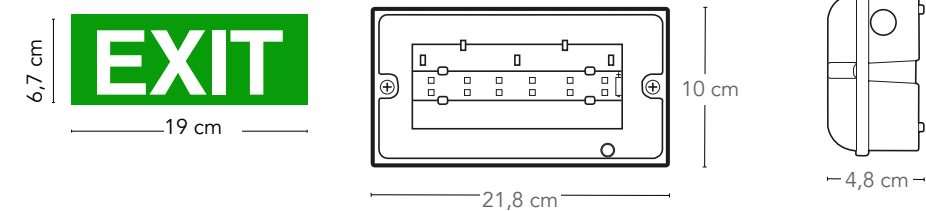

X	1	****	180
---	---	------	-----

CLASSE A



SMD



Ra >80

CE



RoHS WEEE COMPLIANT

# ETERNA

Plafoniera LED in policarbonato batteria Ni-Cd e funzione d'emergenza combinata e permanente  
 Ceiling LED lamp in polycarbonate with Ni-Cd battery and double emergency function



## informazioni tecniche - technical information

## informazioni tecniche - technical information

**LED-ETERNA-120**  
8031440358538

4000K

4W

lampada emergenza  
200 Lumen

lampada emergenza  
DC

>10 000 on/off

Ni-Cd 4,8V 900 mAh

carica/recharge 12h

IP65

plafoniera  
1600 Lumen

plafoniera  
AC

h 30 000

life time 4 years

**LED-ETERNA-54**  
8031440358521

4000K

16W

lampada emergenza  
120 Lumen

lampada emergenza  
DC

>10 000 on/off

Ni-Cd 4,8V 900 mAh

carica/recharge 12h

IP65

plafoniera  
900 Lumen





plafoniera  
AC

h 30 000

life time 4 years

3h full emergency light

3h full emergency light

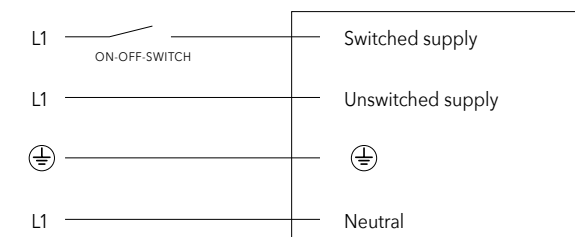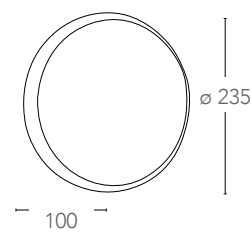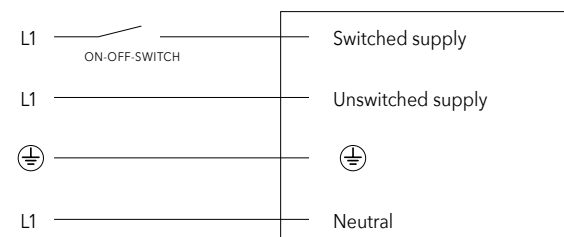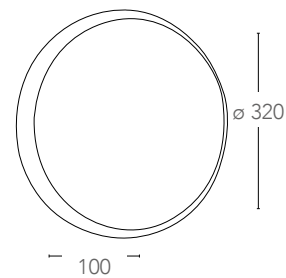

X	1	****	180	CLASSE A		SMD		Ra >80	CE		RoHS WEEE COMPLIANT
---	---	------	-----	----------	--	-----	--	--------	----	--	---------------------

X	0	****	180	CLASSE A		SMD		Ra >80	CE		RoHS WEEE COMPLIANT
---	---	------	-----	----------	--	-----	--	--------	----	--	---------------------



### LUCI DECORATIVE TECNICHE

La nostra gamma di prodotti offrono molteplici soluzioni per realizzare regie luminose per l'illuminazione decorativa di strutture architettoniche, facciate palazzi, fontane. Offerte con un'ampia gamma di fasci ed effetti luminosi, modulabili a seconda delle più svariate esigenze, costruiti in acciaio e pressofusione di alluminio, resistenti agli agenti atmosferici

### TECHNICAL DECORATION LIGHTING

*Our range of products offer multiple solutions to create lighting directions for decorative lighting of architectural structures, exterior building, fountains. Offers a wide range of beams and lighting effects, modulated according to the various needs, made of steel and die-cast aluminum, weather resistant*


# RAYS

Proiettore LED RGB full color in alluminio  
LED RGB full color lamp in aluminium




LED-RAYS-30P  
8031440358071

30X1W  
230V  
45°  
IP65

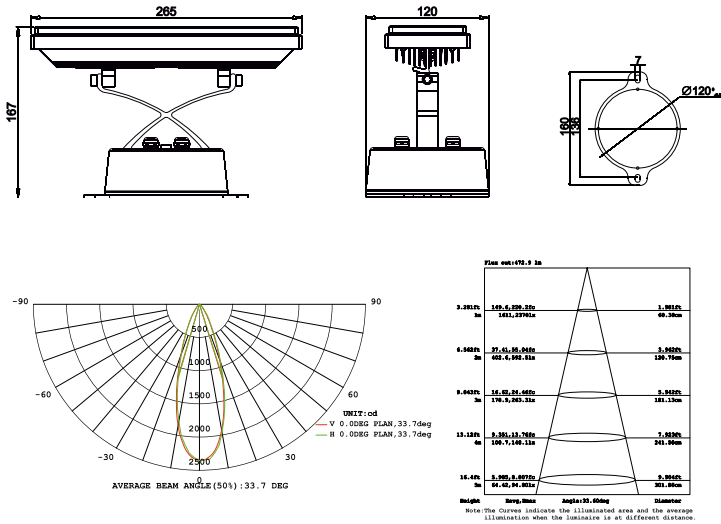


LED-RAYS-36P  
8031440355445

36X1W  
230V  
45°  
IP65

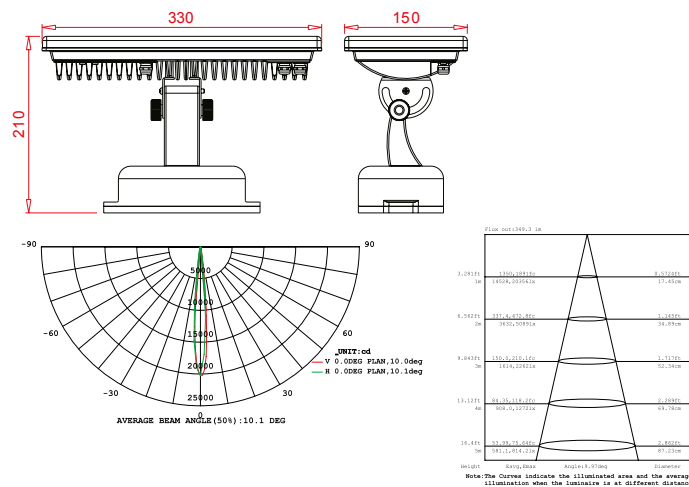

LED-RAYS-72P  
8031440358040

72X2W  
230V  
45°  
IP65

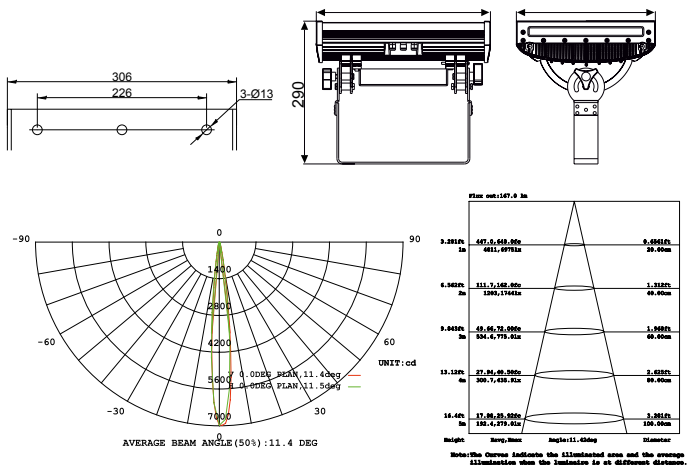



# WALLWASHER

Barra LED RGB full color in alluminio  
LED wallwasher RGB full color in aluminium





LED-WALLWASHER-18  
8031440359559

18X2W  
230V  
45°  
IP65

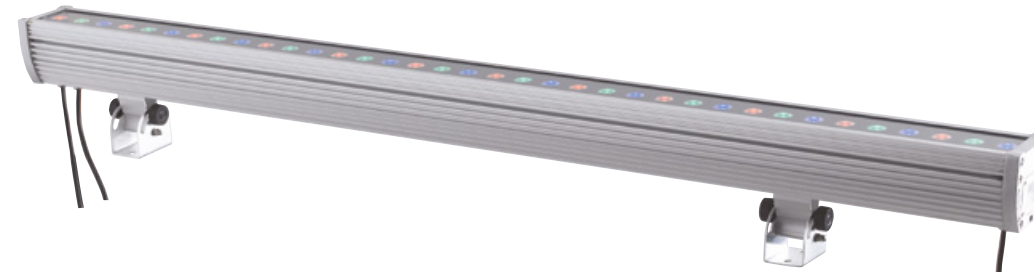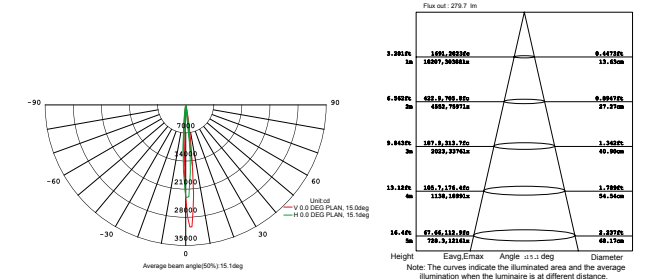

LED-WALLWASHER-36  
8031440359528

36X2W  
230V  
45°  
IP65

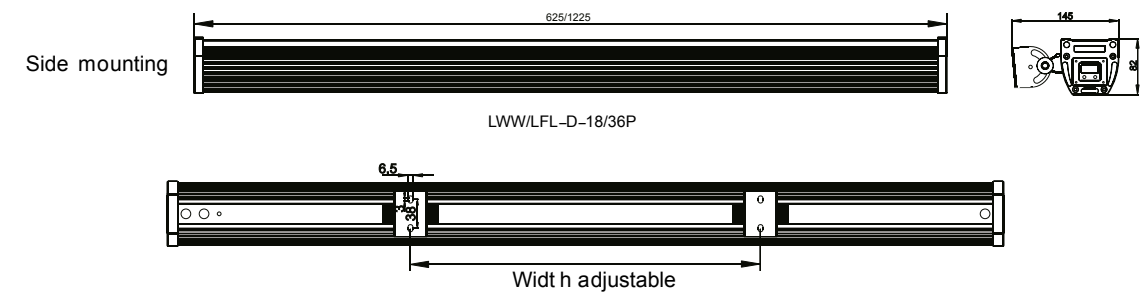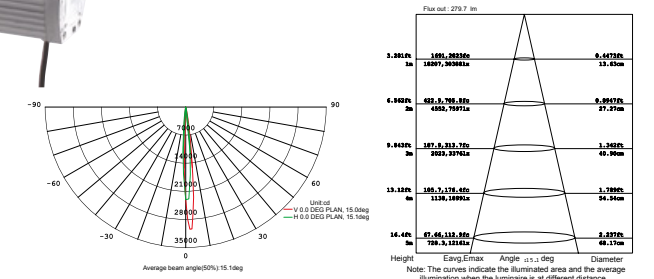

# IRIDE

Proiettore LED RGB FULL COLOR in alluminio  
LED RGB full color lamp in aluminium




**LED-IRIDE-3P**  
8031440358101

3X1W  
12-24V DC  
45°  
IP65

**LED-IRIDE-3P-BCO**  
8031440359719

6000K  
3X1W  
12-24V DC  
45°  
IP65

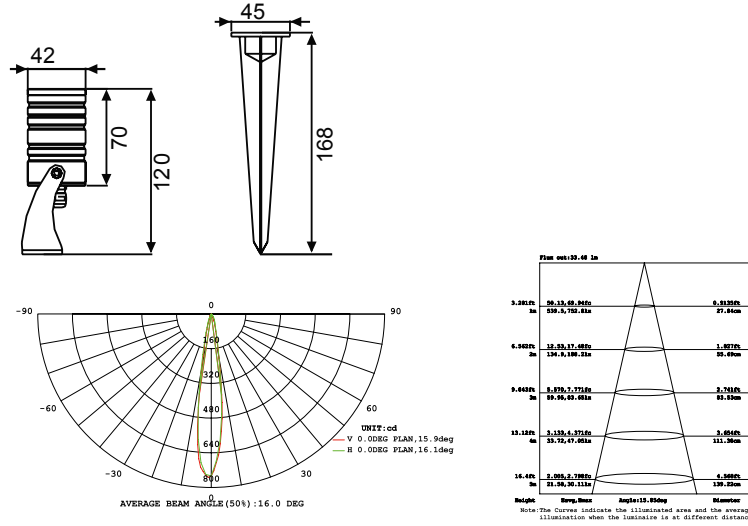


**LED-IRIDE-18P**  
8031440358088

18X1W  
12-24V DC  
40°  
IP65

**LED-IRIDE-18P-BCO**  
8031440359689

6000K  
18X1W  
12-24V DC  
30°  
IP65

1620 Lumen

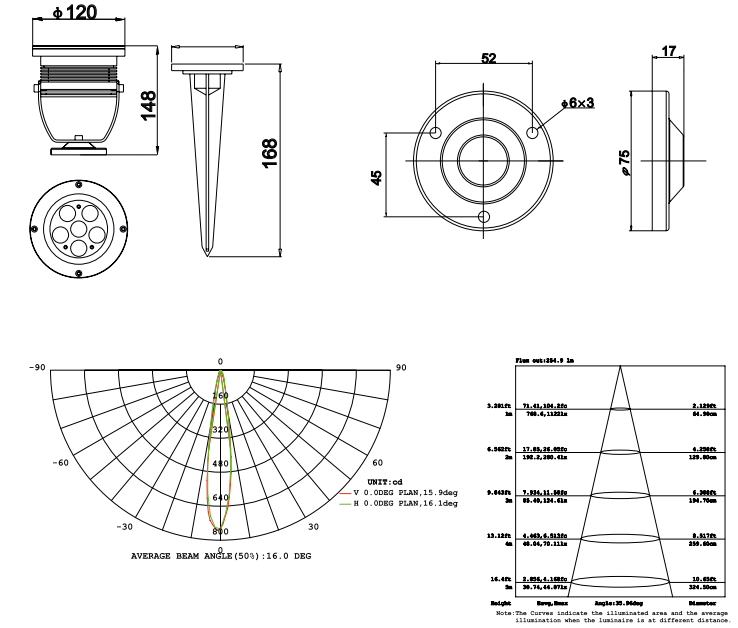


**LED-IRIDE-9P**  
8031440358118

9X1W  
12-24V DC  
40°  
IP65

**LED-IRIDE-9P-BCO**  
8031440359702

6000K  
9X1W  
12-24V DC  
30°  
IP65

720 Lumen

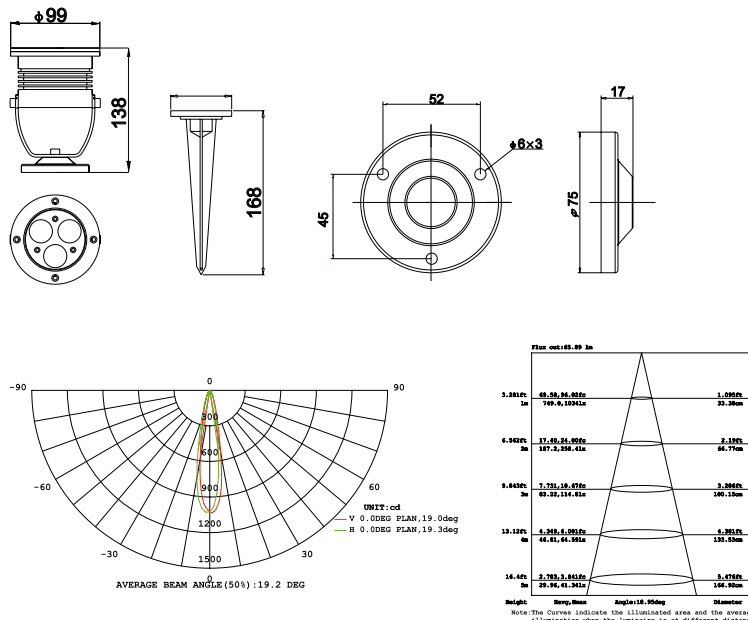

## RAINBOW

Incasso orientabile LED RGB FULL COLOR in alluminio  
 LED RGB full color adjustable down light in aluminium



### informazioni tecniche - technical information

**INC-RAINBOW-S**  
 8031440359429



3X2W



25°



40°

DC 12V

**INC-RAINBOW-M**  
 8031440359436



6X2W





25°



40°

DC 12V

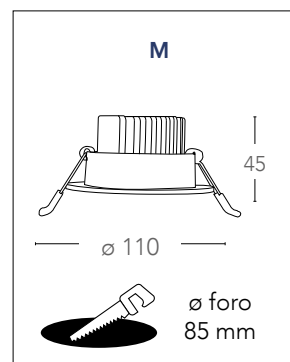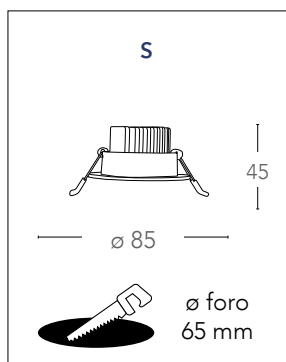



**NEPTUNE**



Proiettore LED RGB full color in alluminio  
 LED RGB full color lamp in aluminium



LED-NEPTUNE-36P  
 8031440358057



36X1W  
 24V DC

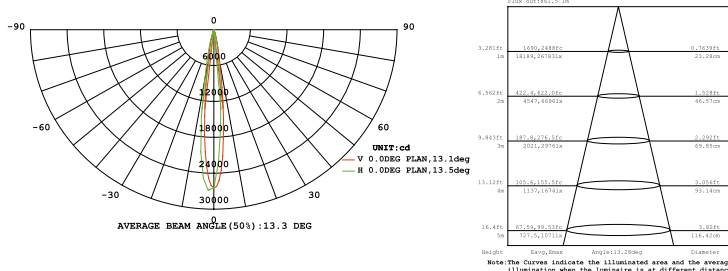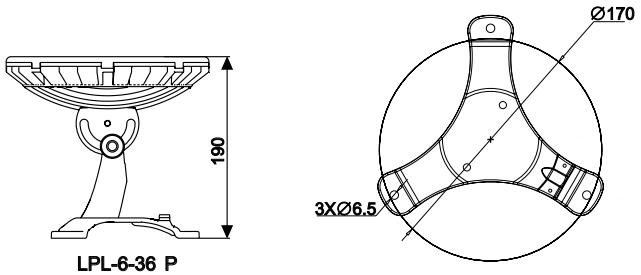



PAR56





LED-PAR56-RGB  
8031440359535




18X1W  
12V DC



CABLE INCLUDED

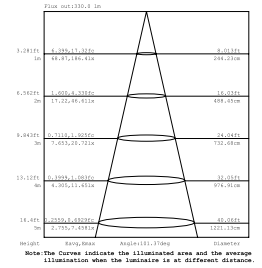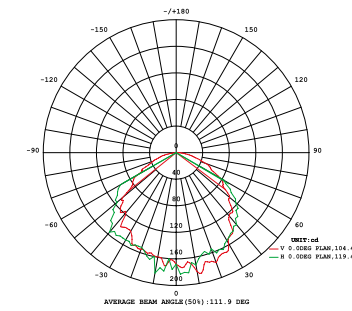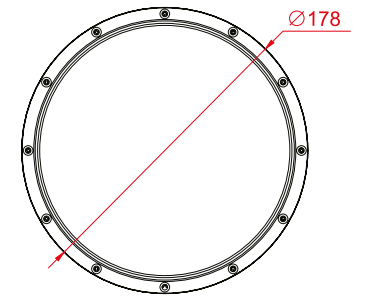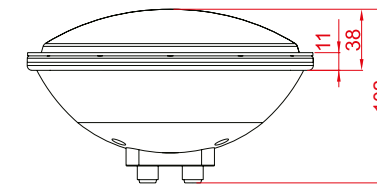

INC-POOL-PAR56 ARMATURA ABS PER PAR56  
8031440359511

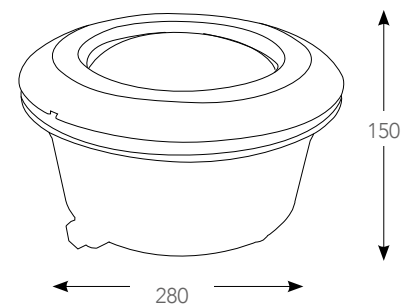





LED-PAR56-BCO  
8031440359504



18X1W  
12V DC



CABLE INCLUDED

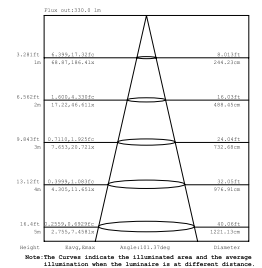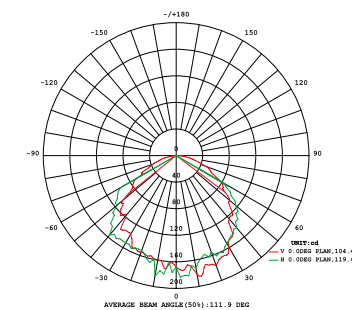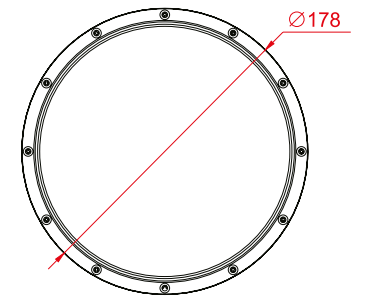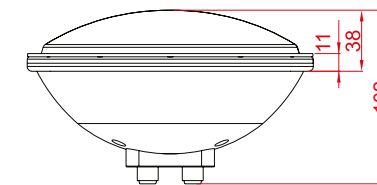

## CONTROLLER

Scatola comando fari proiettori LED 6 canali collegabili DMX 18 canali  
LED lamp control box 6 output ports, connectable with DMX 18-channel





**CONTROLLER-CTR-RGB**  
8031440358026

CONTROLLO C/PORTA DMX512 LED RGB INPUT 230V AC  
OUTPUT 12V/24V DC 300W 6 CANALI RGB (50W)


**CONTROLLER-CTR-RGB12**  
8031440355438

CONTROLLO C/PORTA DMX512 LED RGB INPUT 230V AC  
OUTPUT 12V DC 300W 6 CANALI RGB (50W)

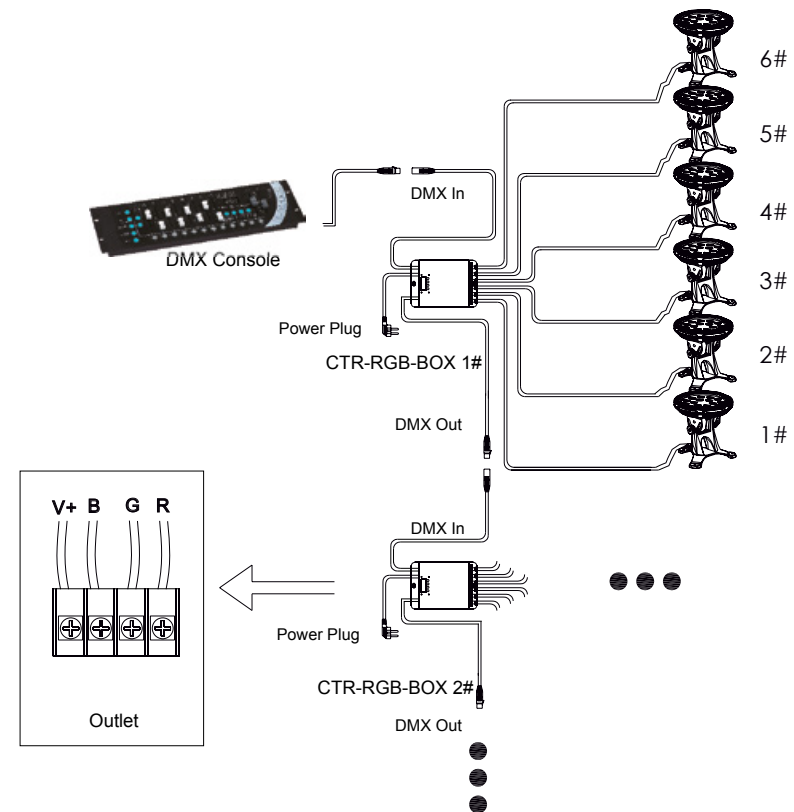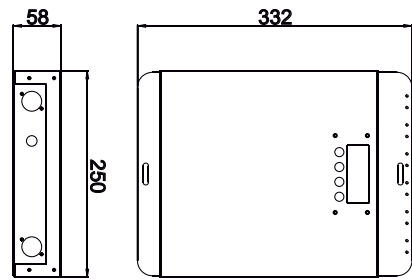



**CONTROLLER-PRO-3**  
8031440358033

CONTROLLER MASTER 3 CANALI PER USO PROIETTORI IN MODALITA EASY IN 230V OUT DMX/XLR-3 2 CANALI IP20

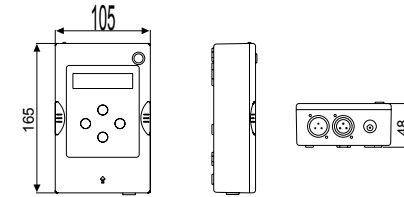

**CONTROLLER-PRO-2**  
8031440358002

CONTROLLER DMX LED 3 CANALI RGB SEGNALE OUTPUT DMX/XLR-3 (DUE USCITE) IP20 CON CAVO CARICATORE

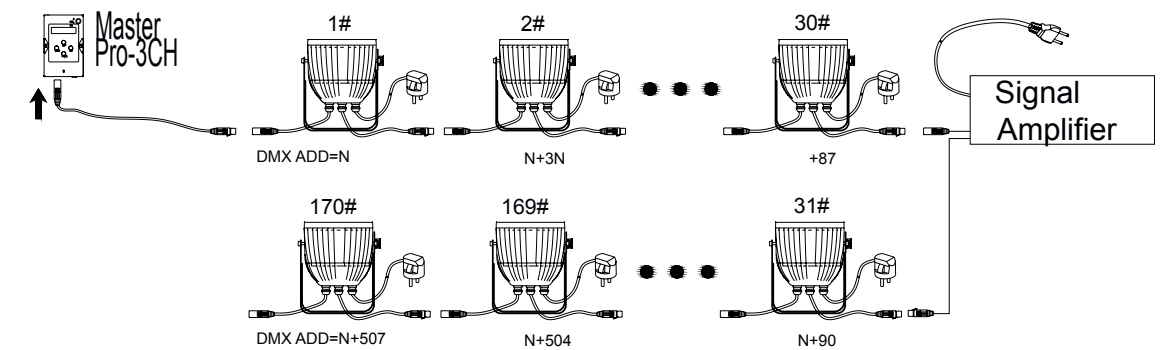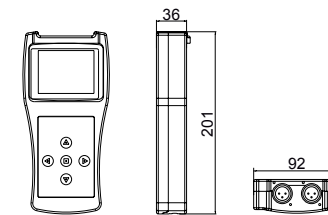





LED-SUNLITE-DE3  
8031440359498

SUNLITE 2X512 DMX ESA PRO/SUITE 2




LED-SUNLITE-U9  
8031440359467

SUNLITE CONTROLLER 218 CANALI INPUT

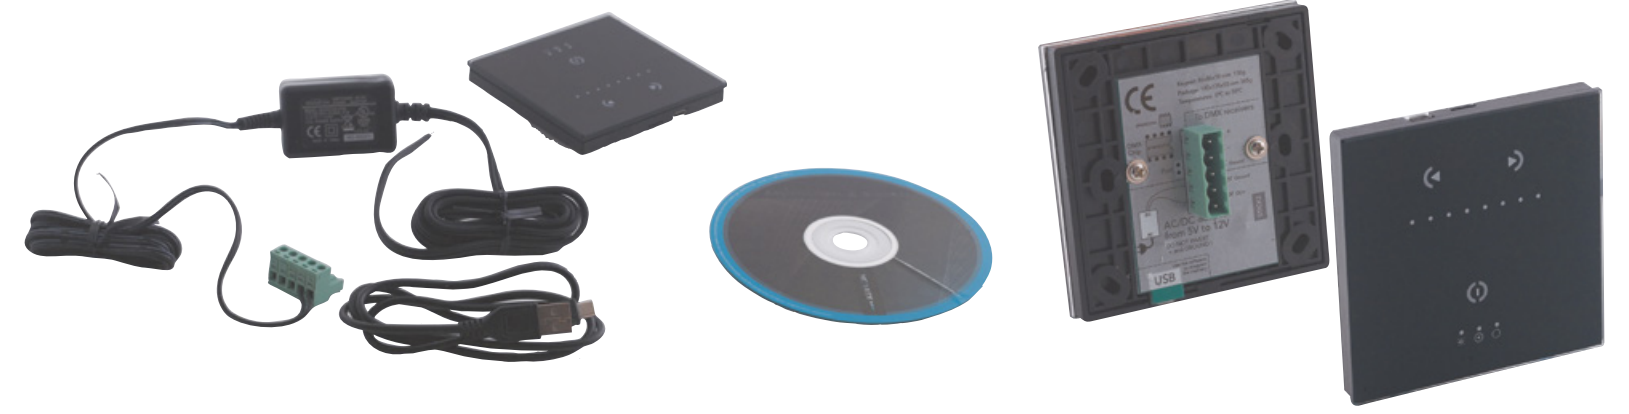

LED-SUNLITE-GU2  
8031422251093

SUNLITE DMX STICK-GU2 128 CANALI INPUT  
240V

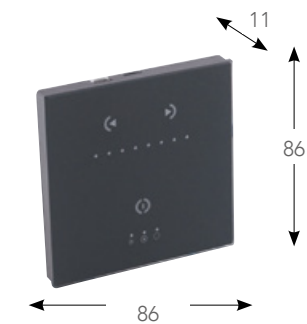


CONTROLLER




CONTROLLER-POOL  
8031440359481


CONTROLLER 240V AC MAX 5A/1000W IP65 DISTANZA MAX 30MT

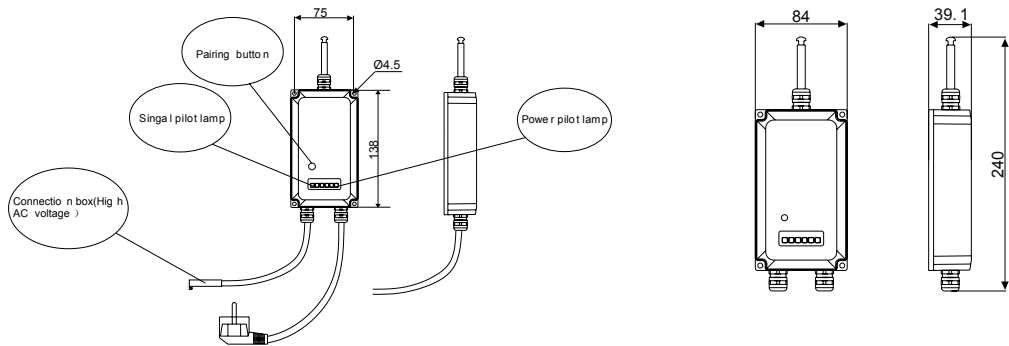

E-1. Recommended control mode and lamp

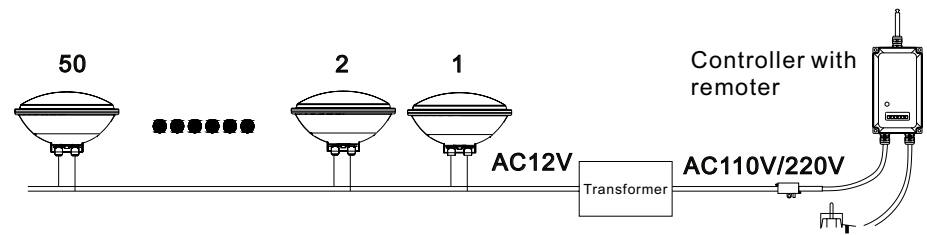

E-2. Other control modes and lamps

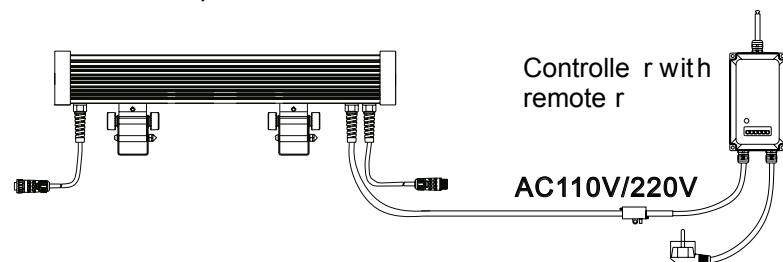


SPLITTER



SPLITTER-DMX-4  
8031440359542

SPLITTER DMX 6W XLR-3X4PCS XLR-5X4PCS

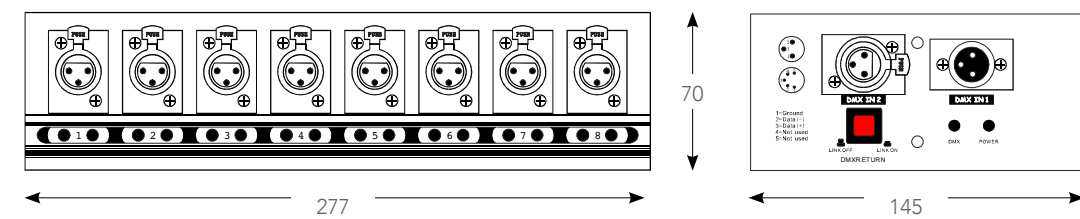

## DRIVER - ACCESSORI



I-DRIVER-HLG-120-12  
8031440360272  
ALIMENTATORE MW HLG  
120W 12V IP67

I-DRIVER-HLG-120-24  
8031440360241  
ALIMENTATORE MW HLG  
120W 24V IP67



I-DRIVER-HLG-320-12  
8031440360258  
ALIMENTATORE MW HLG  
320W 12V IP67

I-DRIVER-HLG-320-24  
8031440360227  
ALIMENTATORE MW HLG  
320W 24V IP67



LED-IRIDE-CAVO-2M  
8031440358095  
CAVO RGB 4 POLI X FARO IRIDE  
RGB ALLUMINIO IP65 BIANCO  
2 mt



LED-IRIDE-CAVO-2M-2P  
8031440355452  
CAVO 2 POLI X FARO IRIDE  
BIANCO ALLUMINIO IP65  
2 mt



CONNETTORE-F  
8031440355476  
CONNETTORE **IP68**  
FEMMINA PER DMX



CONNETTORE-M  
8031440355469  
CONNETTORE **IP68**  
MASCHIO PER DMX



CONNECTBOX-IP68-2  
8031440358927  
SCATOLA CONNESSIONE  
**IP68** A DUE POLI



CONNECTBOX-IP68-3  
8031440358903  
SCATOLA CONNESSIONE  
**IP68** A TRE POLI



GUAINA  
8031440355483  
GUAINA ISOLANTE **IP65**







## KIT STRIP E FIBRE OTTICHE


la nostra gamma di strip led per soddisfare le molteplici esigenze di applicazione , per illuminazione di arredo interno ed esterna , disponibili in varie potenze e wattaggi 12-24-230 V con gamma di colori bianchi e rgb , profili di alluminio , e driver

## STRIP

*our LED strip range to meet the multiple needs of application, for ambience lighting internal and external, available in various power and wattage 12-24-230V ,with range of white colors and rgb, aluminum profiles, and drivers*



## FIBRA OTTICA

Kit fibra ottica  
LED optical fiber kit

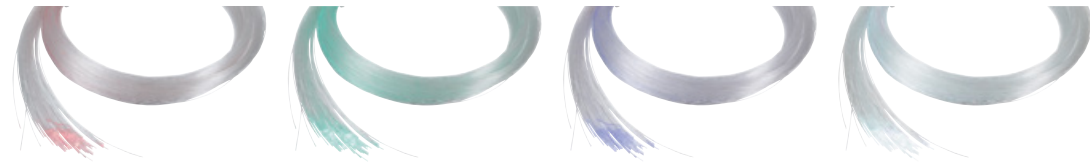

informazioni tecniche - technical information


FIBRAOTTICA-LED-RGB  
8031436691236

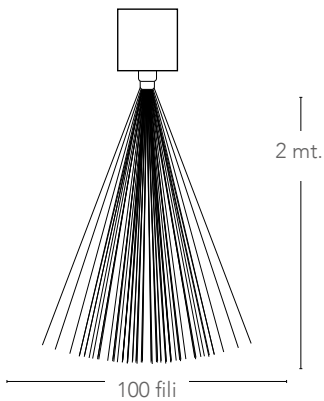

320




## TAYLOR

Kit luci LED fuga piastrelle  
LED set for tiles drain

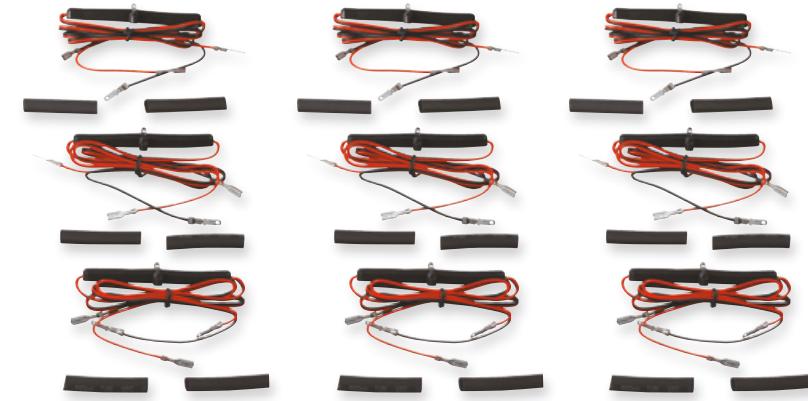

informazioni tecniche - technical information

LED-TAYLOR-KIT NERO  
8031440061278

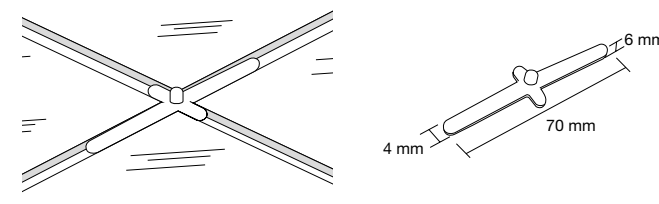

321

## STRIP

Strip LED comando touch con attacco USB  
LED strip light with switch touch control and USB connection



informazioni tecniche - technical information

**STRIP-SURROUND**  
8031440354202






**3,5W**  
**15LED/80CM**



**>15 000 on/off**

**h 25 000**



## STRIP

Kit strisce luci LED monocolor  
LED strip light set single color



informazioni tecniche - technical information

2 strisce da 60 cm - 2 strisce da 30 cm - accessori e driver inclusi  
2 strip 60 cm - 2 strip 30 cm - accessories and driver included

**STRIP-3528-KIT**  
8031436561232



**10W 12V**

**SMD**  
SMD3528




**On / Off**

**>10 000 on/off**

**h 25 000**

**driver incluso**

Kit strisce luci LED RGB  
RGB LED strip set

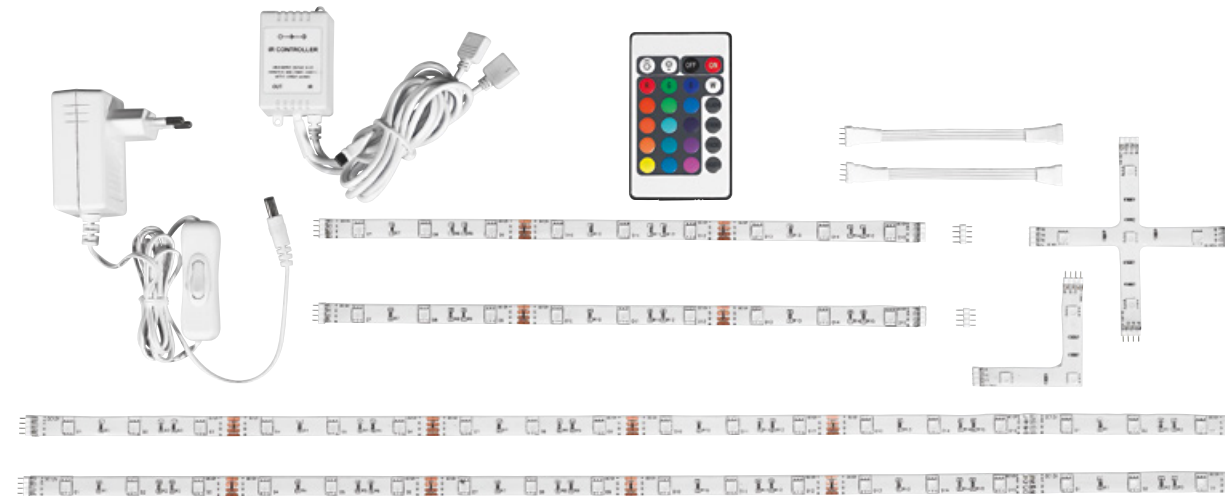

informazioni tecniche - technical information

2 strisce da 60 cm - 2 strisce da 30 cm - accessori e driver inclusi  
2 strip 60 cm - 2 strip 30 cm - accessories and driver included

**STRIP-5050-KIT-RGB**  
8031436571231



**15W 12V**

**SMD**  
SMD5050




**On / Off**

**>10 000 on/off**



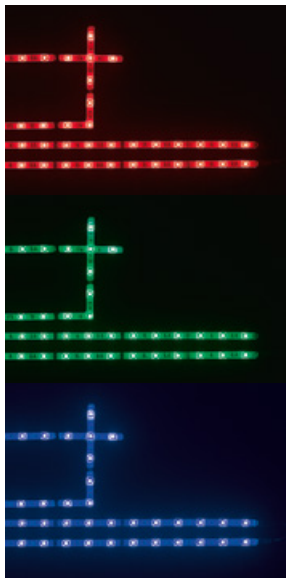


**h 25 000**

**driver incluso**






































**NEON FLEX**  
Neon flex LED 20 mt.  
LED neon flex 20 mt



	<b>NEON-FLEX-CAP</b> 8031440364522	Kit 4 tappi in silicone
	<b>NEON-FLEX-NEX</b> 8031440364478	Connettore di giunzione entrata più uscita 15cm
	<b>NEON-FLEX-NEX-T</b> 8031440364485	Connettore T a 3 entrate
	<b>NEON-FLEX-POWER</b> 8031440364508	Innesto elettrico
	<b>NEON-FLEX-STAFFE</b> 8031440364492	Kit 2pz staffe





informazioni tecniche - technical information


<b>NEON-FLEX-BIANCO</b> 8031440361842		<b>240W</b> DC 24V	 24000 Lumen	<b>SMD</b> 	 >15 000 on/off	 h 25 000	 AC/DC 24V 10A 240W	 10 mm 6 mm
2800XLED SMD2835 non include - not included								
<b>NEON-FLEX-BLU</b> 8031440364454		<b>240W</b> DC 24V	 20000 Lumen	<b>SMD</b> 	 >15 000 on/off	 h 25 000	 AC/DC 24V 10A 240W	 10 mm 6 mm
2800XLED SMD2835 non include - not included								
<b>NEON-FLEX-GIALLO</b> 8031440364515		<b>240W</b> DC 24V	 20000 Lumen	<b>SMD</b> 	 >15 000 on/off	 h 25 000	 AC/DC 24V 10A 240W	 10 mm 6 mm
2800XLED SMD2835 non include - not included								
<b>NEON-FLEX-ROSSO</b> 8031440364560		<b>240W</b> DC 24V	 20000 Lumen	<b>SMD</b> 	 >15 000 on/off	 h 25 000	 AC/DC 24V 10A 240W	 10 mm 6 mm
2800XLED SMD2835 non include - not included								
<b>NEON-FLEX-VERDE</b> 8031440364546		<b>240W</b> DC 24V	 20000 Lumen	<b>SMD</b> 	 >15 000 on/off	 h 25 000	 AC/DC 24V 10A 240W	 10 mm 6 mm
2800XLED SMD2835 non include - not included								

20 mt.

CLASSE **A**

 **Ra >80**


 **CE**

 **RoHS**  
WEEE COMPLIANT



## KIT STRIP

Striscia luci LED rotoli da 5mt.  
LED strip light 5mt. roll

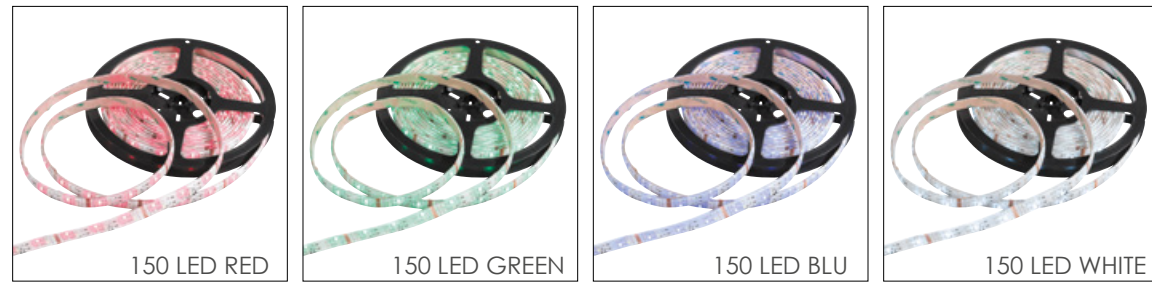



informazioni tecniche - technical information

STRIP-RGBW-KIT 8031436831236

**48W 12V**
 2400 Lumen
 

**SMD**
 >10 000 on/off
 h 25 000
 driver incluso

600XLED SMD3528




## KIT STRIP

Striscia luci LED rotoli da 5mt.  
LED strip light 5mt. roll



## 164 giochi di colore

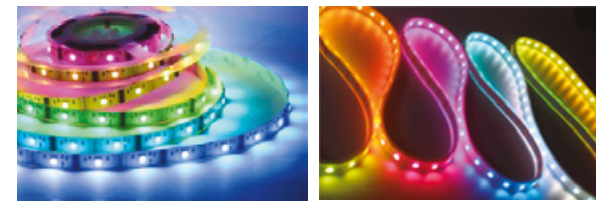



informazioni tecniche - technical information

STRIP-RGB-XL-KIT 8031436801239

**24W 12V**
 2400 Lumen
 

**SMD**
 >10 000 on/off
 h 25 000
 driver incluso

150XLED SMD3528





## KIT STRIP

Striscia luci LED rotoli da 3mt.  
LED strip light 3mt. roll



informazioni tecniche - technical information

STRIP-LINE-3M/C 8031440353281	3000K	18W 12V	810 Lumen	On / Off	SMD 90XLED SMD5050	>15 000 on/off	h 25 000	driver incluso
STRIP-LINE-3M/F 8031440353250	5500K	18W 12V	900 Lumen	On / Off	SMD 90XLED SMD5050	>15 000 on/off	h 25 000	driver incluso





## KIT STRIP

Striscia luci LED rotoli da 3mt.  
LED strip light 3mt. roll




informazioni tecniche - technical information

STRIP-LINE-3M/RGB 8031440353267	RGB	18W 12V	On / Off	SMD 90XLED SMD5050	>10 000 on/off	h 25 000	driver incluso
------------------------------------	-----	---------	----------	--------------------------	----------------	----------	----------------



## KIT STRIP

Striscia luci LED rotoli da 5mt.  
LED strip light 5mt. roll

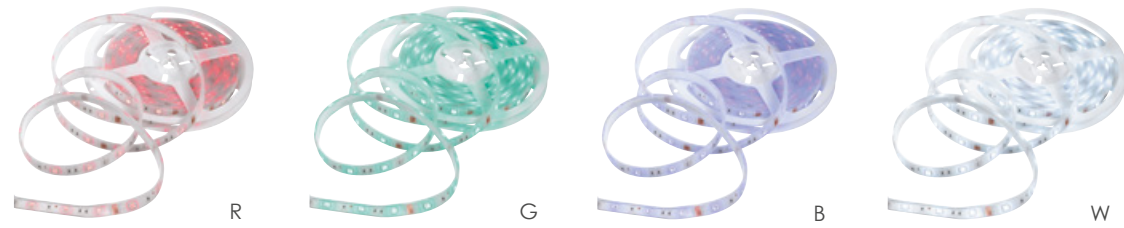

informazioni tecniche - technical information

STRIP-IP68-RGB-KIT  
8031436811238

**20W 12V**
**SMD**
 >10 000 on/off
 

 driver incluso

150XLED SMD5050
 h 25 000

## KIT STRIP

Striscia luci LED rotoli da 5mt.  
LED strip light 5mt. roll





informazioni tecniche - technical information

STRIP-IP68-WW-KIT  
80314368781234



**24W 12V**
**SMD**
 >10 000 on/off
 

 driver incluso

300XLED SMD3528
 h 25 000



330



331



## STRIP

Striscia luci LED rotoli da 5mt.  
LED strip light 5mt. roll



### informazioni tecniche - technical information

STRIP-3528-60/C 8031433191203	3200K	24W 12V	1200 Lumen	SMD 300XLED SMD3528	>15 000 on/off	h 25 000	AC/DC 12V 2A 24W	non include - not included	IP40 con silicone with silicon
STRIP-3528-60/F 8031433201209	5500K	24W 12V	1200 Lumen	SMD 300XLED SMD3528	>15 000 on/off	h 25 000	AC/DC 12V 2A 24W	non include - not included	IP40 con silicone with silicon
STRIPLED-3528-C 8031440359955	3200K	24W 12V	1200 Lumen	SMD 300XLED SMD3528	>15 000 on/off	h 25 000	AC/DC 12V 2A 24W	non include - not included	IP20 senza silicone without silicon
STRIPLED-3528-F 8031440359924	5500K	24W 12V	1200 Lumen	SMD 300XLED SMD3528	>15 000 on/off	h 25 000	AC/DC 12V 2A 24W	non include - not included	IP20 senza silicone without silicon





## STRIP

Striscia luci LED rotoli da 5mt.  
LED strip light 5mt. roll



### informazioni tecniche - technical information

STRIP-5050-60/C 8031433231206	3200K	72W 24V	3600 Lumen	SMD 300XLED SMD5050	>10 000 on/off	h 25 000	AC/DC 24V 3A 72W	non include - not included	IP40 con silicone with silicon
STRIP-5050-60/F 8031433241205	5500K	72W 24V	3600 Lumen	SMD 300XLED SMD5050	>10 000 on/off	h 25 000	AC/DC 24V 3A 72W	non include - not included	IP40 con silicone with silicon





## STRIP

Striscia luci LED rotoli da 5mt.  
LED strip light 5mt. roll



### informazioni tecniche - technical information

STRIPLED-5050-C 8031440355902	3200K	72W 12V	3600 Lumen	SMD 300XLED SMD5050	>15 000 on/off	h 25 000	AC/DC 12V 6A 72W	IP20
				non include - not included		senza silicone without silicon		
STRIPLED-5050-F 8031440355889	5500K	72W 12V	3600 Lumen	SMD 300XLED SMD5050	>15 000 on/off	h 25 000	AC/DC 12V 6A 72W	IP20
				non include - not included		senza silicone without silicon		
STRIPLED-5050-M 8031440355919	4000K	72W 12V	3600 Lumen	SMD 300XLED SMD5050	>15 000 on/off	h 25 000	AC/DC 12V 6A 72W	IP20
				non include - not included		senza silicone without silicon		



334



## STRIP

Striscia luci LED rotoli da 5mt.  
LED strip light 5mt. roll



### informazioni tecniche - technical information

STRIPLED-5050-RGB 8031440355896	72W 12V	SMD 300XLED SMD5050	>15 000 on/off	h 25 000	AC/DC 12V 6A 72W	IP20	
				non include not included		non include not included	senza silicone without silicon



335



## STRIP

Striscia luci LED rotoli da 5mt.  
LED strip light 5mt. roll




### informazioni tecniche - technical information

STRIPLED-5050-IP67-C 8031440355865	3200K	72W 12V	3000 Lumen	SMD SMD5050	>15 000 on/off	h 25 000	AC/DC 12V 6A 72W	non include - not included	con silicone with silicon
STRIPLED-5050-IP67-F 8031440355841	5500K	72W 12V	3000 Lumen	SMD SMD5050	>15 000 on/off	h 25 000	AC/DC 12V 6A 72W	non include - not included	con silicone with silicon
STRIPLED-5050-IP67-M 8031440355872	4000K	72W 12V	3000 Lumen	SMD SMD5050	>15 000 on/off	h 25 000	AC/DC 12V 6A 72W	non include - not included	con silicone with silicon





## STRIP

Striscia luci LED rotoli da 5mt.  
LED strip light 5mt. roll

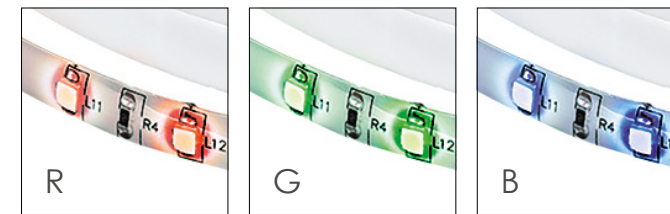

### informazioni tecniche - technical information

STRIPLED-5050-IP67-RGB 8031440355858		72W 12V		SMD SMD5050	>15 000 on/off	h 25 000	AC/DC 12V 6A 72W	non include not included	non include not included	con silicone with silicon
---	--	---------	--	----------------	----------------	----------	---------------------	-----------------------------	-----------------------------	------------------------------



## STRIP

Striscia luci LED rotoli da 5mt.  
LED strip light 5mt. roll

Per una corretta dissipazione  
applicare la strip su un supporto d'alluminio.

For correct dissipation fix the strip light on  
aluminium support.



## STRIP

Kit strisce luci LED monocolora doppia striscia  
LED strip light set single color double strip



informazioni tecniche - technical information

STRIP-3528-240/M 8031433181204	4000K	96W 24V	7200 Lumen	SMD 1200XLED SMD3528	>10 000 on/off	h 25 000	AC/DC 24V 4,5A 96W non include not included	15 MM 5 M
-----------------------------------	-------	---------	------------	----------------------------	----------------	----------	--	--------------

Kit strisce luci LED RGB  
RGB LED strip set





informazioni tecniche - technical information


STRIPLED-240-C 8031440359962	3200K	96W 24V	7200 Lumen	SMD 1200XLED SMD3528	>15 000 on/off	h 25 000	AC/DC 24V 4,5A 96W non include - not included	IP20 senza silicone without silicon
STRIPLED-240-F 8031440359948	5500K	96W 24V	7200 Lumen	SMD 1200XLED SMD3528	>15 000 on/off	h 25 000	AC/DC 24V 4,5A 96W non include - not included	IP20 senza silicone without silicon
STRIPLED-240-M 8031440359979	4200K	96W 24V	7200 Lumen	SMD 1200XLED SMD3528	>15 000 on/off	h 25 000	AC/DC 24V 4,5A 96W non include - not included	IP20 senza silicone without silicon

informazioni tecniche - technical information

STRIP-3528-60/RGB 8031433211208	24W 12V	1200Lumen	SMD 300XLED SMD3528	>10 000 on/off	h 25 000	AC/DC 12V 2A 24W non include not included
------------------------------------	---------	-----------	---------------------------	----------------	----------	--



## PROFILI



informazioni tecniche - technical information




**I-PROFILO-BERLINO**  
8031434611212

mis. 1MT

**I-PROFILO-BERLINO-2**  
8031440359405

mis. 2MT

Tappi inclusi  
Caps included



informazioni tecniche - technical information




**I-PROFILO-ROMA**  
8031434601213

mis. 1MT


**I-PROFILO-ROMA-2**  
8031440359399

mis. 2MT

Tappi inclusi  
Caps included



informazioni tecniche - technical information

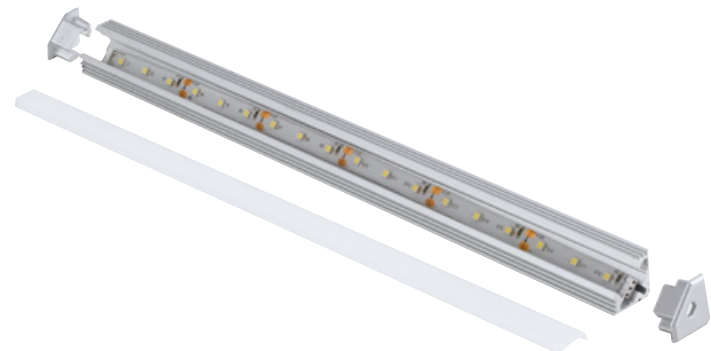


**I-PROFILO-NEWYORK**  
8031434581218

mis. 1MT

**I-PROFILO-NEWYORK-2**  
8031440359382

mis. 2MT

Tappi inclusi  
Caps included



informazioni tecniche - technical information



**I-PROFILO-MILANO**  
8031434611854

mis. 1MT

**I-PROFILO-MILANO-2**  
8031440359412

mis. 2MT

Tappi inclusi  
Caps included

## CONNETTORI - ACCESSORI

Accessori e connettori per strisce LED basso voltaggio  
LED strip light accessories and connectors low voltage



**STRIP-NEX-JACK**  
8031434491210

Kit 2pz connettore clip per strip  
3528 e 5050 12V+jack 5,5 (F)



**STRIP-JACK-MF**  
8031434471212

Kit 2pz jack 5,5 1xmaschio 1xfemmina  
x strip



**STRIP-NEX+C-LV**  
8031434441215

Kit 2pz connettore 1clip + cavo x strip  
3528 e 5050 12V



**STRIP-NEX-LV**  
8031434511215

Kit 2pz connettore 2clip x strip 3528 e  
5050 12V



**STRIP-NEX+C-LVRGB**  
8031434451214

Kit 2pz connettore 1clip + cavo x strip  
RGB12V



**STRIP-NEX-LVRGB**  
8031434461213

Kit 2pz connettore 12xclip x strip  
RGB12V



**STRIP-NEX-LVRGB-PIN**  
8031434481211

Kit 2pz connettore 1clip +1 pin x strip  
RGB 12V



**STRIP-SEAL**  
8031434501216

20cm tubo silicone sigillante strip sigil-  
lante a caldo connessioni strip



**I-PROF-BERLINO2-DIFF**  
8031440357647

Diffusore trasparente profilo Berlino  
2m alluminio



**I-PROF-MILANO2-DIFF**  
8031440357654

Diffusore trasparente profilo Milano  
2mt alluminio



**I-PROF-NEWYORK2-DIFF**  
8031440357623

Diffusore trasparente profilo New York  
2mt angolare alluminio



**I-PROF-ROMA2-DIFF**  
8031440357630

Diffusore trasparente profilo Roma  
2mt alluminio

## DRIVER



### STRIP-DRIVER-150W

8031433351201

Adattatore tensione costante 24V 150W  
Multientrata Output 24V 6A  
INPUT 100-240V  
Misure 200X100X44mm  
IP20 CLASSE 1

### STRIP-DRIVER-240W

8031433361200

Adattatore tensione costante 24V 240W  
Multientrata Output 24V 10A  
INPUT 100-240V  
Misure 200X100X44mm  
IP20 CLASSE 1

### STRIP-DRIVER12V-35W

8031440360265

Adattatore x strip led smd  
Output 12V 3A 35W  
multipla entrata serracavo  
Misure 99X82X30mm

### STRIP-DRIVER12V-75W

8031439581268

Adattatore tensione costante 12V 75W  
Multientrata output 12V 6A  
INPUT 100-240V 2.0A  
Misure 125X100X37mm  
IP20 CLASSE 1

### STRIP-DRIVER12V-100W

8031440359368

Adattatore tensione costante 12V 100W  
Multientrata output 12V 6A  
INPUT 100-240V 2.0A  
Misure 179X99X30mm  
IP20 CLASSE 1

### STRIP-DRIVER12V-150W

8031439611262

Adattatore tensione costante 12V 150W  
Multientrata output 12V 1.2A  
INPUT 100-240V 2.0A  
Misure 180X100X44mm  
IP20 CLASSE 1

### STRIP-DRIVER12V-200W

8031440359375

Adattatore tensione costante 12V 200W  
Multientrata Output 24V 10A  
INPUT 100-240V  
Misure 215X115X30mm  
IP20 CLASSE 1

### STRIP-DRIVER12V-320W

8031440359344

Adattatore tensione costante 12V 320W  
Multientrata Output 24V 6A  
INPUT 100-240V  
Misure 215X115X30mm  
IP20 CLASSE 1

### STRIP-ADAT-12W

8031433141208

Adattatore tensione costante x strip LED 12V 12W - SPINA CEE 7/16 IP20  
OUTPUT 12V 1A INPUT 110-240V 0,5A  
MISURE 38X67X42mm - CAVO 1500MM - IP20 - CLASSE 2

### STRIP-ADAT-24W

8031433251204

Adattatore tensione costante x strip LED 12V 24W - SPINA CEE 7/16 IP20 -  
OUTPUT 12V 2A INPUT 110-240V 0,6A  
MISURE 38X80X50MM - CAVO 1500mm - IP20 - CLASSE 2

### STRIP-ADAT-36W

8031436601235

Adattatore tensione costante x strip LED 12V 36W - SPINA CEE 7/16 IP20 -  
OUTPUT 12V 3A INPUT 110-240V 0,6A  
MISURE 35X100X50Mmm - CAVO 1500MM - IP20 - CLASSE 2



### STRIP-ADAT-72W

8031433261203

Adattatore tensione costante x strip LED 24V 72W - SPINA CEE 7/16 IP20 -  
OUTPUT 24V 3A INPUT 110-240V 1,5A  
MISURE 37X115X50MM - CAVO 1500+1500mm - IP20 - CLASSE 2



### I-DRIVER-DIMM-LCM40

8031439591267

Driver dimmerabile 40W corrente costante - OUTPUT DC 2-100V  
350mA; 2-80V 500mA; 2-67V 600mA; 2-57V 700mA; 2-45V 900mA;  
2-40V 1050mA  
MISURE 120X80X22mm - CLASSE 2



### I-DRIVER-DIMM-LCM60

8031439561260

Driver dimmerabile 60W corrente costante - OUTPUT DC 2-100V  
350mA; 2-80V 500mA; 2-67V 600mA; 2-57V 700mA; 2-45V 900mA;  
2-40V 1050mA  
MISURE 120X80X22mm - CLASSE 2

### I-DRIVER/3W-IP67

8031440357357



DRIVER 3x1W LED OUTPUT  
350mA 3-12V DC INPUT 100-  
240V 0,08A IP67



### I-DRIVER/18W

8031439571269

Driver 18W corrente costante  
Output DC 350mA 48V  
Misure 32X22X240mm



### I-DRIVER/3W

8031436791233

Driver corrente costante 3W - INPUT AC 100-240V 0,09A  
OUTPUT DC 350mA 9-12V MISURE 40X40X22mm



### I-DRIVER/5W

8031436761236

Driver corrente costante 5W - INPUT AC 100-240V 0,06A  
OUTPUT DC 300mA 9-18V - MISURE 40X40X22mm



## DRIVER



**I-DRIVER/6W**  
8031436191231  
Driver corrente costante 6W - INPUT AC 100-240V 0,09A  
OUTPUT DC 350mA 9-18V - MISURE 40X40X22mm



**I-DRIVER/9W**  
8031434541212  
Driver corrente costante 9W - INPUT AC 100-240V 0,08A  
OUTPUT DC 350mA 18-23V  
MISURE 87X37X22mm



**I-DRIVER/10W550MA**  
8031439511265  
Driver corrente costante 10W - INPUT AC 100-240V 0,07A -  
OUTPUT DC 350mA 9-18V  
MISURE 104X37X22mm



**I-DRIVER/12W**  
8031436161234  
Driver corrente costante 12W  
INPUT AC 100-240V 0,1A OUTPUT DC 350mA 18-24V  
MISURE 104X37X22mm



**I-DRIVER/12W550MA**  
8031439471262  
Driver corrente costante 12W  
INPUT AC 100-240V 0,1A OUTPUT DC 550mA 18-24V  
MISURE 104X37X22mm



**I-DRIVER/24W**  
8031434561210  
Driver corrente costante 24W  
INPUT AC 100-240V 0,15A OUTPUT DC 550mA 24-49V  
MISURE 114X44X29mm



**I-DRIVER/36W**  
8031436771235  
Driver corrente costante 36W  
INPUT AC 100-240V 0,23A - OUTPUT DC 850mA 24-49V  
MISURE 130X44X24mm

## DRIVER - ACCESSORI



**STRIP-AMPLIFIER**  
8031440359443  
AMPLIFICATORE RGB DC 12-24V 24A



**STRIP-CONTROL-WIFI**  
8031440359474  
CONTROLLER RGB WIFI TOUCH DC 12/24V 6AX3CH MAX DI-  
STANZA 20MT



**STRIP-SOUND**  
8031434531213  
Ricevitore musicale + telecomando RGB 12V PER STRIP LED  
MISURE 50X70X20mm



**STRIP-RGB-CONTROL-XL**  
8031434521214  
Ricevitore multientrata + telecomando RGB 12V per strip  
INPUT DC12V - 24V MISURE 120X51X27mm  
INPUT 12V 15A MAX 180W - INPUT 24V 15A MAX 360W IP20



## STRIP

Bobina striscia luci LED 50 mt.  
LED strip light roll 50mt.





informazioni tecniche - technical information

	<b>STRIP-R-5050HV-30/C</b> 8031435351223		<b>9,6W/M</b> 230V	1080 Lm/M	<b>SMD</b> 3600XLED SMD5050	>10 000 on/off	h 25 000	
	<b>STRIP-R-5050HV-30/F</b> 8031428901169		<b>9,6W/M</b> 230V	1080 Lm/M	<b>SMD</b> 3600XLED SMD5050	>10 000 on/off	h 25 000	

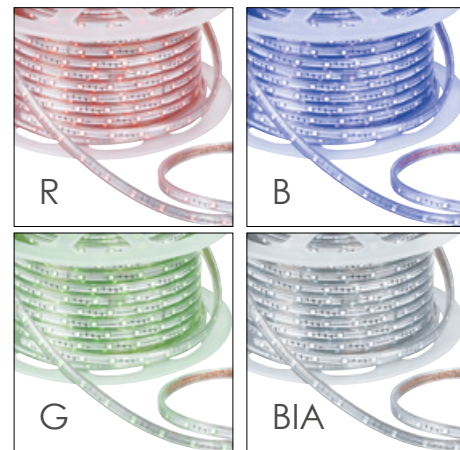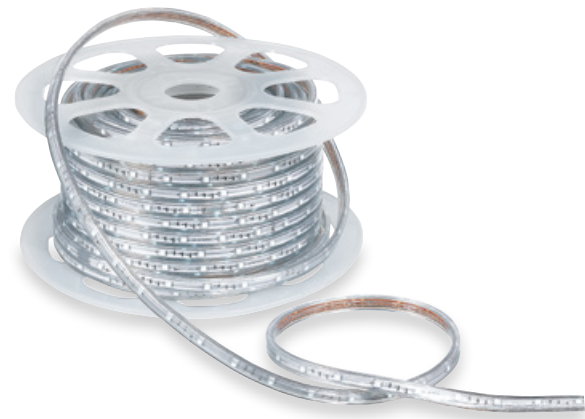

informazioni tecniche - technical information

<b>STRIP-R-5050HV-30RGB</b> 8031435451220		<b>9,6W/M</b> 230V	<b>SMD</b> 3600XLED SMD5050	>10 000 on/off	h 25 000	
--	--	-----------------------	-----------------------------------	----------------	----------	--




## STRIP

Accessori e connettori per strisce LED alto voltaggio  
LED strip light accessories and connectors higt voltage



**STRIP-ADAPT-HV**  
8031435381220



**STRIP-ADAPT-HR-RGB**  
8031435401225



**MAX 600W**

**STRIP-NEX-RGB-MINI** Mini connettore per strip 220V RGB  
8031439131265 IP65 con viti e tappo

**STRIP-NEX-IP65-MINI** Mini connettore per strip 220V IP65  
8031435441221 con viti e tappo

**STRIP-NEX-IP65-60** Connettore per strip 220V 60cm  
8031435431222 con viti

**STRIP-NEX-RGB-60** Connettore per strip 220V RGB  
8031439121266 60cm con viti

**STRIP-CAP-IP65** Kit 3pz tappi in silicone per strip  
8031435411224 220V 14x7mm


**STRIP-FIXIT** Kit 10pz staffe fissa strip 220V  
8031433371209 14x8mm

## SENSORI




I-SENSORE-360  
8031435901237

Sensore PIR 230V max 1600W 360°  
distanza massima 5mt.  
time 10 sec. - 4 min.  
lux 2 - 2000 IP44

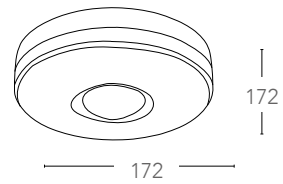


I-SENSORE-130  
8031434401219

Sensore PIR 230V max 1000W 130°  
distanza massima 12mt.  
time 10 sec. - 4 min.  
lux 2 - 2000 IP44  
base accessoria angolare

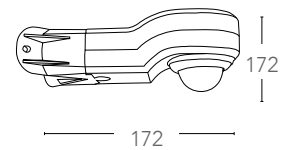

I-SENSORE-180  
8031434411218

Sensore PIR 230V max 1000W 180°  
distanza massima 12mt.  
time 10 sec. - 4 min.  
lux 2 - 2000 IP44

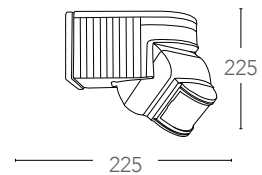

## ADATTATORI



ADATTATORE-E14-E27  
8031439351267



ADATTATORE-E27-E14  
8031439391263



ADATTATORE-E27-2E27  
80314439371265



ADATTATORE-E27-GU10  
8031436171233



ADATTATORE-E14-GU10  
8031439361266



ADATTATORE-GU10-E14  
8031439431266



ADATTATORE-GU10-E27  
8031439421267



ADATTATORE-G9-E14  
8031439401269



ADATTATORE-G9-E27  
8031439411268



ADATTATORE-E27-E27  
8031439451264

FLESSIBILE 20 CM

ACCESSORI



I-PORTALAMPADE-E14-L  
8031440354592



I-PORTALAMPADE-E14-S  
8031440354578



I-PORTALAMPADE-E14-T  
8031440354585



I-PORTALAMPADE-E27-L  
8031440354554



I-PORTALAMPADE-E27-P  
8031440354561



I-PORTALAMPADE-E27-S  
8031440354530



I-PORTALAMPADE-E27-T  
8031440354547




I-PORTALAMPADE-GU10  
8031435751221



I-PORTALAMPADE-MR16  
8031439761264



I-PORTALAMPADE-T8  
8031439851262



INC-MATRIX-KIT  
8031436551233



I-VFUSION  
8031439721268




I-COPRICANDELA/CR  
8031436541234

REFLEX


Strutture incasso per lampade MR16 o GU10  
MR16 or GU10 down light frame




INC-REFLEX-SF1 BCO 8031439321260  
INC-REFLEX-SF1 NIK 8031439311261  
INC-REFLEX-SF1 BR 8031439331269  
INC-REFLEX-SF1 CR 8031439301262  
INC-REFLEX-SF1 ORO 8031439341268

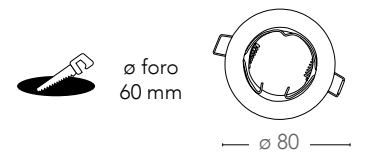

INC-REFLEX-SM1 BCO 8031439251260  
INC-REFLEX-SM1 NIK 8031439261269  
INC-REFLEX-SM1 BR 8031439291266  
INC-REFLEX-SM1 CR 8031439281267  
INC-REFLEX-SM1 ORO 8031439271268

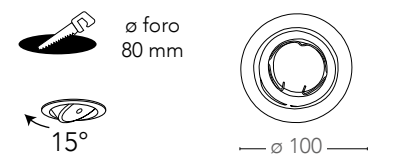

INC-REFLEX-Q-SM1 NIK 8031440363280  
INC-REFLEX-Q-SM1 BCO 8031440363310

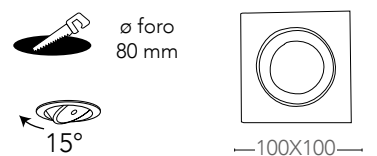

# Legenda simboli

	CLASSE <b>A</b>	Classificazione di classe energetica come da normativa 874/2012 <i>Energy class according to ERP normative 874/2012</i>		Indicazione colore luce in gradi kelvin <i>Color temperature indicator under Kelvin degrees</i>		Prodotto dimmerabile luce calda o fredda <i>Product color temperature changing and dimmable</i>
	3500K			5500K		Numero di accensioni garantite <i>number of ON/OFF guaranteed</i>
	4000K			Indicatore di luminosità espresso in Lumen <i>Brightness indicator in meter of Lumen</i>		Prodotto con interruttore touch on/off <i>Product equipped with touch ON/OFF switch</i>
	850 Lm			Apparecchio a led / integrato o provvisto di lampadina led <i>Led equipped product</i>		Prodotto con interruttore manuale on/off <i>Product equipped with ON/OFF switch</i>
	LED			Apparecchio provvisto di lampadina alogena <i>Halogen equipped product</i>		Articolo alimentato da batterie <i>Product powered by battery</i>
	Halogen			Apparecchio provvisto di lampadine a risparmio energetico <i>Energy Saving bulb equipped product</i>		Prodotto provvisto di alimentatore driver <i>Product with driver included</i>
	Energy Saver			Indicatore di potenza espresso in Watt <i>Power indicator in Watt</i>		Prodotto provvisto di alimentatore drive su spina <i>Product with plug power supply</i>
	E14 MAX 40W			Indice cromatico del led <i>Color Rendering Index</i>		Prodotto provvisto di spina per uso esterno <i>Product equipped with Schuko plug for outdoor</i>
	Ra >80			Prodotto provvisto di led cob <i>Product equipped with COB led type.</i>		Prodotto con possibilita' di connessione <i>Product with connection</i>
	COB			Prodotto provvisto di led smd <i>Product equipped with SMD led type.</i>		Indicazione grado flusso luminoso <i>Beam angle degree</i>
	SMD			Indicazione di garanzia di durata <i>Life time warranty</i>		Indicazione inclinazione <i>Adjustable inclination degree</i>
	h 15 000			Apparecchio in doppio isolamento <i>Double insulation product, Class 2</i>		Indicazione foro per alloggiamento incasso <i>Cutout size for down light</i>
				Apparecchio in classe 3 <i>Insulation needless product (low voltage), Class 3</i>		Prodotto calpestabile <i>Product to be fixed in ground and walkable</i>
				Apparecchio in classe 1 <i>Product with earth connection Class 1</i>		Prodotto provvisto di rilevatore di presenza e timer regolabile <i>Product equipped with setting up sensor</i>
				Indice di protezione dell'apparecchio <i>Ingress protection rate</i>		Prodotto provvisto di rilevatore di presenza <i>Product equipped with sensor</i>
	IP...			Apparecchio conforme alle normative ce <i>Product conform with CE normative</i>		Indicazione del materiale del prodotto <i>Product in aluminum</i>
	CE			Prodotto dimmerabile <i>Dimmable product</i>		
				Prodotto non dimmerabile <i>Not dimmable product</i>		Prodotto conforme a EMC <i>(Electromagnetic Compatibility) normative</i>
				Prodotto fornito di telecomando <i>Product equipped with remote control</i>		Prodotto conforme a ROHS <i>(Restriction of Hazardous Substances Directive) normative</i>
				Prodotto dimmerabile rgb con le variabili colori <i>Product color changing RGB and dimmable</i>		

**INTEC**  
LIGHT

Divisione F.A.N. EUROPE LIGHTING s.r.l.

**faneurope**

Agglomerato A.S.I Località Bosco Fangone 80035 Nola (Napoli)  
Tel. +39 0813151017 - Tel. +39 0818210771 - Fax +39 0818210600  
commerciale@faneurope.it

www.faneurope.it



Fan Europe Lighting srl



FanEurope.Light

L'azienda si riserva il diritto di effettuare modifiche ai prodotti presenti in questo catalogo senza preavviso alcuno.  
*The company reserves the right to make changes to the products in this catalog without prior notice.*

StudioFava  
www.favafotografica.it