



In.tec: Materiali, Tecniche, Innovazione.

Le collezioni della serie IN.TEC offrono la più ampia libertà di scelta, tra un gran numero di soluzioni coordinate per tutte le esigenze di illuminazione ad alto contenuto tecnologico. Ideali in qualsiasi ambientazione di arredo e per la fornitura Contract di alta qualità. Frutto della progredita ricerca e del know-how specifico Fan Europe, questi prodotti sono destinati a durare nel tempo, con in più quel tocco di originalità inconfondibile che li rende sempre protagonisti dell'ambiente.

In.tec: Materiali, Tecniche, Innovazione.

IN.TEC collection series offer a wide choice of lighting solutions for any lighting option from the basic to the highest and newest technologies. Our products' versatility allow the utilization in any furniture setting even in the most exigent qualified contracts. Result of continuous research and innovation of company Fan Europe, these products are projected for long lasting and for following day by day the new borders of efficiency. Showing always some feature of originality our products are recognized as protagonists of any scene.

INDICE

Index

Incassi <i>down light</i>	pag. 7
Gesso <i>gypsun</i>	pag. 73
Lampade da parete <i>Wall lamp</i>	pag. 109
Lampade da bagno <i>Bathroom light</i>	pag. 172
Illuminazione LED per arredi <i>Cabinet LED light</i>	pag. 185
Lampade da esterno LED <i>LED outdoor lamp</i>	pag. 192
Lampade da esterno <i>Outdoor lamp</i>	pag. 203
Plafoniere e applique da esterno <i>Outdoor ceiling and wall lamp</i>	pag. 237
Proiettori <i>Wall lamp</i>	pag. 266
Kit strip e fibre ottiche <i>Kit strip and optical fiber</i>	pag. 291
Industriali <i>Industrial</i>	pag. 302
Kit strip e fibre ottiche <i>Kit strip and optical fiber</i>	pag. 311
Componenti <i>components</i>	pag. 339

Incassi *down light*




Gesso *gypsun*



Lampade da parete *Wall lamp*


4

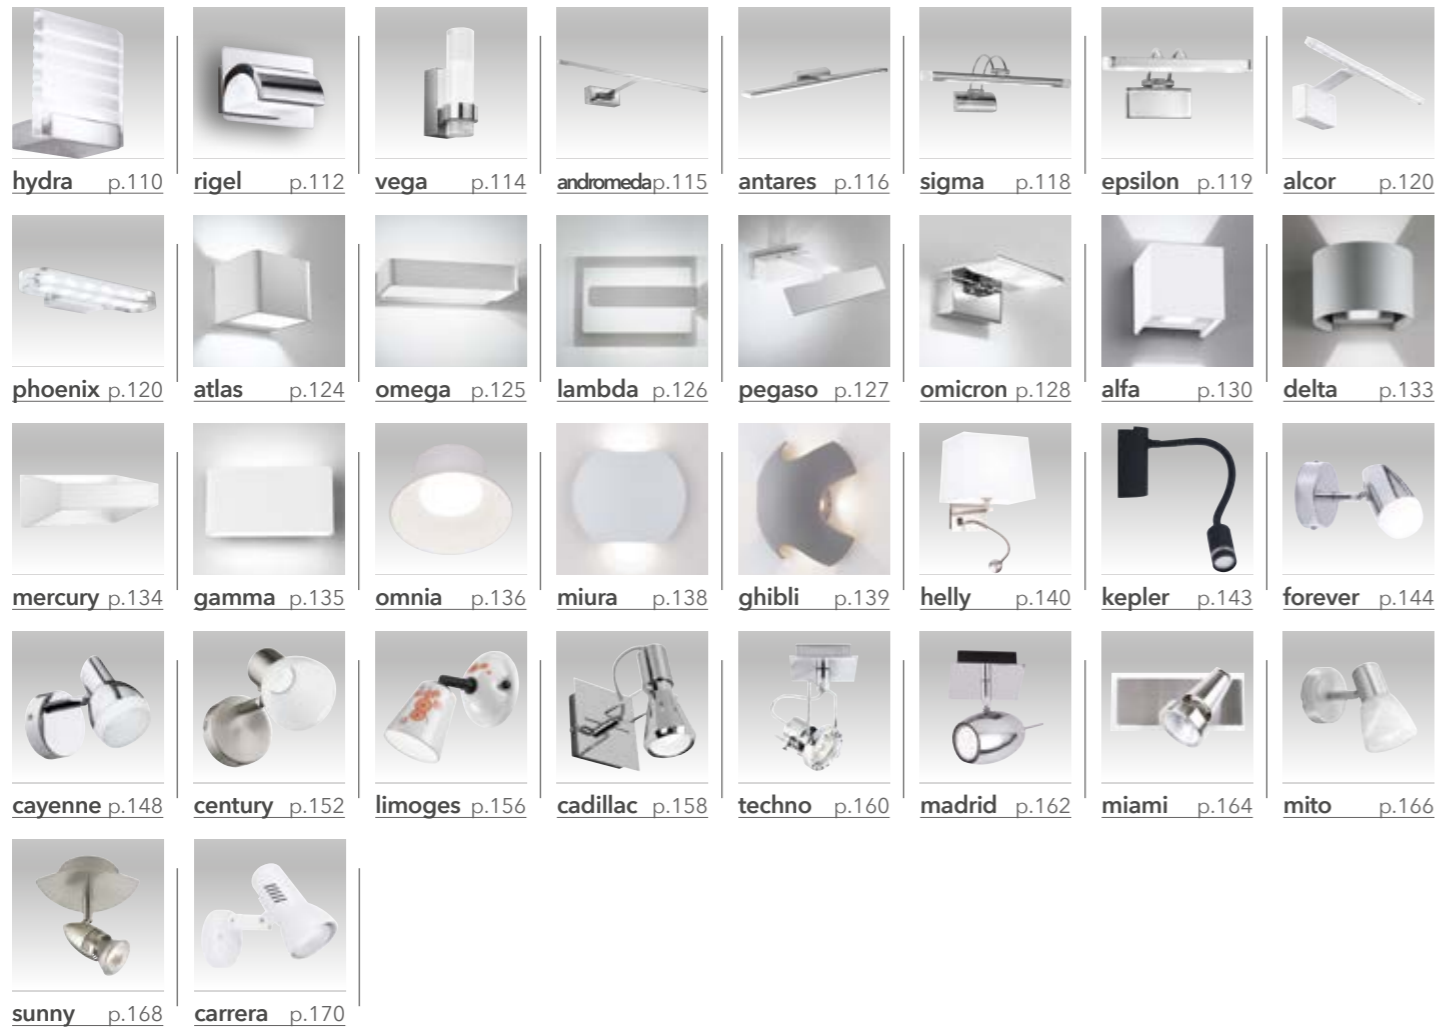

Lampade da bagno *Bathroom light*




5 | Illuminazione LED per arredi *Cabinet LED light*

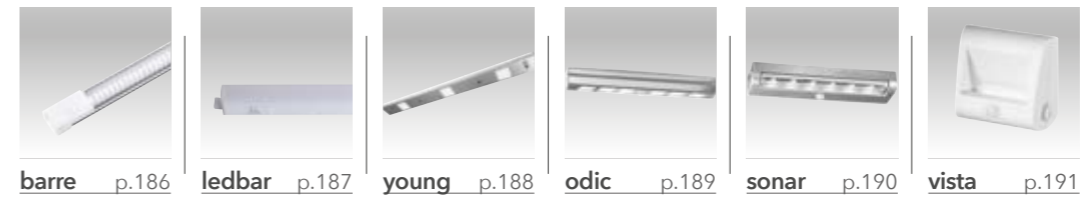


Lampade da esterno LED *LED outdoor lamp*



Lampade da esterno *Outdoor lamp*

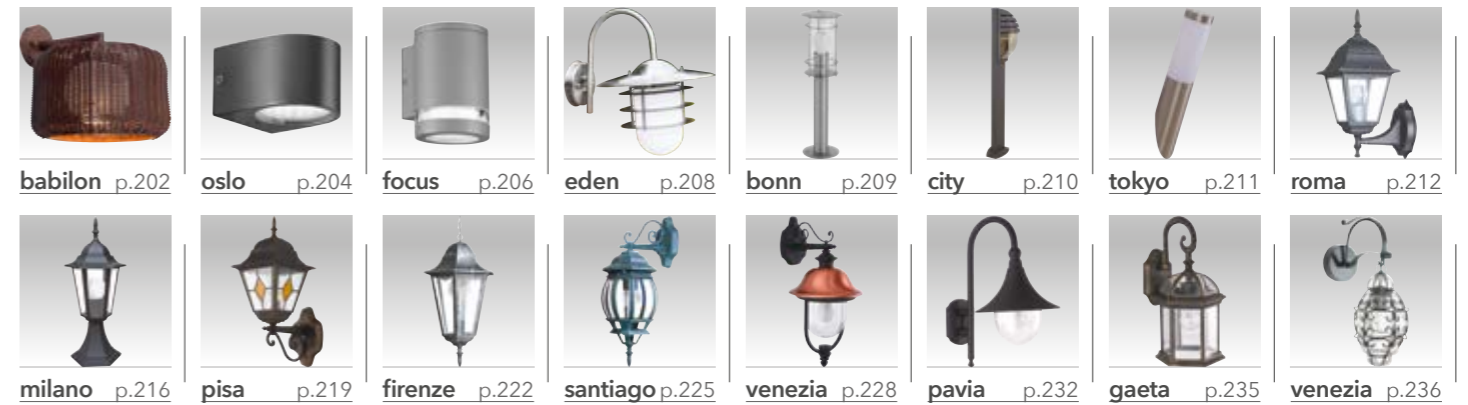

Plafoniere e applique da esterno *Outdoor ceiling and wall lamp*

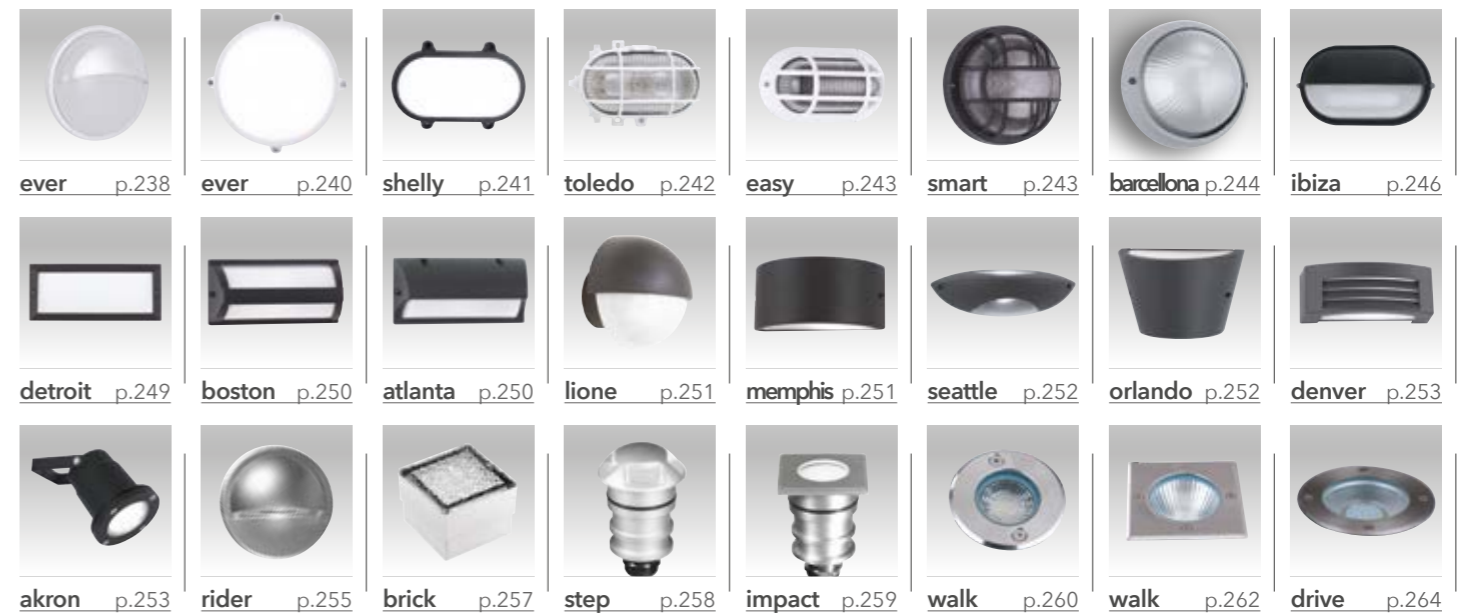

Proiettori *Wall lamp*



6

7

INCASSI *Down light*


Industriali *Industrial*



Illuminazione led professionale esterno *-Professional outdoor LED lighting*



Kit strip e fibre ottiche *Kit strip and optical fiber*

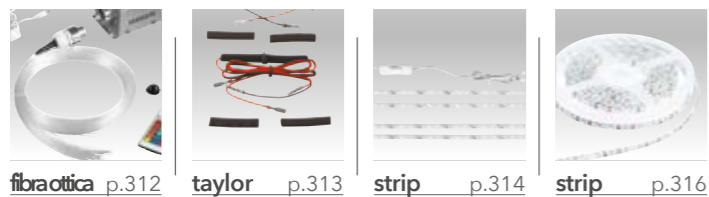

Componenti *components*



SLIM



8



9

ALU*

Incasso in alluminio pressofuso
LED integrato colore bianco opaco
Diecast aluminium down light
built-in LED satin white color



articoli e varianti - items and options

INC-SLIM/8W BCO 8031440357203 4000K	INC-SLIM/8WF BCO 8031440357197 5500K	INC-SLIM/8WC BCO 8031440357180 3000K
--	---	---

informazioni tecniche - technical information

120°
120°

>10 000 on/off

h 25 000


Ø foro 105 mm

driver incluso

LED 8W | 640 Lumen | Ra >80

SMD

CLASSE A+

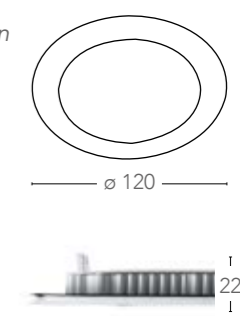

articoli e varianti - items and options

INC-SLIM/12W BCO 8031431491183 4000K	INC-SLIM/12WF BCO 8031440357234 5500K	INC-SLIM/12WC BCO 8031440357258 3000K
---	--	--

informazioni tecniche - technical information

120°

>10 000 on/off

h 25 000


Ø foro 165 mm

driver incluso

LED 12W | 860 Lumen | Ra >80

SMD

CLASSE A+

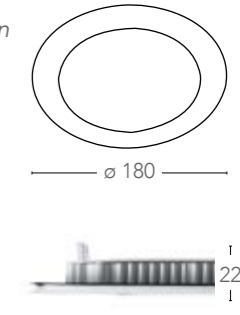

certificazioni - certification



SLIM



ALU*

Incasso in alluminio pressofuso
LED integrato colore bianco opaco
Diecast aluminium down light
built-in LED satin white color

10

11

SLIM



ALU*

Incasso in alluminio pressofuso
LED integrato colore nickel spazzolato
Diecast aluminium down light
built-in LED brush nickel color



articoli e varianti - items and options

INC-SLIM/18W BCO INC-SLIM/18WF BCO INC-SLIM/18WC BCO

8031431511188

8031440357210


8031440357227



informazioni tecniche - technical information


120° | >10 000 on/off | h 25 000

ø foro 225 mm | driver incluso



LED 18W | 1350 Lumen | Ra >80

SMD | CLASSE A+

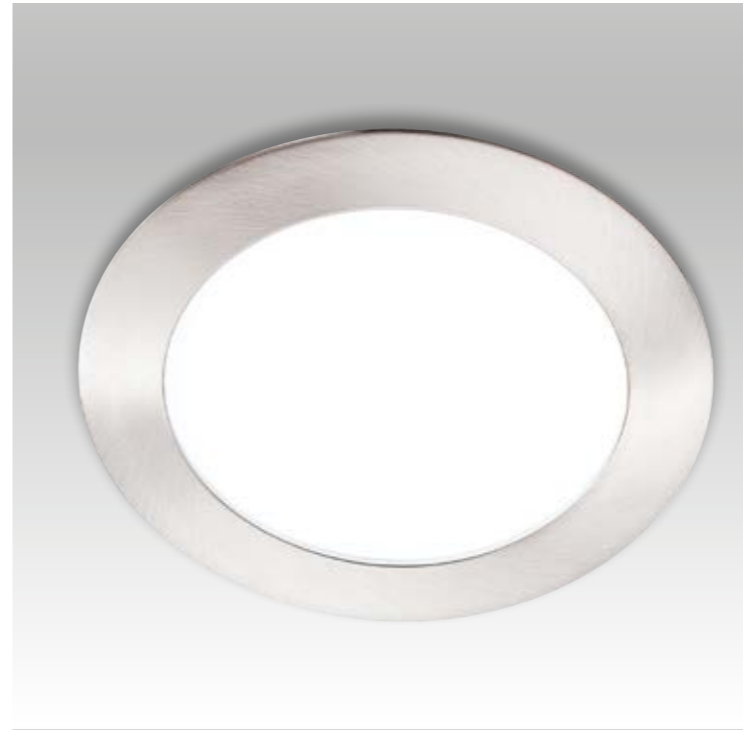


INC-SLIM/18W NIK

8031431521187

informazioni tecniche - technical information

120° | >10 000 on/off | h 25 000

ø foro 225 mm | driver incluso



LED 18W | 1350 Lumen | 4000K

SMD | CLASSE A+ | Ra >80




INC-SLIM/12W NIK

8031431501189

informazioni tecniche - technical information

120° | >10 000 on/off | h 25 000

ø foro 165 mm | driver incluso



LED 12W | 860 Lumen | 4000K

SMD | CLASSE A+ | Ra >80



certificazioni - certification



INTEC LIGHT

certificazioni - certification



INTEC LIGHT

PLASMA 



Incasso in alluminio pressofuso
LED integrato vetro temperato
Anello rifinito in cromo
Diecast aluminium down light
built-in LED tempered glass
Ring finish in chrome



ALU*

INC-PLASMA-18W

8031440091275


informazioni tecniche - technical information

 120°  > 10 000 on/off  h 25 000

 ø foro 165 mm  driver incluso

 LED 18W  1100 Lumen  4000K

   CLASSE A+ Ra >80





INC-PLASMA-12W

8031440081276


informazioni tecniche - technical information

 120°  > 10 000 on/off  h 25 000


 ø foro 127 mm  driver incluso

 LED 12W  740 Lumen  4000K

   CLASSE A+ Ra >80



FLAP

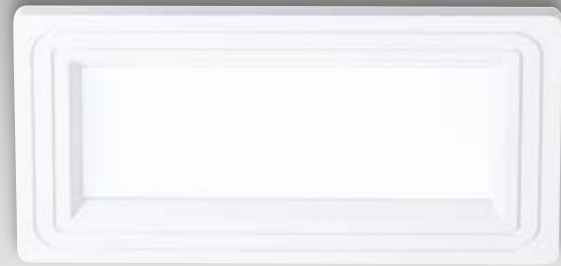

INC-FLAP-RT/12W

8031431461186

informazioni tecniche - technical information

120°	>10 000 on/off	h 25 000	4000K
foro 185x90 mm	driver incluso		
LED 12W	960 Lumen	Ra >80	
SMD	CLASSE A		
		210	
		117	

Incasto in alluminio pressofuso
LED integrato colore bianco opaco
Diecast aluminium down light
built-in LED satin white color

ALU*

articoli e varianti - items and options

INC-FLAP/12W

8031431441188



INC-FLAP/12WF

8031440357265





INC-FLAP/12WC

8031440354615



informazioni tecniche - technical information

120°	>10 000 on/off	h 25 000	
foro 155x155 mm	driver incluso		
LED 12W	960 Lumen	Ra >80	
SMD	CLASSE A		
		172	
		172	

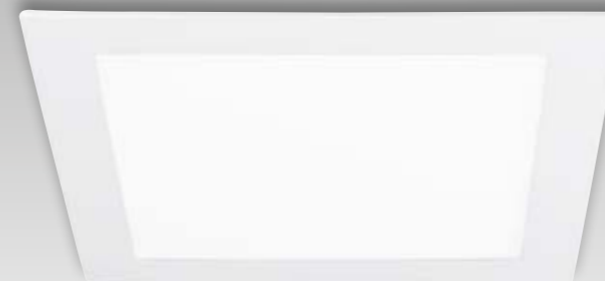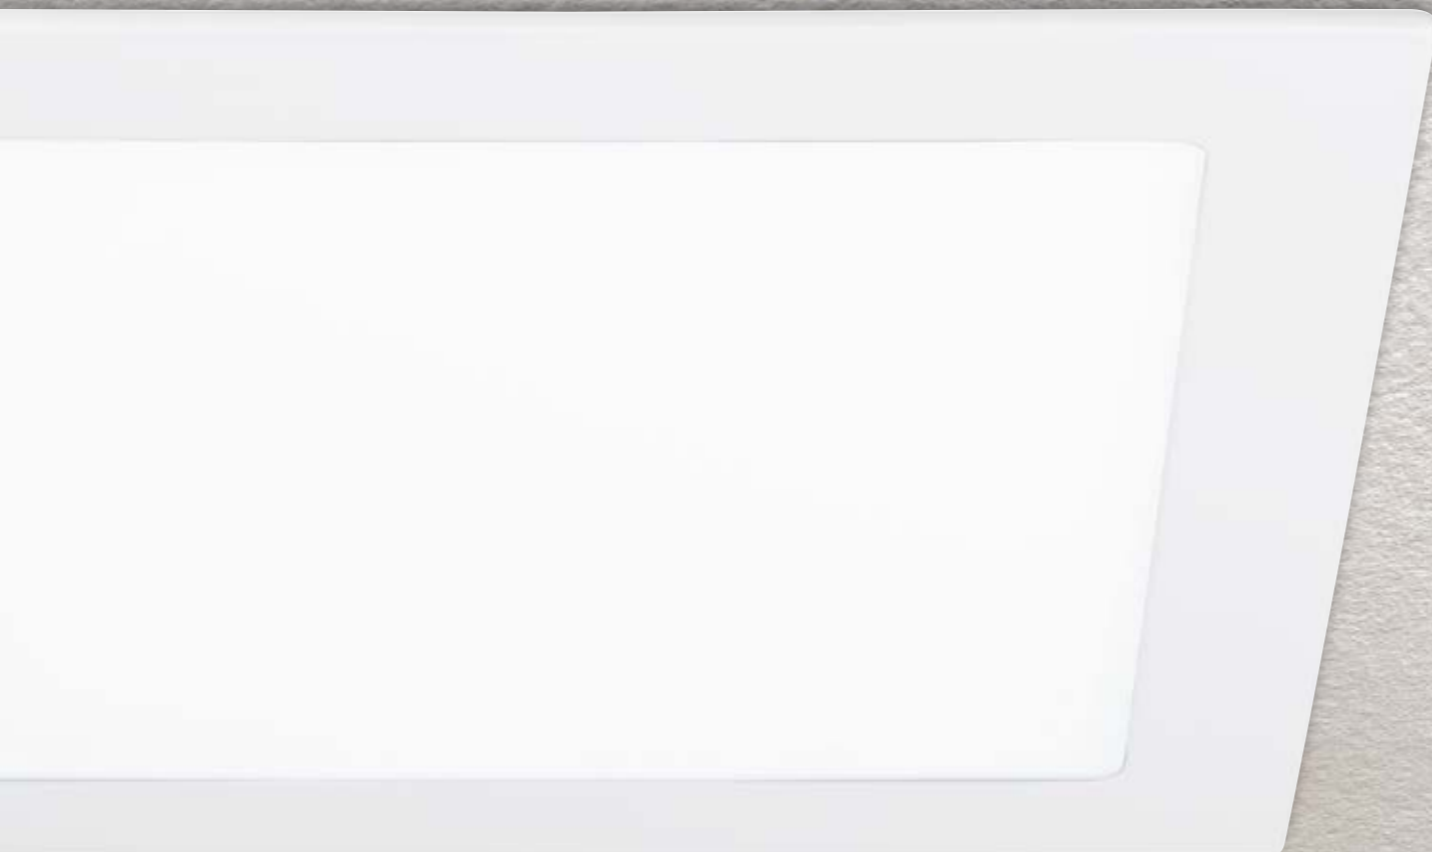

articoli e varianti - items and options

INC-FLAP/18W

8031431451187



INC-FLAP/18WF

8031440357241



INC-FLAP/18WC

8031440357272



informazioni tecniche - technical information















120°	>10 000 on/off	h 25 000	
foro 205x198 mm	driver incluso		
LED 18W	1440 Lumen	Ra >80	
SMD	CLASSE A		
		225	
		225	



INC-EXIGE-8W

8031440351898

informazioni tecniche - *technical information*














 120°	 >10 000 on/off	 h 25 000		78
 foro ø 100 mm	 driver incluso			
 LED 8W	 510 Lumen	 4000K		
	 SMD		 CLASSE A	 Ra >80

articoli e varianti - *items and options*

INC-EXIGE-12W

8031440351904














informazioni tecniche - *technical information*

 120°	 >10 000 on/off	 h 25 000	 LED 12W	 850 Lumen	 4000K		83
 foro ø 120 mm	 driver incluso		 SMD		 CLASSE A		

INC-EXIGE-20W

8031440351911














informazioni tecniche - *technical information*

 120°	 >10 000 on/off	 h 25 000	 LED 20W	 1450 Lumen	 4000K		86
 foro ø 150 mm	 driver incluso		 SMD		 CLASSE A		

INC-EXIGE-30W

8031440351928

informazioni tecniche - *technical information*



 120°	 >10 000 on/off	 h 25 000	 LED 30W	 2000 Lumen	 4000K		93
 foro ø 170 mm	 driver incluso		 SMD		 CLASSE A		



articoli e varianti - items and options



INC-LYRA-10C

8031434851212

 800 Lumen | 

INC-LYRA-10F


8031434861211




 800 Lumen | 




informazioni tecniche - technical information

 98° |  >15 000 on/off |  h 25 000

 foro ø 145 mm |  driver incluso



 LED 10W |  COB |  Ra >80



 |  |  CLASSE A



articoli e varianti - items and options

INC-LYRA-30C

8031434901221


 2400 Lumen | 

INC-LYRA-30F


8031434911220




 2400 Lumen | 





informazioni tecniche - technical information

 99° |  >15 000 on/off |  h 25 000

 foro ø 205 mm |  driver incluso



 LED 30W |  COB |  Ra >80


 |  |  CLASSE A |  PF 0,90



articoli e varianti - items and options



INC-LYRA-20C

8031434871210

 1600 Lumen | 

INC-LYRA-20F


8031434891225




 1600 Lumen | 




informazioni tecniche - technical information

 99° |  >15 000 on/off |  h 25 000

 foro ø 170 mm |  driver incluso



 LED 10W |  COB |  Ra >80



 |  |  CLASSE A



articoli e varianti - items and options

INC-LYRA-60C

8031440357166




 5100 Lumen | 



INC-LYRA-60F


8031440357173




 5100 Lumen | 





informazioni tecniche - technical information

 99° |  >15 000 on/off |  h 25 000

 foro ø 205 mm |  driver incluso



 LED 60W |  COB |  Ra >80


 |  |  CLASSE A |  PF 0,90



articoli e varianti - items and options


INC-MARK-10C

8031435061221





INC-MARK-10F

8031435071220




informazioni tecniche - technical information

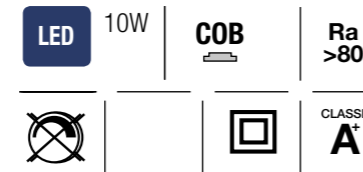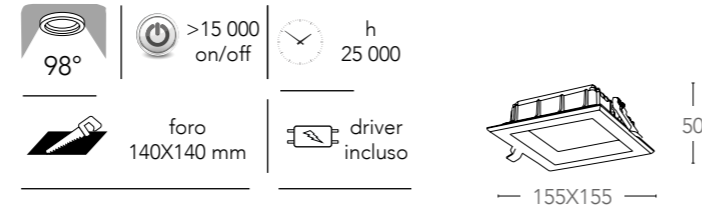

articoli e varianti - items and options

INC-MARK-30C

8031435101224





INC-MARK-30F

8031435111223




informazioni tecniche - technical information

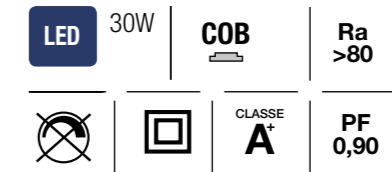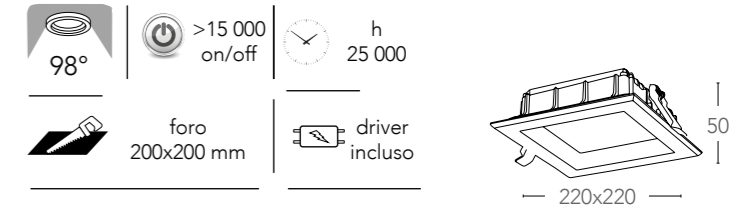

articoli e varianti - items and options


INC-MARK-20C

8031435081229





INC-MARK-20F

8031435091228



informazioni tecniche - technical information

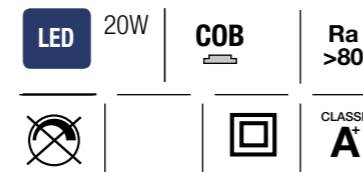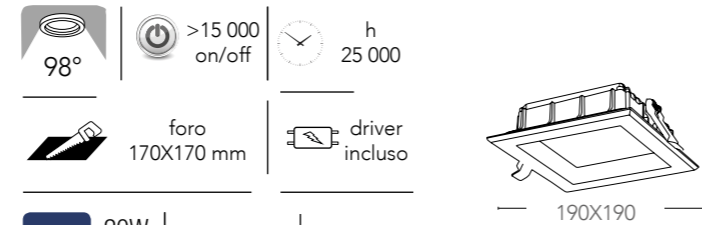

certificazioni - certification



certificazioni - certification



DELTA 














ALU*


Incasso orientabile Snooker bianco satinato ri-
flettore silver LED COB integrato
*Diecast aluminium adjustable down light in satin
white color built-in COB LED*

INC-DELTA-8

8031434921229

informazioni tecniche - *technical information*












 74°	 >15 000 on/off	 h 25 000
 foro ø 98 mm	 driver incluso	
 LED 8 W	 500 Lumen	 3200K
		CLASSE A  Ra >80




INC-DELTA-20

8031434931228

informazioni tecniche - *technical information*












 68°	 >15 000 on/off	 h 25 000
 foro ø 172 mm	 driver incluso	
 LED 20W	 1100 Lumen	 3200K
		CLASSE A  Ra >80




INC-DELTA-30

8031434941227


informazioni tecniche - *technical information*

 68°	 >15 000 on/off	 h 25 000
 foro ø 205 mm	 driver incluso	PF 0,90
 LED 30W	 1550 Lumen	 3200K
		CLASSE A  Ra >80

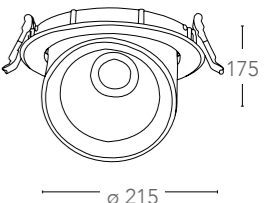

LYBRA 




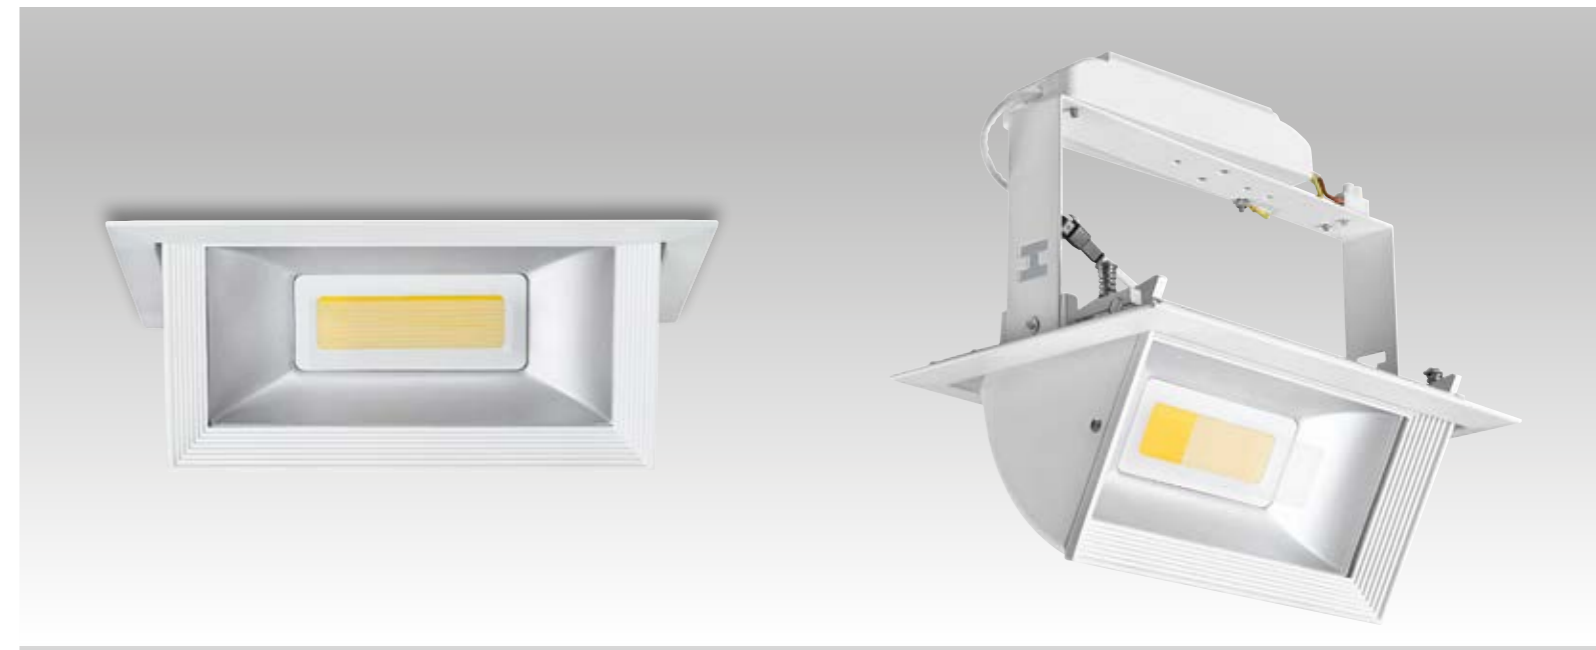








ALU*
 Incasso orientabile Snooker bianco satinato ri-
 flettore silver LED COB integrato
 Diecast aluminium adjustable down light in satin
 white color built-in COB LED





INC-LYBRA-30

8031434951226

informazioni tecniche - technical information

 99°	 >15 000 on/off	 h 25 000	 LED 30W	 1600 Lumen	 3200K
 foro 220x132 mm	 driver incluso			 CLASSE A	 COB Ra >80
PF 0,90					

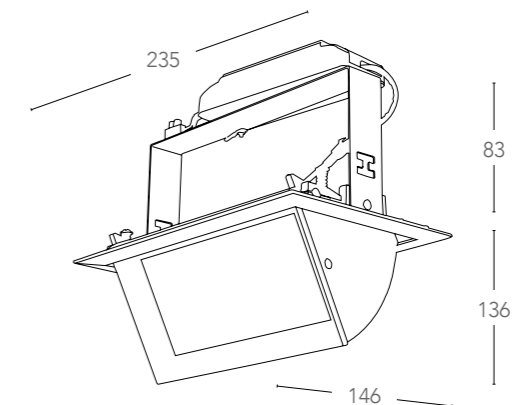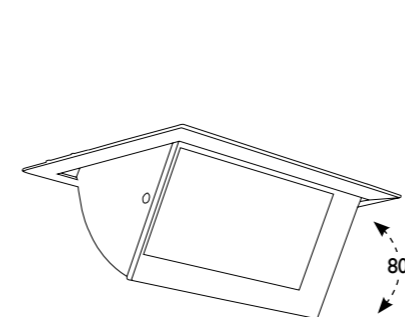

















Incasso orientabile in 4 direzioni con modulo LED COB
riflettore cromo bordo bianco satinato
*Down light adjustable four directionS with chrome reflector
and satin white frame built-in COB LED*

INC-FRANK-Q1

8031435121222

informazioni tecniche - *technical information*















 24°	 >15 000 on/off	 h 25 000	 195 205
 foro 160x160 mm	 driver incluso		
 32°x32°			
 LED 23W	 1700 Lumen	 3000K	
		 CLASSE A	 COB Ra >80



INC-FRANK-Q2

8031435131221

informazioni tecniche - *technical information*











 24°	 >15 000 on/off	 h 25 000	 195 350
 foro 310x160 mm	 driver incluso		
 32°x32°			
 LED 2x 23W	 3400 Lumen	 3000K	
		 CLASSE A	 COB Ra >80




INC-FRANK-M23

8031435141220

Modulo adattabile ad incasso AR111
LED COB module fit for AR111 nesting

 LED 23W	 1700 Lumen	 3000K	 driver incluso	 24°
		 CLASSE A	 h 25 000	 >15 000 on/off





ALU*













Faretto in alluminio pressofuso orientabile, rifiniture in bianco goffrato LED COB integrato
Spotlight diecast aluminium adjustable in embossed white color built-in COB LED




LED-GENESIS-15W

8031436721230

informazioni tecniche - technical information

 60°	 >15 000 on/off	 h 25 000	 LED 15W	 1281 Lumen	 3200K
 driver incluso			 CLASSE A	 COB	 Ra >80

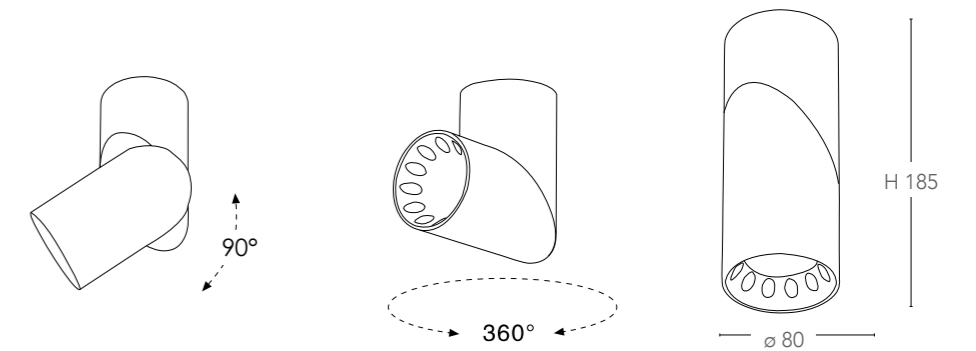

GATE



Proiettore orientabile in alluminio pressofuso rifiniture in bianco e nero goffrato LED COB integrato
Adjustable diecast aluminum spotlight finish embossed white black built-in COB LED





LED-GATE-PL26W

8031436701232

informazioni tecniche - technical information

60°	>15 000 on/off	h 25 000	LED 26W	2450 Lumen	3000K
PF 0,90	driver incluso			CLASSE A	COB Ra >80

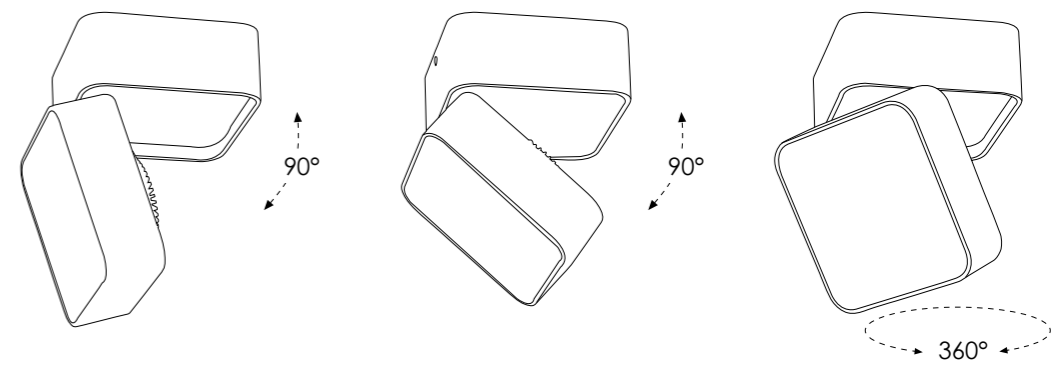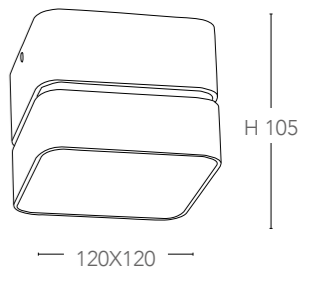

certificazioni - certification



GATE 

Sospensione in alluminio pressofuso rifiniture in bianco e nero goffrato LED COB integrato
Adjustable diecast aluminum spotlight finish embossed white black built-in COB LED


32


ALU*

LED-GATE-S-26W



8031436711231



informazioni tecniche - technical information

 60° |  >15 000 on/off |  h 25 000

PF 0,90 |  driver incluso

LED 26W |  2400 Lumen |  3000K

 |  | **CLASSE A** | **COB** | **Ra >80**

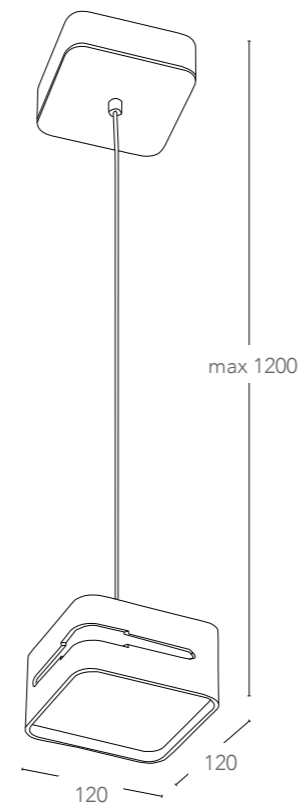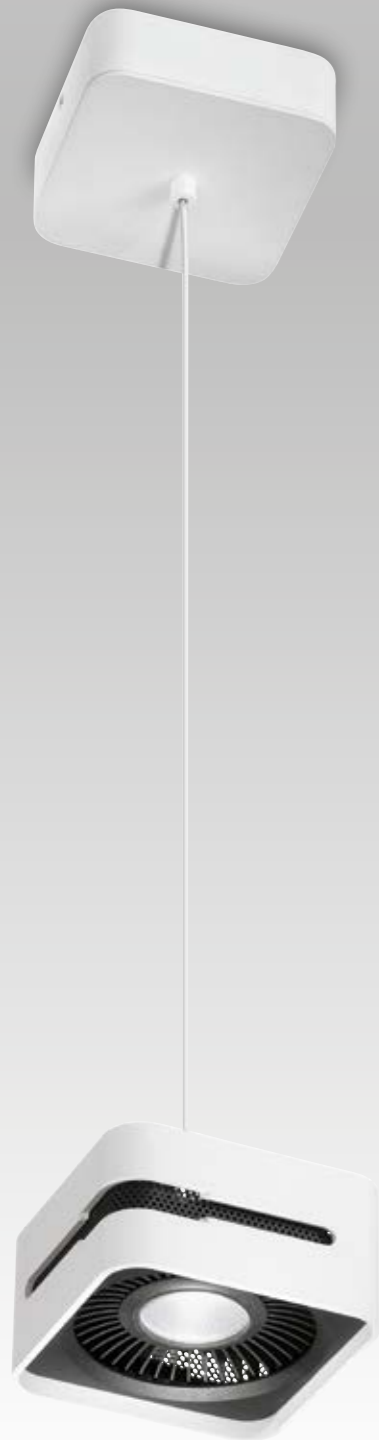

certificazioni - certification



TRAIN

ALU*

Faro binario con adattatore trifase in alluminio pressofuso rifiniture in bianco e nero goffrato LED COB integrato
Track light with three phase adaptor aluminum spotlight finish embossed white black built-in COB LED









34



LED-TRAIN-33W

8031439201265

informazioni tecniche - technical information


 24°	 >15 000 on/off	 h 25 000	
	 driver incluso	PF 0,90	
LED 33W	 1850 Lumen	3000K	
	CLASSE A	COB	Ra >80

35


TRAIN

ALU*

Faro binario con adattatore trifase in alluminio pressofuso rifiniture in bianco o nero goffrato LED COB integrato
Track light with three phase adaptor aluminum spotlight finish embossed white or black built-in COB LED

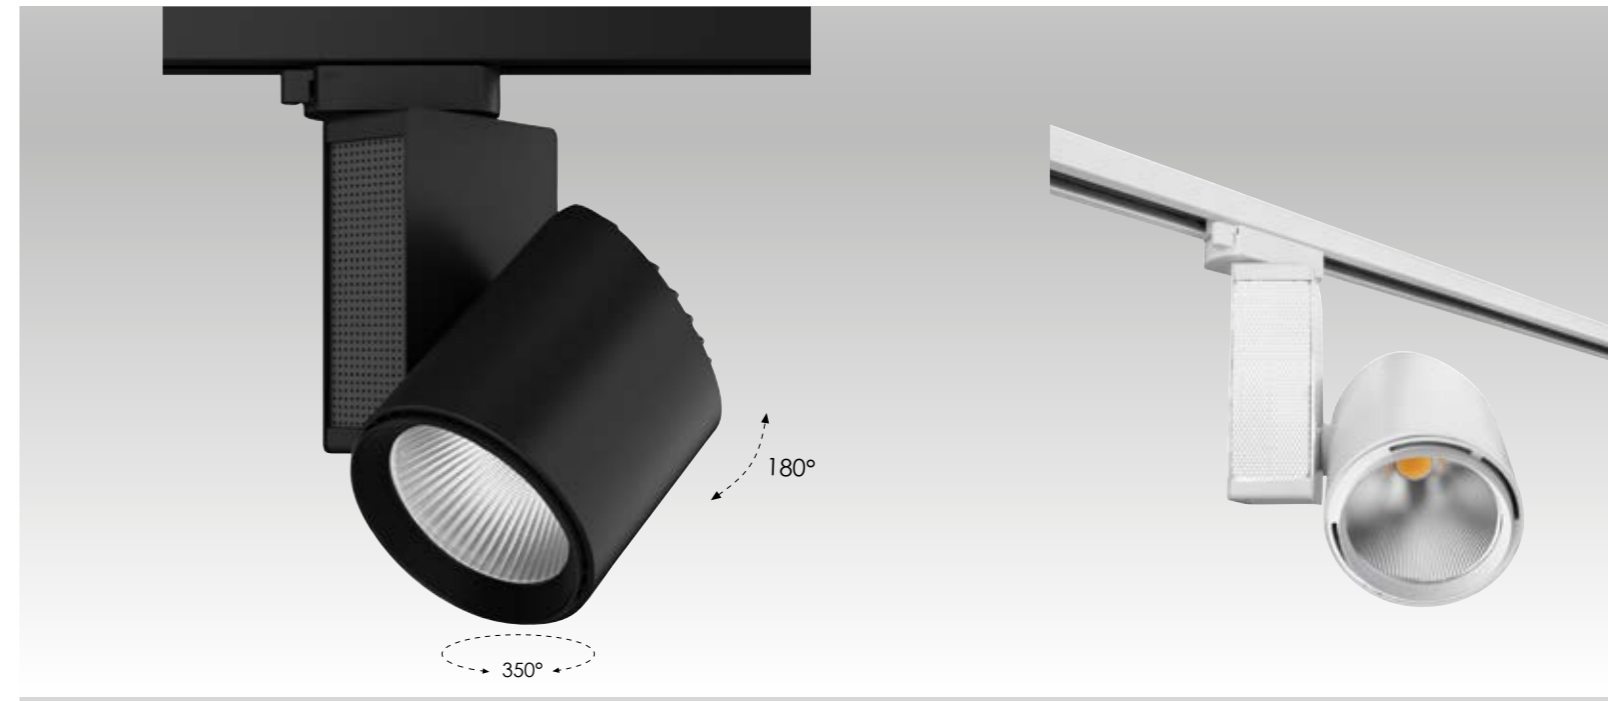

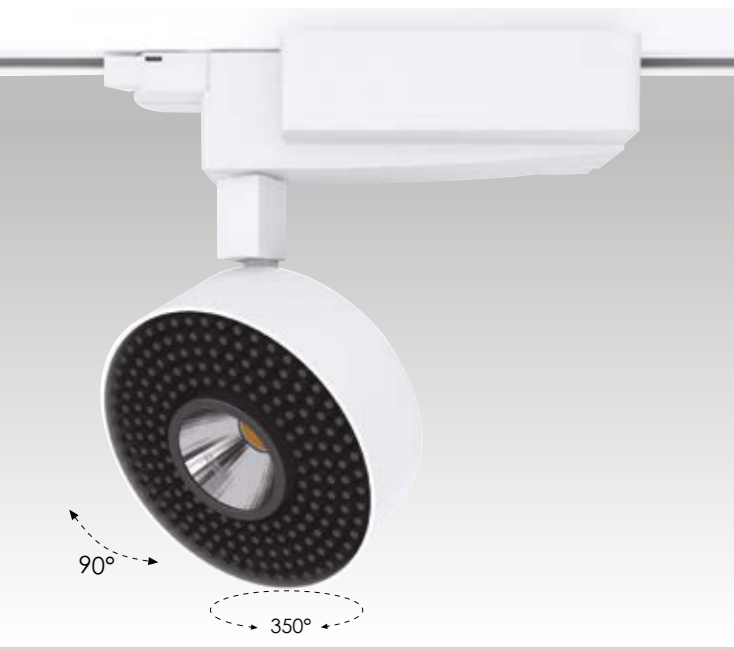







ARROW



LED-ARROW-40W

8031439211264

informazioni tecniche - technical information


 24°	 >15 000 on/off	 h 25 000	
	 120 ~ 240V 50/60Hz	PF 0,90	
LED 40W	 2800 Lumen	3000K	
	CLASSE A	COB	Ra >80

articoli e varianti - items and options

finitura bianco - white finish


LED-TRAIN-W-40WM

8031440360296

 2400 Lumen	4000K
--	--------------

LED-TRAIN-W-40WC


8031440360449

 2400 Lumen	3200K
--	--------------

finitura nero - black finish


LED-TRAIN-B-40WM

8031440360289







 2400 Lumen	4000K
--	--------------


LED-TRAIN-B-40WC

8031440360456

 2400 Lumen	3200K
--	--------------

informazioni tecniche - technical information

 40°	 >15 000 on/off	 h 25 000	LED 40W	
 driver incluso		COB	CLASSE A	Ra >80
				PF 0,90

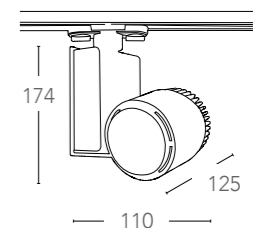

certificazioni - certification



INTEC LIGHT

INTEC LIGHT

EAGLE 

ALU*

Faro binario con adattatore trifase in alluminio pressofuso
 rifiniture in bianco o nero satinato LED COB integrato
 Track light with three phase adaptor aluminum spotlight
 finish satin white or black built-in COB LED

36

37

EXPRESS

Faro binario con adattatore trifase attacco E27 rifiniture
 in bianco satinato
 Track light with three phase adaptor with E27 lamp holder
 finish satin white





articoli e varianti - items and options

finitura bianco - white finish



LED-EAGLE-W-30WM

8031440360326

 1900 Lumen | 

LED-EAGLE-W-30WC



8031440360463

 1900 Lumen | 

finitura nero - black finish


LED-EAGLE-B-30WM

8031440360302

 1900 Lumen | 

LED-EAGLE-B-30WC


8031440360333

 1900 Lumen | 

informazioni tecniche - technical information

 40° |  >15 000 on/off |  h 25 000 |  LED 30W | 

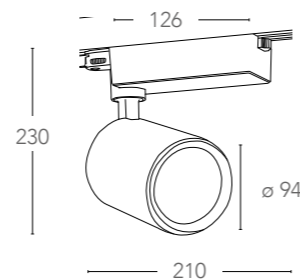

 driver incluso 110 ~ 240V |  COB |  CLASSE A |  Ra >80 |  PF 0,90




LED-EXPRESS

8031440360470

informazioni tecniche - technical information

 1xE27
 MAX 60W | 

non include - not included




INTEC

INTEC
 LIGHT

TRACK

Binari ed accessori
Track and components

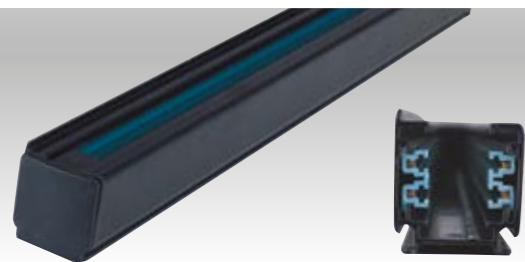

LED-TRACK-1M-NERO

8031440360425


LED-TRACK-2M-NERO

8031440360364

LED-TRACK-3M-NERO

8031440360371

Binari elettrificati trifasi in alluminio rifiniture in nero (tappi inclusi)
Track rail in aluminium with threephase adaptor (endcap)

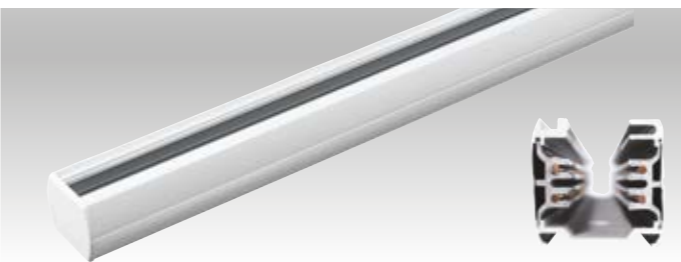

LED-TRACK-1M

8031439221263

LED-TRACK-2M

8031440360340

LED-TRACK-3M

8031440360357

Binari elettrificati trifasi in alluminio rifiniture in bianco (tappi inclusi)
Track rail in aluminium with threephase adaptor (endcap)



LED-TRACK-NEST-NERO

80314403360418

Innesto per binari guida entrata L N + cavo di terra per circuito a 3 fasi
Power connector for three phase track rail in white color



LED-TRACK-NEST

8031440311564


Innesto per binari guida entrata L N + cavo di terra per circuito a 3 fasi
Power connector for three phase track rail in white color



LED-TRACK-I-NERO

8031440360432


Connettore lineare per binari guida
Straght extension



LED-TRACK-I

8031440311526

Connettore lineare per binari guida
Straght extension

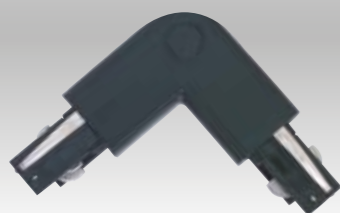

LED-TRACK-L-NERO

80314340360401

Connettore a L per binari guida
Extension L shape



LED-TRACK-L

8031439241261

Connettore a L per binari guida
Extension L shape



LED-TRACK-T-NERO

8031440360388

Connettore a Tper binari guida
Extension T shape



LED-TRACK-T

8031440311571

Connettore a Tper binari guida
Extension T shape



LED-TRACK-X -NERO

8031440360395


Connettore a croce per binari guida
Extension X shape



LED-TRACK-X

8031439231262

Connettore a croce per binari guida
Extension X shape

SLOT 



Faro strutture esterna in metallo bianco goffrato con riflettore prismatico cromo LED COB integrato
Surface mount in metal embossed white color with prismatic reflector built-in COB LED

articoli e varianti - items and options

LED-SLOT-10WC

8031440101271

 800 Lumen

 3200K

LED-SLOT-10WF

8031439681265

 900 Lumen

 5500K

informazioni tecniche - technical information

 100°


 >10 000 on/off

 h 25 000

 driver incluso

 LED 10W


 COB

 Ra >80





CLASSE A



articoli e varianti - article and finish

LED-SLOT-20WC

8031440111270

 1600 Lumen

 3200K

LED-SLOT-20WF

8031439711269

 1700 Lumen


 5500K

informazioni tecniche - technical information

 100°


 >10 000 on/off

 h 25 000

 driver incluso

 LED 20W


 COB

 Ra >80





CLASSE A



BARREL 



Plafoniera in alluminio pressofuso finitura bianco gofrato LED integrato
Aluminium surface mount ceiling lamp embossed white built-in LED

ALU*

LED-BARREL-10W

8031440352048

informazioni tecniche - *technical information*

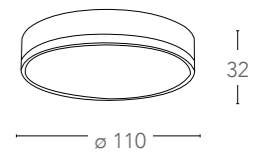
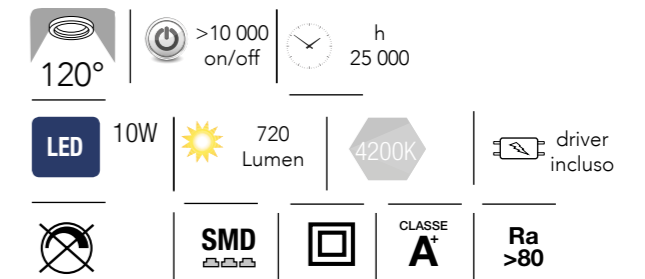


articoli e varianti - *items and options*

LED-BARREL-16W

8031440352017



informazioni tecniche - *technical information*

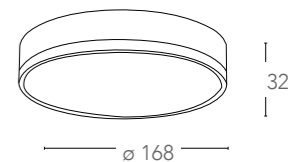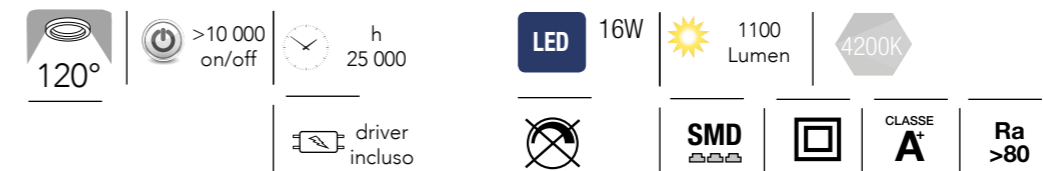

LED-BARREL-24W

8031440352024

informazioni tecniche - *technical information*

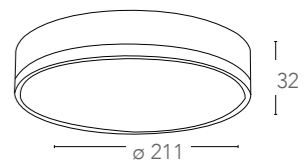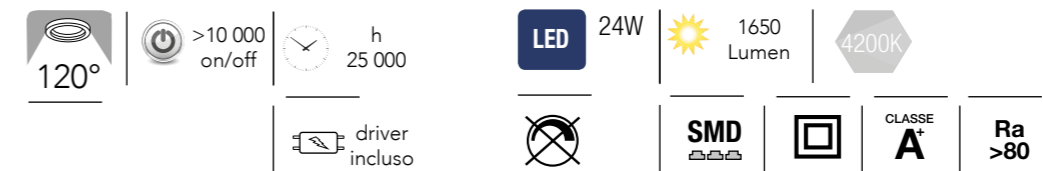

PANEL 














Pannello da controsoffitto in alluminio
rifiniture bianco LED integrato
*Panel light for dropped ceiling in alumi-
nium white color built-in LED*

ALU*

LED-PANEL-60X60

8031440352444



informazioni tecniche - *technical information*

 120°	 >10 000 on/off	 h 20 000		
 foro 600x600 mm	 driver incluso			
 LED 40W	 3000 Lumen	 4000K		
	 SMD		 CLASSE A+	 Ra >80

articoli e varianti - *items and options*

LED-PANEL-C-60X60




8031440354868

 3000 Lumen	
--	---

LED-PANEL-F-60X60


8031440354929

 3000 Lumen	
--	---

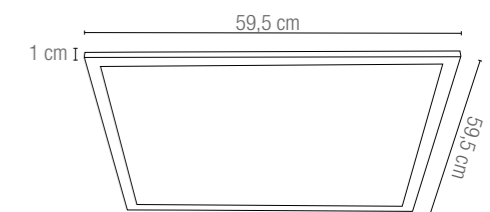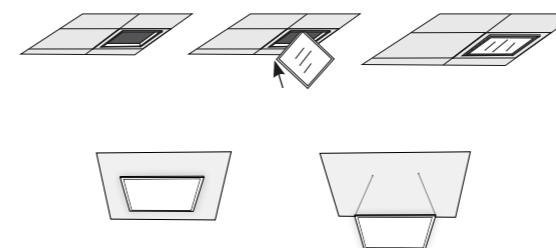


LED-PANEL-KIT

8031440352451

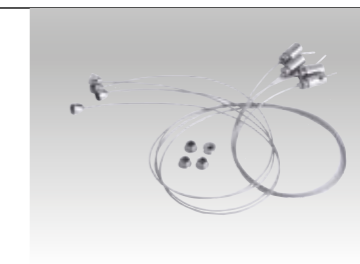

Kit cavi in acciaio per sospensione
Steel cable kit for suspension

PANEL 

Pannello da controsoffitto in alluminio
rifiniture bianco LED integrato
Panel light for dropped ceiling in alumi-
nium white color built-in LED



ALU*



articoli e varianti - items and options



LED-PANEL-30X120

8031440352468












 3000 Lumen	 4000K
--	---


LED-PANEL-F-30X120

8031440354912


 3000 Lumen	 5000K
--	---

informazioni tecniche - technical information

 120°	 >10 000 on/off	 h 20 000	 LED 40W	 CLASSE A	 Ra >80
 foro 300x1200mm	 driver incluso		 SMD		




KIT INCL.

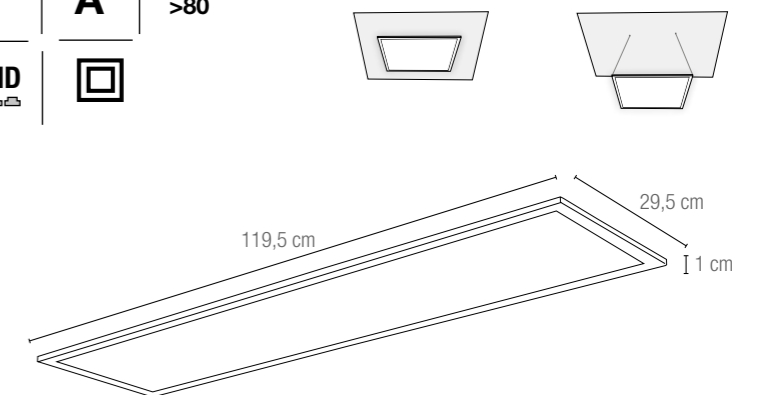

LED-PANEL-KIT

8031440352451

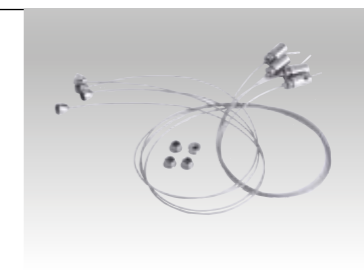

Kit cavi in acciaio x sospensione
Steel cable kit for suspension

ZENIT 

48


















49



Incasso struttura in policarbonato
LED integrato
Polycarbonate frame down light built-in
LED

zenit

informazioni tecniche - technical information

 120°	 >10 000 on/off	 h 25 000
 ø foro 65 mm	 25°	 230V DRIVER FREE
 LED 5W	 450 Lumen	 3000K
		 CLASSE A
 SMD	 Ra >80	

articoli e varianti - items and options



finitura nickel spazzolato - *satin nickel finish*

INC-ZENIT-5W NIK

8031439901271



finitura bianco gofrato - *embossed white finish*

INC-ZENIT-5W BCO

8031439881276



finitura cromo - *chrome finish*

INC-ZENIT-5W CR

8031439891275



finitura oro satinato - *satin gold finish*

INC-ZENIT-5W ORO

8031439911270

INTEC
LIGHT

certificazioni - certification



INTEC

POLARIS



50



51



Incasso orientabile in alluminio pressofuso LED COB integrato
Die cast adjustable down light built-in COB LED

INC-POLARIS-R3 BCO

8031429681169

finitura bianco goffrato
embossed white finish


INC-POLARIS-R3

8031432041196

finitura silver goffrato
embossed silver finish

informazioni tecniche - technical information

24°	>10 000 on/off	h 25 000
ø foro 55 mm	25°	Ra >80
LED 3W	190 Lumen	4000K
		CLASSE A
		COB



INC-POLARIS-Q3 BCO

8031429761168

finitura bianco goffrato
embossed white finish


INC-POLARIS-Q3

8031432051195

finitura silver goffrato
embossed silver finish

informazioni tecniche - technical information

24°	>10 000 on/off	h 25 000
ø foro 50 mm	25°	Ra >80
LED 3W	190 Lumen	4000K
		CLASSE A
		COB



ORIONE



Incasso orientabile in alluminio pressofuso LED COB integrato
Die cast adjustable down light built-in COB LED

52

53

GEMINI



Incasso orientabile in alluminio pressofuso LED COB integrato
Double die cast adjustable down light built-in COB LED



INC-ORIONE-R6 BCO

8031429771167

finitura bianco goffrato
embossed white finish

INC-ORIONE-R6

8031432021198

finitura silver goffrato
embossed silver finish

informazioni tecniche - technical information

87°	>10 000 on/off	h 25 000	
ø foro 75 mm	25°	Ra >80	
LED 6W	380 Lumen	4000K	
		CLASSE A+	COB



INC-GEMINI-PL6

8031432011199

finitura silver goffrato - embossed silver finish

informazioni tecniche - technical information


87°	>10 000 on/off	h 25 000	LED 2x5W	630 Lumen	4000K	
foro 155x80 mm	driver incluso	15°		COB		

articoli e varianti - items and options

finitura bianco goffrato - embossed white finish

INC-GEMINI-PL6 BCO

8031439191269

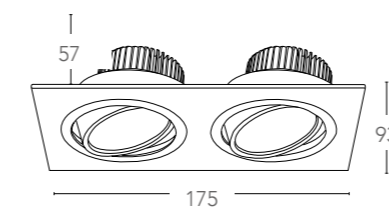

INC-ORIONE-Q6 BCO

8031434361216

finitura bianco goffrato
embossed white finish

INC-ORIONE-Q6

8031432031197

finitura silver goffrato
embossed silver finish

informazioni tecniche - technical information

87°	>10 000 on/off	h 25 000	
ø foro 75 mm	25°	Ra >80	
LED 6W	380 Lumen	4000K	
		CLASSE A+	COB

certificazioni - certification



INTEC

LIGHT

certificazioni - certification



NADIR



Incasso in alluminio pressofuso finitura bianco goffrato LED COB integrato
Aluminium die cast embossed white built-in COB LED

54

55

KLIPPE



Incasso orientabile in 4 direzioni in alluminio pressofuso finitura bianco goffrato LED COB integrato
Aluminium die cast down light adjustable in 4 direction embossed white finish built-in COB LED



articoli e varianti - items and options

INC-NADIR-R6C

8031439671266



390 Lumen



3200K

INC-NADIR-R6F

88031439641269



420 Lumen



5500K

informazioni tecniche - technical information



21°




>10 000 on/off



h 25 000



ø foro 80 mm



90



LED 6W



CLASSE A



COB

Ra >80



IP44



articoli e varianti - items and options

INC-KLIPPE-8C

8031435041223



480 Lumen



3200K

INC-KLIPPE-8F

8031435051222



550 Lumen



5500K

informazioni tecniche - technical information



24°



>10 000 on/off



h 25 000



15°



foro ø 95 mm



driver incluso



LED 8W




CLASSE A

Ra >80



COB

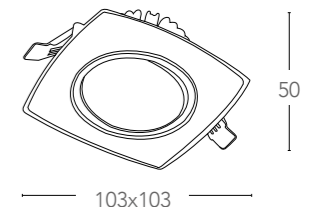

103x103

50



articoli e varianti - items and options

INC-NADIR-Q6C

8031439691264



390 Lumen



3200K

INC-NADIR-Q6F

8031439661267



420 Lumen



5500K

informazioni tecniche - technical information



21°




>10 000 on/off



h 25 000



ø foro 80 mm

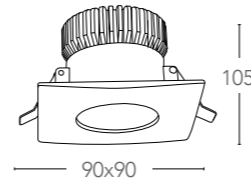

90x90



LED 6W



CLASSE A



COB

Ra >80



IP44

certificazioni - certification



INTEC LIGHT

certificazioni - certification



INTEC LIGHT

KRONE 

ALU*

56
 Incasso orientabile in alluminio pressofuso con riflettore cromo LED COB integrato
 Diecast aluminium down light adjustable with chrome reflector built-in COB LED

POUND 

ALU*

57
 Incasso orientabile in alluminio pressofuso con riflettore cromo LED COB integrato
 Diecast aluminium down light adjustable with chrome reflector built-in COB LED

INC-KRONE-5C BCO

8031434961225









finitura bianco - white finish


INC-KRONE-5C NIK

8031434981223

finitura nickel - nickel finish

informazioni tecniche - technical information

 87°	 >10 000 on/off	 h 25 000
 ø foro 80 mm	 15°	Ra >80
LED 5W	 320 Lumen	3200K
		CLASSE A
		COB



INC-KRONE-5F BCO

8031434971224









finitura bianco - white finish


INC-KRONE-5F NIK

8031434991222

finitura nickel - nickel finish

informazioni tecniche - technical information

 87°	 >10 000 on/off	 h 25 000
 ø foro 80 mm	 15°	Ra >80
LED 5W	 380 Lumen	5500K
		CLASSE A
		COB




INC-POUND-5C BCO

8031435001227









finitura bianco - white finish


INC-POUND-5C NIK

8031435021225

finitura nickel - nickel finish

informazioni tecniche - technical information

 87°	 >10 000 on/off	 h 25 000
 ø foro 80 mm	 15°	Ra >80
LED 5W	 320 Lumen	3200K
		CLASSE A
		COB



INC-POUND-5F BCO

8031435011226









finitura bianco - white finish


INC-POUND-5F NIK

8031435031224

finitura nickel - nickel finish

informazioni tecniche - technical information

 87°	 >10 000 on/off	 h 25 000
 ø foro 80 mm	 15°	Ra >80
LED 5W	 380 Lumen	5500K
		CLASSE A
		COB



certificazioni - certification



INTEC
LIGHT

certificazioni - certification



certificazioni - certification



INTEC
LIGHT

SIRIO



ALU*

Incasso in alluminio pressofuso finitura nickel spazzolato LED integrato
Diecast aluminium down light brush nickel color built-in LED

58

59

ALU*

Kit 3pz incasso in alluminio pressofuso finitura nickel spazzolato LED integrato
Kit 3 pcs diecast aluminium down light brush nickel color built-in LED





INC-SIRIO-R1

8031433991216

variante rotonda
round option

informazioni tecniche - technical information



INC-SIRIO-Q1

8031433961219



variante quadra
square option



INC-SIRIO-R3

8031432071193



informazioni tecniche - technical information

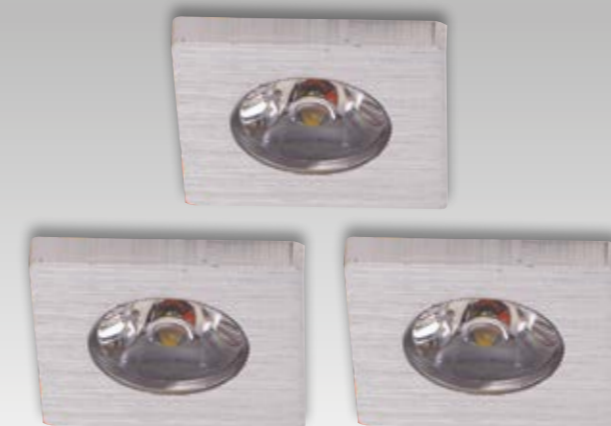

INC-SIRIO-Q3

8031432061194

informazioni tecniche - technical information



INTEC

LIGHT

certificazioni - certification



FUSION



60



61

ALU*



Kit 3pz incasso in alluminio LED integrato
Kit 3 pcs aluminium down light built-in LED

INC-FUSION-3X5W NIK

8031440353342

finitura nickel- *nickel finish*

informazioni tecniche - *technical information*

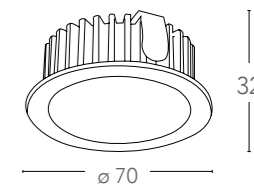

articoli e varianti - *items and options*

finitura bianco- *white finish*

INC-FUSION-3X5W BCO


8031440353335



finitura oro - *gold finish*

INC-FUSION-3X5W ORO

8031440353359

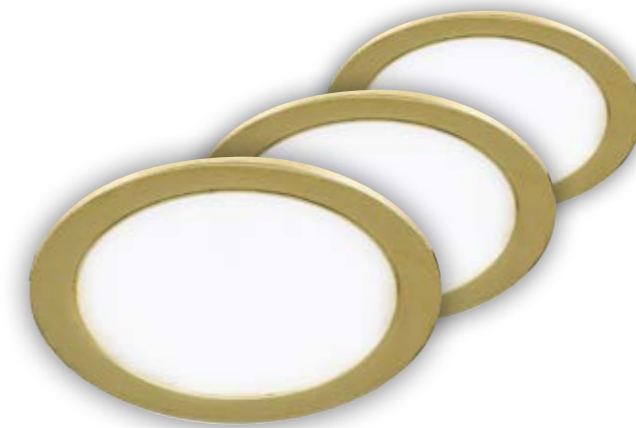

INTEC
LIGHT

certificazioni - *certification*



INTEC

BLIZ



ALU*


Kit faretti in alluminio con struttura esterna
Kit surface mount aluminium down light

62

63

MATRIX

Kit incasso in metallo
Kit metal down lights

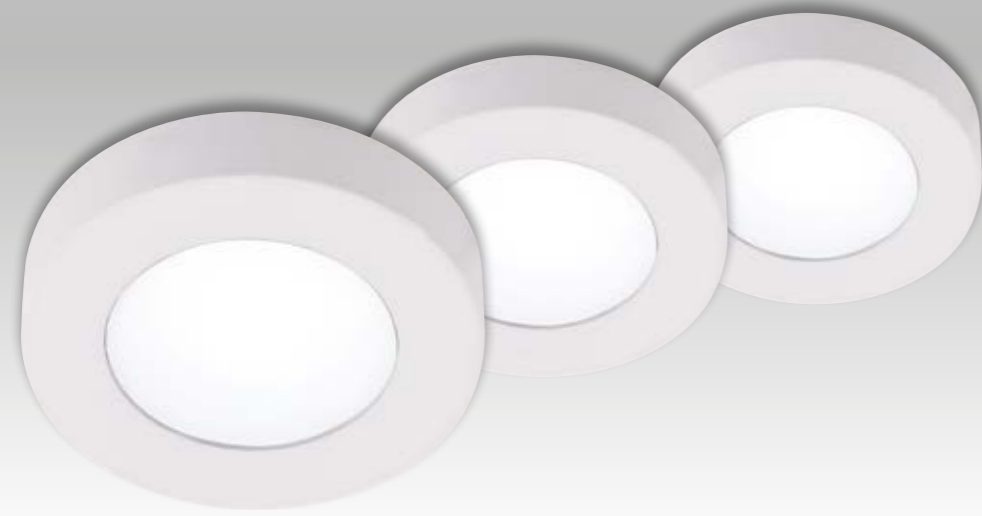


LED-BLIZ-R3

8031440353274

informazioni tecniche - technical information

105°	>10 000 on/off	h 25 000	LED	3x5 W	3x300 Lm	4000K
230V DRIVER FREE			CLASSE A	SMD		



articoli e varianti - items and options

INC-MATRIX-DF3 NIK

8031431661180

finitura nickel- nickel finish

Kit 3 pcs.

INC-MATRIX-DF3 BCO


8031431671189

finitura bianco - white finish

Kit 3 pcs.

informazioni tecniche - technical information

120°	>8 000 on/off	h 2000	3 GU10 MAX 42W	600 Lm x3
ø foro 60 mm			$0,5m$	CLASSE D

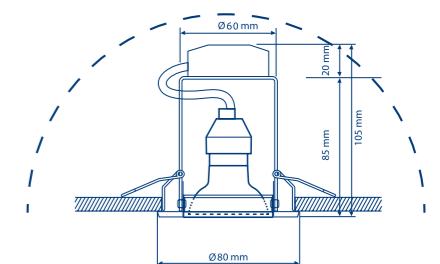

certificazioni - certification



INTEC LIGHT

certificazioni - certification




MATRIX



Kit incasso in metallo orientabili lampade
alogene incluse
Kit metal down lights adjustable with
halogen bulbs included

MATRIX

informazioni tecniche - technical information

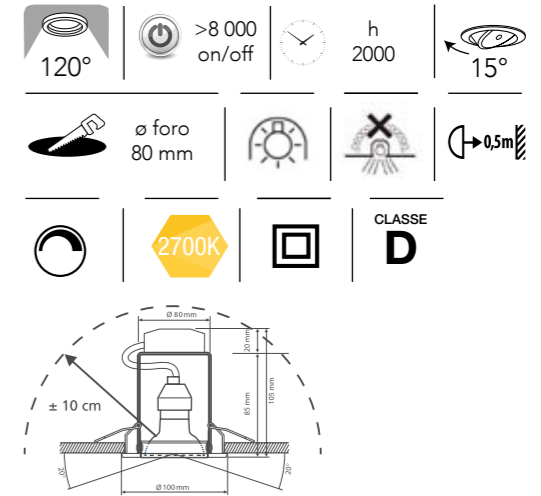

articoli e varianti - items and options

GU10
MAX 42W | 600
Lumen

3 GU10
MAX 42W | 600 Lm
x3



finitura bianco - white finish

Singolo - single
INC-MATRIX-DM1 BCO
8031431651181



finitura nickel- nickel finish

Singolo - single
INC-MATRIX-DM1 NIK
8031431641182



finitura oro - gold finish

Singolo - single
INC-MATRIX-DM1 ORO
8031431631183

finitura bianco - white finish

kit 3 pcs.
INC-MATRIX-DM3 BCO
8031431621184



finitura nickel- nickel finish

kit 3 pcs.
INC-MATRIX-DM3 NIK
8031431611185



INTEC
LIGHT

certificazioni - certification




MATRIX LED



Kit incasso in metallo orientabili lampade LED incluse
Kit metal down lights adjustable with LED bulbs included

MATRIX

informazioni tecniche - technical information

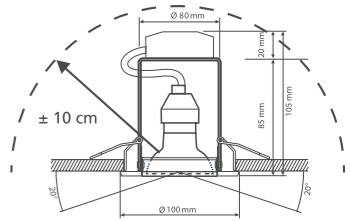

articoli e varianti - items and options

LED 6W | 345 Lumen

finitura nickel - nickel finish

Singolo - single
INC-MATRIX-LEDM1 NIK
8031440313049

finitura bianco - white finish

Singolo - single
INC-MATRIX-LEDM1 BCO
8031440313063

finitura cromo - chrome finish

Singolo - single
INC-MATRIX-LEDM1 CR
8031440313056

finitura oro - gold finish

Singolo - single
INC-MATRIX-LEDM1 ORO
8031440313070

LED 3 x 6W | 3x345 Lumen

finitura nickel - nickel finish

kit 3 pcs.
INC-MATRIX-LEDM3 NIK
8031431571182

finitura bianco - white finish

kit 3 pcs.
INC-MATRIX-LEDM3 BCO
8031429651162

finitura cromo - chrome finish

kit 3 pcs.
INC-MATRIX-LEDM3 CR
8031440313032

finitura oro - gold finish

kit 3 pcs.
INC-MATRIX-LEDM3 ORO
8031440313025

certificazioni - certification



ALAN



68
 Incasso in metallo
 con gemme in acrilico
Metal down light with acrylic beads



INC-ALAN-CR

8031440311915

informazioni tecniche - *technical information*



69
 Incasso in metallo
 con gemme in acrilico
Metal down light with acrylic beads

INCASSO

Incasso in metallo con diffusore in vetro
 trasparente
Metal down light with clear glass diffusor



articoli e varianti - *items and options*



INCASSO-UP-L-BCO


8031440351737




INCASSO-UP-L-NIK

8031440351744

informazioni tecniche - *technical information*



non include - *not included*

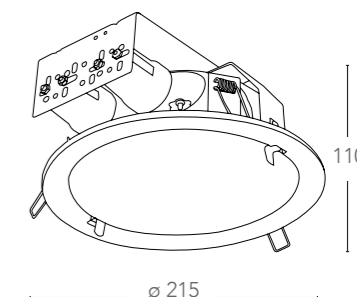


GEMMA



INC-GEMMA-CR

8031439951276

informazioni tecniche - *technical information*



INTEC
 LIGHT

certificazioni - *certification*



INCASSO



INCASSO/M-BCO

8031427671148

finitura bianco - white finish

INCASSO/M-NIK

8031427641141

finitura nickel - nickel finish

informazioni tecniche - technical information

ø foro 205 mm
 Energy Saver 800 Lumen 6400K
 2xE27 15W
 inclusa - included
 CLASSE A
 ø 215
 110



70

Incasso in metallo con diffusore in vetro acidato
Metal down light with acid glass diffusor

71

ADAM



INCASSO-ADAM-R2

8031433921213

informazioni tecniche - technical information

ø foro 165 mm
 2xE27 MAX 60W
 non include - not included
 ø 180



INCASSO/Q-BCO

8031427631142

finitura bianco - white finish

Art. INCASSO/Q-NIK

8031427611144

finitura nickel - nickel finish

informazioni tecniche - technical information

foro 185x185 mm
 Energy Saver 1300 Lumen 6400K
 2xE27 22W
 inclusa - included
 CLASSE A
 225x225
 110



INCASSO-ADAM-Q2

8031433971218

informazioni tecniche - technical information

foro 150x150 mm
 2xE27 MAX 60W
 non include - not included
 190x190



certificazioni - certification



INTEC
LIGHT

certificazioni - certification





ADAM

Incasso in metallo diffusore in vetro
trasparente
Metal down light with transparent glass
diffusor


INCASSO-ADAM-R1

8031433951210

informazioni tecniche - technical information





non include - not included





INCASSO-ADAM-Q1

8031433941211

informazioni tecniche - technical information



non include - not included

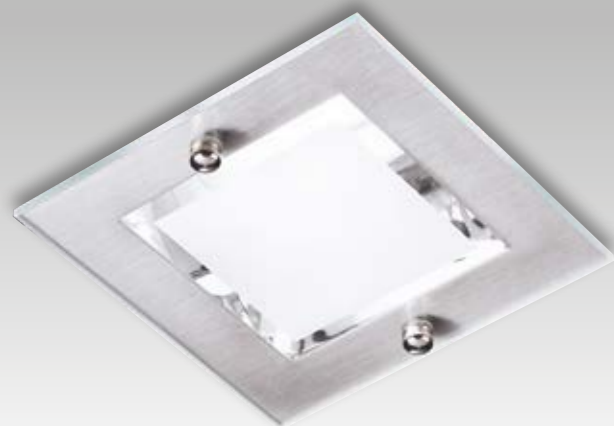


ILLUMINAZIONE GESSO
Gypsun lighting

INTEC
LIGHT

certificazioni - certification



PHANTOM



74
 Incassi in gesso verniciabili con lampada alogena inclusa
 Gypsun down light paintable with halogen bulbs

SPETTRO



75
 Incassi in gesso verniciabili con lampada alogena inclusa
 Gypsun down light paintable with halogen bulbs




INC-PHANTOM-R1

8031431551184

informazioni tecniche - technical information

45°	ø foro 83 mm		
Halogen	600 Lumen		2700K
1xGU10 35W			

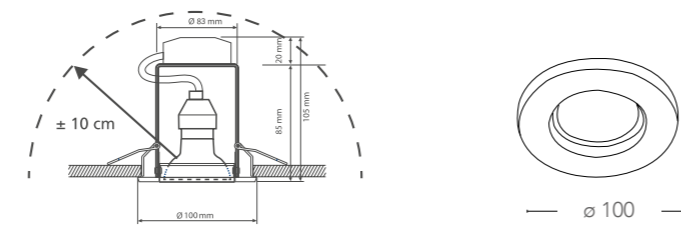


INC-SPETTRO-R1

8031431531186

informazioni tecniche - technical information

45°	ø foro 85 mm		
Halogen	600 Lumen		2700K
1xGU10 35W			

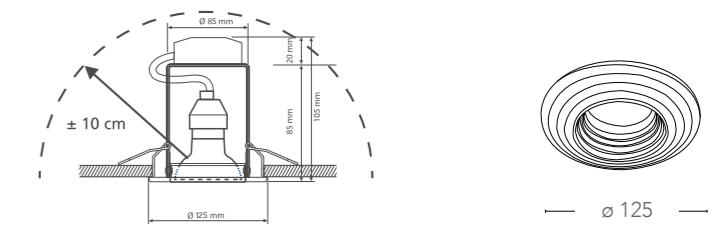


INC-PHANTOM-Q1

8031431561183

informazioni tecniche - technical information

45°	foro 73x73 mm		
Halogen	600 Lumen		2700K
1xGU10 35W			

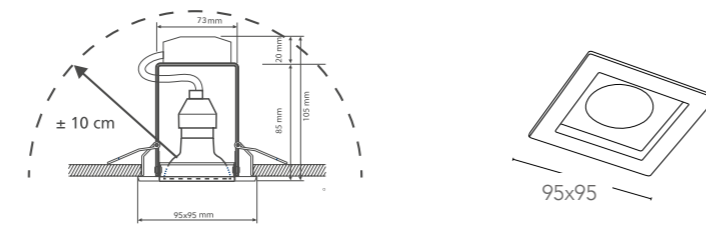


INC-SPETTRO-Q1

8031431541185

informazioni tecniche - technical information

45°	foro 95x95 mm		
Halogen	600 Lumen		2700K
1xGU10 35W			

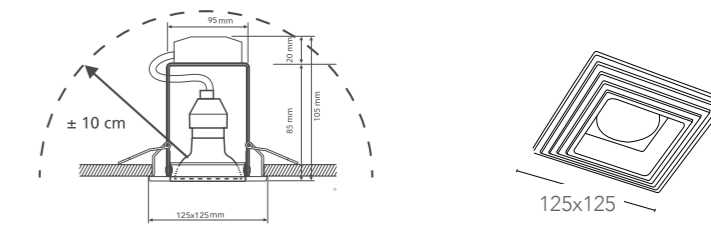

certificazioni - certification




certificazioni - certification



GHOST

76

77



Incassi in gesso verniciabili a scomparsa
Recess gypsum down light paintable

INC-GHOST-Q1

8031434261219

informazioni tecniche - technical information



45°



foro
125x125 mm



120x120

55



GU10
MAX 35W



non include - not included



INCL



INC-GHOST-Q1D

8031434241211


informazioni tecniche - technical information



45°



foro
125x125x8-15 mm



120x120


55



GU10
MAX 35W




non include - not included



INCL



GHOST



Doppio incasso in gesso verniciabili a scomparsa
Double recess gypsun down light paintable

78

SENSO



Incassi in gesso verniciabili a scomparsa
Recess gypsun down light paintable

79




INC-GHOST-Q2

8031434301212

informazioni tecniche - technical information

45° |
 foro 220x115x8-15 mm |
 2XGU10 MAX 35W |
 non incluse - not included

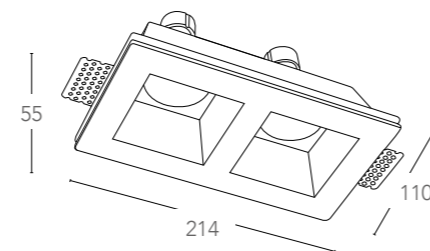


INC-SENSO-1

8031434221213

informazioni tecniche - technical information

45° |
 foro 125x125x8-15 mm |
 GU10 MAX 35W |
 non incluse - not included

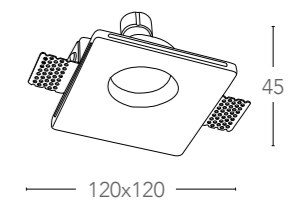


certificazioni - certification



certificazioni - certification



SNOW




Incassi in gesso verniciabili a scomparsa con vetro
Recess gypsun down light paintable with glass

80

81

MORGANA





Incassi in gesso verniciabili a scomparsa orientabile
Recess gypsun down light paintable adjustable

INC-SNOW-R

8031440351607




informazioni tecniche - technical information



INC-MORGANA-Q1

8031434231212




informazioni tecniche - technical information

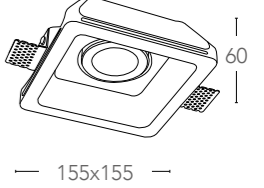

INC-SNOW-Q

8031440351577



informazioni tecniche - technical information

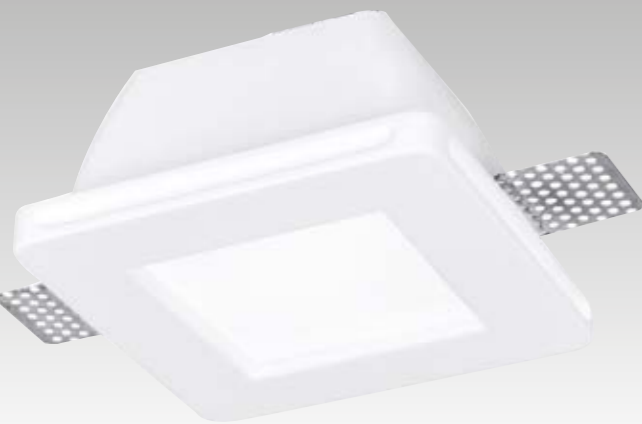

INC-MORGANA-R1

8031434211214

informazioni tecniche - technical information

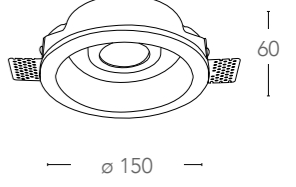

certificazioni - certification



certificazioni - certification



MORGANA

Verniciabile

Doppio incasso orientabile in gesso verniciabili a scomparsa
Double recess gypsum down light paintable adjustable



INC-MORGANA-Q2

8031434201215

informazioni tecniche - technical information



45°




foro
260x160x8-15 mm



GU10
MAX 35W



non incluse - not included

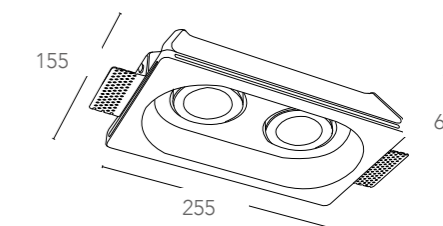

Verniciabile



Incasso a parete in gesso verniciabile a scomparsa
Recess gypsun wall lamp paintable

I-ANIMA-AP

8031434161212

informazioni tecniche - technical information




foro
335x255x125 mm



E14
MAX 40W



non incluse - not included

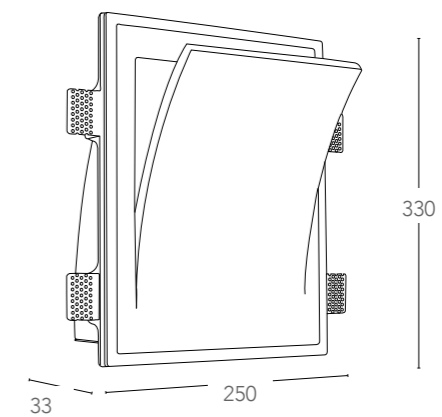

ARIEL

86

87

Verniciabile

Incasso a parete in gesso verniciabile a scomparsa
Recess gypsun wall lamp paintable

I-ARIEL-QL1

8031434151213

informazioni tecniche - technical information



35°



foro
115x250x12mm



Halogen



480
Lumen



2700K




GU10 mini
MAX 35W



CLASSE
D

include - included

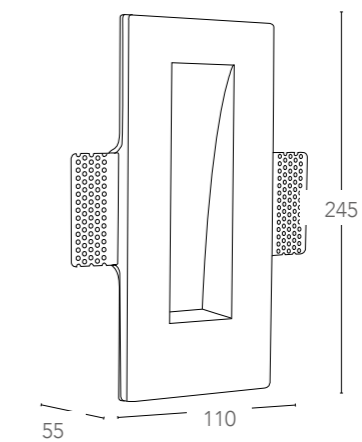

certificazioni - certification















Verniciabile

Incasso a parete in gesso verniciabile a scomparsa
Recess gypsun wall lamp paintable

I-ARIEL-RS1

8031434131215











informazioni tecniche - technical information

 35°	 foro 105x105x12mm	
 Halogen	 480 Lumen	 2700K
 GU10 mini MAX 35W		 CLASSE D
include - included		

I-ARIEL-RM1

8031434121216


informazioni tecniche - technical information

 35°	 foro 125x185x12mm	
 Halogen	 480 Lumen	 2700K
 GU10 mini MAX 35W		 CLASSE D
include - included		

PROFY



Profilo in gesso verniciabile a scomparsa
 Recess gypsun profile paintable

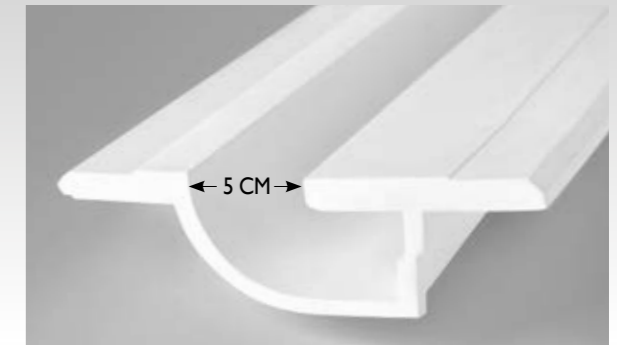


I-PROFY-100


8031434081213

informazioni tecniche - technical information



foro
 1005x180x60 mm

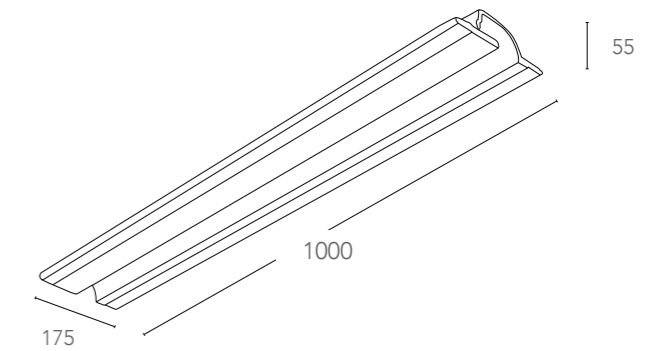



Faro struttura esterna in gesso verniciabile
Surface mount gypsum lamp paintable


I-SPACE-S-Q1

8031439521264

informazioni tecniche - technical information



GU10
MAX 35W
non incluse - not included




I-SPACE-S-R1

8031439531263

informazioni tecniche - technical information



GU10
MAX 35W
non incluse - not included



SPACE



Faro orientabile struttura esterna in gesso verniciabile
Adjustable surface mount gypsum lamp paintable


I-SPACE-Q1

8031434171211

informazioni tecniche - technical information



GU10
MAX 35W
non include - not included

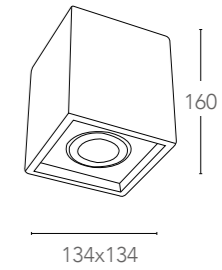


I-SPACE-R1

8031434141214


informazioni tecniche - technical information



GU10
MAX 35W
non include - not included

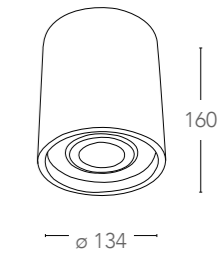

SPACE

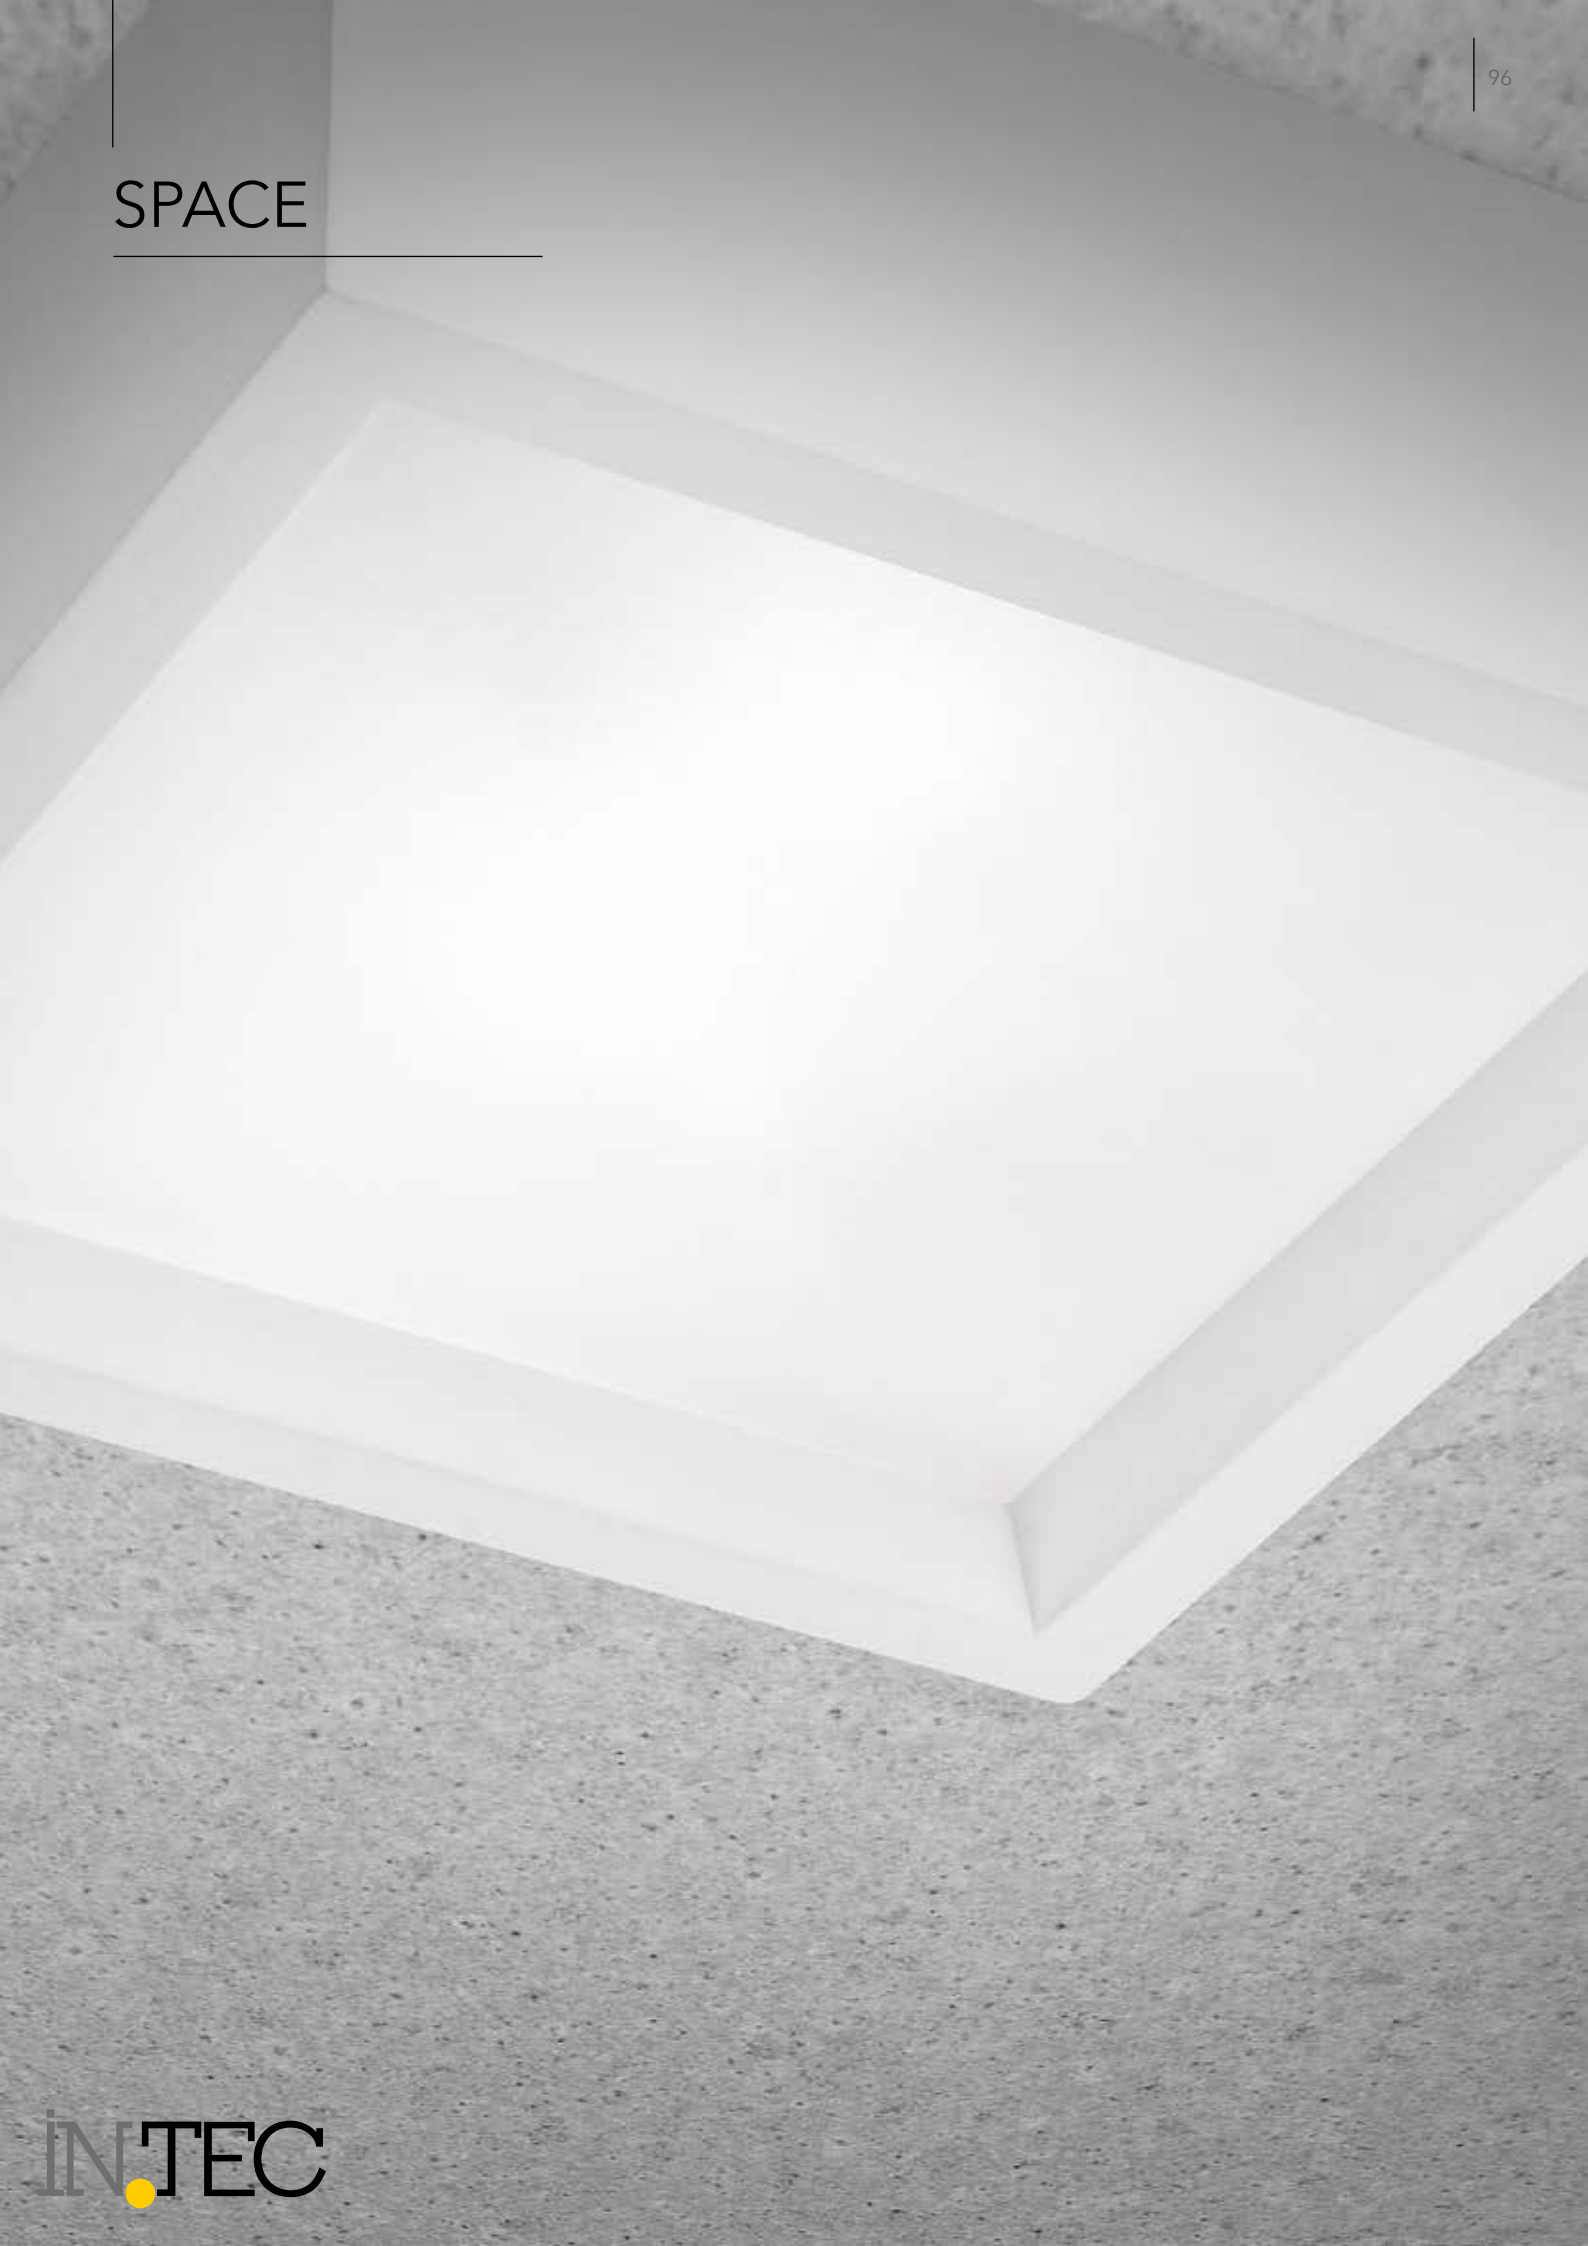


Verniciabile



Plafoniera in gesso verniciabile con
diffusore in vetro
Gypsun ceiling paintable with glass
diffuser

**I-GABRIEL/PL25Q**


8031434101218

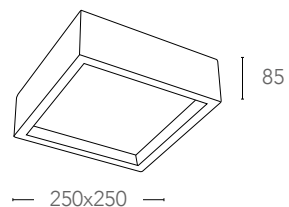informazioni tecniche - *technical information*non incluse - *not included***I-GABRIEL/PL30R**

8031434111217

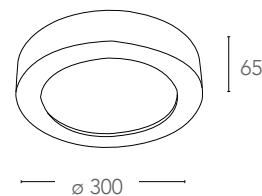informazioni tecniche - *technical information*non incluse - *not included*

MOSES



Appliche a parete in gesso verniciabile
Gypsun wall lamp paintable

98

99

SHINE



Appliche a parete in gesso verniciabile
Gypsun wall lamp paintable



I-MOSES-AP

8031434181210

informazioni tecniche - *technical information*



Halogen

430 Lumen


2700K



G9
MAX 28W
include - included



CLASSE
D

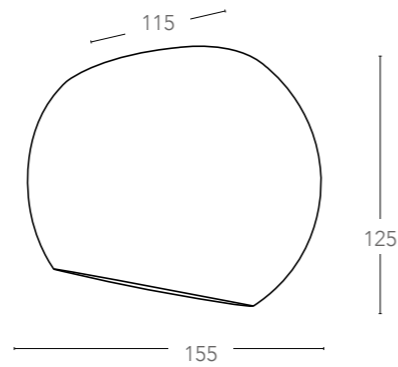

certificazioni - *certification*



I-SHINE-AP

8031434191219

informazioni tecniche - *technical information*



Halogen

430 Lumen


2700K



G9
MAX 28W
include - included




CLASSE
D

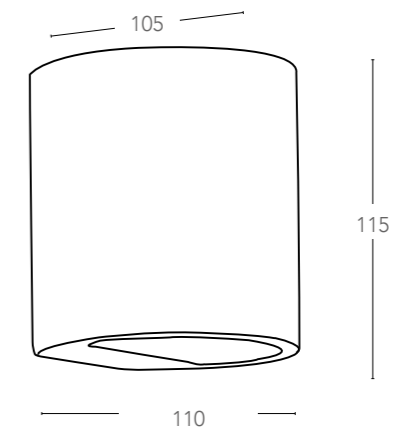

certificazioni - *certification*



CANDIDA



Applique a parete in gesso verniciabile
Gypsun wall lamp paintable

100

101

LEIRON



Applique a parete in gesso verniciabile
Gypsun wall lamp paintable




I-CANDIDA-AP


8031436751237

informazioni tecniche - technical information

2xE14
MAX 28W



non incluse
not included

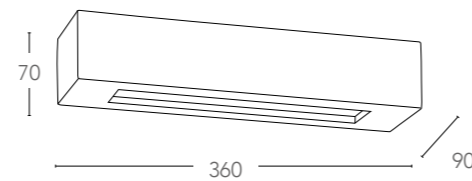

I-LEIRON-AP

8031436741238

informazioni tecniche - technical information



Halogen

430
Lumen

2700K




G9
MAX 28W



CLASSE
D

include - included




certificazioni - certification



certificazioni - certification



SANTORINI




Applique a parete angolare verniciabile
con diffusione luminosa vero l'alto
*Angular gypsun wall lamp paintable with
light diffusion upward*


102

103

MYKONOS




Applique a parete angolare verniciabile con
diffusione luminosa superiore e inferiore
*Angular gypsun wall lamp paintable with light
diffusion up and down*

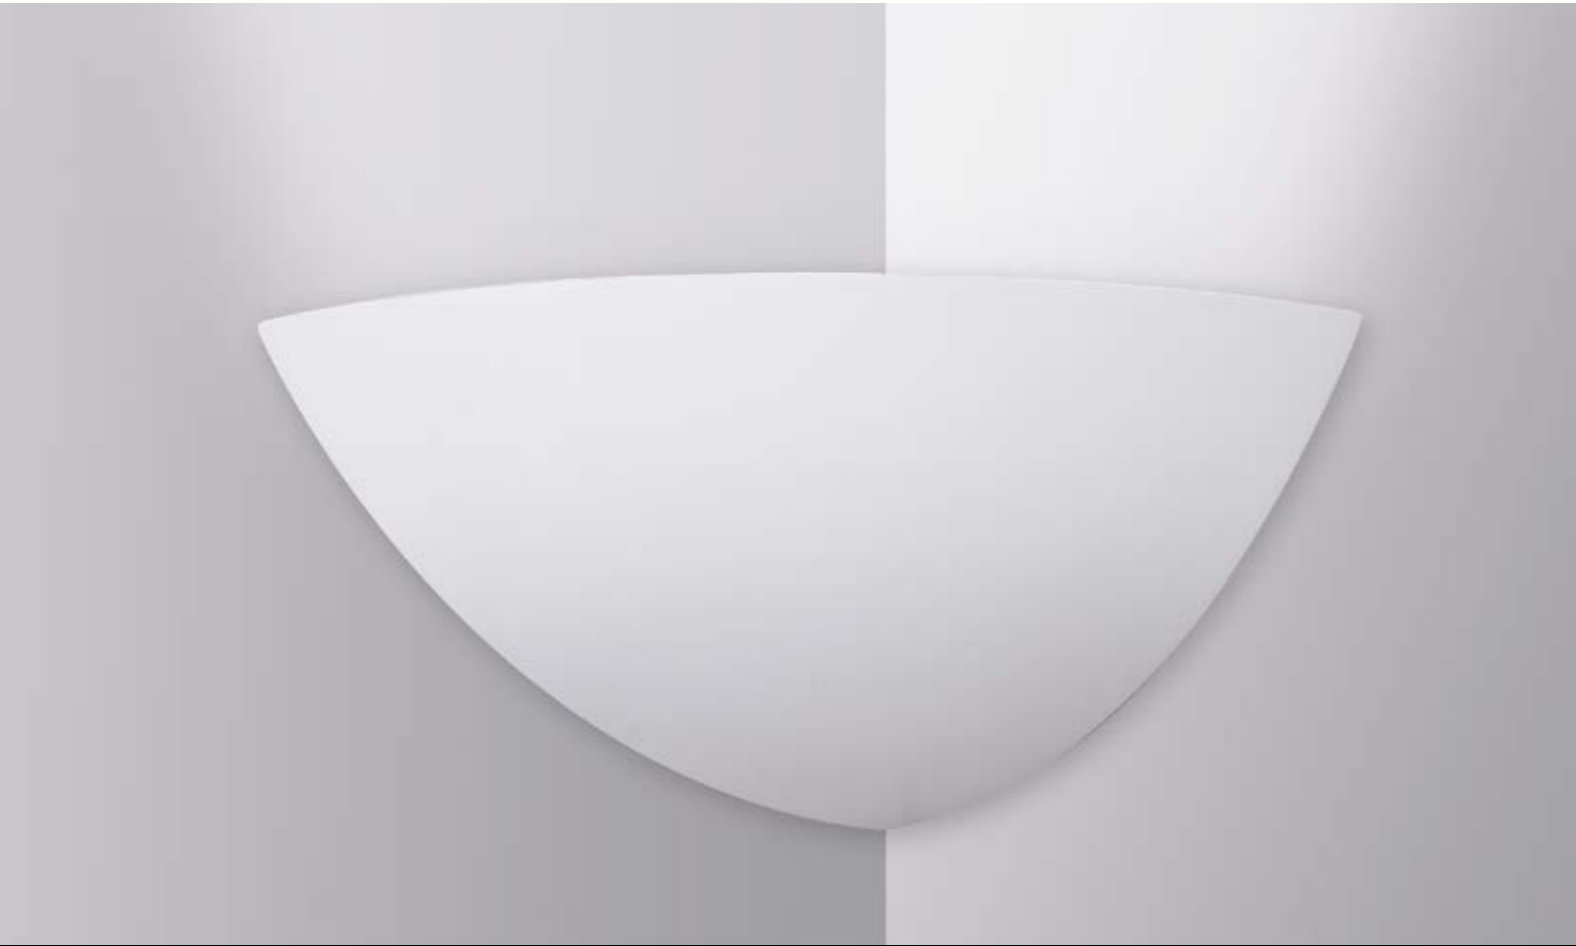


I-SANTORINI-AP

8031440351553

informazioni tecniche - *technical information*




non include
not included

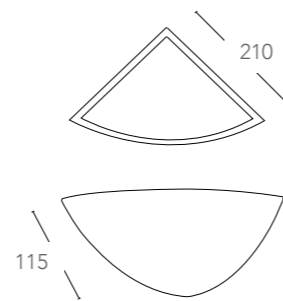


I-MYKONOS-AP

8031440351584

informazioni tecniche - *technical information*



non include
not included

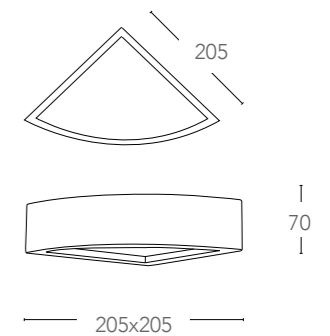

certificazioni - *certification*




INTEC
LIGHT

certificazioni - *certification*



LELLA

Verniciabile



Applique a parete in ceramica verniciabile con diffusione luminosa verso l'alto
Ceramic wall lamp paintable with light diffusion upward

104

105

STEFAN

Verniciabile



Applique a parete angolare verniciabile con diffusione luminosa superiore e inferiore
Angular gypsun wall lamp paintable with light diffusion up and down

164/00200

8031414052516

informazioni tecniche - *technical information*




max 78 mm



R7s
MAX 120W

non include - *not included*

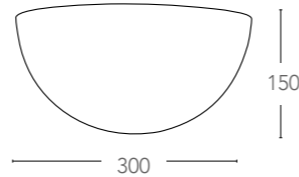

166/00100

8031414034260

informazioni tecniche
technical information



max 78 mm



R7s
MAX 120W

non include - *not included*




166/01600

8031422971106

informazioni tecniche
technical information



non include - *not included*

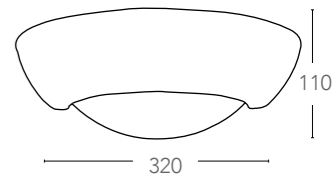

PAULA

Applique a parete in gesso verniciabile con diffusione luminosa superiore e inferiore
Gypsun wall lamp paintable with light diffusion up and down

166/01200

8031414056583

informazioni tecniche - *technical information*




max 78 mm



R7s
MAX 120W

non include - *not included*

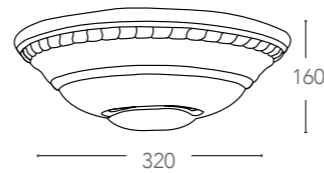

INTEC
LIGHT

certificazioni - *certification*



certificazioni - *certification*



ANTHEA

106
107
Incasso in porcellana lavorato a mano
Hand made porcelain down light

ZARAH

Incasso in porcellana lavorato a mano
Hand made porcelain down light



INC-ANTHEA-BCO
8031439791261


informazioni tecniche - technical information



120°



ø foro
65 mm



ø 122



non include - not included



MR16

INCL



INC-ZARAH-ORO
8031440121279

informazioni tecniche - technical information



120°




ø foro
80 mm



ø 130



non include - not included



MR16

INCL

BLUMA

FLORENZA



INC-BLUMA-BLU
8031439731267

informazioni tecniche - technical information



120°



ø foro
70 mm



ø 115



non include - not included



MR16

INCL



INC-FLORENZA-BCO
8031439771263


informazioni tecniche - technical information



120°




ø foro
80 mm



ø 142



non include - not included



MR16

INCL

certificazioni - certification



INTEC
LIGHT

certificazioni - certification



INTEC
LIGHT

108

109



LAMPADE DA PARETE
Wall lamp

HYDRA 



Applicato a LED in alluminio con diffusore in acrilico
Aluminium LED wall lamp with acrylic dif-fuser

ALU*


LED-W-HYDRA/3W

8031432951204

informazioni tecniche - technical information

 120°	 >10 000 on/off	 h 25 000
--	--	--

 driver incluso



 LED 3W	 240 Lumen	 3500K
--	---	---

	 SMD		CLASSE A	Ra >80
---	---	---	-----------------	------------------
















LED-W-RIGEL/6W

8031433041201

informazioni tecniche - *technical information*



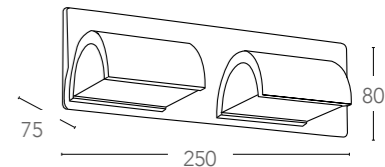









	 >10 000 on/off	 h 25 000	 6W	 400 Lumen	
 driver incluso				 CLASSE A	 Ra >80




LED-W-RIGEL/3W

8031433021203

informazioni tecniche - *technical information*

	 >10 000 on/off	 h 25 000	 3W	 200 Lumen	
 driver incluso				 CLASSE A	 Ra >80

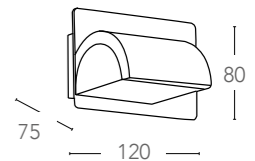

VEGA 

ALU*

Applique a LED in alluminio con diffusore in acrilico
Aluminium LED wall lamp with acrylic dif- fuser


114

115

ANDROMEDA 

ALU*



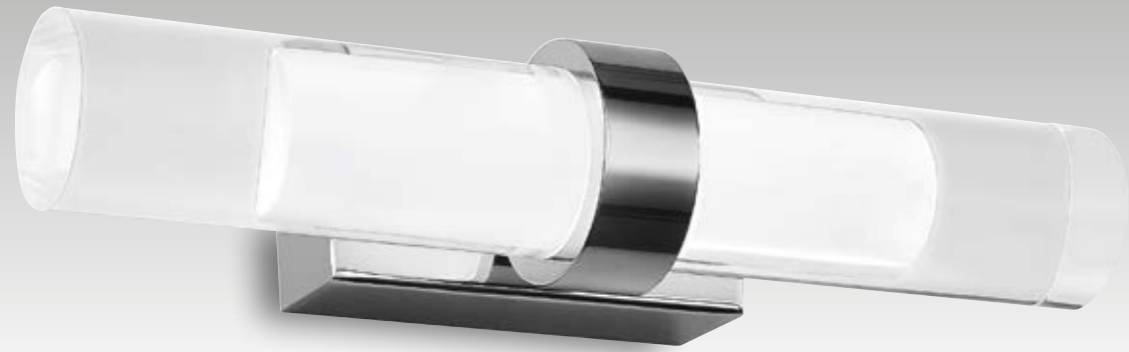









Applique a LED in metallo
Metal LED wall lamp



LED-W-VEGA/6W

8031432991200













informazioni tecniche - technical information


 >10 000 on/off
  h 25 000
 
 400 Lumen
 





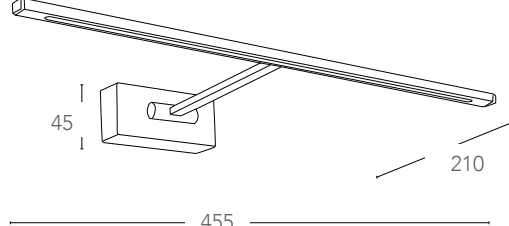

LED-W-ANDROMEDA/4W

8031432941205













informazioni tecniche - technical information


 >10 000 on/off
  h 25 000
 
 280 Lumen
 







LED-W-VEGA/3W

8031432961203

informazioni tecniche - technical information


 >10 000 on/off
  h 25 000
 
 200 Lumen
 







certificazioni - certification



certificazioni - certification



ANTARES




116

117

Applicare a LED in alluminio con diffusore in acrilico
Aluminium LED wall lamp with acrylic diffuser

ALU*

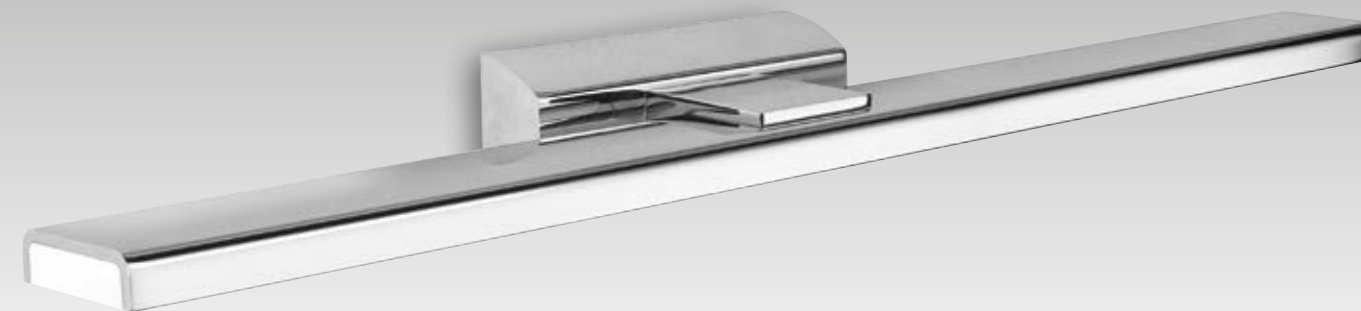

LED-W-ANTARES/8W CR



8031433081207

informazioni tecniche - *technical information*

	>10 000 on/off	h 25 000			
driver incluso				CLASSE A	Ra >80

LED-W-ANTARES/8W BCO

8031433091206

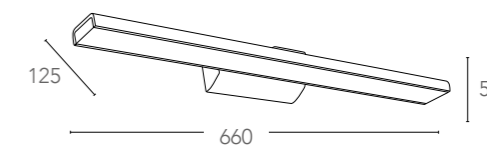

INTEC
LIGHT

certificazioni - *certification*



SIGMA

Applique a LED in metallo
Metal LED wall lamp

118

119

EPSILON

Applique a LED in metallo
Metal LED wall lamp



LED-W-SIGMA/4W

8031432971202

informazioni tecniche - technical information


	>10 000 on/off	h 25 000	4W	320 Lumen	
driver incluso				CLASSE A	Ra >80

LED-W-EPSILON/4W

8031433061209


informazioni tecniche - technical information

	>10 000 on/off	h 25 000	4W	320 Lumen	
driver incluso				CLASSE A	Ra >80

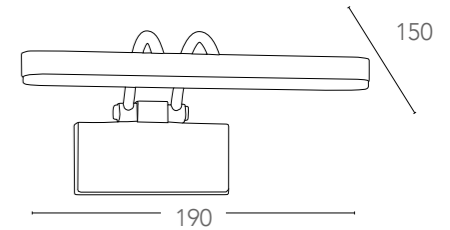

LED-W-SIGMA/4W BR

8031414089376

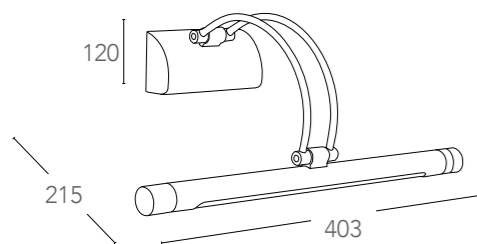

certificazioni - certification



certificazioni - certification



ALCOR 

120°

121

ALU*


Appliche a LED in alluminio
Aluminium LED wall lamp



LED-W-ALCOR/5W BCO


8031440355186

informazioni tecniche - *technical information*



LED-W-ALCOR/5W SIL

8031440355148

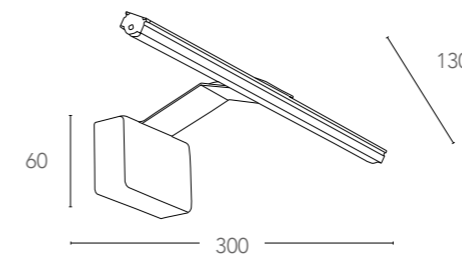

INTEC
LIGHT

certificazioni - *certification*



INTEC

PHOENIX






Appliche a LED in alluminio con diffusore in acrilico
Aluminium LED wall lamp with acrylic diffuser



LED-W-PHOENIX/6W

8031433051200

informazioni tecniche - technical information

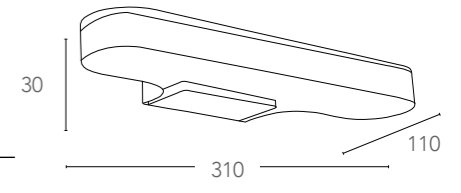

ATLAS 



ALU*

Applique a LED in alluminio
Aluminium LED wall lamp

OMEGA 

ALU*


Applique a LED in alluminio
Aluminium LED wall lamp

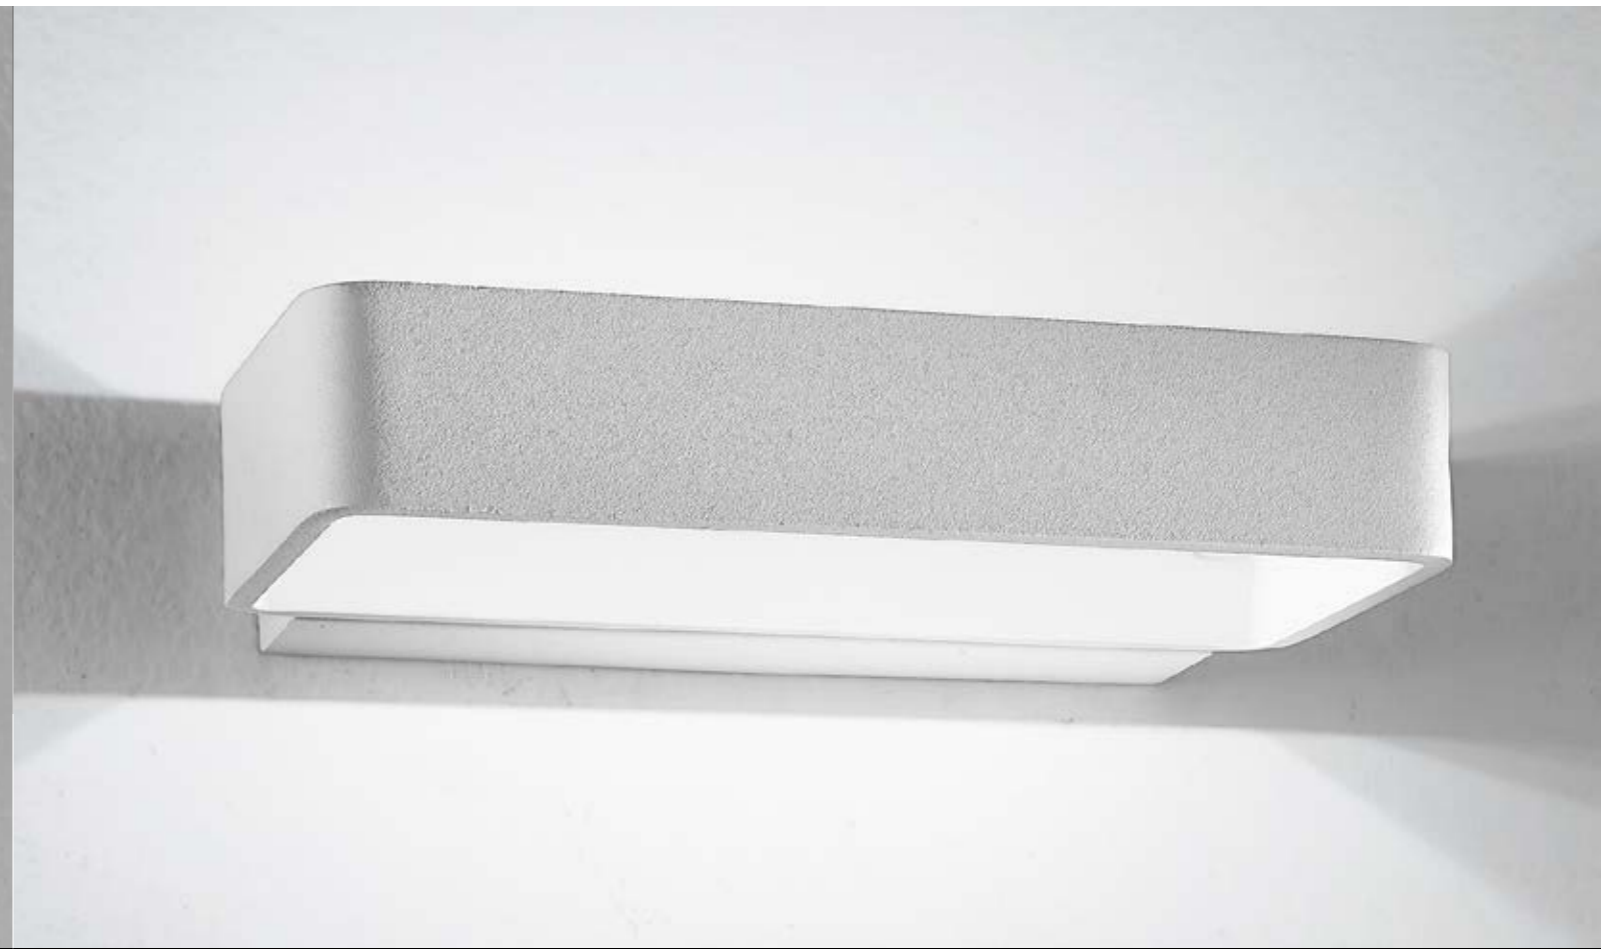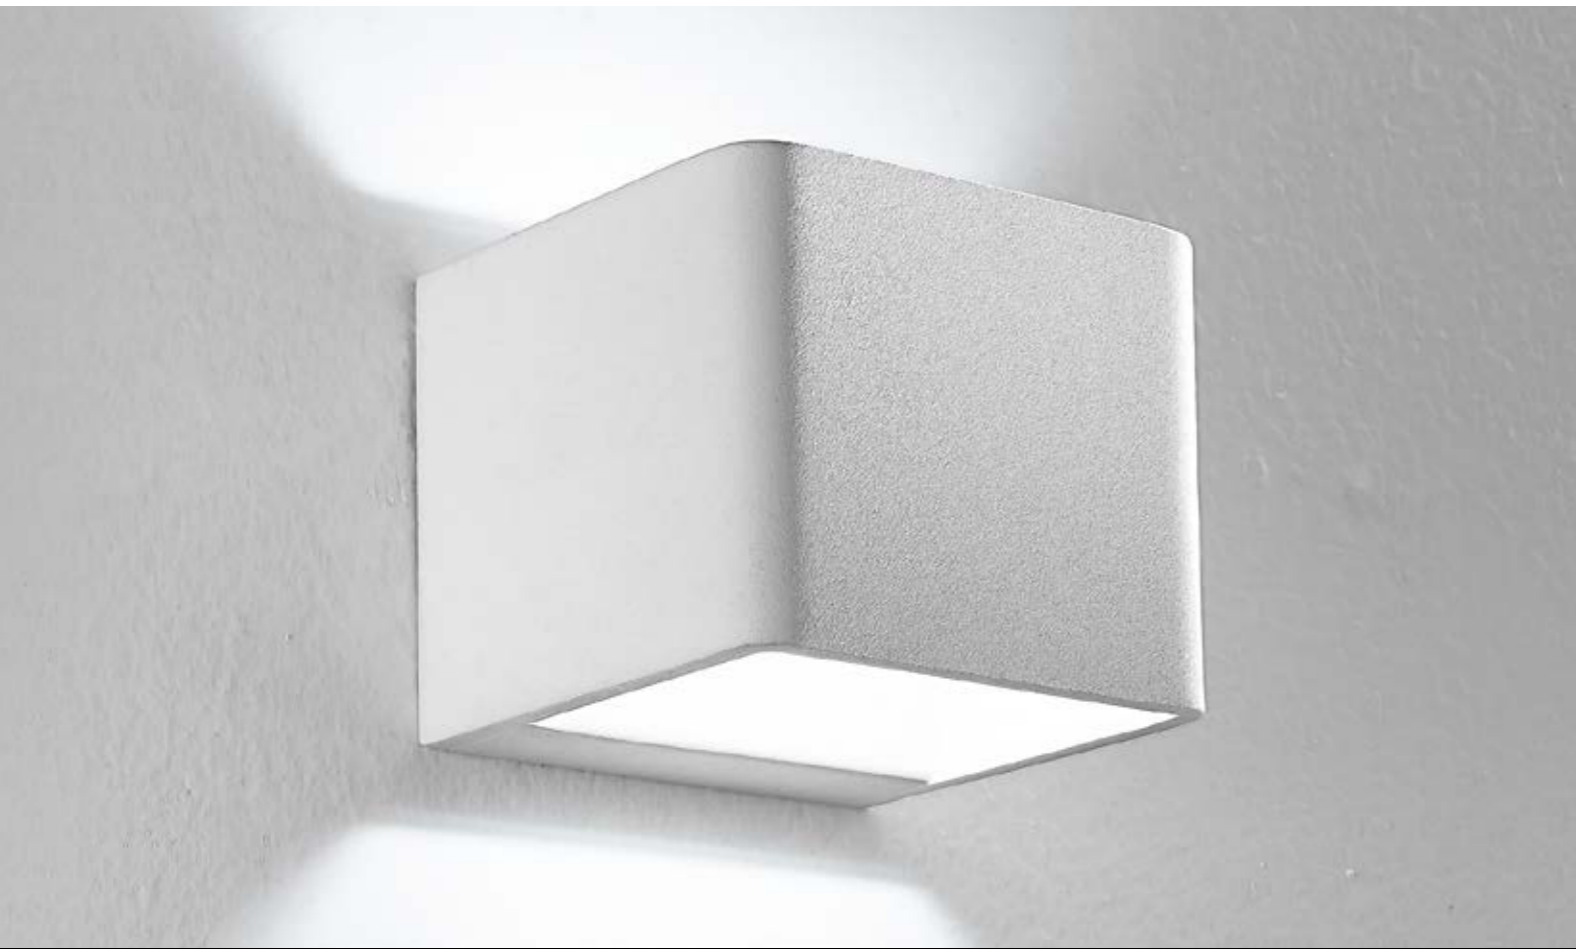

LED-W-ATLAS/6W

8031433071208


informazioni tecniche - technical information

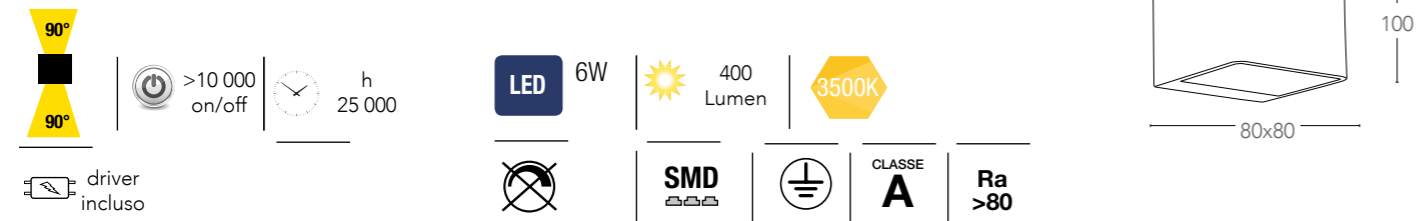

LED-W-OMEGA/4W

8031433011204

informazioni tecniche - technical information

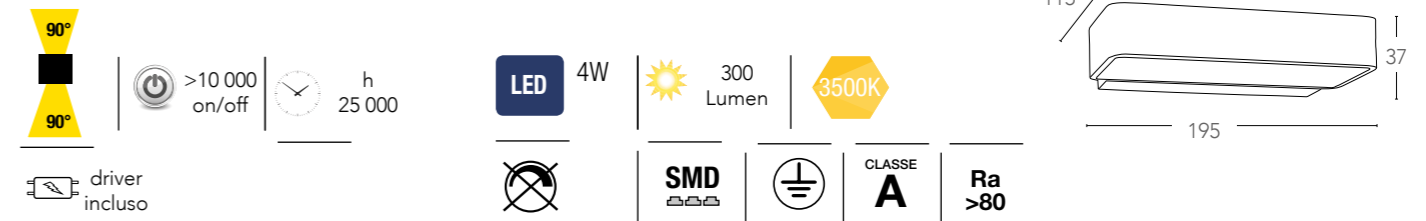

certificazioni - certification



INTEC
LIGHT

certificazioni - certification



LAMBDA



ALU*


Applique a LED in alluminio
Aluminium LED wall lamp

PEGASO



ALU*



Applique a LED in alluminio
Aluminium LED wall lamp

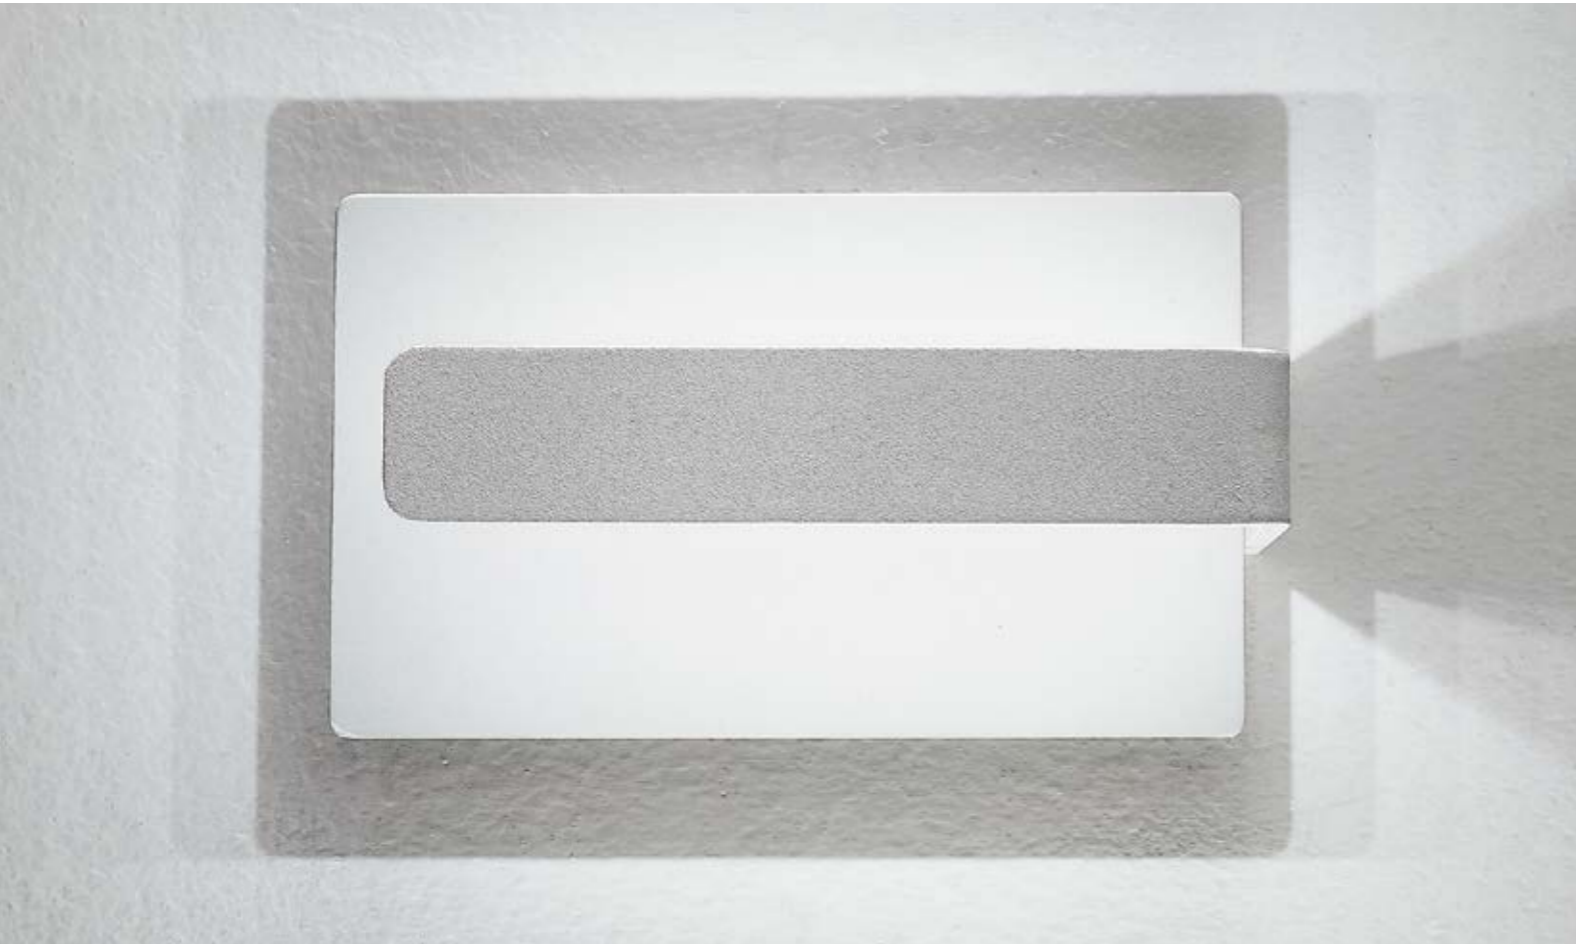

LED-W-LAMBDA/4W

8031433001205



informazioni tecniche - technical information

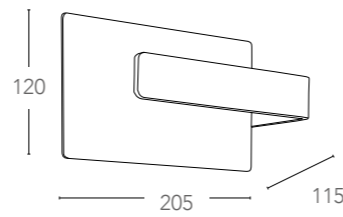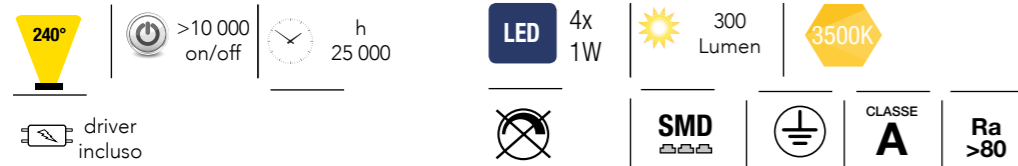

LED-W-PEGASO/4W

8031432981201

informazioni tecniche - technical information

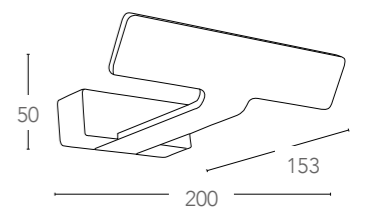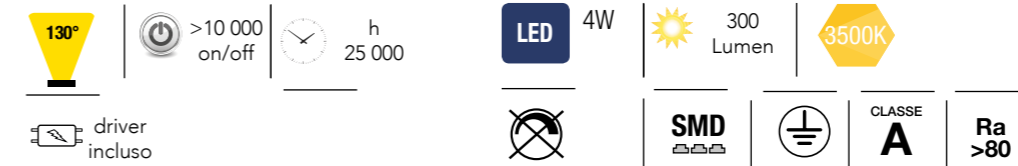

INTEC
LIGHT

certificazioni - certification



certificazioni - certification



OMICRON



ALU*

Applicare a LED in alluminio con diffusore orientabile
Aluminium LED wall lamp with adjustable diffuser




LED-W-OMICRON/6W

8031433031202

informazioni tecniche - technical information

	>10 000 on/off	h 25 000			
driver incluso					

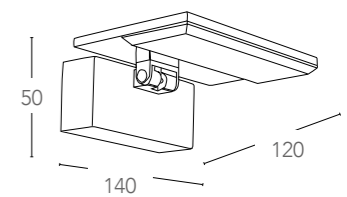

ALFA

130

131



ALU*

Appliche a LED in alluminio con diffusori di fascio di luce regolabili
Aluminium LED wall lamp with adjustable light flood diffusers






LED-W-ALFA/2W

8031433981217

finitura silver goffrato
embossed silver finish

informazioni tecniche - technical information

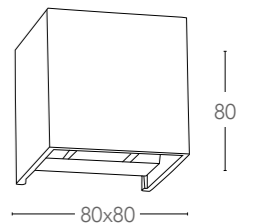

LED-W-ALFA/2W BCO

8031439541262

finitura bianco goffrato
embossed white finish



INTEC
LIGHT

certificazioni - certification



ALFA



ALU*

Applique a LED in alluminio con diffusori di fascio di luce regolabili
Aluminium LED wall lamp with adjustable light flood diffusers

132

133

DELTA



ALU*

Applique a LED in alluminio con diffusori di fascio di luce regolabili
Aluminium LED wall lamp with adjustable light flood diffusers




LED-W-ALFA/6W

8031439551261

finitura silver gofrato
embossed silver finish

informazioni tecniche - technical information




LED-W-DELTA/6W

8031440341271

finitura silver gofrato
embossed silver finish

informazioni tecniche - technical information

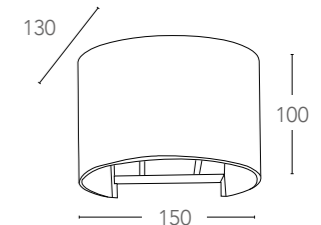

LED-W-ALFA/6W BCO

8031439651268

finitura bianco gofrato
embossed white finish



LED-W-DELTA/6W BCO

8031440351270

finitura bianco gofrato
embossed white finish



certificazioni - certification



certificazioni - certification



MERCURY




Applicque a LED in alluminio
Aluminium LED wall lamp

GAMMA



Applicque a LED in alluminio coon diffu-
sore di luce superiore e inferiore
Aluminium LED wall lamp with up and
down light diffuser

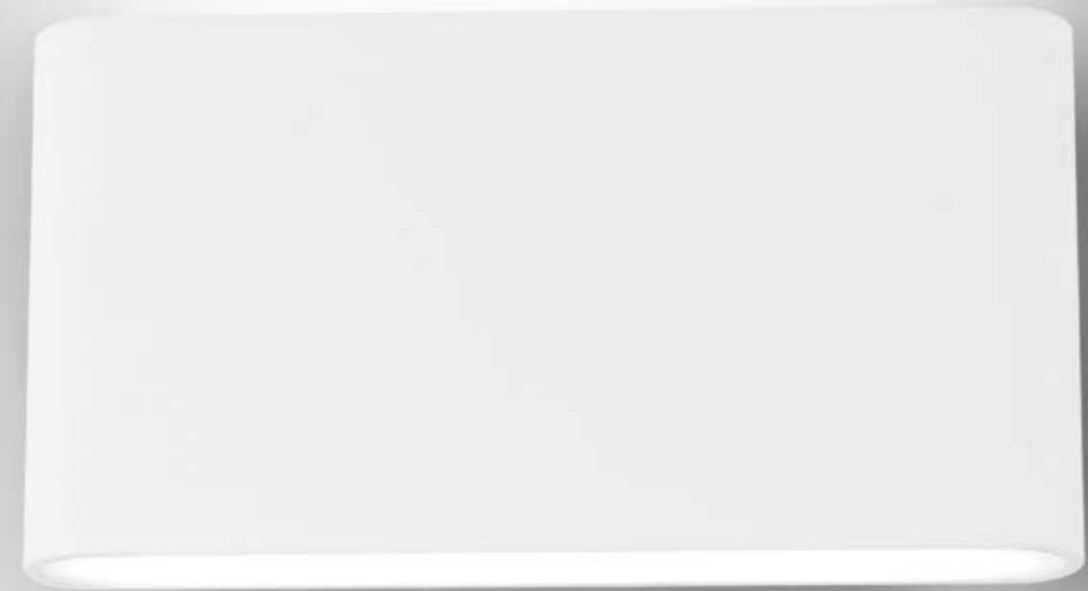


LED-W-MERCURY/5W

8031434091212

informazioni tecniche - technical information

	>10 000 on/off	h 25 000		630 Lumen		
driver incluso						

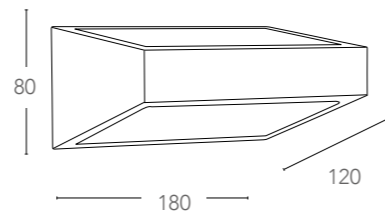


LED-W-GAMMA/10W

8031434041217

informazioni tecniche - technical information

	>10 000 on/off	h 25 000		1080 Lumen		
driver incluso						

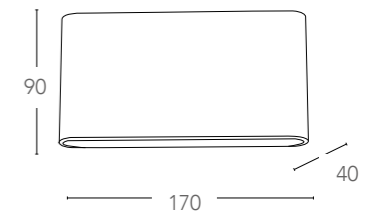

certificazioni - certification



certificazioni - certification



OMNIA


136

137



ALU*

Faro a LED dimmerabile in alluminio, orientabile
Dimmable aluminium LED lamp adjustable

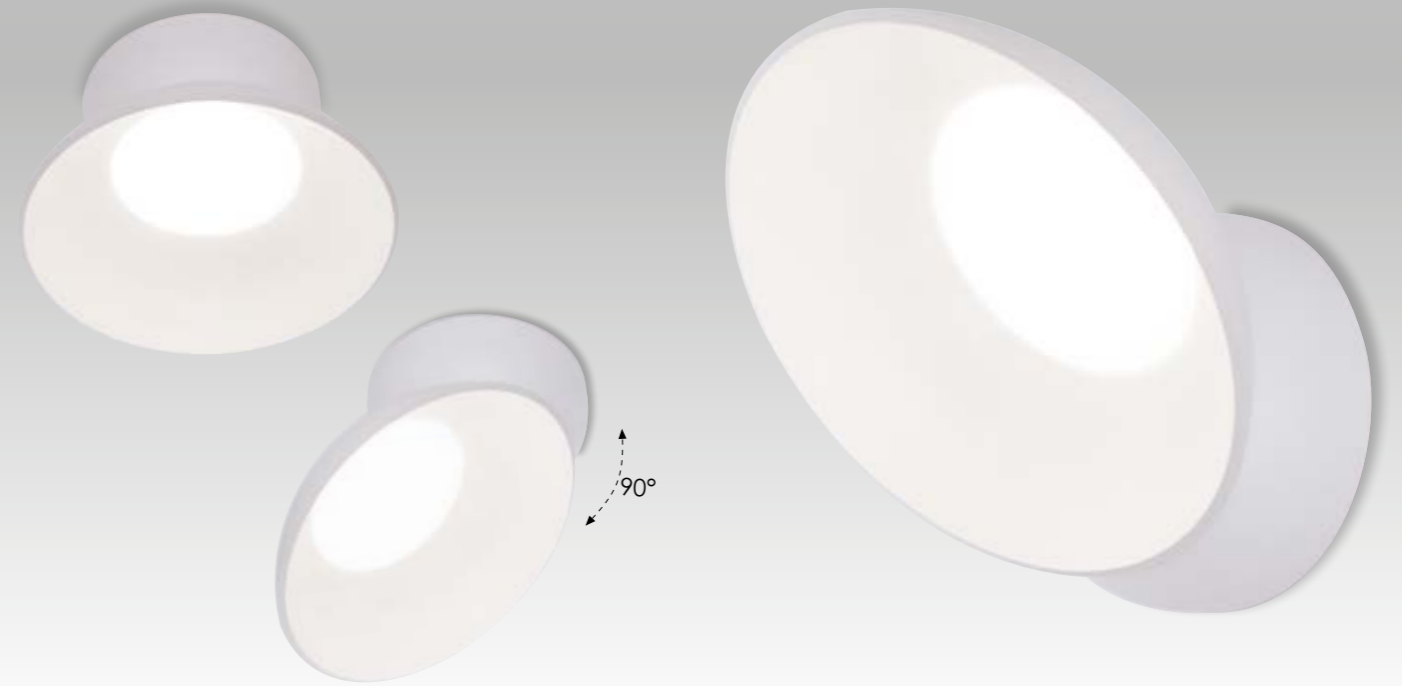


LED-W-OMNIA/15W

8031440351423

informazioni tecniche - technical information

107°	>10 000 on/off	h 25 000	LED 15W	1300 Lumen	3000K
driver incluso	SMD		CLASSE A*	Ra >80	

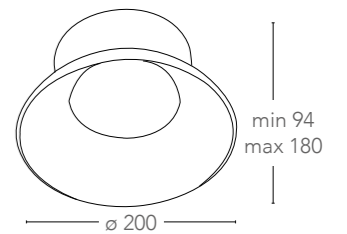

MIURA



138

Applique a LED dimmerabile in alluminio con diffusore di luce superiore ed inferiore
Dimmable aluminium LED wall lamp with up and down diffuser

ALU*


139

GHIBLI



ALU*

Faro a LED in alluminio con 4 fasci luminosi
Aluminium LED lamp with 4 light flood

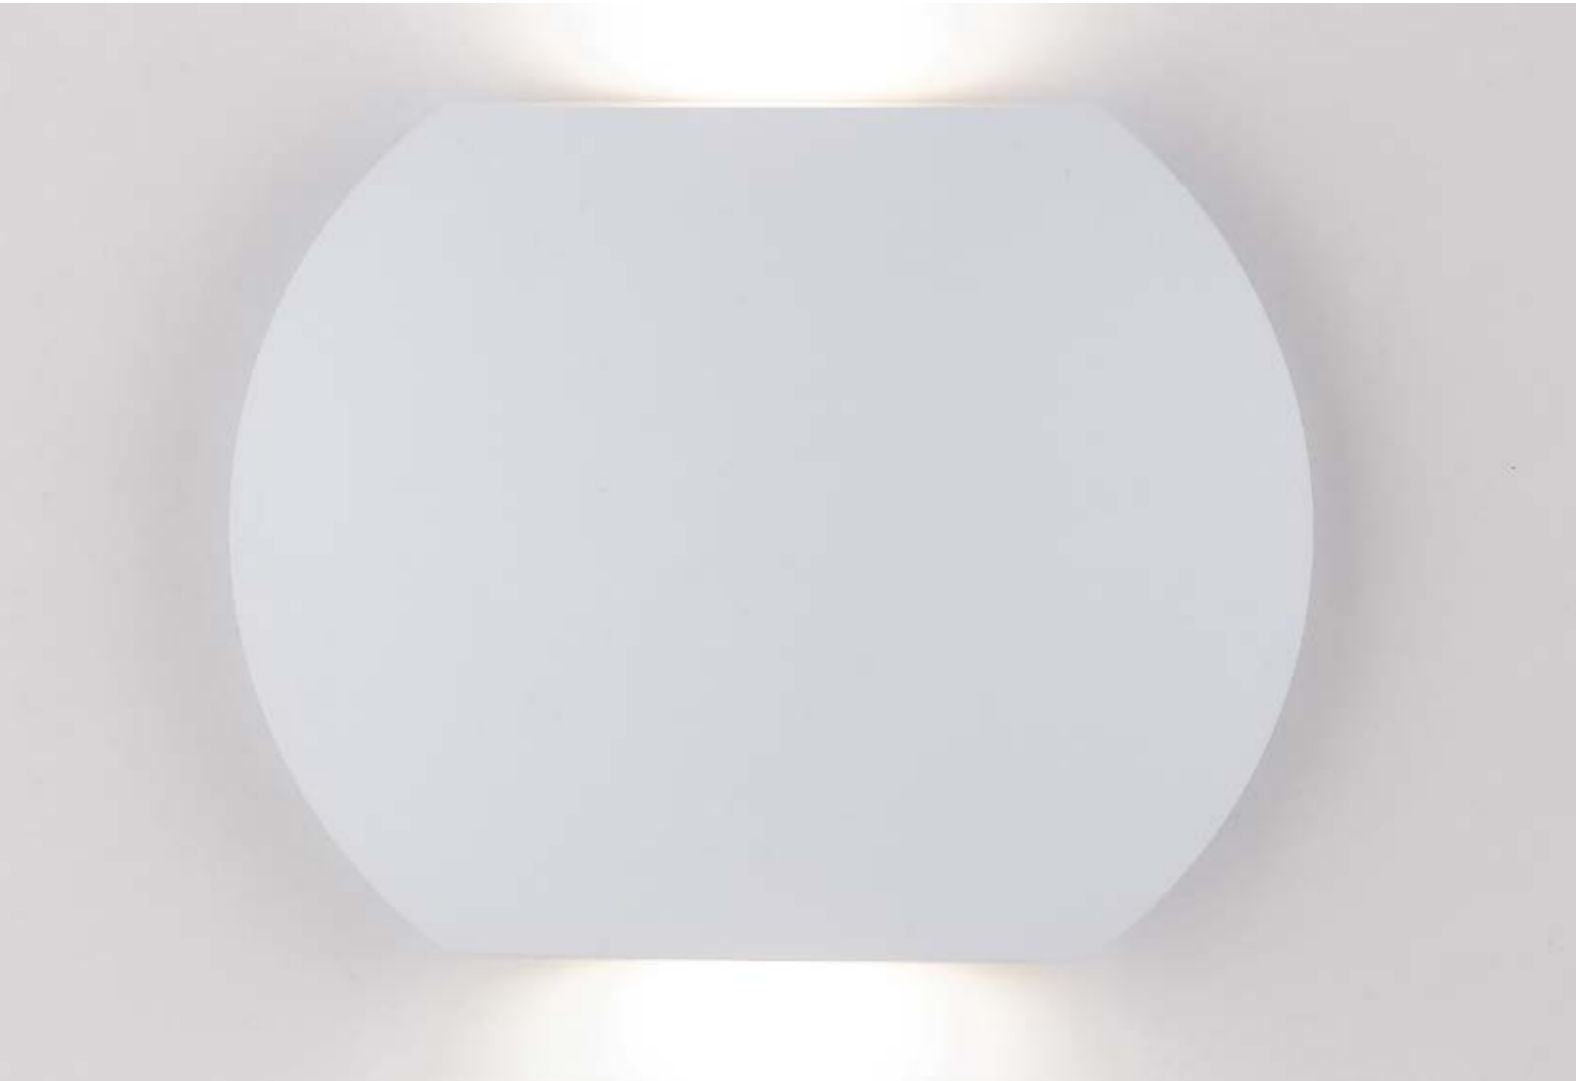


LED-W-MIURA/6W

8031440351447

informazioni tecniche - technical information

>10 000 on/off | h 25 000

LED 6W	520 Lumen	3000K	IP54
SMD	CLASSE A*	Ra >80	

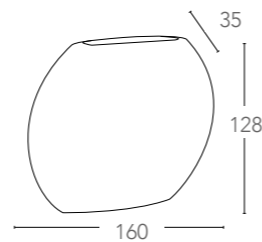

driver incluso



LED-W-GHIBLI/8W


8031440351430

finitura silver gofrato
embossed silver finish

informazioni tecniche - technical information

>10 000 on/off | h 25 000

LED 8W	520 Lumen	3000K	IP54
SMD	CLASSE A*	Ra >80	

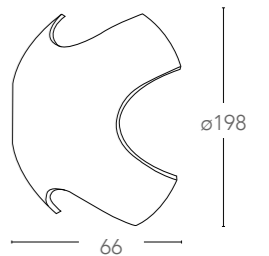

driver incluso



LED-W-GHIBLI/8W BCO

8031440360593

finitura bianco gofrato
embossed white finish

certificazioni - certification



certificazioni - certification



HELLY

140

141




Applique da comodino con luce LED da lettura
Bedside wall lamp with reading LED light

I-090111-5F

8031440311557

informazioni tecniche - technical information

		>10 000 on/off		h 25 000
		CLASSE A⁺	Ra >80	
	3W		160 Lumen	
		E14 MAX 40W		

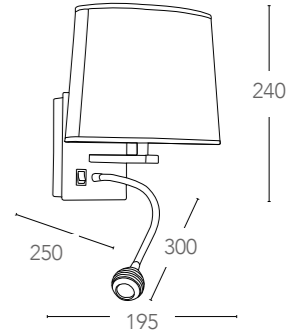


I-090111-5E

8031440051279

informazioni tecniche - technical information

		>10 000 on/off		h 25 000
		CLASSE A⁺	Ra >80	
	3W		160 Lumen	
		E14 MAX 40W		

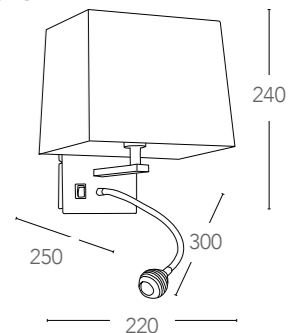

INTEC LIGHT

certificazioni - certification



INTEC LIGHT

HELLY

Applique da comodino con luce LED da lettura
Bedside wall lamp with reading LED light

I-090111-5A

8031421131082

informazioni tecniche - *technical information*


	>10 000 on/off	h 25 000
		CLASSE A+ Ra >80
3W	160 Lumen	4500K
	E14 MAX 40W	

articoli e varianti - *items and options*

I-090111-5B
8031421101085

I-090111-5C
8031427741148

I-090111-5D
8031425831124



certificazioni - *certification*



KEPLER

Lampada applique flessibile da lettura
 rivestita in silicone con LED integrato
*Reading light wall lamp flexible with sili-
 con cover built-in LED*

Kepler

informazioni tecniche - *technical information*


	>10 000 on/off	h 25 000
		CLASSE A+ Ra >80
3W	100 Lumen	3000K

articoli e varianti - *items and options*

LED-KEPLER-BCO
8031440355766
finitura bianco
white finish

LED-KEPLER-CR
8031440355742
finitura cromo
chrome finish

LED-KEPLER-NERO
8031440355759
finitura nero
black finish

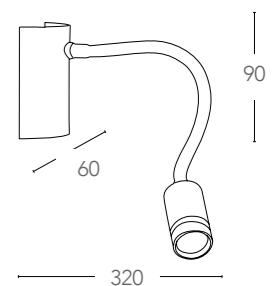

certificazioni - *certification*



FOREVER

145



Spot led integrato in policarbonato e metallo finitura cromo
Built in LED spot light in polycarbonate and metal chrome finish


SPOT-FOREVER-1

8031440358606

informazioni tecniche - technical information

>10 000 on/off | h 20 000

driver incluso



LED 4W | 320 Lumen | 4000K

| **SMD** | | **CLASSE A+** | **Ra >80**




SPOT-FOREVER-C

8031440358576

informazioni tecniche - technical information

>10 000 on/off | h 20 000

driver incluso | On / Off

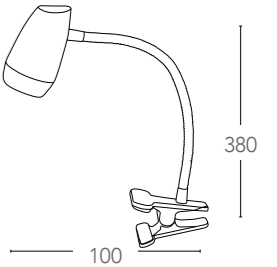

LED 4W | 320 Lumen | 4000K

| **SMD** | | **CLASSE A** | **Ra >80**



FOREVER



Spot led integrato in policarbonato e metallo finitura cromo
Built in LED spot light in polycarbonate and metal chrome finish



SPOT-FOREVER-6

8031440358569


informazioni tecniche - technical information

>10 000 on/off | h 20 000

LED 6x 4W

1920 Lumen

4000K

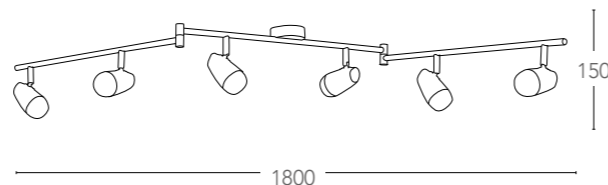

driver incluso



SMD




SPOT-FOREVER-4

8031440358590

informazioni tecniche - technical information

>10 000 on/off | h 20 000

driver incluso

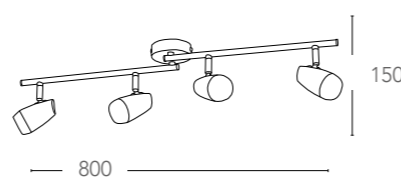

LED 4x 4W

1280 Lumen

4000K



SMD



CLASSE A

Ra >80




SPOT-FOREVER-2

8031440358613

informazioni tecniche - technical information

>10 000 on/off | h 25 000

driver incluso

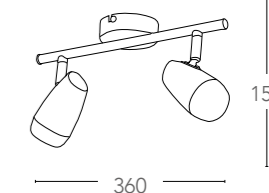

LED 2x 4W

640 Lumen

4000K



SMD



CLASSE A

Ra >80




SPOT-FOREVER-3

8031440358583

informazioni tecniche - technical information

>10 000 on/off | h 25 000

driver incluso

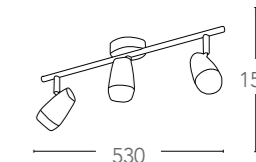

LED 3x 4W

960 Lumen

4000K



SMD



CLASSE A

Ra >80

certificazioni - certification



INTEC
LIGHT

certificazioni - certification



CAYENNE



SPOT-CAYENNE-1

8031440241274


informazioni tecniche - technical information

>10 000 on/off | h 25 000

driver incluso

LED 5W | 400 Lumen | 4000K

| SMD | | CLASSE A⁺

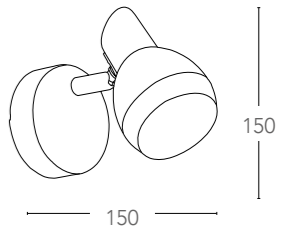

SPOT-CAYENNE-C

8031440301275


informazioni tecniche - technical information

>10 000 on/off | h 25 000

driver incluso | On / Off

LED 5W | 400 Lumen | 4000K

| SMD | | CLASSE A

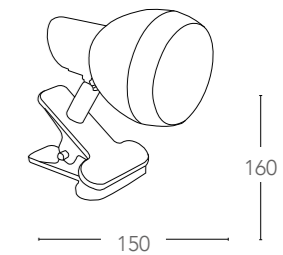

INTEC
LIGHT

certificazioni - certification



CAYENNE

150

151



Spot led integrato in policarbonato e metallo finitura cromo
Built in LED spot light in polycarbonate and metal chrome finish




SPOT-CAYENNE-2

8031440251273

informazioni tecniche - technical information

>10 000 on/off h 25 000

driver incluso

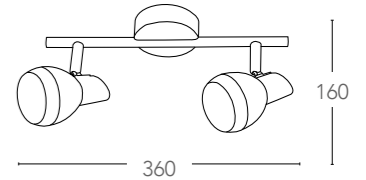

LED 2x 5W 800 Lumen 4000K

SMD **CLASSE A**

SPOT-CAYENNE-6


8031440281270

informazioni tecniche - technical information

>10 000 on/off h 25 000 **LED** 6x 5W 2400 Lumen 4000K

driver incluso

SMD **CLASSE A**

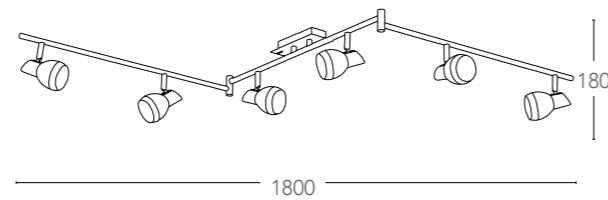


SPOT-CAYENNE-S3

8031440261272

informazioni tecniche - technical information

>10 000 on/off h 25 000

driver incluso

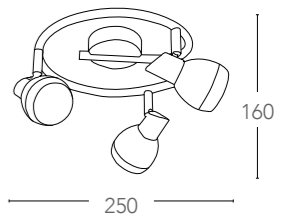

LED 3x 5W 1200 Lumen 4000K

SMD **CLASSE A**



SPOT-CAYENNE-L1

8031440291279

informazioni tecniche - technical information

>10 000 on/off h 25 000

driver incluso On / Off

LED 5W 400 Lumen 4000K

SMD **CLASSE A**




SPOT-CAYENNE-PL4

8031440271271

informazioni tecniche - technical information

>10 000 on/off h 25 000

driver incluso

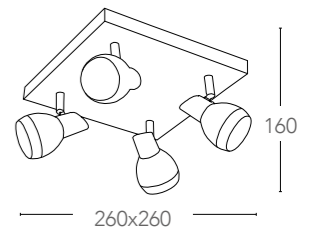

LED 4x 5W 1600 Lumen 4000K

SMD **CLASSE A**



certificazioni - certification



certificazioni - certification



CENTURY

152

153



Spot LED integrato in metallo con
diffusore in vetro finitura nickel
*Built-in LED spot light in metal with glass
shade nickel finish*


SPOT-CENTURY-1

8031440161275

informazioni tecniche - *technical information*


>10 000 on/off | h 25 000

driver incluso



LED 5W | 400 Lumen | 4000K

SMD **CLASSE A**

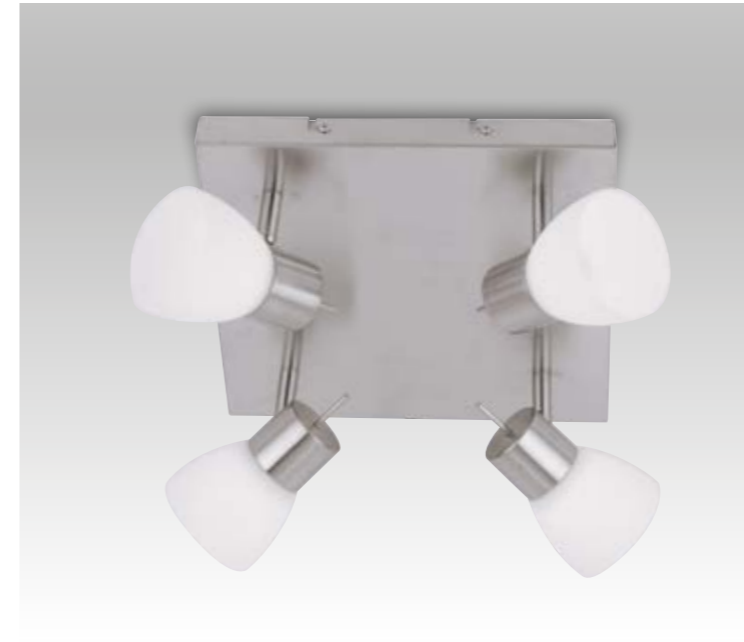


SPOT-CENTURY-PL4

8031440221276

informazioni tecniche - *technical information*

>10 000 on/off | h 25 000

driver incluso

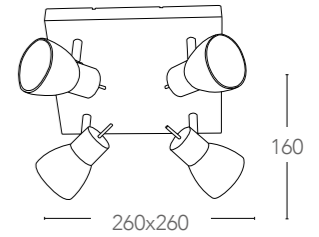

LED 4x 5W | 1600 Lumen | 4000K

SMD **CLASSE A**

certificazioni - *gypsum finish*




SPOT-CENTURY-2

8031440171274

informazioni tecniche - *technical information*

>10 000 on/off | h 25 000

driver incluso

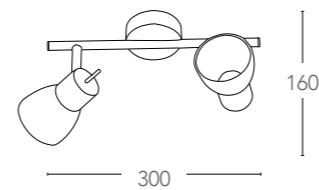

LED 2x 5W | 800 Lumen | 4000K

SMD **CLASSE A**




SPOT-CENTURY-FC

8031440201278

informazioni tecniche - *technical information*

>10 000 on/off | h 25 000

driver incluso On / Off

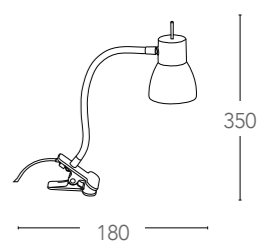

LED 5W | 400 Lumen | 4000K

SMD **CLASSE A**

certificazioni - *certification*



INTEC
LIGHT

certificazioni - *certification*



CENTURY

154

155



Spot LED integrato in metallo con diffusore in vetro finitura nickel
Built-in LED spot light in metal with glass shade nickel finish




SPOT-CENTURY-4

8031440181273

informazioni tecniche - technical information

>10 000 on/off | h 25 000

driver incluso

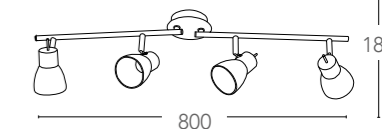

LED 4x 5W | 1600 Lumen | 4000K

| **SMD** | | **CLASSE A**

SPOT-CENTURY-6

8031440191272


informazioni tecniche - technical information

>10 000 on/off | h 25 000

LED 6x 5W | 2400 Lumen | 4000K

driver incluso

| **SMD** | | **CLASSE A**

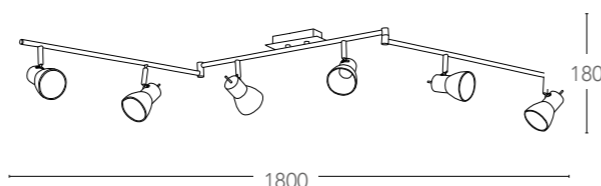

SPOT-CENTURY-PT3

8031440231275


informazioni tecniche - technical information

>10 000 on/off | h 25 000

ø foro 75 mm

LED 3x 5W | 1200 Lumen | 3000K

| **SMD** | | **CLASSE A**

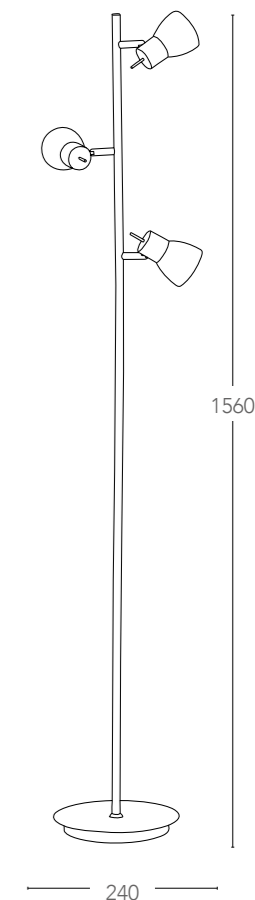

SPOT-CENTURY-L1

8031440211277


informazioni tecniche - technical information

>10 000 on/off | h 25 000

driver incluso | On / Off

LED 5W | 400 Lumen | 4000K

| **SMD** | | **CLASSE A**

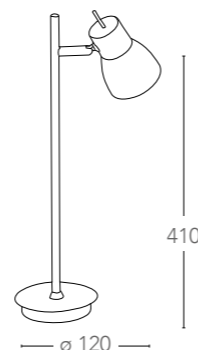

LIMOGES



156

157

Spot in ceramica
Ceramic spot light


SPOT-LIMOGES-1

8031438531257

informazioni tecniche - technical information

Halogen	430 Lumen	2700K
G9	MAX 33W	CLASSE D

include - included




SPOT-LIMOGES-2

8031438501250

informazioni tecniche - technical information

Halogen	860 Lumen	2700K
2xG9	MAX 33W	CLASSE D

include - included

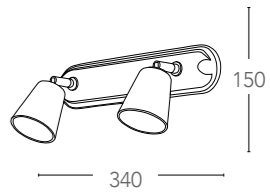


SPOT-LIMOGES-PL3

8031438511259

informazioni tecniche - technical information

Halogen	1290 Lumen	2700K
3xG9	MAX 33W	CLASSE D

include - included

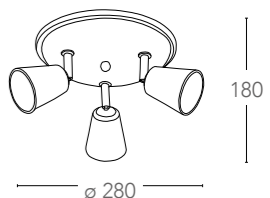

CADILLAC


Spot in metallo finitura cromo
Metal spot light chrome finish




SPOT-CADILLAC-2

8031438551255

informazioni tecniche - *technical information*




non include - *not included*

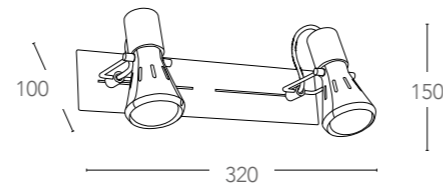


SPOT-CADILLAC-3

8031414076918

informazioni tecniche - *technical information*




non include - *not included*

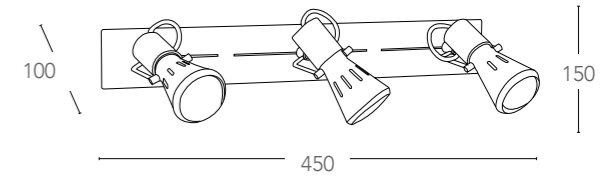


SPOT-CADILLAC-1

8031438541256

informazioni tecniche - *technical information*




non include - *not included*

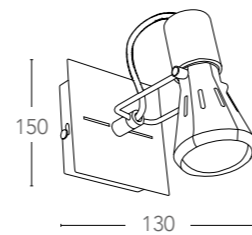


SPOT-CADILLAC-PL4

8031438521258

informazioni tecniche - *technical information*



non include - *not included*

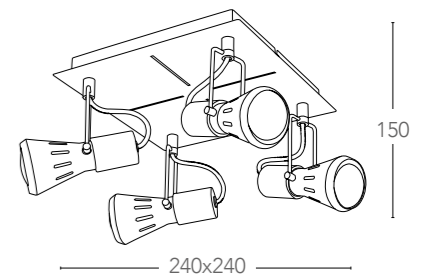

certificazioni - *certification*



certificazioni - *certification*



TECHNO



Spot in metallo finitura cromo satinato
Metal spot light satin chrome finish



SPOT-TECHNO-2

8031440352017



informazioni tecniche - technical information

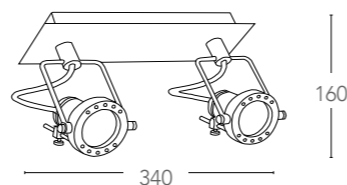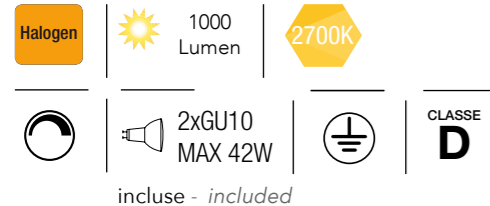

SPOT-TECHNO-3

8031423041105



informazioni tecniche - technical information

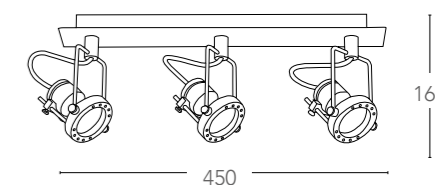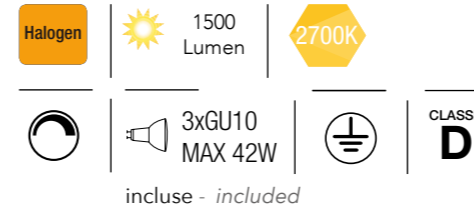

SPOT-TECHNO-1

8031422881108



informazioni tecniche - technical information

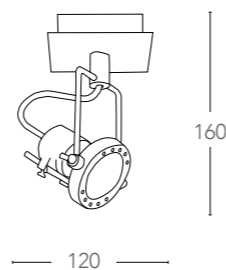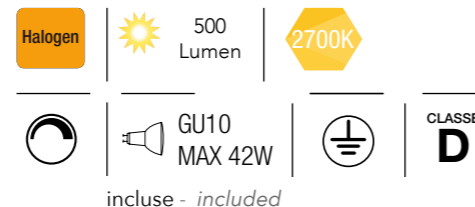

SPOT-TECHNO-PL4

8031423051104

informazioni tecniche - technical information

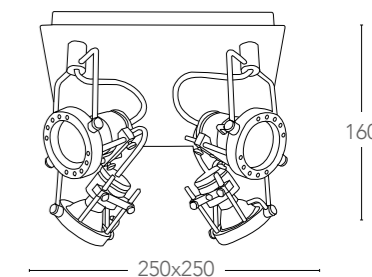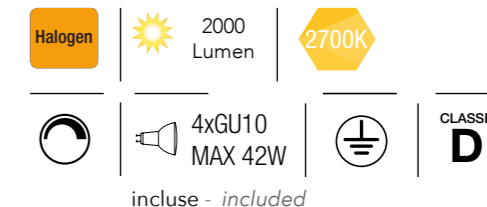

certificazioni - certification



certificazioni - certification



MADRID

Spot LED in metallo cromato
Chrome metal spot light LED


SPOT-MADRID-2

8031420321071

informazioni tecniche - technical information

LED	2x 5W	800 Lumen	3000K	Ra >80
	SMD		CLASSE A	

lampadine incluse - bulbs included

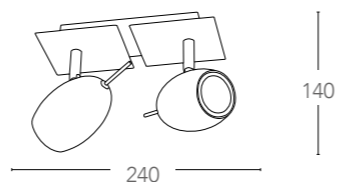


SPOT-MADRID-3

8031418791053

informazioni tecniche - technical information

LED	3x 5W	1200 Lumen	3000K	Ra >80
	SMD		CLASSE A	

lampadine incluse - bulbs included

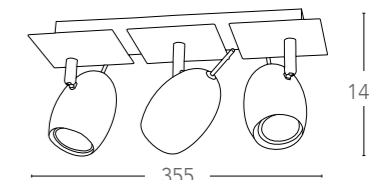


SPOT-MADRID-1

8031418781054

informazioni tecniche - technical information

LED	5W	400 Lumen	3000K	Ra >80
	SMD		CLASSE A	

lampadine incluse - bulbs included




SPOT-MADRID-PL4

8031418761056

informazioni tecniche - technical information

LED	4x 5W	1600 Lumen	3000K	Ra >80
	SMD		CLASSE A	

lampadine incluse - bulbs included

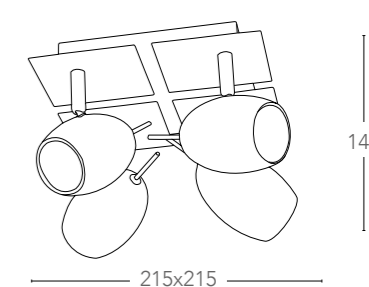

certificazioni - certification



certificazioni - certification



MIAMI

Spot in metallo finitura nickel spazzolato
con bordo base in vetro
Metal spot light brush nickel finish with
base edge in transparent glass




SPOT-MIAMI 02

8031414076796

Halogen	1000 Lumen	2700K	CLASSE D
	2xGU10 MAX 42W		

include - included

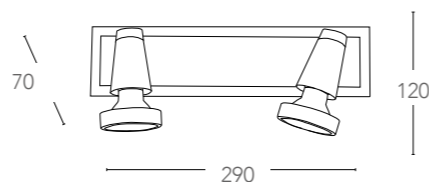


SPOT-MIAMI 03

8031414076802

informazioni tecniche - technical information

Halogen	1500 Lumen	2700K	CLASSE D
	3xGU10 MAX 42W		

include - included

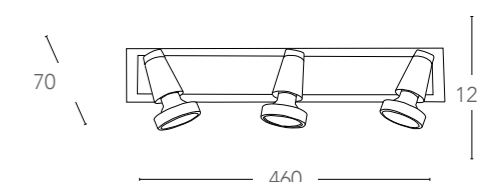


SPOT-MIAMI 01

8031414076772

informazioni tecniche - technical information

Halogen	500 Lumen	2700K	CLASSE D
	GU10 MAX 42W		

include - included

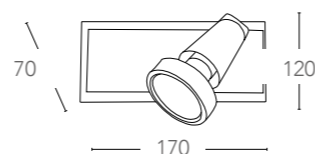


SPOT-MIAMI PL4

8031414076819

informazioni tecniche - technical information

Halogen	2000 Lumen	2700K	CLASSE D
	4xGU10 MAX 42W		

include - included

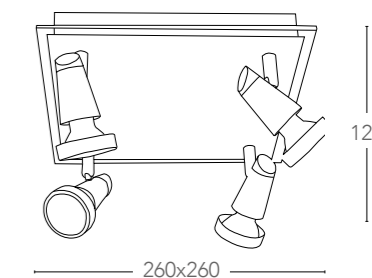

certificazioni - certification



certificazioni - certification





MITO



Spot in metallo finitura cromo satinato
con diffusore in vetro
Metal spot light satin chrome finish with
glass shade

**SPOT-MITO-1**

8031431791184



informazioni tecniche - *technical information*

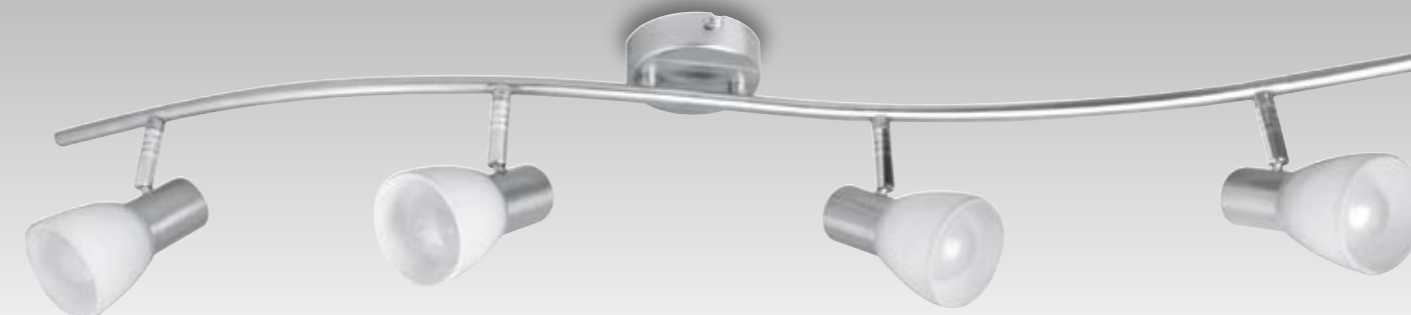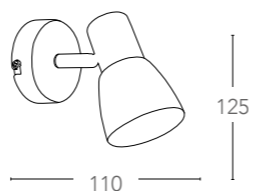
 E14
MAX 40W | 
non incluse - *not included*

**SPOT-MITO-S4**

8031431821188



informazioni tecniche - *technical information*


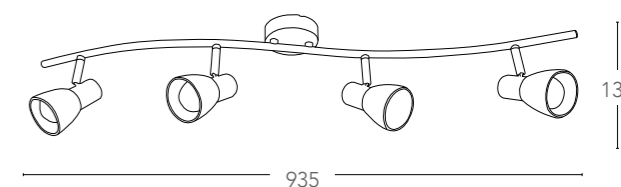
 4xE14
MAX 40W | 
non incluse - *not included*

**SPOT-MITO-PL3**

8031431801180



informazioni tecniche - *technical information*

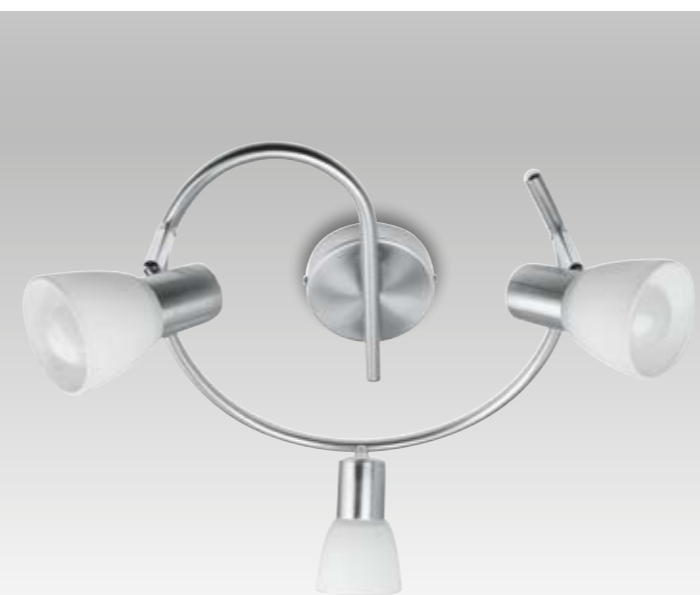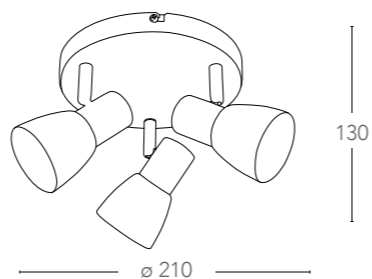
 3xE14
MAX 40W | 
non incluse - *not included*

**SPOT-MITO-S3**

8031431811189

informazioni tecniche - *technical information*

 3xE14
MAX 40W | 
non incluse - *not included*

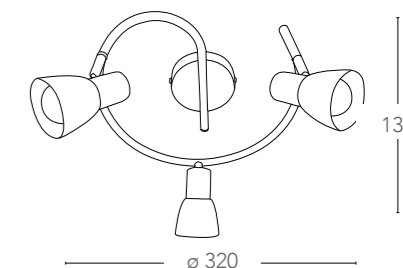certificazioni - *certification*certificazioni - *certification*

SUNNY

Spot in metallo finitura nickel
Metal spot light nickel finish




SPOT-SUNNY-2

8031431841186

informazioni tecniche - technical information

Halogen	1000 Lumen	2700K	CLASSE D
	2xGU10 MAX 42W		

include - included

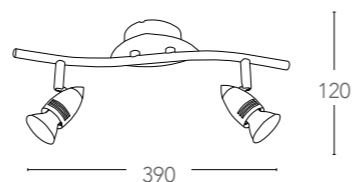


SPOT-SUNNY-4

8031431851185

informazioni tecniche - technical information

Halogen	2000 Lumen	2700K	CLASSE D
	4xGU10 MAX 42W		

include - included

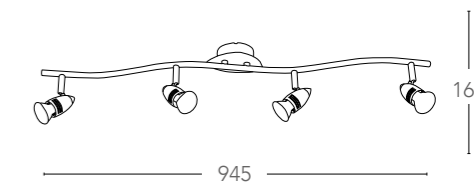


SPOT-SUNNY-1

8031431831187

informazioni tecniche - technical information

Halogen	500 Lumen	2700K	CLASSE D
	GU10 MAX 42W		

include - included




SPOT-SUNNY-S3

8031431861184

informazioni tecniche - technical information

Halogen	1500 Lumen	2700K	CLASSE D
	3xGU10 MAX 42W		

include - included

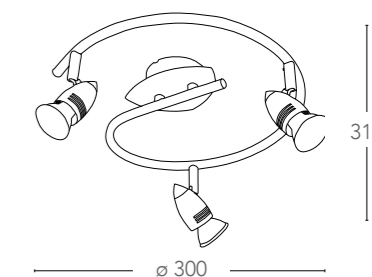

certificazioni - certification



certificazioni - certification



CARRERA



Spot in metallo
Metal spot light




SPOT-CARRERA-1

8031431701183

informazioni tecniche - technical information

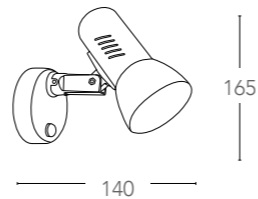

 E27
MAX 42W | 
non include - not included




SPOT-CARRERA-C

8031431731180

informazioni tecniche - technical information

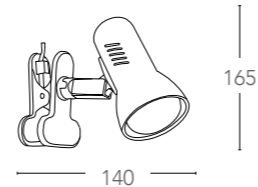

 E27
MAX 42W | 
non include - not included




SPOT-CARRERA-3

8031431721181

informazioni tecniche - technical information

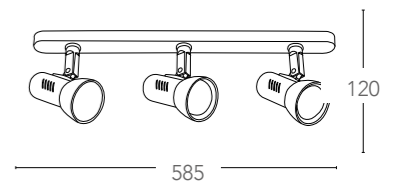

 3xE27
MAX 42W | 
non include - not included




SPOT-CARRERA-2

8031431711182

informazioni tecniche - technical information



 2xE27
MAX 42W | 
non include - not included




SPOT-CARRERA-PL3

8031431741189

informazioni tecniche - technical information

 3xE27
MAX 42W | 
non include - not included



LAMPADE DA BAGNO

Bathroom light



DADO






Applique da specchio in metallo
con diffusore in vetro finitura cromo
*Mirror lamp in metal with glass shade
chrome finish*




SPOT-B-DADO

8031431931191

informazioni tecniche - *technical information*

Halogen	 300 Lumen	 2700K	CLASSE D
	G9 MAX 28W		 IP23

include - *included*








LELE




SPOT-B-LELE

8031431981196

informazioni tecniche - *technical information*

Halogen	 600 Lumen	 2700K	CLASSE D
	2xG9 MAX 28W		 IP23

include - *included*



GAIA

174

Applique da specchio in metallo finitura nickel
Mirror lamp in metal nickel finish




SPOT-B-GAIA

8031431951199

informazioni tecniche - technical information

Halogen	500 Lumen	2700K	CLASSE D
include - included	GU10 MAX 42W	IP23	



175

SHON

Applique in vetro con rifiniture in metallo cromo
Glass wall lamp and metal with metal chrome finish



KRISS

Applique da specchio in metallo con diffusore in vetro finitura nickel
Mirror lamp in metal with glass shade nickel finish




SPOT-B-KRISS

8031431971197

informazioni tecniche - technical information

driver incluso	170 Lumen	2700K	CLASSE D
include - included	2xG4 MAX 7W	IP23	

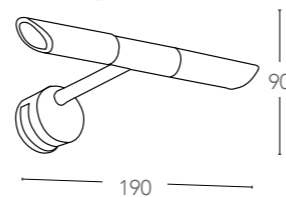


SPOT-B-SHON/M

8031432001190

informazioni tecniche - technical information

2xE14 MAX 40W	IP20
non include - not included	




SPOT-B-SHON/L

8031431991195

informazioni tecniche - technical information

3xE14 MAX 40W	IP20
non include - not included	

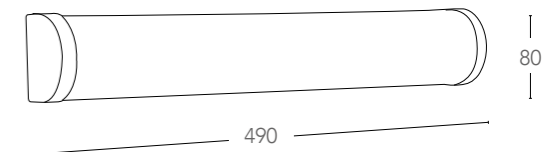

certificazioni - certification



certificazioni - certification



ROBY

176

Applique da specchio in metallo
con diffusore in vetro finitura cromo
*Mirror lamp in metal with glass shade
chrome finish*

177

ENDY

Applique da parete in metallo
con diffusore in vetro finitura nickel
*Wall lamp in metal with glass shade
nickel finish*




SPOT-B-ROBY-CP

8031440312349

informazioni tecniche - *technical information*



non include - *not included*

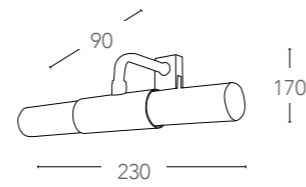


SPOT-B-ENDY

8031431941190

informazioni tecniche - *technical information*



non include - *not included*

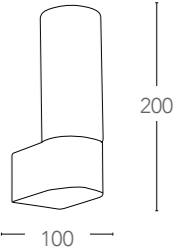

Applique da parete in metallo
con diffusore in vetro finitura cromo
*Wall lamp in metal with glass shade
chrome finish*

JOY




SPOT-B-ROBY

8031440312356

informazioni tecniche - *technical information*



non include - *not included*

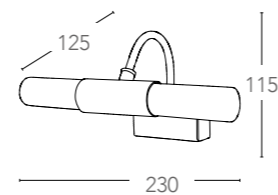


SPOT-B-JOY

8031431961198

informazioni tecniche - *technical information*



non include - *not included*

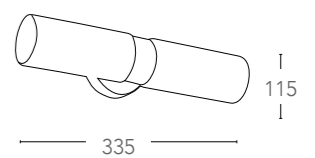

certificazioni - *certification*



certificazioni - *certification*



STEFANY

178

Applique in vetro con rifiniture in metallo cromo
Glass wall lamp and metal with metal chrome finish



15/02400

8031425791121


informazioni tecniche - technical information

2xE14
MAX 40W



IP20

non include - not included

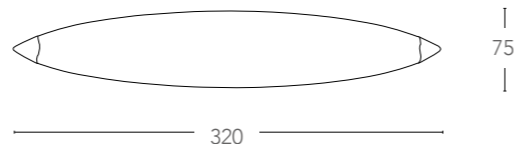

15/02300

8031422751098


informazioni tecniche - technical information

E14
MAX 40W



IP20

non include - not included

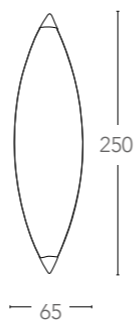

179

certificazioni - certification



CERCHIO

Applique in metallo con lampada T5
fluorescente finitura cromo
*Metal wall lamp with fluorescent T5 bulbs
chrome finish*

180

181

F1


Applique metallo flessibile con diffusore
in vetro
Metal wall lamp with glass shade



CERCHIO/AP

8031414085385

informazioni tecniche - *technical information*

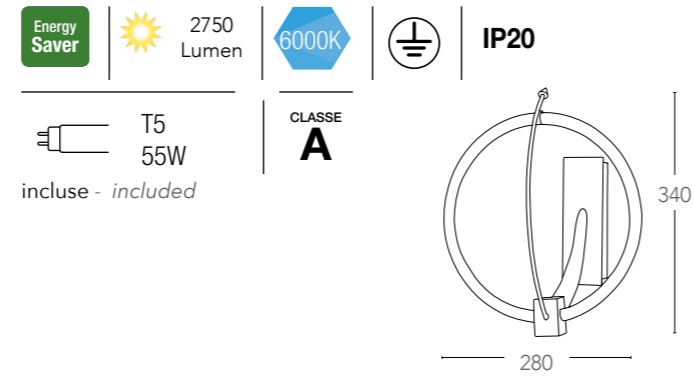


SPOT-F1

8031414076956

finitura cromo - *chrome finish*

informazioni tecniche - *technical information*

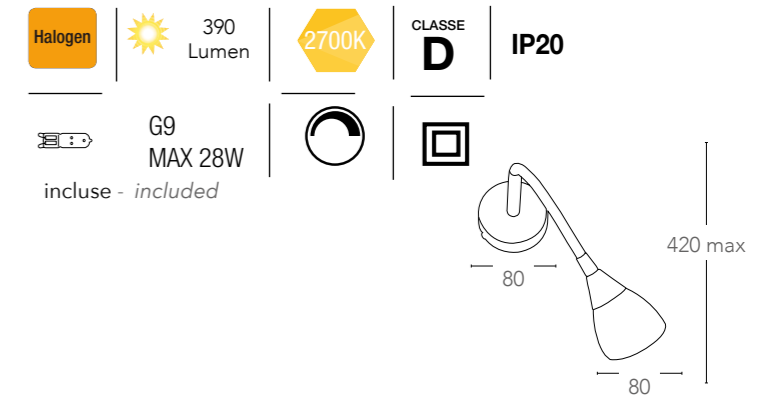

SPECCHIO

Applique vetro specchio
Mirror glass wall lamp


F2



SPECCHIO/40

8031414085408

informazioni tecniche - *technical information*

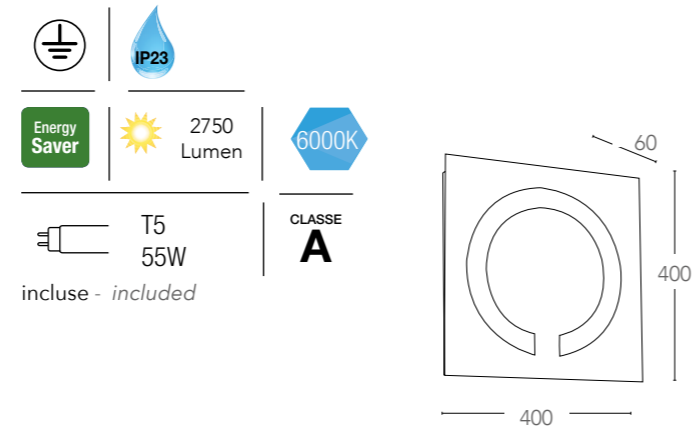


SPOT-F2

8031414076963

finitura brunita - *antique brass finish*

informazioni tecniche - *technical information*

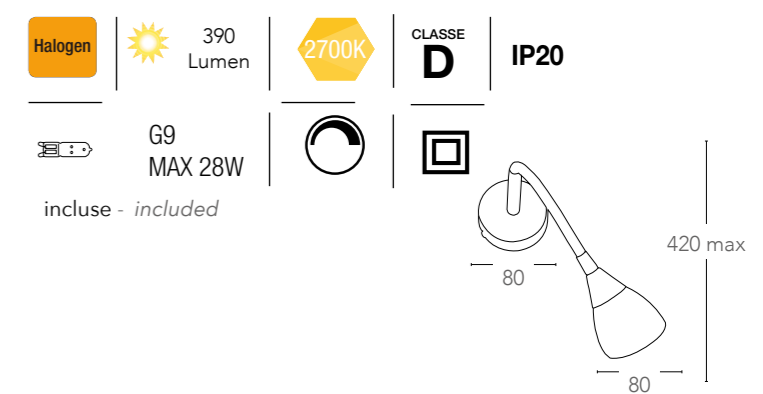

certificazioni - *certification*



INTEC

LIGHT

certificazioni - *certification*



ET

182

Applique in metallo con diffusore in vetro
finitura cromo
Metal wall lamp with glass shape
chrome finish




I-YHS7014/WB

8031414043590

informazioni tecniche - technical information

Halogen	2250 Lumen	2700K	CLASSE D	IP20
R7s MAX 120W	include - included			

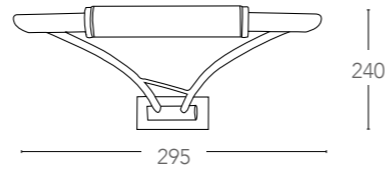

183

Q1

Applique in metallo con diffusore in vetro
Metal wall lamp with glass diffusor




SPOT-Q1

8031414076932

finitura cromo e cromo satinato
chrome and satin chrome finish

informazioni tecniche - technical information

Halogen	2x390 Lumen	2700K	CLASSE D	IP21
2xG9 MAX 28W	include - included			

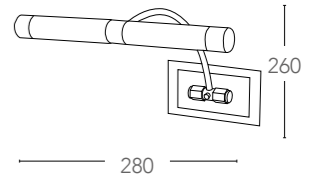

Q2


SPOT-Q2

8031414076949

finitura oro e oro satinato
gold and satin gold finish

informazioni tecniche - technical information

Halogen	2x390 Lumen	2700K	CLASSE D	IP21
2xG9 MAX 28W	include - included			

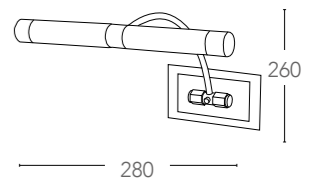

ILLUMINAZIONE LED PER ARREDI
Cabinet LED light



BARRE



ALU*

Barra sottopensile a LED in alluminio con diffusore in policarbonato
Cabinet ledbar in aluminium with polycarbonate diffuser

186

187

LEDBAR



Barre sottopensile a LED in policarbonato
Cabinet LED bar in polycarbonate




LEDBAR-100CM

8031433121200

informazioni tecniche - technical information

	>10 000 on/off	h 25 000	LED 15W 12v	1200 Lumen				CLASSE A	SMD	Ra >80	
AC/DC 15W INPUT: 230V ~ 50Hz OUTPUT: 12V --- 1,2A											

non include - not included

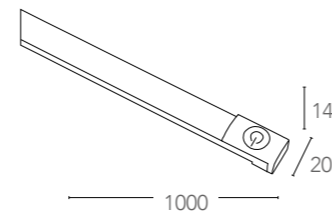


LEDBAR-60CM

8031433131209

informazioni tecniche - technical information

	>10 000 on/off	h 25 000	LED 10W 12v	750 Lumen				CLASSE A	SMD	Ra >80	
AC/DC 10W INPUT: 230V ~ 50Hz OUTPUT: 12V --- 0,8A											

non include - not included

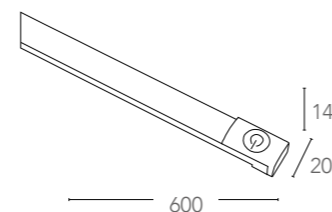

certificazioni - certification




LEDBAR-T5-30

8031440354691

informazioni tecniche - technical information

	>10 000 on/off	h 15 000	LED 4w	300 Lumen				SMD	CLASSE A	230V DRIVER FREE
--	----------------	----------	---------------	-----------	--	--	--	------------	-----------------	-------------------------




LEDBAR-T5-60

8031440354707

informazioni tecniche - technical information

	>10 000 on/off	h 15 000	LED 8w	600 Lumen				SMD	CLASSE A	230V DRIVER FREE
--	----------------	----------	---------------	-----------	--	--	--	------------	-----------------	-------------------------




LEDBAR-T5-90

8031440354677

informazioni tecniche - technical information

	>10 000 on/off	h 15 000	LED 10w	750 Lumen				SMD	CLASSE A	230V DRIVER FREE
--	----------------	----------	----------------	-----------	--	--	--	------------	-----------------	-------------------------





LEDBAR-T5-120

8031440354684

informazioni tecniche - technical information

	>10 000 on/off	h 15 000	LED 15w	1000 Lumen				SMD	CLASSE A	230V DRIVER FREE
--	----------------	----------	----------------	------------	--	--	--	------------	-----------------	-------------------------

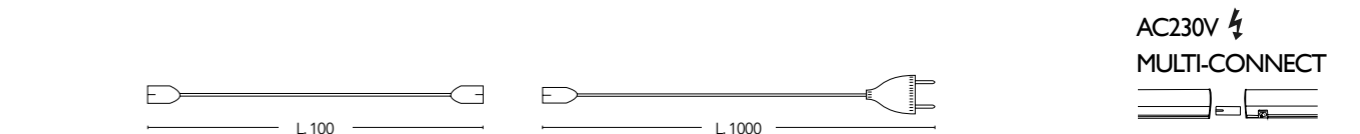

AC230V
MULTI-CONNECT

MAX 15 m.

certificazioni - certification



YOUNG



ALU*

Barra sottopensile a LED in alluminio con interruttore ottico
Cabinet ledbar in aluminium with optical switch

188


189

ODIC



ALU*

Lampada sottopensile alimentata a batterie con sensore di movimento
Cabinet lamp battery powered with sensor

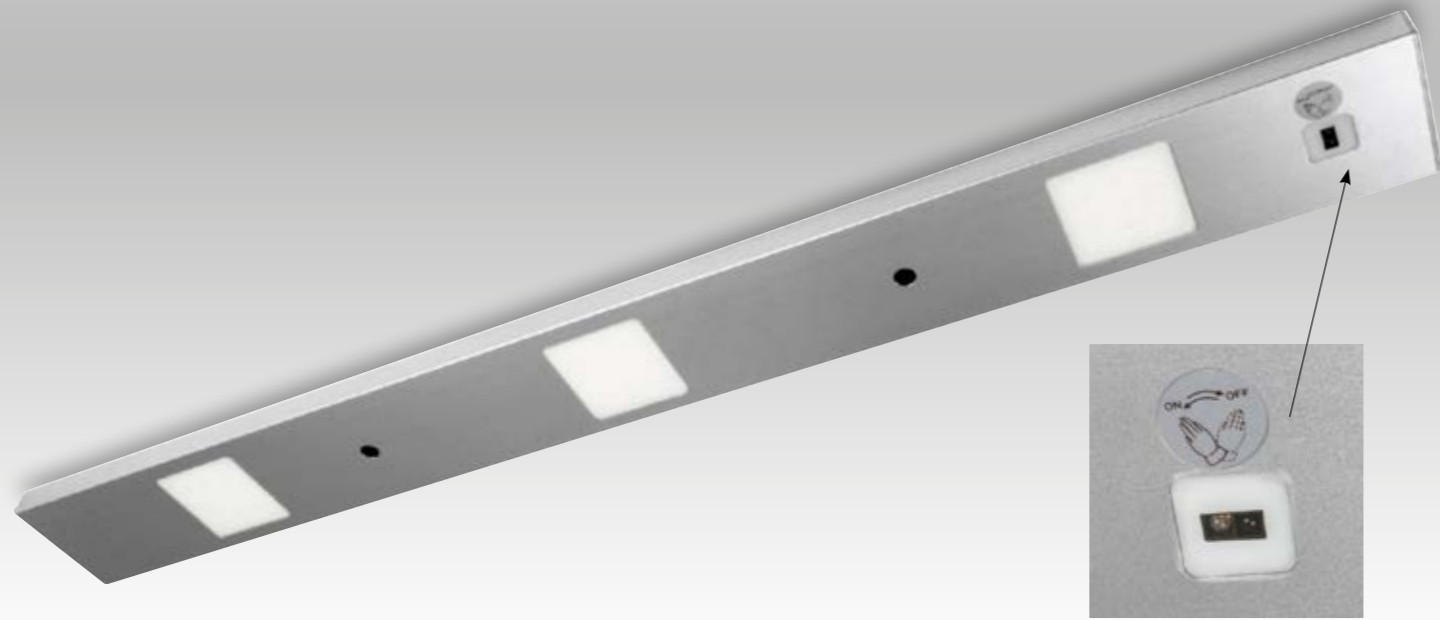


LED-YOUNG-5W

8031440071277

informazioni tecniche - technical information

	>10 000 on/off	h 25 000	4,9W	330 Lumen	
foro ø 120 mm	driver incluso			Ra >80	

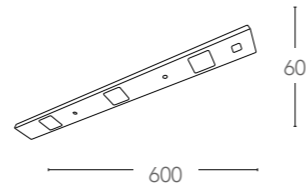


LED-ODIC-3W

8031440041270

informazioni tecniche - technical information

	>10 000 on/off	h 25 000	6x 0,16w	60 Lumen	
10LUX	90°	3x1,5V AAA			Ra >80

15sec.- 45sec.
3m

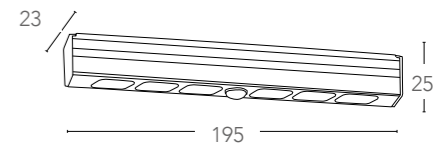

INTEC LIGHT

certificazioni - certification
CE RoHS EMC

INTEC LIGHT

certificazioni - certification
CE RoHS EMC

SONAR



190

Lampada a LED orientabile con sensore alimentata a batterie
LED adjustable lamp with sensor battery powered

191

VISTA



Lampada a LED orientabile con sensore alimentata a batterie
LED adjustable lamp with sensor battery powered



LED-SONAR-AP

8031440021272

informazioni tecniche - technical information

	>10 000 on/off	h 25 000	6x 0,075w	35 Lumen	4500K	
90°	3x1,5V AAA			CLASSE A	Ra >80	
			<p>217</p>			

LED-VISTA-M-AP

8031440031271

finitura bianco - white finish

informazioni tecniche - technical information

	>10 000 on/off	h 25 000	3x 0,075W	18 Lumen	6000K	
	3x1,5V AA			CLASSE A+	Ra >80	
<p>non include not included</p>						<p>80</p>

LED-VISTA-AP

8031439991272

finitura silver - silver finish



	>10 000 on/off	h 25 000	3x 0,075W	20 Lumen	4500K	
	3x1,5V AAA			CLASSE A+	Ra >80	
<p>non include not included</p>						<p>95</p>



certificazioni - certification



certificazioni - certification



LAMPADE DA ESTERNO LED
LED outdoor lamp

EROS






Lampada in alluminio a LED integrato
finitura silver
Built in aluminium LED lamp silver finish

ALU*




LED-EROS-AP

8031434061215

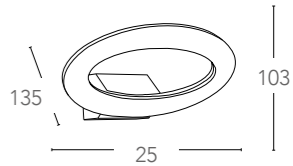informazioni tecniche - *technical information*

LED-EROS-P1

8031434071214

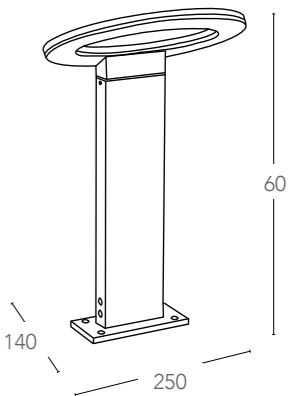informazioni tecniche - *technical information*certificazioni - *certification*

INTEC

BETA

Collezione orientabile in alluminio a LED integrato finitura silver
Built-in LED aluminium adjustable collection silver finish



ALU*



LED-BETA-AP1

8031434051216





informazioni tecniche - technical information

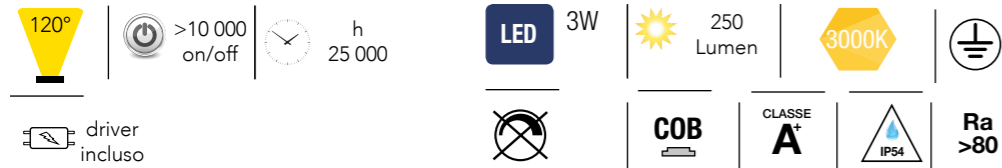

LED-BETA-AP2

8031434021219




informazioni tecniche - technical information

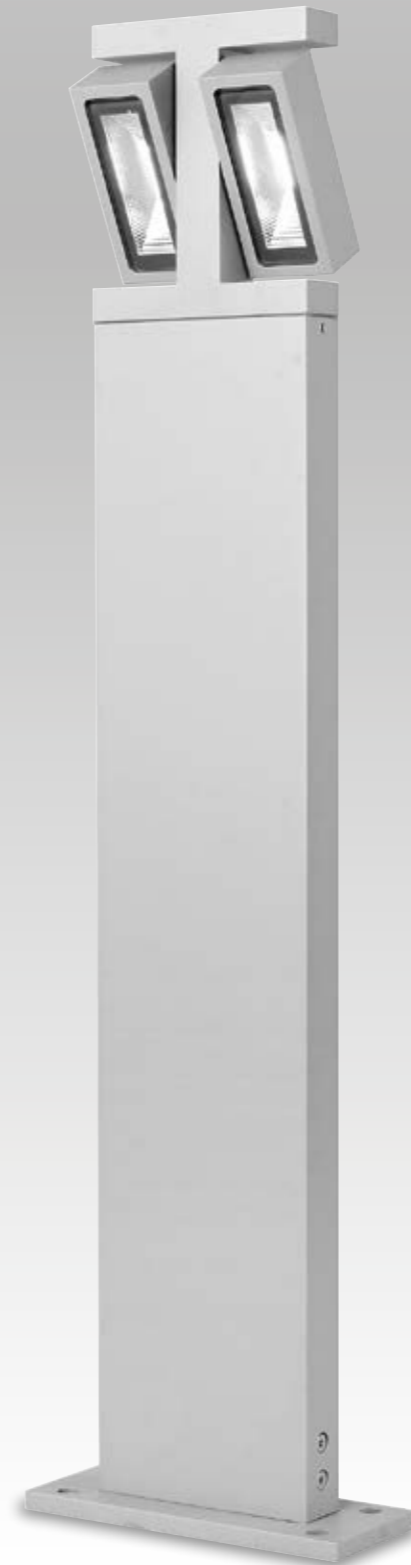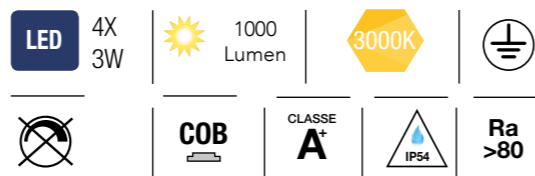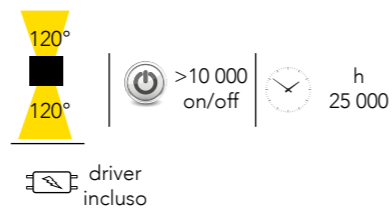

LED-BETA-P1

8031434031218

informazioni tecniche - technical information

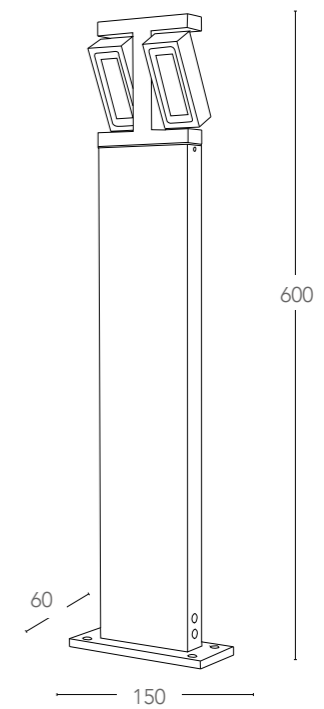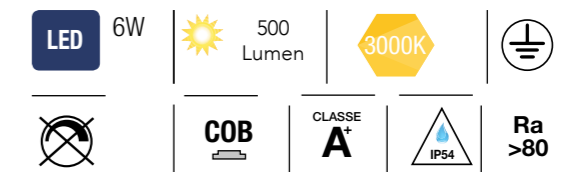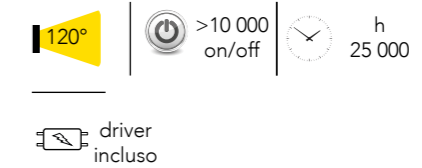

certificazioni - certification



certificazioni - certification






LADY



LANT-LADY/AP1B

8031440352130

informazioni tecniche - technical information

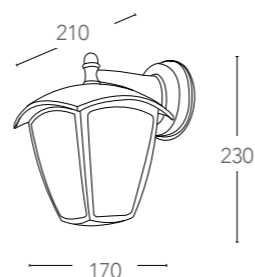


ALU*

Lanterna in alluminio pressofuso colore nero
goffrato diffusore in policarbonato LED incluso
Die cast aluminium lantern black embossed
finish with polycarbonate diffuser LED included

LANT-LADY/P3

80314403522116





informazioni tecniche - technical information



LANT-LADY/S1

8031440352147

informazioni tecniche - technical information

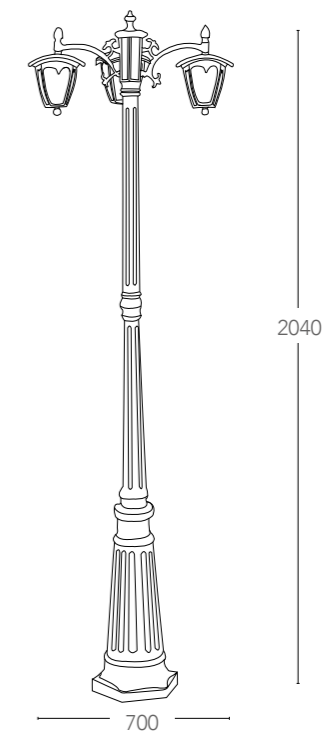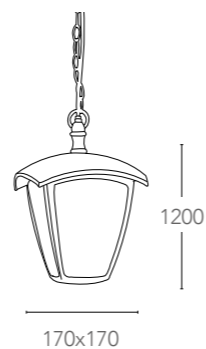

certificazioni - certification



certificazioni - certification



BERLIN



198

Applique a LED in alluminio pressofuso
finitura antracite
Diecast aluminium LED wall lamp
anthracite finish



LED-BERLIN-AP

8031432181199

informazioni tecniche - technical information

	>10 000 on/off	h 25 000		
driver incluso			— 147 — — 71 —	
LED 2x 3W	320 Lumen	4000K		
	SMD	CLASSE A		Ra >80



OSAKA



199

Applique a LED in alluminio pressofuso
finitura antracite
Diecast aluminium LED wall lamp
anthracite finish



LED-MONTREAL-AP

8031432211193

informazioni tecniche - technical information

	>10 000 on/off	h 25 000	— 191 —
driver incluso			75
			77
LED 3x 1W	240 Lumen	4000K	
	SMD	CLASSE A	Ra >80




LED-OSAKA-AP

8031432201194

informazioni tecniche - technical information

	>10 000 on/off	h 25 000	LED 3x 1W	240 Lumen	4000K	
driver incluso				SMD	CLASSE A	Ra >80

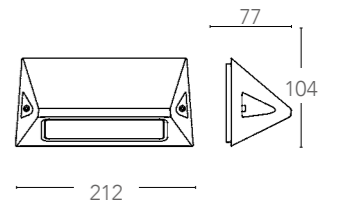

certificazioni - certification



certificazioni - certification





LAMPADE DA ESTERNO
Outdoor lamp

INTEC

BABILON

Lampada da giardino diffusore in materiale polivinilico finitura moka e sfera opale in PMMA

202

203

Garden lamp with shade in polyvinil moka finish and sphere opal in PMMA




I-BABILON-S

8031440356329

informazioni tecniche - technical information



non include - not included

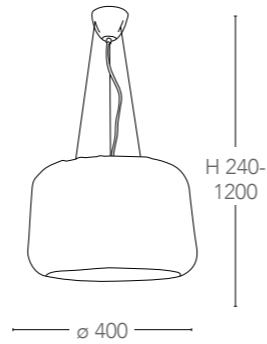


I-BABILON-AP

8031440356336

informazioni tecniche - technical information



non include - not included




I-BABILON-PT

8031440356312

informazioni tecniche - technical information



non include - not included

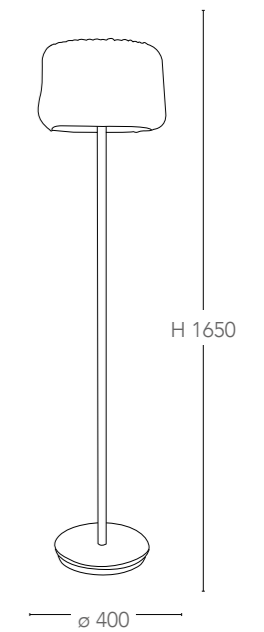


I-BABILON-L

8031440356305

informazioni tecniche - technical information



non include - not included

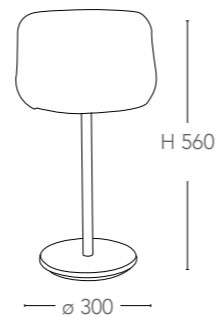

certificazioni - certification





OSLO

Lampada in alluminio pressofuso
finitura nero
Die cast aluminium lamp black finish


ALU*

I-OSLO-AP

8031440151276

informazioni tecniche - technical information

1xGX53
non incluse
not included

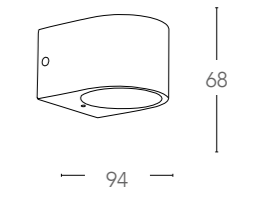


I-OSLO-P1

8031440131278

informazioni tecniche - technical information

1xGX53
non incluse
not included

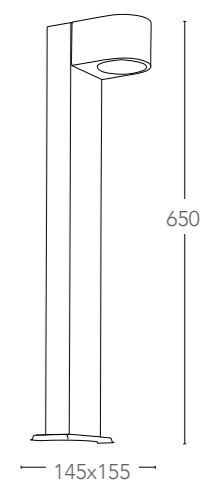

certificazioni - certification



FOCUS




I-6047/SILVER

8031420171072

finitura silver - silver finish

informazioni tecniche - technical information

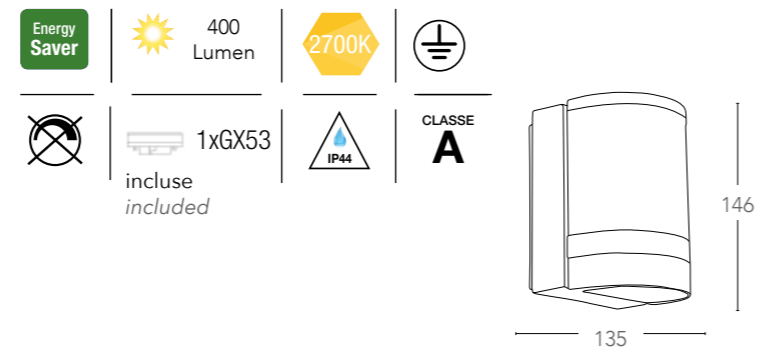

ALU*


Lampada in alluminio pressofuso
Die cast aluminium lamp

I-6041/NERO

8031420511076

finitura nero - black finish

informazioni tecniche - technical information

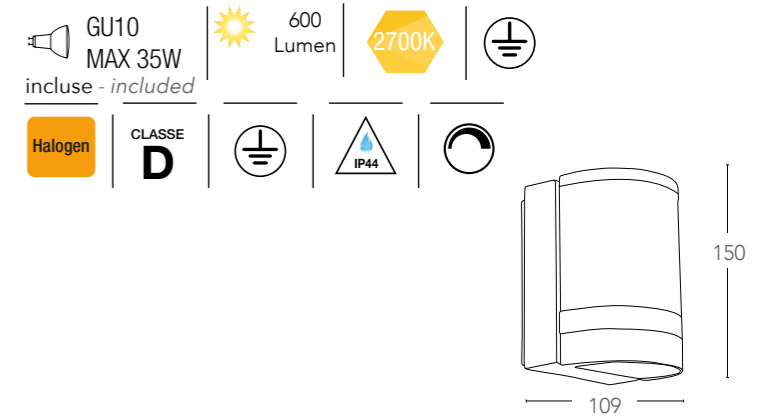


I-6046/SILVER

8031420161073

finitura silver - silver finish

informazioni tecniche - technical information

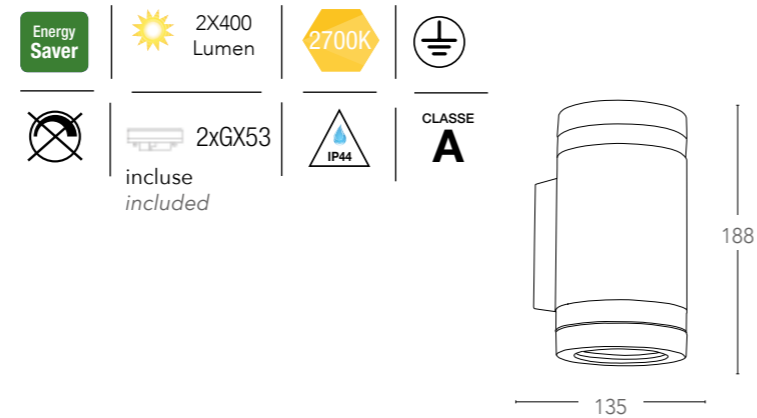


I-6048/SILVER

8031420181071

finitura silver - silver finish

informazioni tecniche - technical information

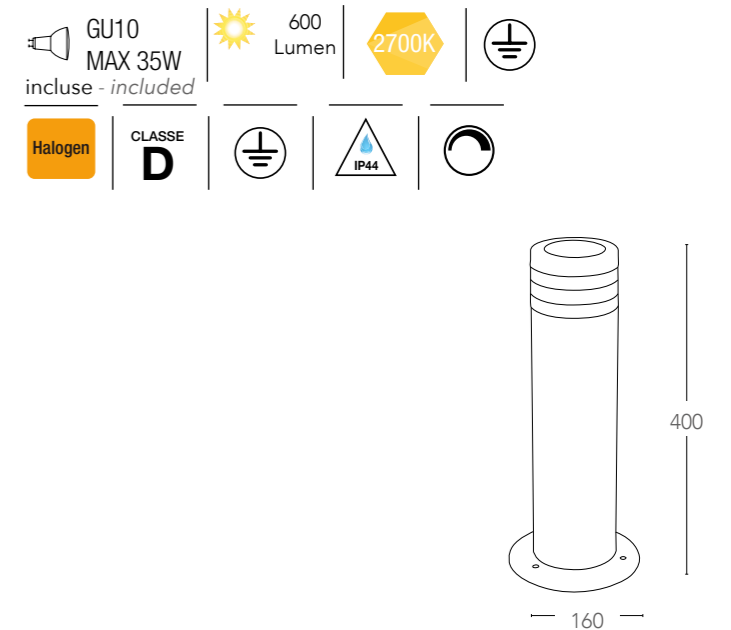

certificazioni - certification



certificazioni - certification



EDEN

Lampada in acciaio inox diffusore opale
Stainless steel lamp opal diffuser




I-ST042

8031421351084

informazioni tecniche - technical information



non include
not included



BONN

Lampada in acciaio inox diffusore trasparente
Stainless steel lamp with clear diffuser




I-ST004S-500

8031421441082

informazioni tecniche - technical information



non include
not included

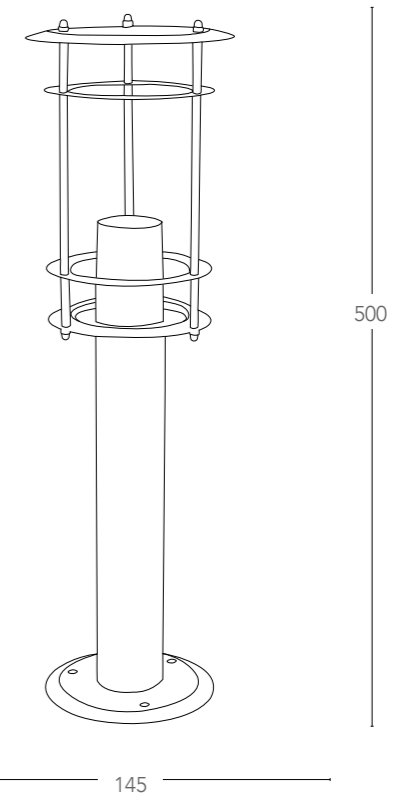

certificazioni - certification



INTEC
LIGHT

certificazioni - certification



CITY

210

Lampada in alluminio pressofuso finitura antracite con diffusore in policarbonato
Diecast aluminium lamp anthracite finish with polycarbonat diffuser


ALU*

I-11836R/ANTRACITE

8031440131278

informazioni tecniche - technical information

 E27
MAX 40W |  | 
non incluse
not included

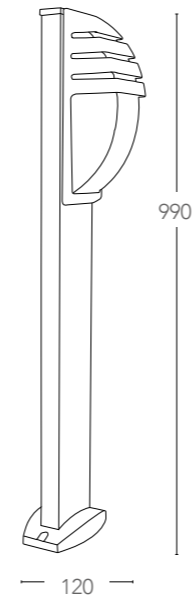

211



TOKYO


Lampada in acciaio inox diffusore in policarbonato
Stainless steel lamp with diffuser in polycarbonate

I-ST021

8031421451081

informazioni tecniche - technical information

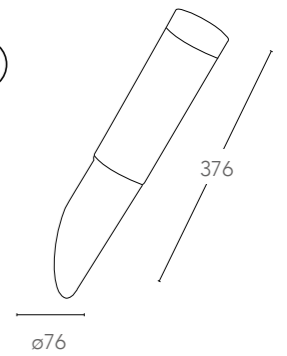

 E27
MAX 40W |  | 
non incluse
not included




I-ST022-1100

8031421661084

informazioni tecniche - technical information

 E27
MAX 40W |  | 
non incluse
not included

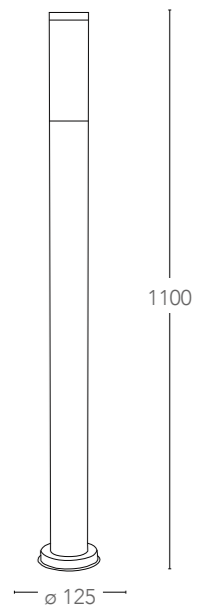

certificazioni - certification



certificazioni - certification



ROMA

Lanterne in alluminio pressofuso con diffusore in vetro
 Diecast aluminium lantern with glass diffuser

ALU*



LANT-PALETTO


8031414042203

finitura nero - black finish

E27
MAX 40W



non include
not included



390

150



LANT-ROMA/L1 BCO

8031436951248

finitura bianco - white finish

E27
MAX 40W



non include
not included



articoli e varianti - items and options

finitura nero - black finish

LANT-ROMA/AP1A

8031430751172



E27
MAX 40W



non include
not included



finitura bianco - white finish

LANT-ROMA/AP1A BCO


8031434661217



E27
MAX 40W



non include
not included



365

195

LANT-ROMA/S1


8031439521264

finitura nero - black finish

E27
MAX 40W



non include
not included

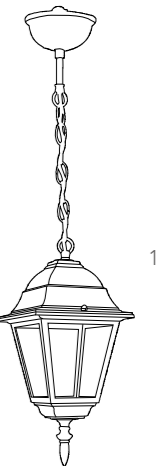

110

150



LANT-ROMA/S1 BCO

8031434681215

finitura bianco - white finish

E27
MAX 40W



non include
not included



LANT-ROMA/AP1B

8031430761171



E27
MAX 40W



non include
not included



LANT-ROMA/AP1B BCO

8031434671216



E27
MAX 40W



non include
not included



365

195

LANT-ROMA/AP1A-S

8031435921235



E27
MAX 40W




non include
not included



10LUX
5sec.- 5 min.

1-8 m



365

195

certificazioni - certification



certificazioni - certification




ROMA

LANT-ROMA/P1

8031430771170



finitura nero - black finish

non include
not included

LANT-ROMA/P1 BCO

8031436941249

finitura bianco - white finish

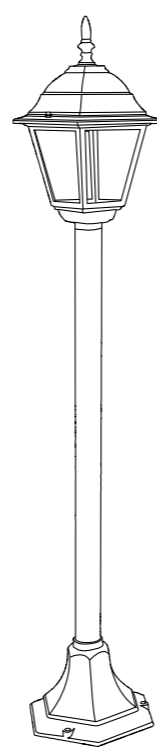non include
not included

210

1060



certificazioni - certification



LANT-ROMA/P3

8031430781179

finitura nero - black finish

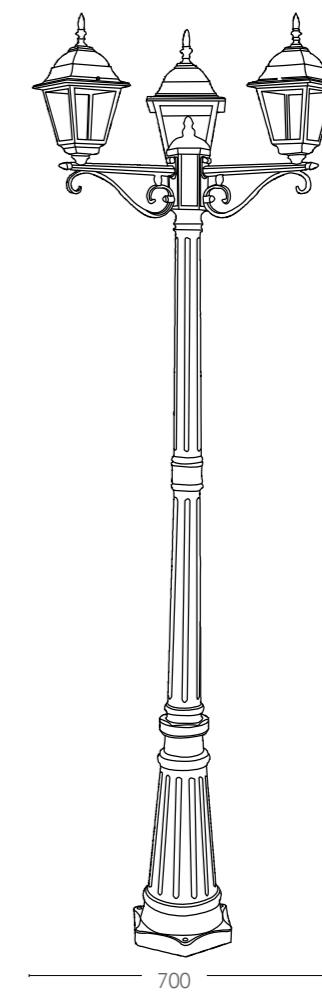non include
not included

700

2000

certificazioni - certification



Lanterne in alluminio pressofuso con
diffusore in vetro
Diecast aluminium lantern with glass
diffuser

ALU*

MILANO

Lanterne in alluminio pressofuso con diffusore in vetro
Diecast aluminium lantern with glass diffuser


ALU*



LANT-MILANO/L1

8031436881248

finitura nero - black finish

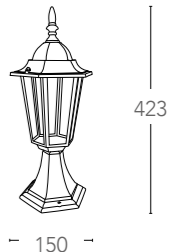non include
not included

LANT-MILANO/L1 BCO

8031436891247

finitura bianco - white finish

non include
not included

articoli e varianti - items and options

finitura nero - black finish

LANT-MILANO/AP1A


8031436921241

non include
not included

finitura bianco - white finish

LANT-MILANO/AP1A BCO

8031436931240

non include
not included

370

210




LANT-MILANO/AP1B

8031436901243

non include
not included

LANT-MILANO/AP1B BCO

8031436911242

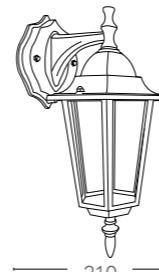non include
not included


370

210

LANT-MILANO/S1

8031436841235

finitura nero - black finish

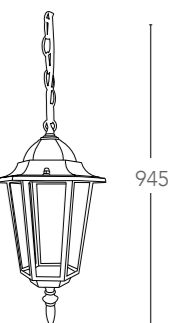non include
not included

945

175



LANT-MILANO/S1 BCO

8031436851234

finitura bianco - white finish

non include
not included

certificazioni - certification



certificazioni - certification



MILANO



LANT-MILANO/P1

8031430771170


finitura nero - black finish

non include
not included

LANT-MILANO/P1 BCO

8031436871232

finitura bianco - white finish

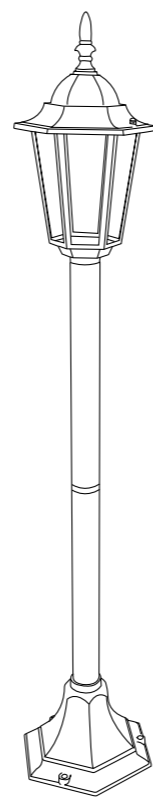non include
not included

1055

210

certificazioni - certification



PISA




ALU*

Lanterne in alluminio pressofuso con dif-
fusore in vetro finitura nero-oro
Diecast aluminium lantern with glass dif-
fuser finish black-gold

articoli e varianti - items and options

LANT-PISA/AP1A

8031435561226

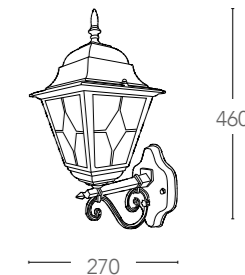
non include
not included

460

270

LANT-PISA/AP1B

8031435571225

non include
not included

460

270

certificazioni - certification



PISA

220

221


ALU*


Lanterne in alluminio pressofuso con diffusore in vetro finitura nero-oro
Diecast aluminium lantern with glass diffuser finish black-gold



LANT-PISA/L1


8031435551227

 E27
MAX 40W
non include
not included

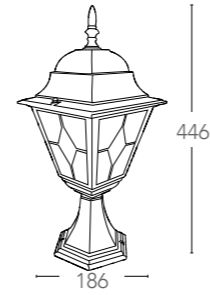

LANT-PISA/P1


8031435531229



 E27
MAX 40W
non include
not included



LANT-PISA/S1

8031435541228

 E27
MAX 40W
non include
not included

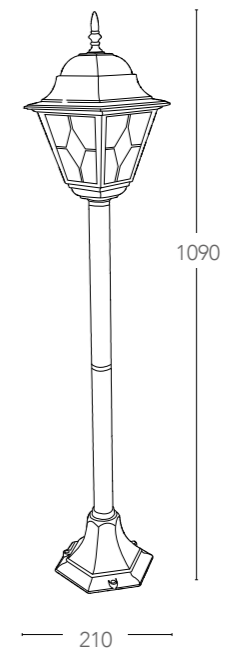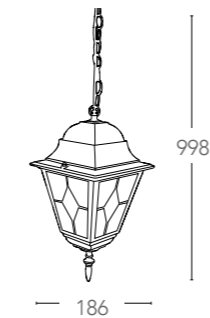

FIRENZE

Lanterne in alluminio pressofuso con diffusore in vetro finitura nero-silver
Diecast aluminium lantern with glass diffuser finish black-silver


ALU*

LANT-FIRENZE/S1

8031430741173

 E27
MAX 40W

non include
not included

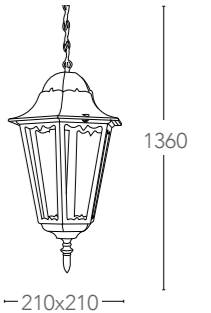


LANT-FIRENZE/AP1A

8031430701177

 E27
MAX 40W

non include
not included

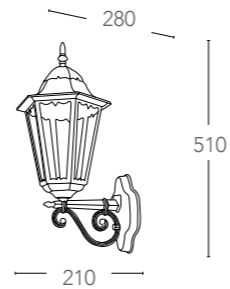


LANT-FIRENZE/AP1B

8031430711176

 E27
MAX 40W

non include
not included

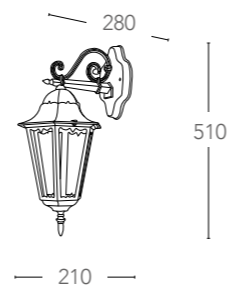


LANT-FIRENZE/P1

8031430721175

 E27
MAX 40W

non include
not included

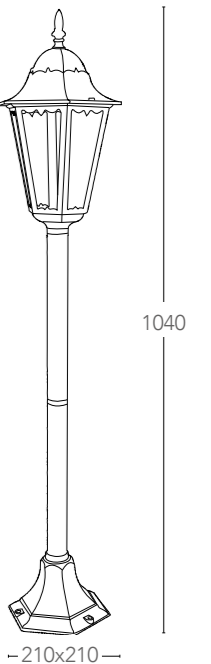

certificazioni - certification



INTEC
LIGHT

certificazioni - certification





FIRENZE



LANT-FIRENZE/P3

8031430731174

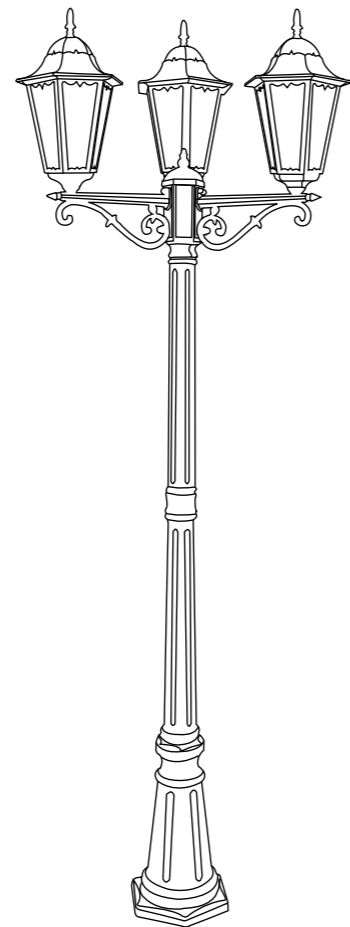

2180

765

certificazioni - certification



SANTIAGO

Lanterne in alluminio pressofuso con diffusore in vetro finitura nero-verde
Diecast aluminium lantern with glass diffuser finish black-green



ALU*



articoli e varianti - items and options


LANT-SANTIAGO/AP1B

8031430811173

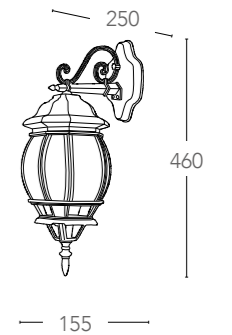

LANT-SANTIAGO/AP1A

8031430801174

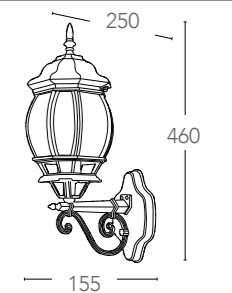

INTEC

LIGHT

certificazioni - certification



SANTIAGO

226


227


Lanterne in alluminio pressofuso con diffusore in vetro finitura nero-verde
 Diecast aluminium lantern with glass diffuser finish black-green

ALU*

LANT-SANTIAGO/S1


8031430841170


 E27
 MAX 40W
 non include
 not included

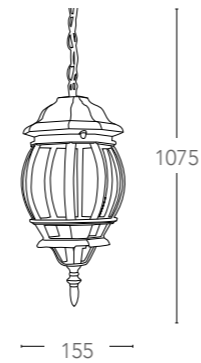

LANT-SANTIAGO/P1


8031430821172


 E27
 MAX 40W
 non include
 not included

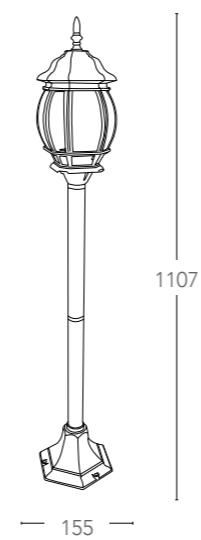

LANT-SANTIAGO/P3

8031430831171

 E27
 MAX 40W
 non include
 not included

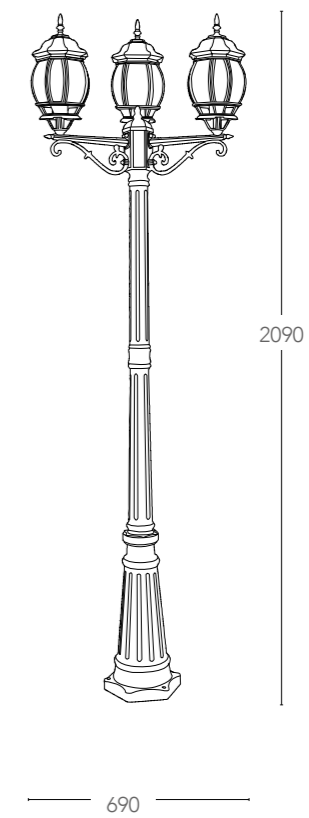

certificazioni - certification



certificazioni - certification



VENEZIA

Lanterne in alluminio finitura in rame e nero diffusore in policarbonato
Diecast aluminium lantern with finish black and copper polycarbonate diffuser


ALU*

LANT-VENEZIA-L1

8031440311984

 E27
MAX 40W

non include
not included

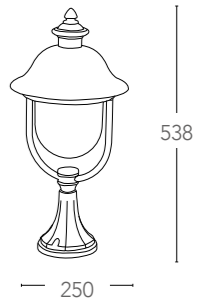


articoli e varianti - article and finish

LANT-VENEZIA-AP1B

8031440311991

 E27
MAX 40W

non include
not included

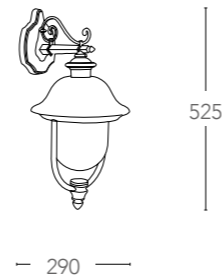


LANT-VENEZIA-AP1A

8031440312004

 E27
MAX 40W

non include
not included

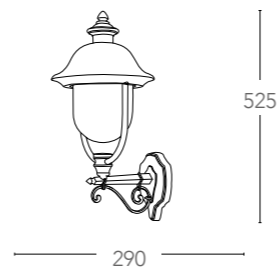


LANT-VENEZIA-S1

8031440313285

 E27
MAX 40W

non include
not included

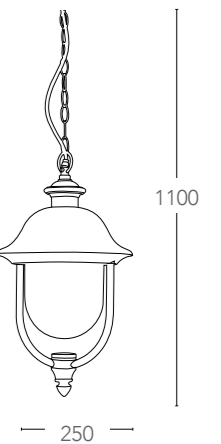

certificazioni - certification





certificazioni - certification



VENEZIA

LANT-VENEZIA-P1

8031440313308

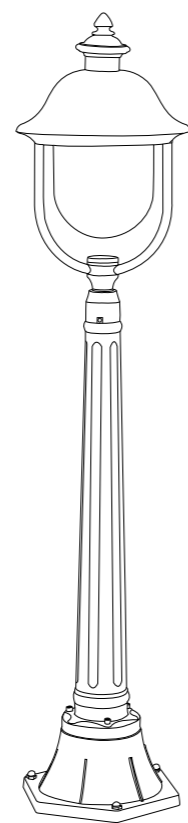

1280

250

certificazioni - certification





ALU*

Lanterne in alluminio finitura in rame
e nero diffusore in policarbonato
*Diecast aluminium lantern with finish
black and copper polycarbonate diffuser*

LANT-VENEZIA-P3

8031440313292

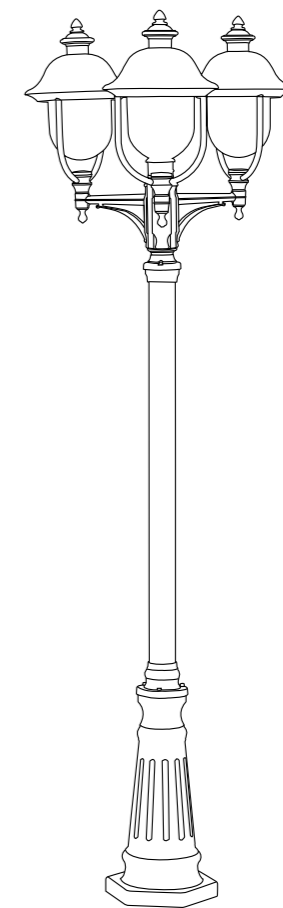

2300

750

certificazioni - certification



PAVIA


Lampada in alluminio finitura nero
diffusore in policarbonato
*Aluminium lamp black finish with
polycarbonate*


ALU*



LANT-PAVIA-AP1


8031440312028

 E27
MAX 40W
non include
not included

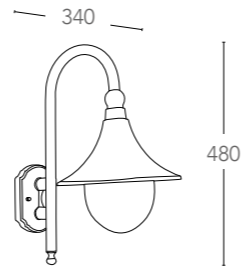

LANT-PAVIA-P1


8031440312035



 E27
MAX 40W
non include
not included



LANT-PAVIA-S1

8031440312042

 E27
MAX 40W
non include
not included

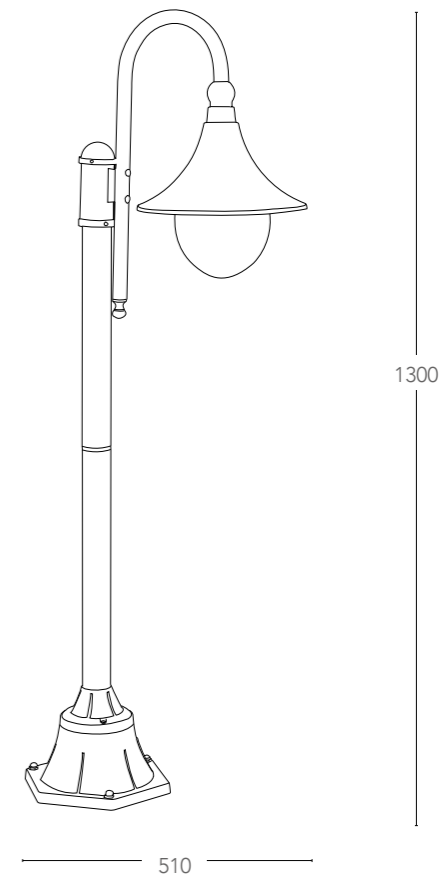
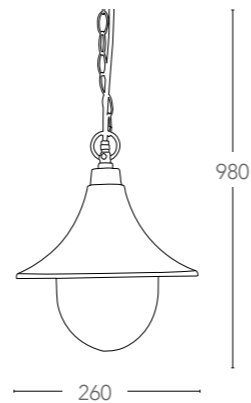


PAVIA



LANT-PAVIA-P3

8031440312011

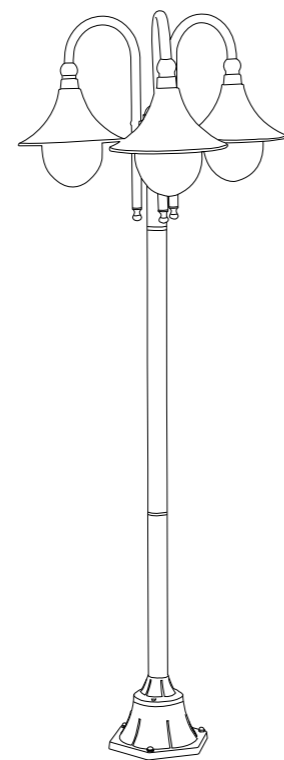

1900

560

certificazioni - certification



GAETA

ALU*



Lanterne in alluminio finitura nero-oro
pressofuso con diffusore in vetro
Diecast aluminium black-gold finish
lantern with glass



articoli e varianti - article and finish

LANT-GAETA-AP1

8031440313278

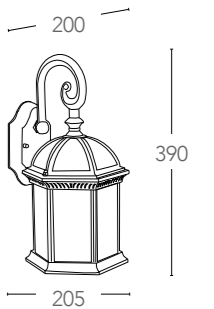

certificazioni - certification



INTEC
LIGHT

VENEZIA

236

237

Lampada in vetro struttura in metallo
Glass lamp with metal structure

ALU*

215/02500


8031414046911



E27
MAX 40W



non incluse
not included

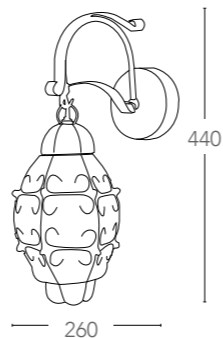

PLAFONIERE E APPLIQUE DA ESTERNO
Outdoor ceiling and wall lamp



215/00800


8031414046027



E27
MAX 40W



non incluse
not included



EVER




Plafoniera LED integrato materiale policarbonato con diffusore opale
 Polycarbonate built-in LED ceiling lamp with opal diffuser

**LED-EVER-LP-BCO**

8031440355650

finitura bianco - *white finish***LED-EVER-LP-ANT**


8031440355643

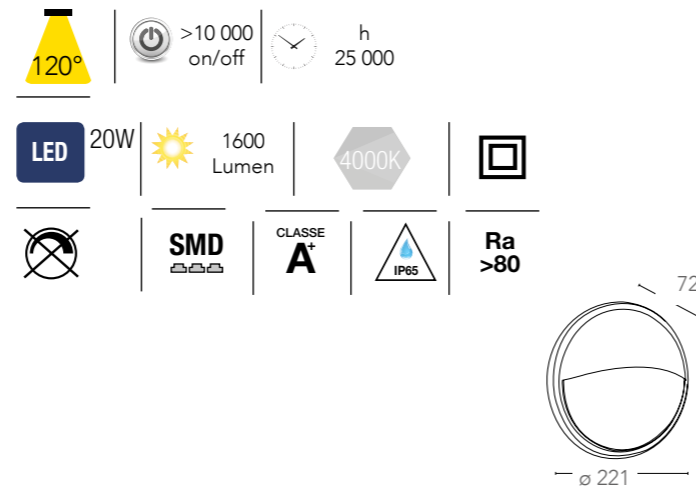finitura antracite
*anthracite finish*informazioni tecniche - *technical information***LED-EVER-XLP-BCO**


8031440355643

finitura bianco - *white finish***LED-EVER-XLP-ANT**

8031440355629

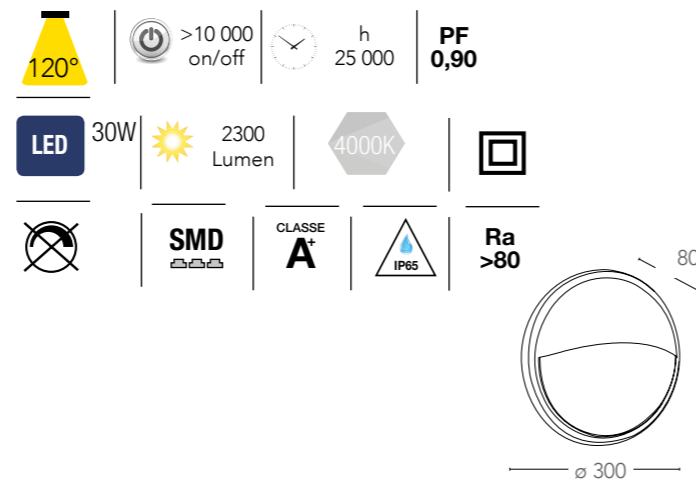finitura antracite
*anthracite finish*informazioni tecniche - *technical information***LED-EVER-XL-BCO**

8031440355612

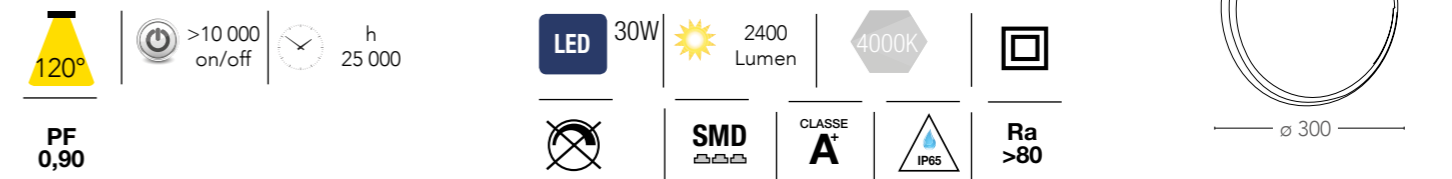finitura bianco - *white finish*informazioni tecniche - *technical information*finitura silver - *silver finish***LED-EVER-XL-SIL**

8031440355605

certificazioni - *certification*certificazioni - *certification*

EVER



Plafoniera LED integrato materiale policarbonato diffusore opale
Plycarbonate built-in LED ceiling lamp with opal diffuser

240

241

SHELLY



Plafoniera LED integrato materiale policarbonato diffusore opale
Plycarbonate built-in LED ceiling lamp with opal diffuser



LED-EVER-L-BCO

8031440351676

finitura bianco - white finish

LED-EVER-L-ANT

8031440351645

finitura antracite
anthracite finish

informazioni tecniche - technical information



LED-SHELLY-L-BCO

8031440351713


finitura bianco - white finish

LED-SHELLY-L-ANT

8031440351690

finitura antracite
anthracite finish

informazioni tecniche - technical information

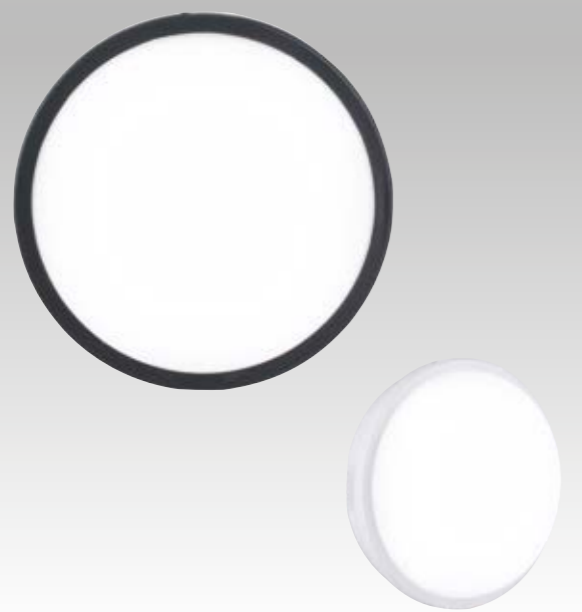

LED-EVER-S-BCO

8031440351683

finitura bianco - white finish

LED-EVER-S-ANT

8031440351638

finitura antracite
anthracite finish

informazioni tecniche - technical information



LED-SHELLY-S-BCO

8031440351720

finitura bianco - white finish

LED-SHELLY-S-ANT

8031440351706

finitura antracite
anthracite finish

informazioni tecniche - technical information

certificazioni - certification



INTEC

LIGHT

certificazioni - certification



INTEC

LIGHT

TOLEDO

242

Plafoniera in poliammide con diffusore in vetro
Polyamide plastic ceiling lamp with glass diffuser


I-TOLEDO-BCO

8031440312073

informazioni tecniche - technical information



non include - not included

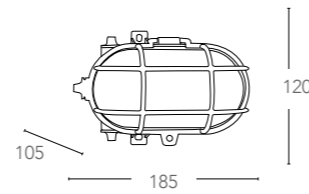

243

EASY

Plafoniera in poliammide con diffusore in vetro
Polyamide plastic ceiling lamp with glass diffuser

I-EASY-S-BCO

8031440357883

finitura bianco - white finish

I-EASY-S-NERO


8031440357890

finitura nero - black finish

informazioni tecniche - technical information



non include - not included

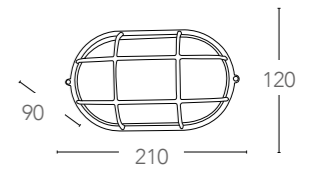

SMART

I-SMART-S-BCO

8031440357869

finitura bianco - white finish

I-SMART-S-NERO


8031440357876

finitura nero - black finish

informazioni tecniche - technical information



non include - not included



certificazioni - certification



certificazioni - certification



INTEC
LIGHT

INTEC
LIGHT

BARCELLONA

Plafoniera in alluminio con diffusore in vetro
Diecast ceiling lamp with glass diffuser

ALU*

I-3072L/SILVER

8031421531080

finitura silver - silver finish

I-3072L/NERO


8031421501083

finitura nero - black finish

informazioni tecniche - technical information



non include - not included



I-3074L/SILVER

8031421491087

finitura silver - silver finish

I-3074L/NERO


8031421461080

finitura nero - black finish

informazioni tecniche - technical information



non include - not included



I-3072S/SILVER

8031421551088

finitura silver - silver finish

I-3072S/NERO


8031421521081

finitura nero - black finish

informazioni tecniche - technical information



non include - not included

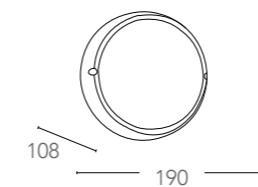

I-3074S/SILVER

8031421511082

finitura silver - silver finish

I-3074S/NERO


8031421481088

finitura nero - black finish

informazioni tecniche - technical information



non include - not included

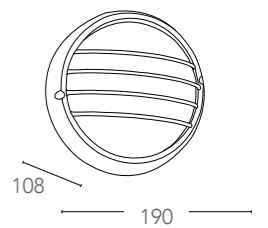

certificazioni - certification



certificazioni - certification




IBIZA

**I-BIZA-LD-BCO**

8031440312127

finitura bianco - *white finish***I-BIZA-LD-NERO**


8031440312172

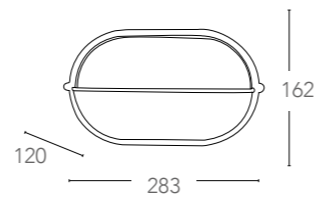finitura nero - *black finish*informazioni tecniche - *technical information*non include - *not included***I-BIZA-LP-BCO**

8031440312110

finitura bianco - *white finish***I-BIZA-LP-NERO**

8031440312196

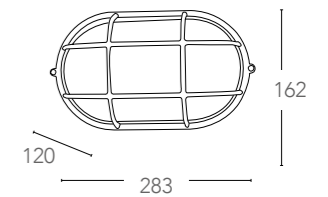finitura nero - *black finish*informazioni tecniche - *technical information*non include - *not included*

Plafoniera in vetro con struttura
in alluminio
Glass ceiling lamp with aluminium frame



ALU*

**I-BIZA-SD-BCO**

8031440312097

finitura bianco - *white finish***I-BIZA-SD-NERO**


8031440312158

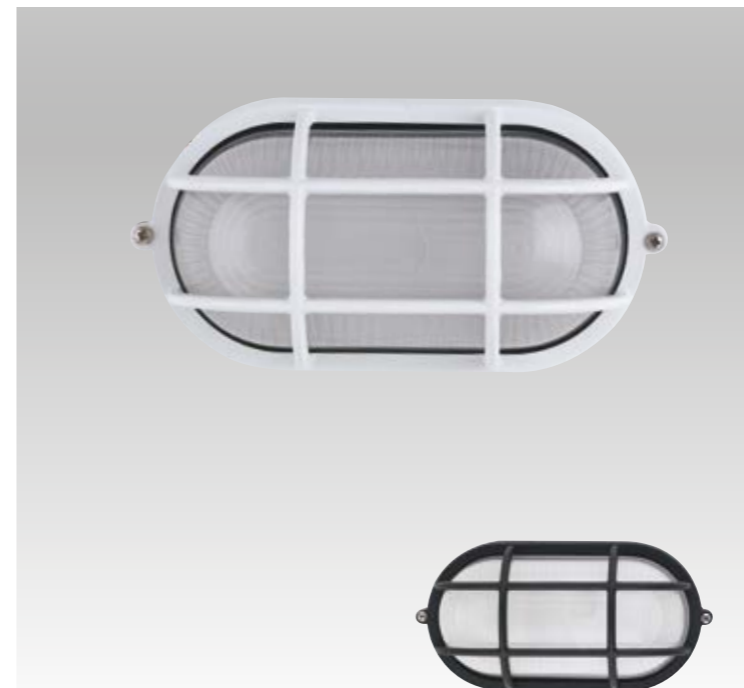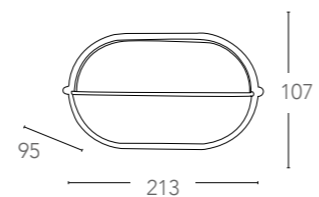finitura nero - *black finish*informazioni tecniche - *technical information*non include - *not included***I-BIZA-SP-BCO**

8031440312080

finitura bianco - *white finish***I-BIZA-SP-NERO**

8031440312141

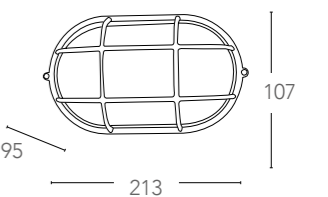finitura nero - *black finish*informazioni tecniche - *technical information*non include - *not included*certificazioni - *certification*

INTEC
LIGHT

certificazioni - *certification*

IBIZA

248
 Plafoniera in vetro con struttura
 in alluminio
 Glass ceiling lamp with aluminium frame

ALU*

I-IBIZA-L-BCO

8031440312134

finitura bianco - white finish

I-IBIZA-L-NERO


8031440312189

finitura nero - black finish

informazioni tecniche - technical information



non include - not included

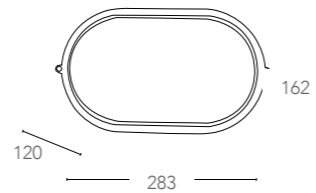

249

DETROIT

ALU*
 Incasso da parete segnapassi in alluminio
 e diffusore in vetro finitura nero
 Recessed wall step light in diecast
 aluminium and glass diffuser black finish

INC-DETROIT-E27

8031440312059



senza griglia - without frame

INC-DETROIT-E27-P



8031440312066

con griglia - with frame

informazioni tecniche - technical information



non include - not included

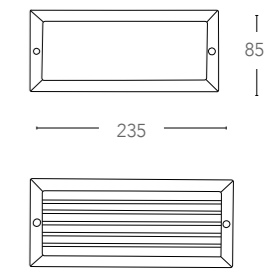

I-IBIZA-S-BCO

8031440312103

finitura bianco - white finish

I-IBIZA-S-NERO


8031440312165

finitura nero - black finish

informazioni tecniche - technical information



non include - not included

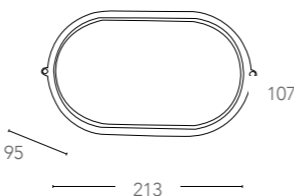

certificazioni - certification



certificazioni - certification



BOSTON

250

251

Applique in alluminio con diffusore opale
in policarbonato finitura antracite
Aluminium wall lamp with polycarbonat
opal diffuser anthracite finish

ALU*




I-BOSTON-AP

8031440312240

informazioni tecniche - technical information



non incluse - not included

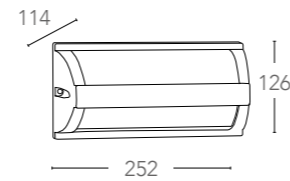

LIONE

Applique in alluminio con diffusore opale
in policarbonato finitura antracite
Aluminium wall lamp with polycarbonat
opal diffuser anthracite finish

ALU*




I-1842/ANTRACITE

8031420231073

informazioni tecniche - technical information



non incluse - not included



ATLANTA




I-ATLANTA-AP

8031440312257

informazioni tecniche - technical information



non incluse - not included

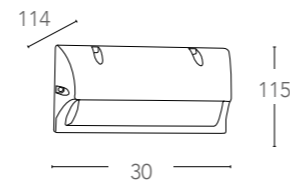

MEMPHIS




I-MEMPHIS-AP

8031440312226

informazioni tecniche - technical information



non incluse - not included

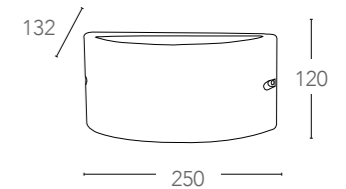

certificazioni - certification



INTEC

LIGHT

certificazioni - certification



INTEC

LIGHT

SEATTLE

252

Applique in alluminio con diffusore satinato in policarbonato finitura antracite
Aluminium wall lamp with polycarbonat clear frost diffuser anthracite finish

ALU*


I-SEATTLE-AP

8031440312233

informazioni tecniche - technical information



non incluse - not included

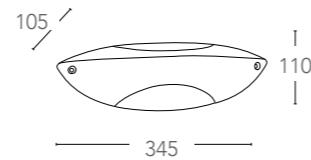

253

DENVER


Applique in alluminio con diffusore opale in policarbonato finitura antracite
Aluminium wall lamp with polycarbonat opal diffuser anthracite finish

ALU*



I-DENVER-AP

8031440312264

informazioni tecniche - technical information



non incluse - not included

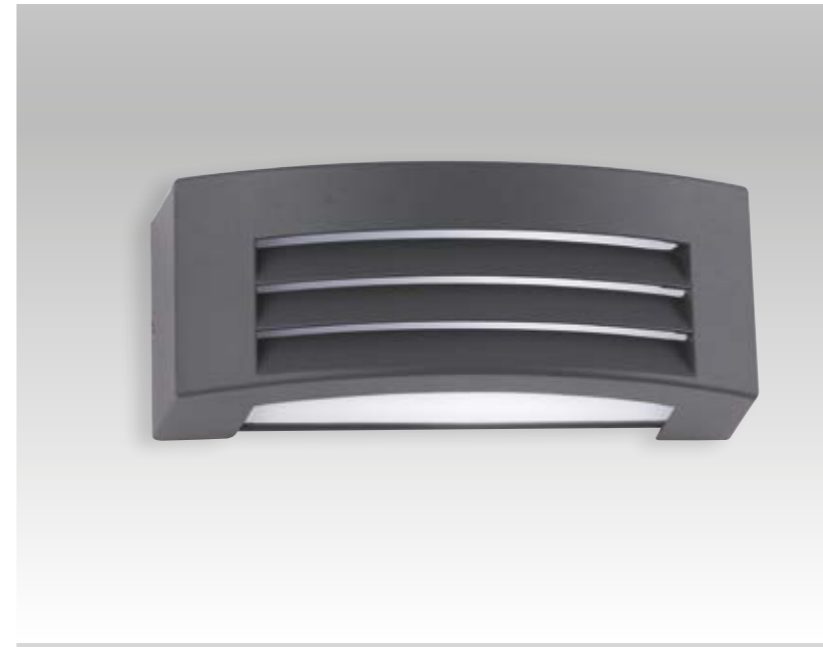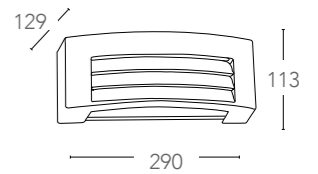

ORLANDO

Applique in alluminio con diffusore opale in policarbonato finitura antracite
Aluminium wall lamp with polycarbonat opal diffuser anthracite finish

ALU*


I-ORLANDO-AP

8031440312271

informazioni tecniche - technical information



non incluse - not included

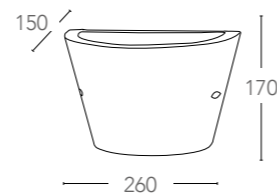


AKRON

Faro in alluminio con picchetto
Aluminium flood light with spike


I-AKRON-PR

8031440312219

informazioni tecniche - technical information



non incluse - not included

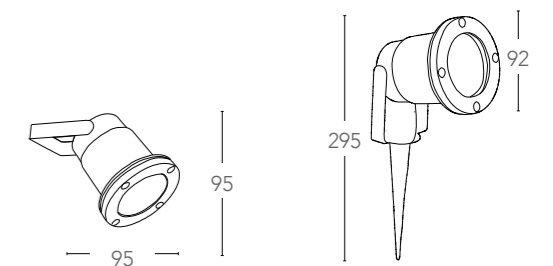

certificazioni - certification



INTEC

LIGHT

certificazioni - certification



INTEC

LIGHT

CALPESTABILI
Walkable

RIDER


Kit segnapassi in alluminio incasso a pavimento
o parete LED integrato finitura nickel
LED built-in aluminium in ground or wall spot
light nickel finish

ALU*

LED-RIDER-R6-DIR

8031439921279


informazioni tecniche - technical information

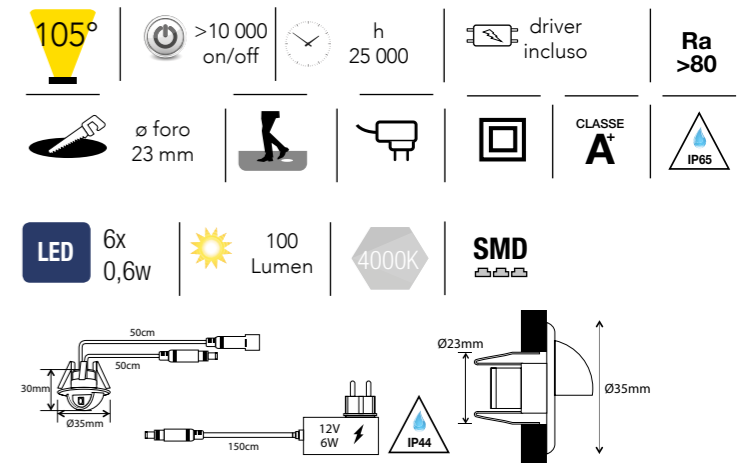

LED-RIDER-R6

8031436141236


informazioni tecniche - technical information

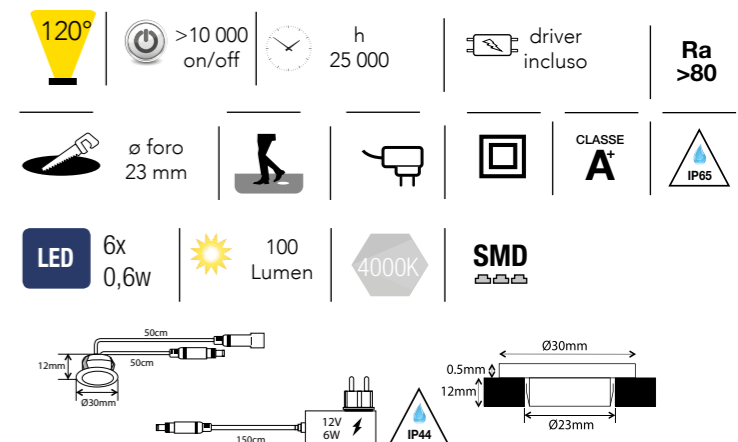

LED-RIDER-R6-RGB

8031439871260

informazioni tecniche - technical information

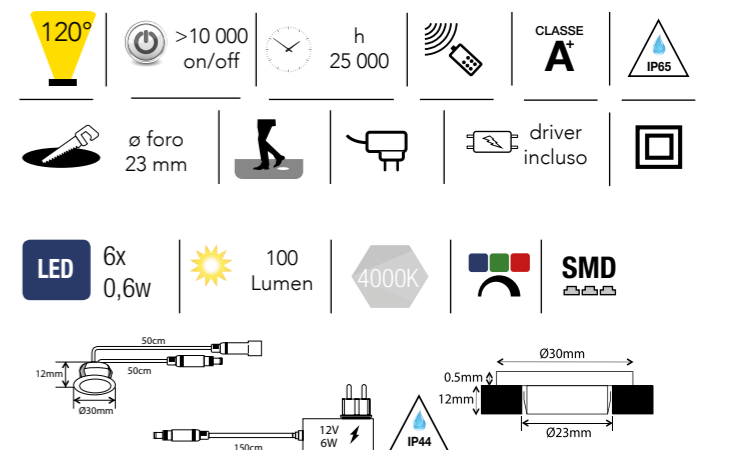

certificazioni - certification



INTEC

INTEC LIGHT



BRICK

256

257




Faro calpestabile da incasso a pavimento
LED integrato
LED built-in walkable light

LED-BRICK-10

8031440141277

informazioni tecniche - technical information

	>10 000 on/off	h 25 000		
foro 103x103 x133 mm		driver incluso		
LED 1.6W	120 Lumen			

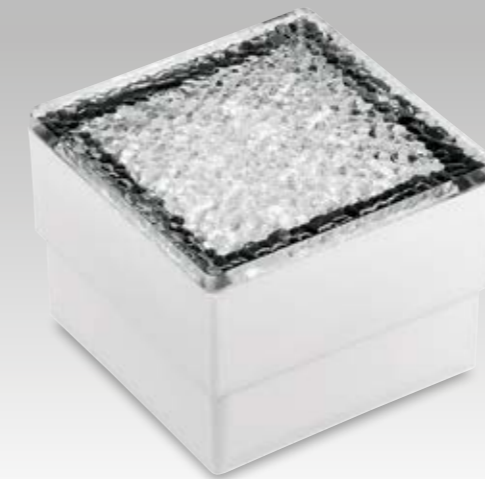


LED-BRICK-20

8031440311274

informazioni tecniche - technical information

	>10 000 on/off	h 25 000		
foro 203x203 x133 mm		driver incluso		
LED 3.6W	280 Lumen			

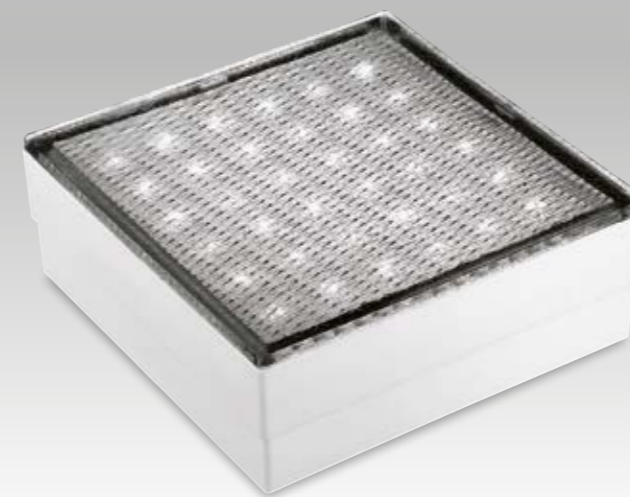

certificazioni - certification



INTEC
LIGHT

INTEC
LIGHT

STEP




ALU*

Faretto calpestabile da incasso a pavimento in alluminio finitura nickel LED integrato
Walkable built-in aluminium nickel finish

LED-STEP-R-4

8031434011210

informazioni tecniche - technical information

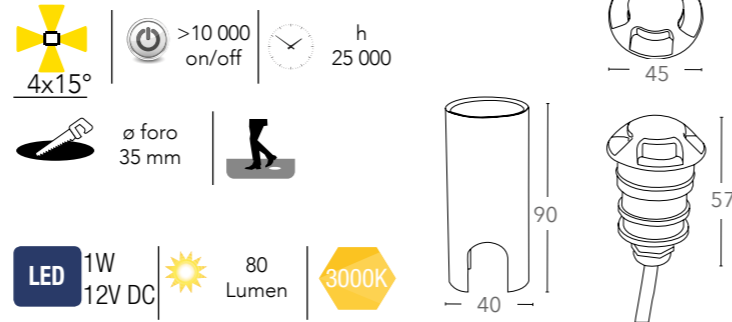

LED 1W 12V DC 80 Lumen 3000K

IP67 Ra >80

driver output min. 1w 3,5V 350mA
non include - not included

Driver page da 342 a 345

IMPACT




ALU*

Faretto calpestabile da incasso a pavimento in alluminio finitura nickel LED integrato
Walkable built-in aluminium nickel finish

LED-IMPACT-Q-1W

8031440331272

informazioni tecniche - technical information

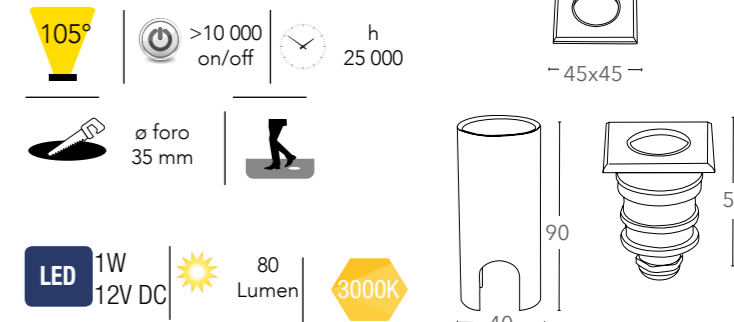

LED 1W 12V DC 80 Lumen 3000K

IP67 Ra >80


driver output min. 1w 3,5V 350mA
non include - not included

Driver page da 342 a 345

LED-STEP-R-1

8031434001211

informazioni tecniche - technical information

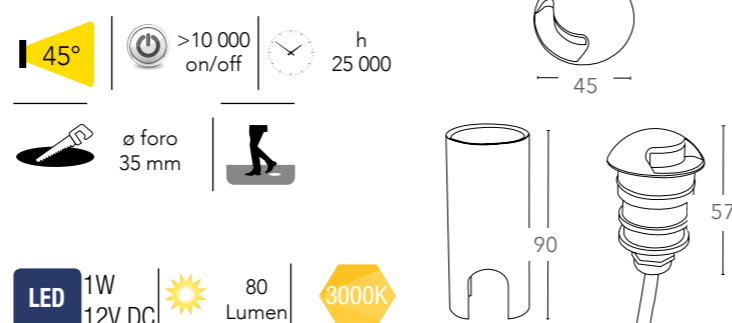

LED 1W 12V DC 80 Lumen 3000K

IP67 Ra >80


driver output min. 1w 3,5V 350mA
non include - not included

Driver page da 342 a 345

LED-IMPACT-R-1W

8031440321273

informazioni tecniche - technical information

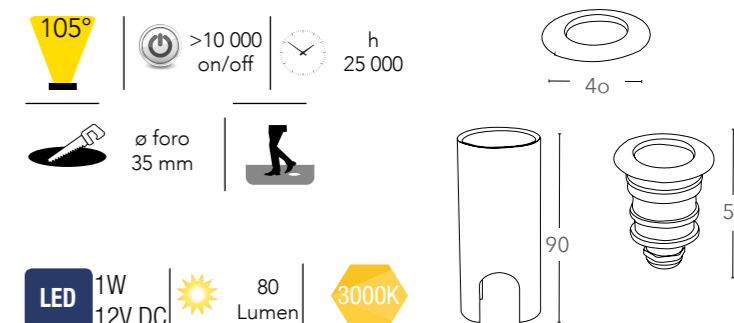

LED 1W 12V DC 80 Lumen 3000K

IP67 Ra >80

driver output min. 1w 3,5V 350mA
non include - not included

Driver page da 342 a 345

certificazioni - certification



INTEC
LIGHT

certificazioni - certification



WALK

260

261




Faro calpestabile da incasso a pavimento
LED integrato acciaio inox
Walkable stainless steel built-in LED light

LED-WALK-R7

8031440355582

informazioni tecniche - technical information

	>10 000 on/off	h 25 000	CLASSE A+		4000K
3W	230V DRIVER FREE		240 Lumen		

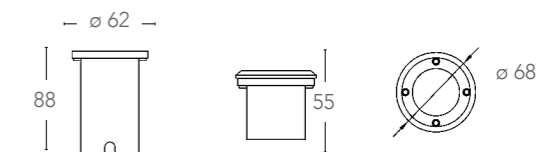


LED-WALK-R11

8031440355568

informazioni tecniche - technical information

	>10 000 on/off	h 25 000	CLASSE A+		4000K
10W	230V DRIVER FREE		800 Lumen		

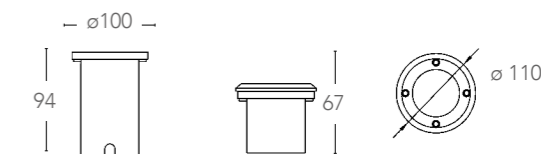


LED-WALK-R14

8031440355544

informazioni tecniche - technical information

	>10 000 on/off	h 25 000	CLASSE A+		4000K
15W	230V DRIVER FREE		1200 Lumen		

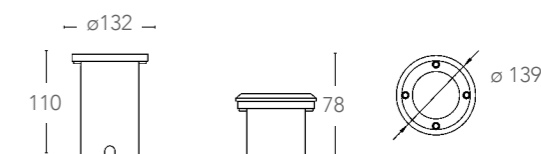

WALK

262

263





Faro calpestabile da incasso a pavimento
LED integrato acciaio inox
Walkable stainless steel built-in LED light

LED-WALK-Q7

8031440355599



informazioni tecniche - technical information

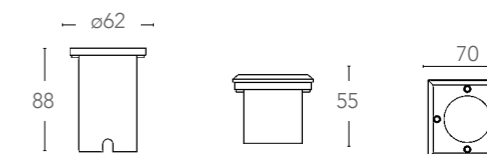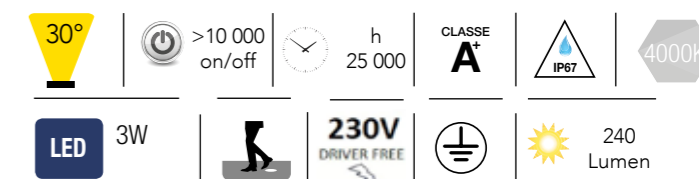

LED-WALK-Q11

8031440355575



informazioni tecniche - technical information

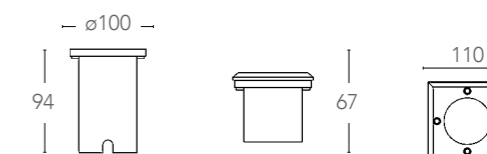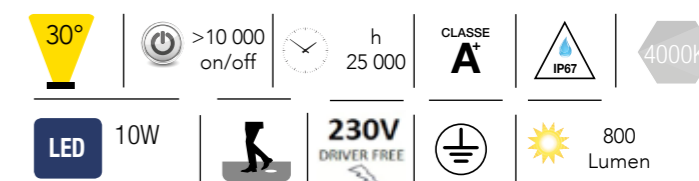

LED-WALK-Q14

8031440355551

informazioni tecniche - technical information

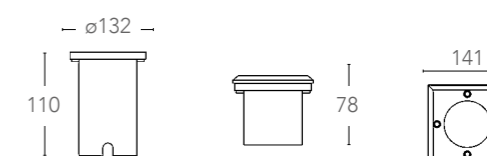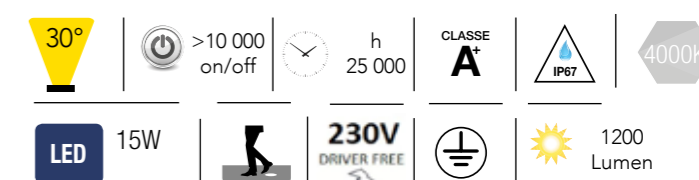

DRIVE

Faro calpestabile da incasso a pavimento
acciaio inox
Walkable stainless steel built-in




I-DRIVE-R1

8031440313261

informazioni tecniche - *technical information*

GU10
MAX 42W


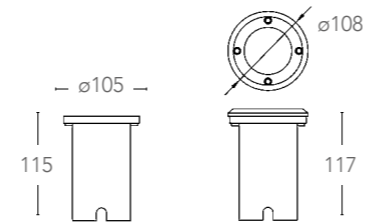
non include - *not included*

I-DRIVE-M-R1

8031440313247

informazioni tecniche - *technical information*

GU10
MAX 42W

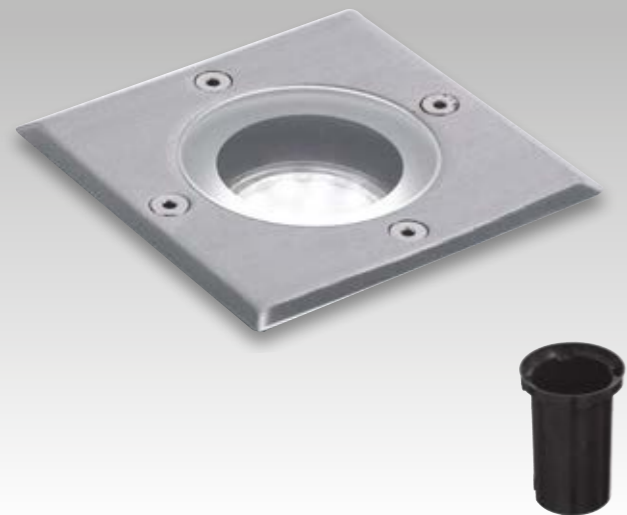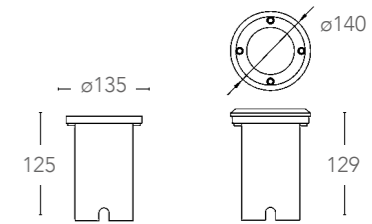
non include - *not included*

I-DRIVE-Q1

8031440313254

informazioni tecniche - *technical information*

GU10
MAX 42W

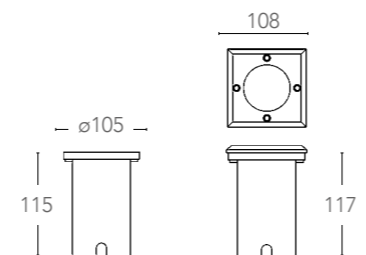
non include - *not included*

I-DRIVE-E27

8031440313230

informazioni tecniche - *technical information*

E27
MAX 60W

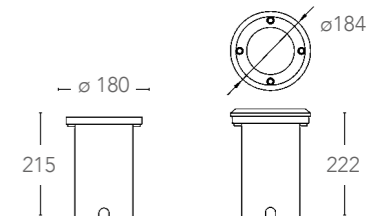non include - *not included*certificazioni - *certification*

INTEC
LIGHT

certificazioni - *certification*

PROIETTORI

Flood light

COSMO


Proiettore LED con sensore in policarbonato
alimentato a batteria colore nero
*LED flood light in polycarbonate material
powered by battery black color*



LED-COSMO/S

8031439841263

informazioni tecniche - *technical information*

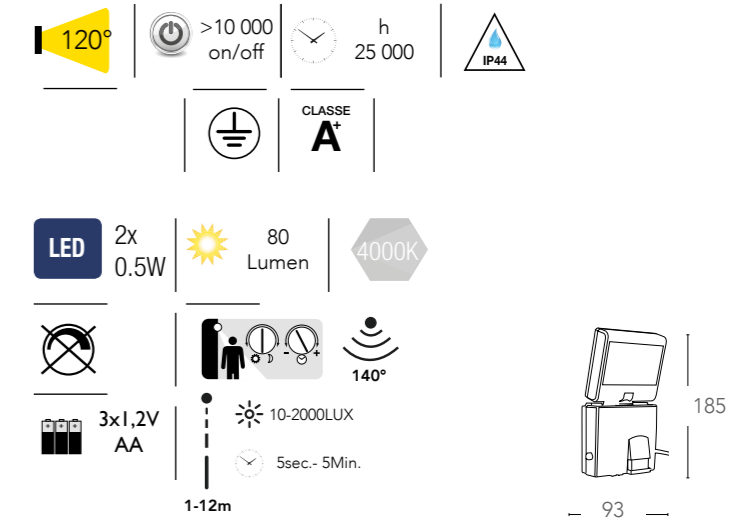


Proiettore LED con sensore ricaricabile tramite
pannello solare colore nero
*LED flood light with sensor rechargeable by solar
panel black color*



LED-COSMO/S-FV

8031439821265

informazioni tecniche - *technical information*

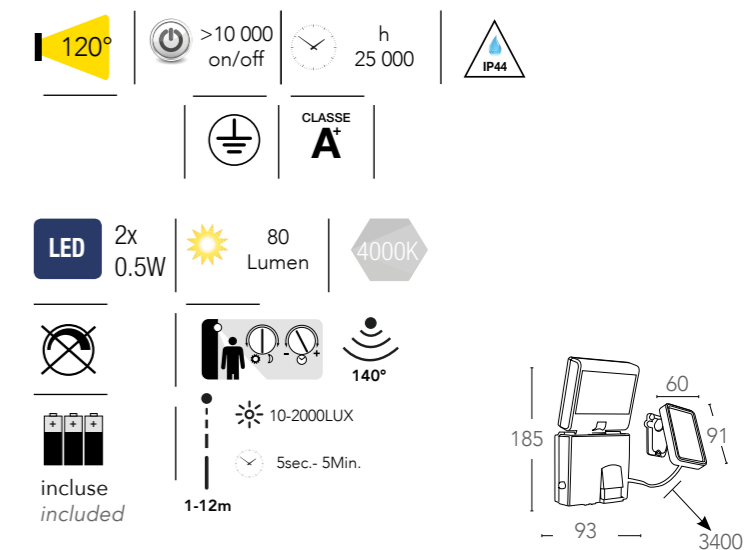

INTEC

INTEC

LIGHT

certificazioni - *certification*



SHEDAR

268

269

Proiettore orientabile LED integrato con
sensore colore nero
*LED built-in adjustable flood lamp with
sensor black color*



Proiettore orientabile LED integrato
colore bianco
*LED Built-in adjustable flood lamp
white color*



LED-SHEDAR-S/10W

8031439971274

informazioni tecniche - *technical information*

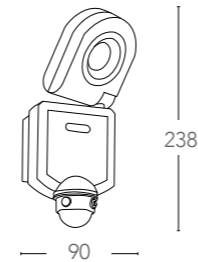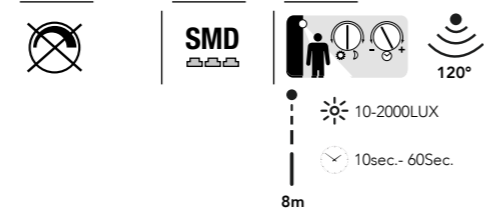



LED-SHEDAR/10W

8031440001274

informazioni tecniche - *technical information*





illuminazione - *gypsum finish*

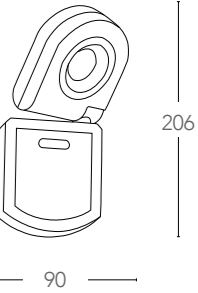

LED-SHEDAR-S/20W

8031439981273


informazioni tecniche - *technical information*

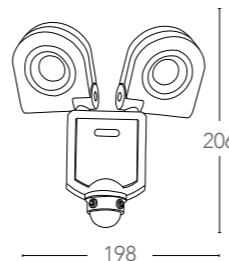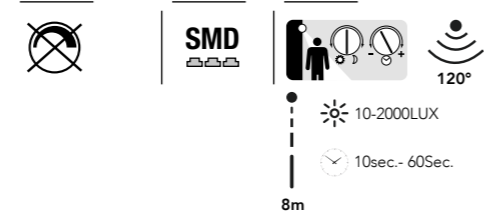

LED-SHEDAR/20W

8031440011273

informazioni tecniche - *technical information*



certificazioni - *certification*



INTEC

LIGHT

certificazioni - *certification*



KRONOS


Proiettore in alluminio LED integrato
finitura bianco goffrato
Built-in LED aluminium flood lamp
embossed white finish

ALU*

LED-KRONOS/10W

8031436031230


informazioni tecniche - technical information



LED-KRONOS/50W

8031436011232


informazioni tecniche - technical information

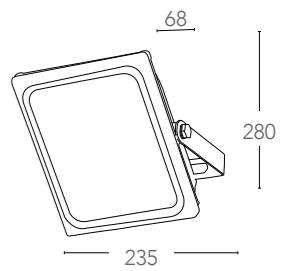

LED-KRONOS/20W

8031436001233

informazioni tecniche - technical information

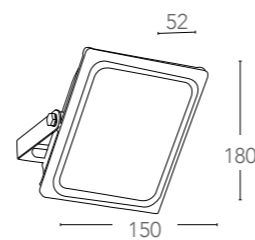

certificazioni - certification



certificazioni - certification



KRONOS

272



273

Proiettore LED integrato con picchetto
finitura silver
LED built-in LED flood light with spike
silver finish

LED-KRONOS/SPK-10W

8031435991238

informazioni tecniche - technical information

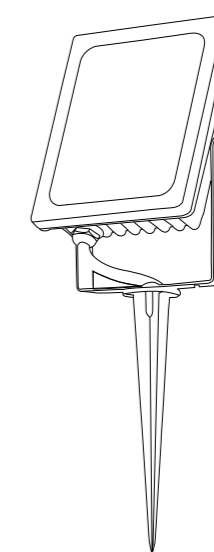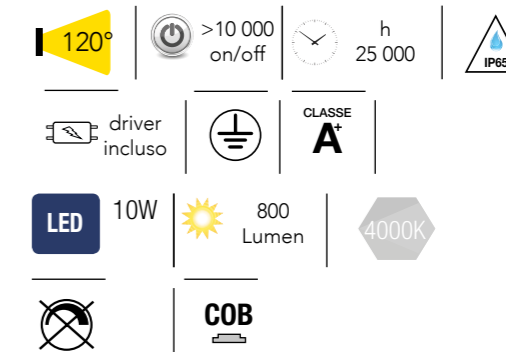

315

110

INTEC
LIGHT

certificazioni - certification



TITAN




LED-TITAN/10W

8031437941255

informazioni tecniche - *technical information*

LED-TITAN-S/10W

8031440360616

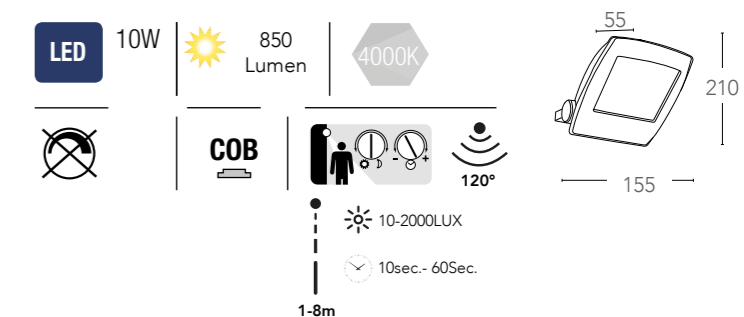
informazioni tecniche - *technical information*

Proiettore in alluminio LED integrato
finitura silver
*Built-in LED aluminium flood lamp
silver finish*




LED-TITAN/30W

8031437931256

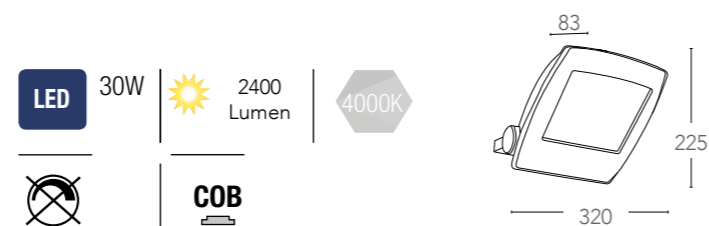informazioni tecniche - *technical information*

LED-TITAN/50W


8031437911258

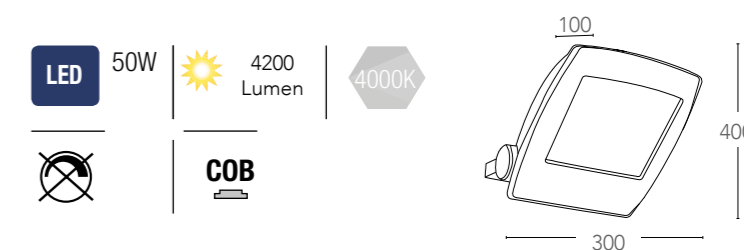informazioni tecniche - *technical information*certificazioni - *certification*

INTEC
LIGHT

certificazioni - *certification*


ELIOS

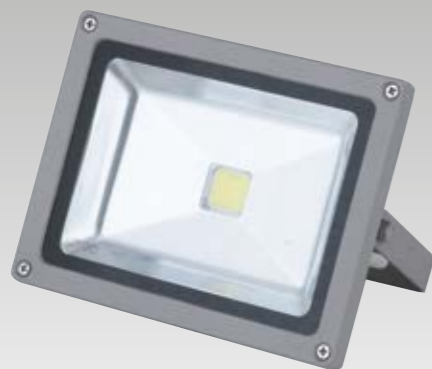

LED-ELIOS/10W

8031431291189

informazioni tecniche - technical information





Proiettore in alluminio finitura silver LED integrato
Built-in LED aluminium flood lamp silver finish

ALU*

LED-ELIOS/30W

8031437391241


informazioni tecniche - technical information

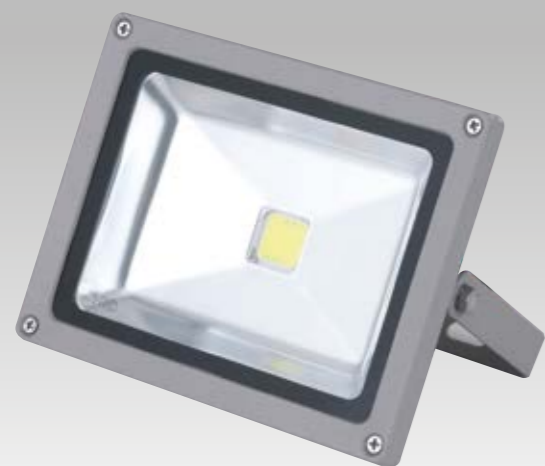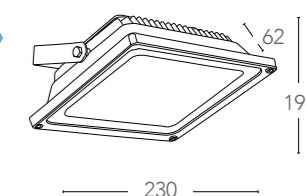

LED-ELIOS/20W

8031431281180


informazioni tecniche - technical information

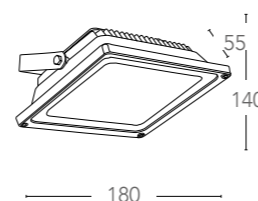

LED-ELIOS/50W

8031432091191

informazioni tecniche - technical information



certificazioni - certification



INTEC

LIGHT

certificazioni - certification




ELIOS



LED-ELIOS/80W

8031440357142

informazioni tecniche - technical information





Proiettore in alluminio finitura silver LED integrato
Built-in LED aluminium flood lamp silver finish

ALU*

LED-ELIOS/150W

8031440357128


informazioni tecniche - technical information

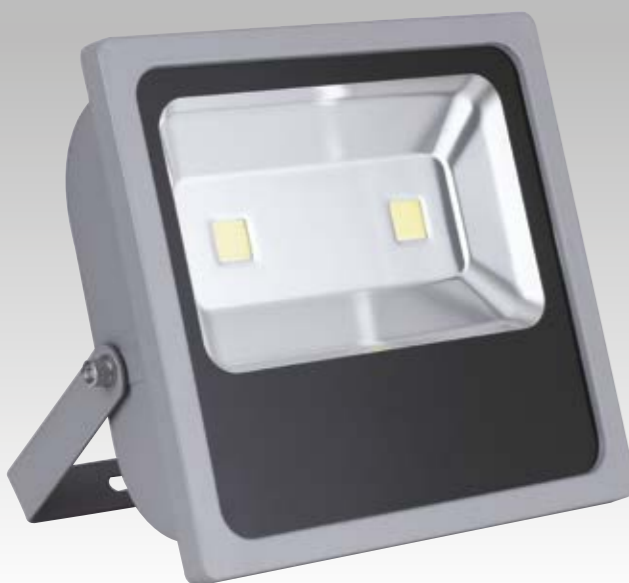

LED-ELIOS/100W

8031440357159


informazioni tecniche - technical information



LED-ELIOS/200W

8031440357135

informazioni tecniche - technical information



certificazioni - certification



INTEC

LIGHT

certificazioni - certification



ELIOS

280

281

Proiettore LED con sensore e pannello solare policristallino
LED flood light with sensor and polycrystalline solar panel

Proiettore LED in alluminio con sensore
LED flood light in aluminium with sensor



LED-ELIOS-S/10W

8031437381242

informazioni tecniche - technical information

120° |
 >10 000 on/off |
 h 25 000 |
 IP44
 driver incluso |
 |
 CLASSE **A**

LED 10W |
 750 Lumen |
 6000K
 |
 INCL. 120° |
 LUX 2 - LUX 2000
 12 m |
 10SEC. - 1MIN.

LED-ELIOS-SOLAR


8031440355124

informazioni tecniche - technical information

120° |
 >10 000 on/off |
 h 25 000
 driver incluso |
 IP44

LED 9W |
 620 Lumen |
 5000K

|
 COB |
 carica/recharge 12h |
 Li thium 7,4V 1800 mAh inclusa
 INCL. 120° |
 LUX 2 - LUX 2000
 12 m |
 10SEC. - 1MIN.

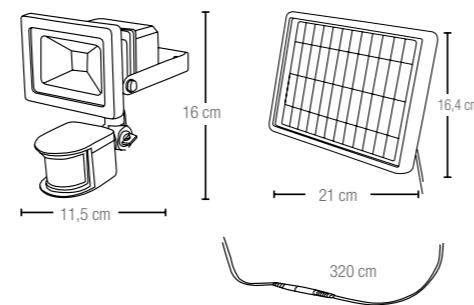

LED-ELIOS-S/30W

8031436391235

informazioni tecniche - technical information

120° |
 >10 000 on/off |
 h 25 000 |
 IP44 |
 PF 0,90
 driver incluso |
 |
 CLASSE **A**

LED 30W |
 2400 Lumen |
 6000K
 |
 INCL. 120° |
 LUX 2 - LUX 2000
 12 m |
 10SEC. - 1MIN.

certificazioni - certification



INTEC
LIGHT

certificazioni - certification



ELIOS

Proiettore LED portatile
LED portable flood light




LED-ELIOS-P/20W

8031436381236

informazioni tecniche - technical information

	>10 000 on/off	h 25 000	LED 20W	1600 Lumen	6000K
driver incluso	Filo 2 mt.		COB		CLASSE A

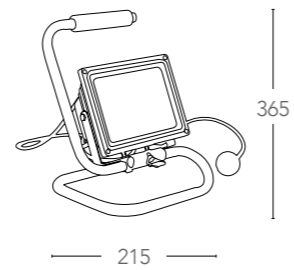

INTEC

LIGHT


certificazioni - certification



MAXWELL

ALU*



Proiettore in alluminio con diffusore in vetro bordo in policarbonato finitura silver LED integrato
Built-in LED flood lamp aluminium with glass diffuser and PC frame silver finish

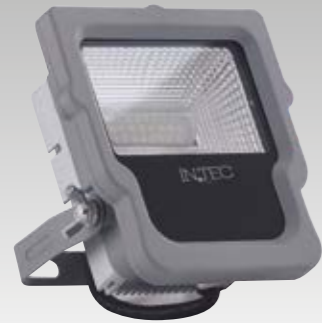

LED-MAXWELL/10W

8031440358019


informazioni tecniche - technical information

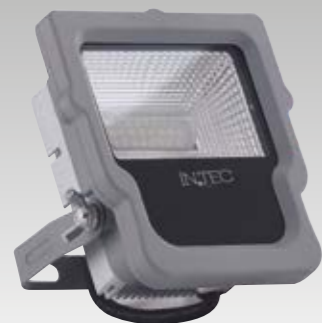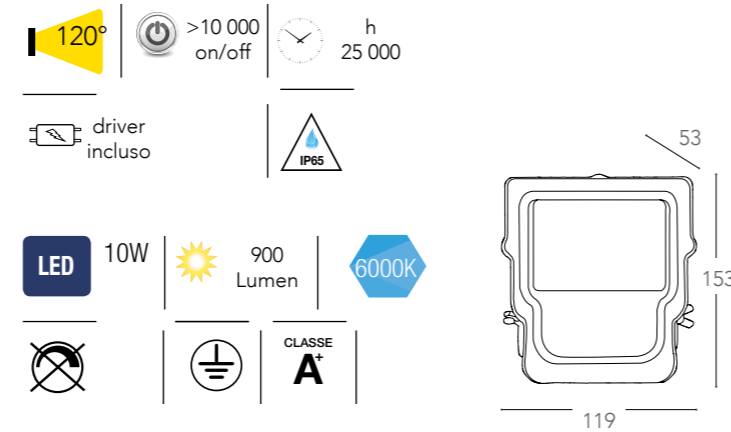

LED-MAXWELL/20W

8031440357982



informazioni tecniche - technical information

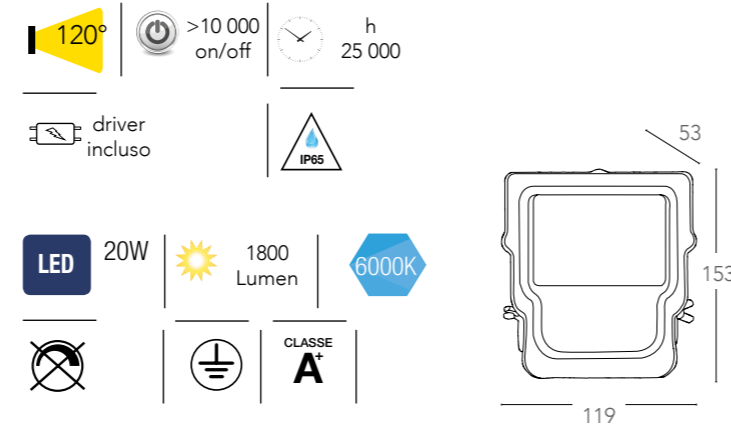

LED-MAXWELL/30W

8031440357999


informazioni tecniche - technical information

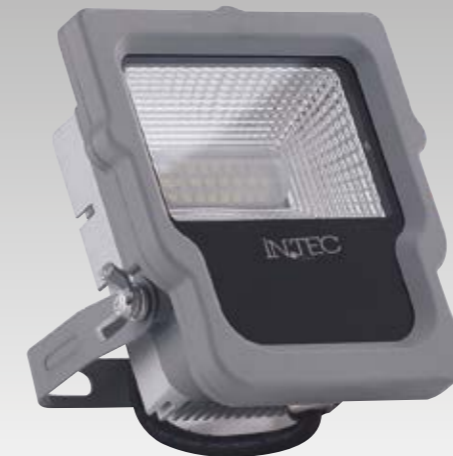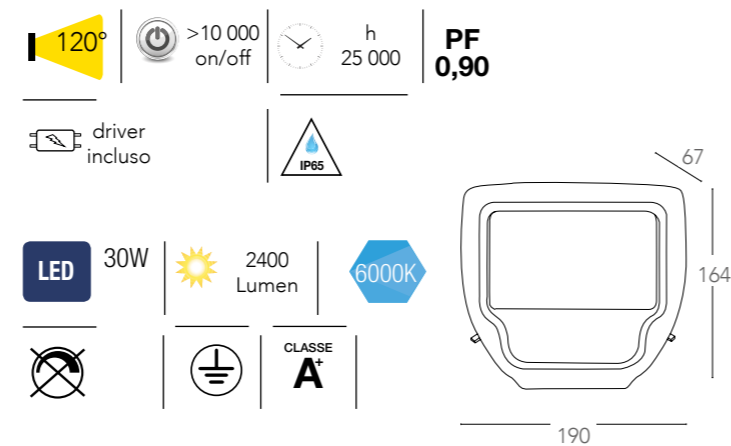

LED-MAXWELL/50W

8031440357968


informazioni tecniche - technical information

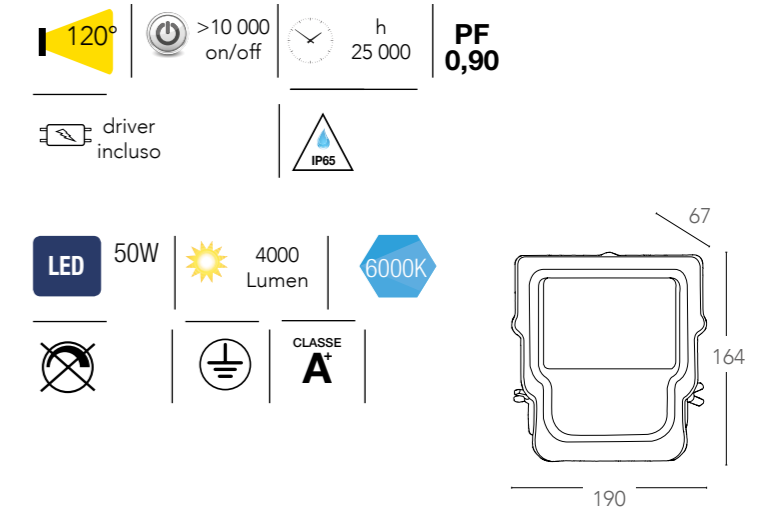

LED-MAXWELL/70W

8031440357975

informazioni tecniche - technical information

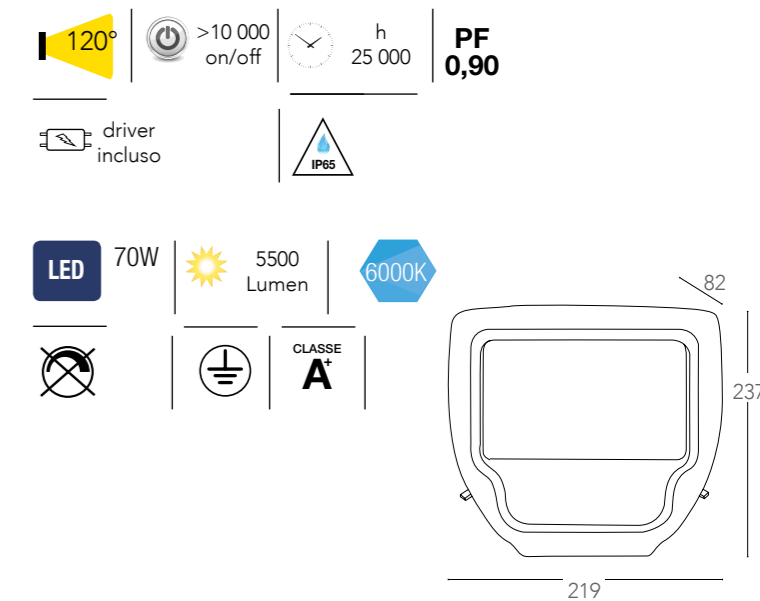

certificazioni - certification



certificazioni - certification




URANO



I-URANO/120W

8031438441259

informazioni tecniche - technical information

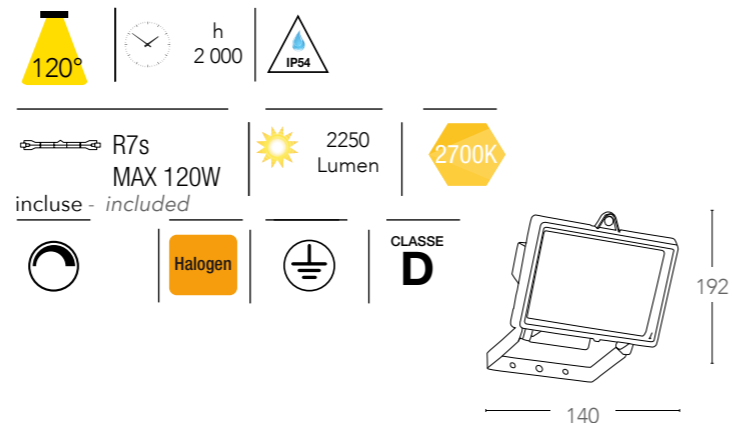


Proiettore alogeno in alluminio
Halogen flood lamp

ALU*

I-URANO/400W

8031438681259


informazioni tecniche - technical information

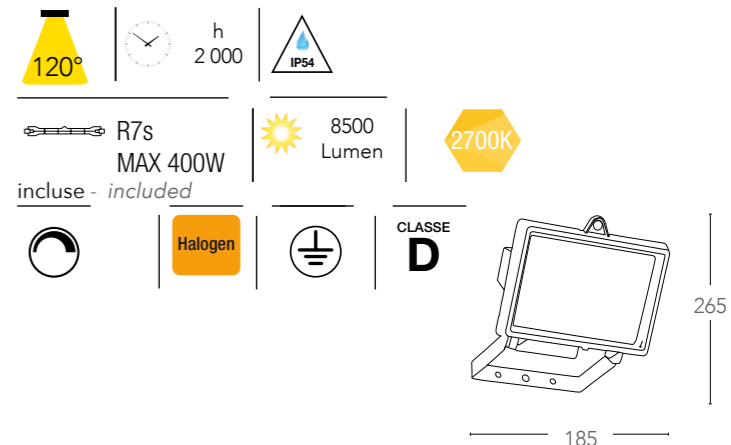

I-URANO-S/120W

8031438451258


informazioni tecniche - technical information

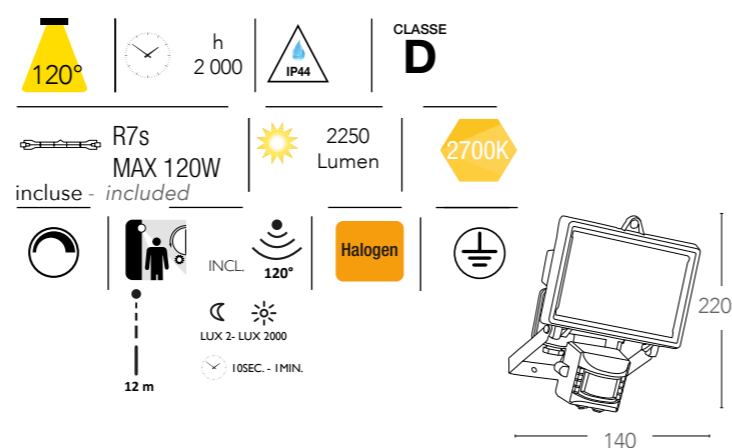

I-URANO-S/400W

8031438401253


informazioni tecniche - technical information

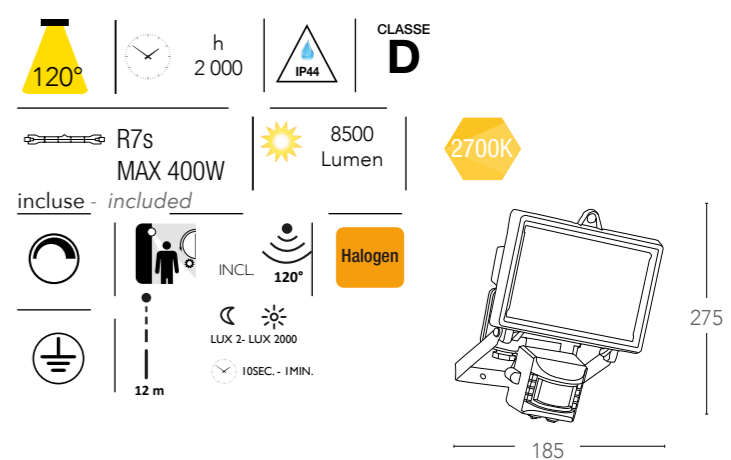

I-URANO-P/120W

8031438421251


informazioni tecniche - technical information

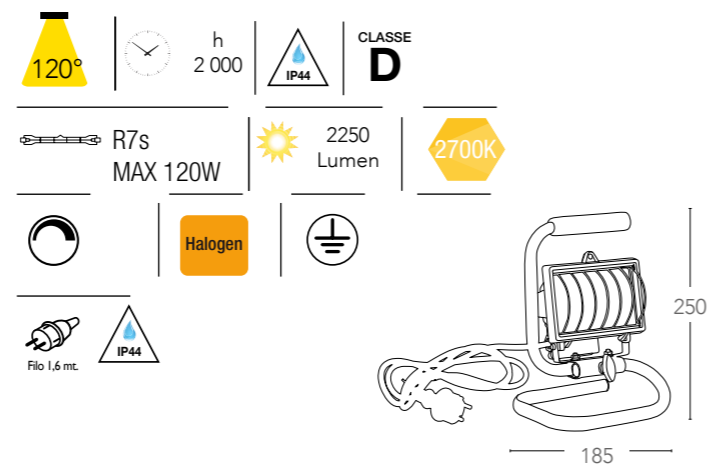

I-URANO-P/400W

8031438361250

informazioni tecniche - technical information

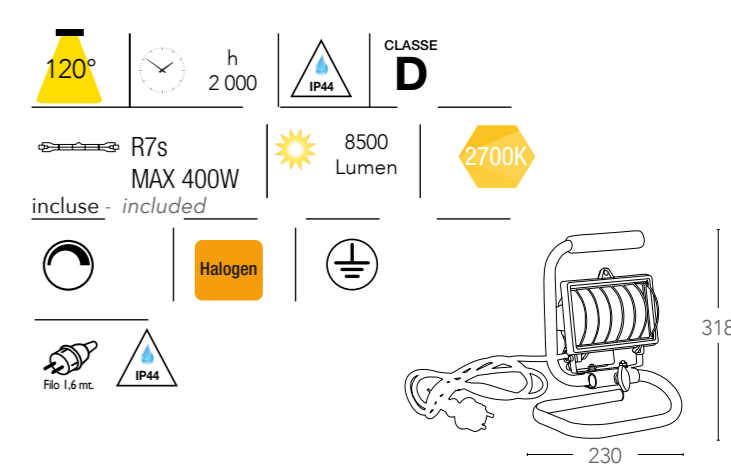

certificazioni - certification



certificazioni - certification



certificazioni - certification



URANO



ALU*

Proiettore alogeno in alluminio
Halogen flood lamp


I-URANO-T1/400W

8031438391257

informazioni tecniche - technical information

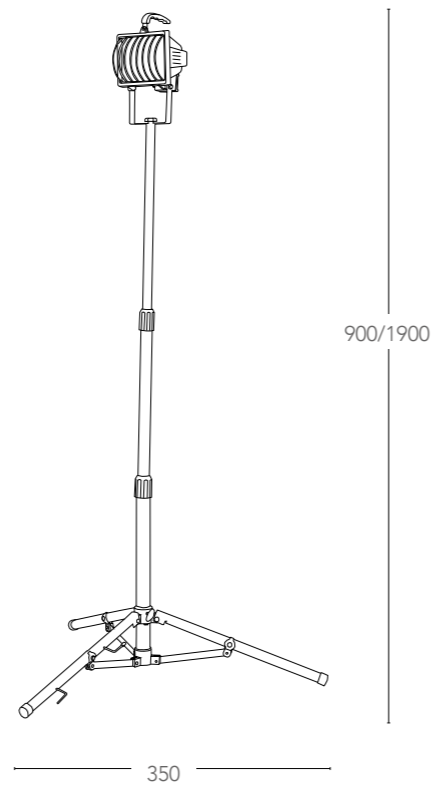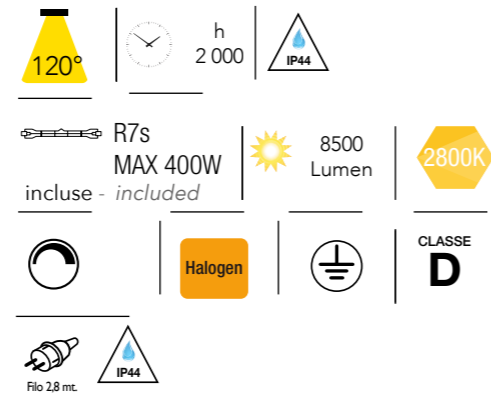



certificazioni - certification

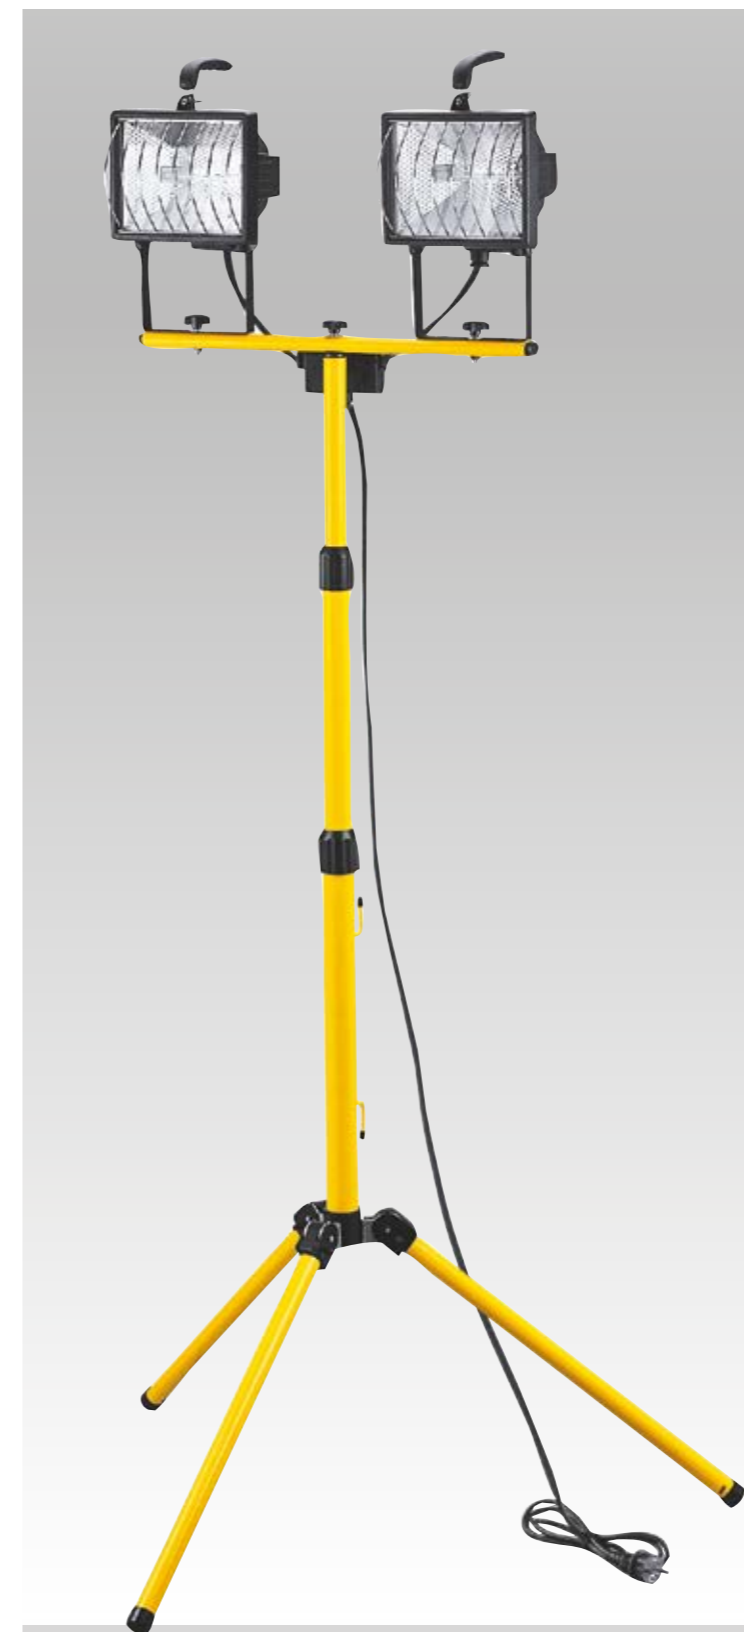

I-URANO-T2/800W

8031438381258

informazioni tecniche - technical information

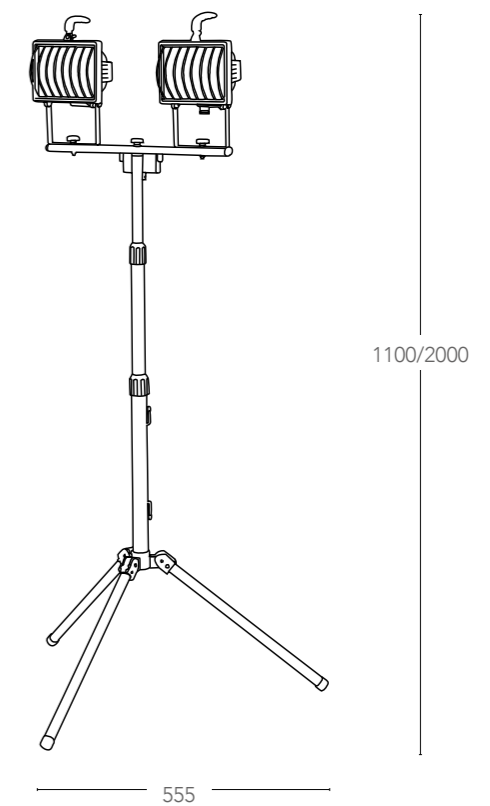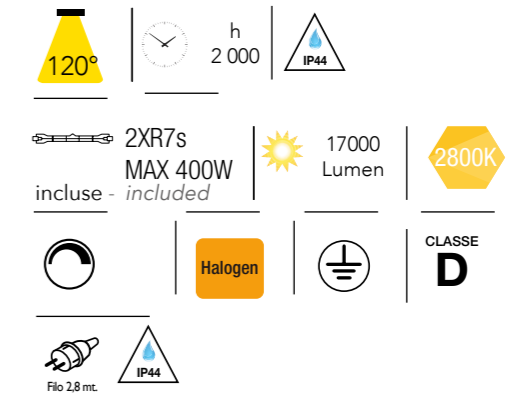

certificazioni - certification



URANO



Industriali
Industrial

I-URANO/1000W

8031438371259

informazioni tecniche - *technical information*



120°



h
2 000

R7s

MAX 1000W

include - included



17000
Lumen

2800K




IP54



Halogen



CLASSE
D

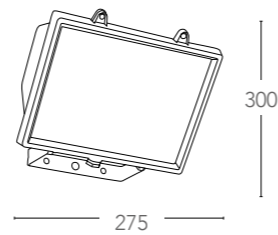

275

300

certificazioni - *certification*



INTEC



FUTURA

Lampada LED high bay in alluminio
Aluminium high bay LED lamp

LED-FUTURA-50W

8031440355261


informazioni tecniche - *technical information*

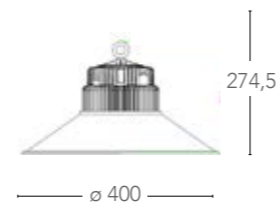

LED-FUTURA-100W

8031440355254



informazioni tecniche - *technical information*

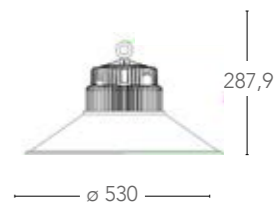

LED-FUTURA-150W

8031440355247

informazioni tecniche - *technical information*

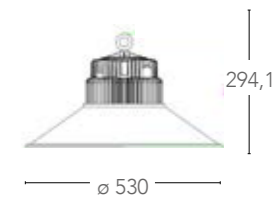

certificazioni - *certification*



INTEC
LIGHT



certificazioni - *certification*



ATLANTIC





294

Plafoniere stagno LED integrato in policarbonato
Built-in LED waterproof ceiling lamps in polycarbonate

295

Armature stagne per tubi a LED bilampada in policarbonato
Waterproof lamp for double LED tube in polycarbonate

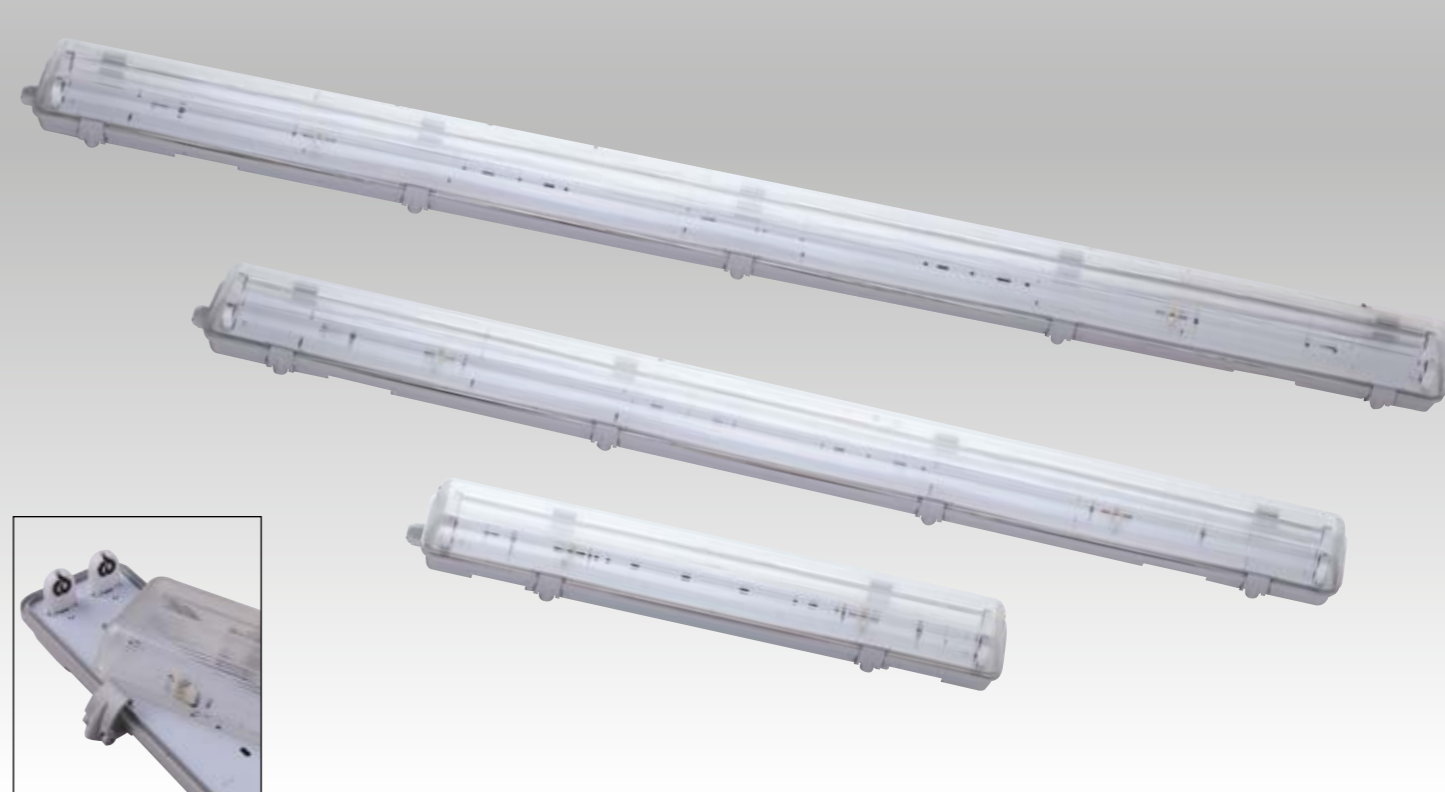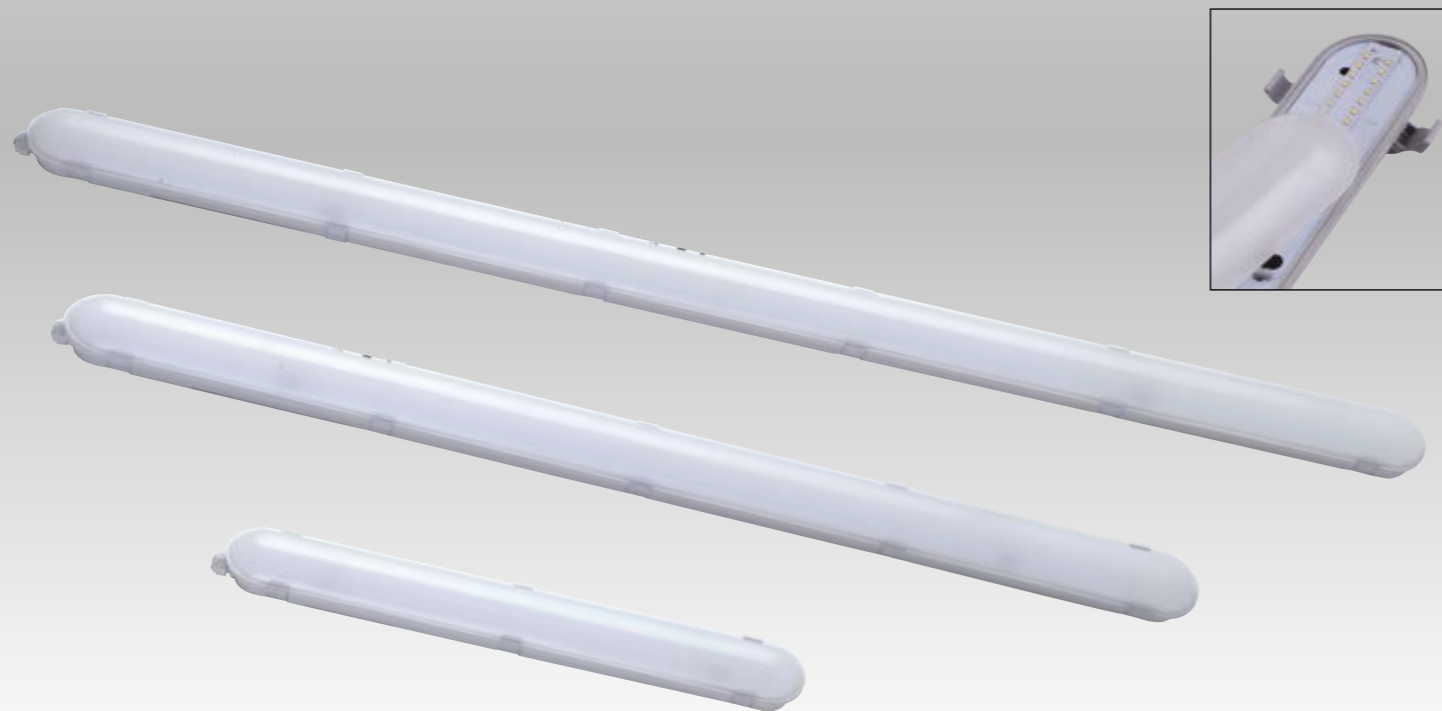


LED-ATLANTIC-INT-150

8031440355285

informazioni tecniche - technical information

	>10 000 on/off	55W	5000 Lumen		
	h 25 000				Ra >80

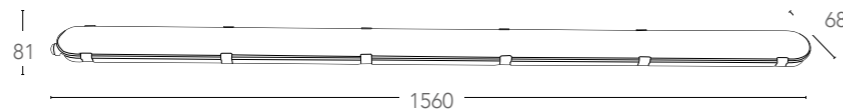


LED-ATLANTIC-ST-150

8031440355292

informazioni tecniche - technical information

	2XT8 230V LED non include - not included		
--	---	--	--

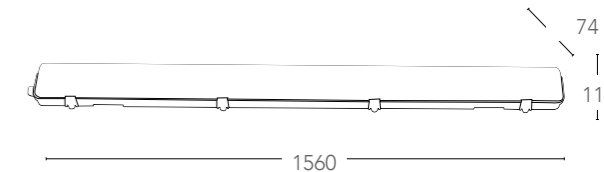


LED-ATLANTIC-INT-120

8031440355308

informazioni tecniche - technical information

	>10 000 on/off	40W	4000 Lumen		
	h 25 000				Ra >80

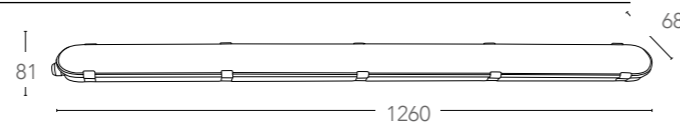


LED-ATLANTIC-ST-120

8031440355322

informazioni tecniche - technical information

	2XT8 230V LED non include - not included		
--	---	--	--

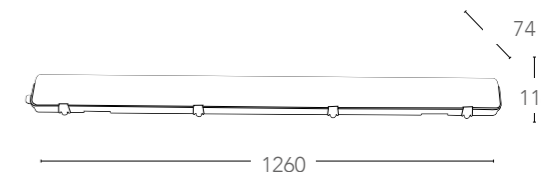

LED-ATLANTIC-INT-60

8031440355278

informazioni tecniche - technical information

	>10 000 on/off	20W	2000 Lumen		
	h 25 000				Ra >80



certificazioni - certification




LED-ATLANTIC-ST-60

8031440355315

informazioni tecniche - technical information

	2XT8 230V LED non include - not included		
--	---	--	--

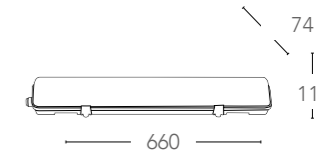

certificazioni - certification



HELP



Lampade di emergenza LED in policarbonato batteria Ni-Cd
Emergency LED lamp in polycarbonate with Ni-Cd battery





LED-HELP-30

8031440354837

informazioni tecniche - technical information

Ni-Cd 4,8V 900mA
 carica/recharge 12h
 >10 000 on/off
 h 30 000
 LED
 4W
 195 Lumen
 4000K
 SMD x30
 Life time 4 years
 3h full emergency light

adesivi inclusi - labels included

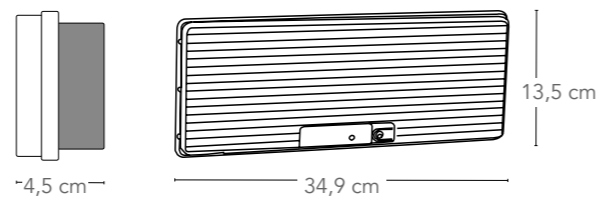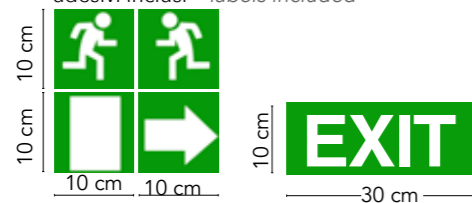

certificazioni - certification

X	1	****	180
---	---	------	-----





LED-HELP-12

8031440353496


informazioni tecniche - technical information

Ni-Cd 4,8V 900mA
 carica/recharge 12h
 >10 000 on/off
 h 30 000
 LED
 3W
 170 Lumen
 4000K
 SMD x12
 Life time 4 years
 3h full emergency light

adesivo incluso - label included

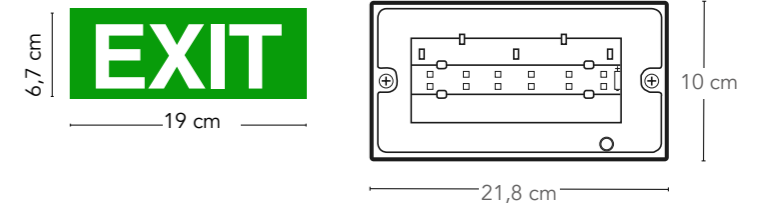

4,8 cm

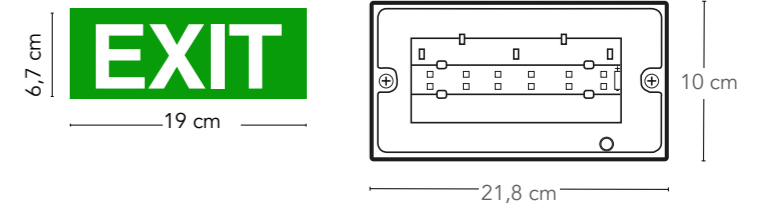

certificazioni - certification

X	1	****	180
---	---	------	-----



ETERNA




Plafoniera LED in policarbonato batteria Ni-Cd e funzione d'emergenza combinata e permanente
 Ceiling LED lamp in polycarbonate with Ni-Cd battery and double emergency function




LED-ETERNA-120

8031440358538




informazioni tecniche - technical information

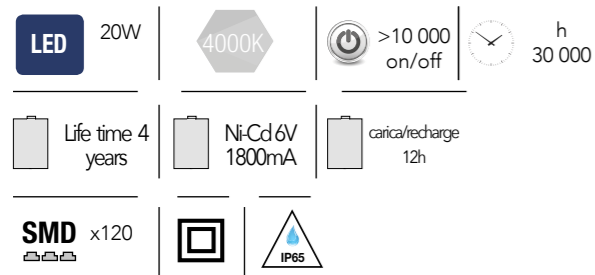


lampada emergenza - emergency lamp



plafoniera - ceiling lamp

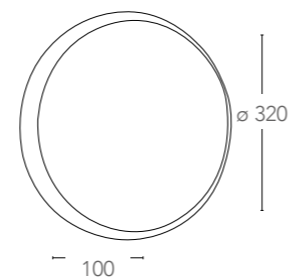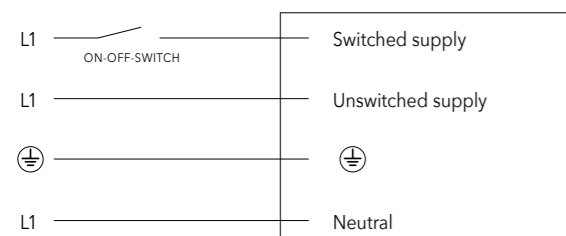


certificazioni - certification




LED-ETERNA-54

8031440358521




informazioni tecniche - technical information

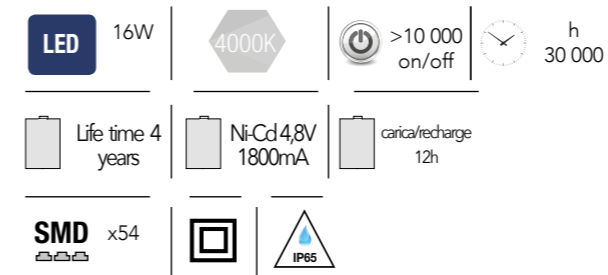


lampada emergenza - emergency lamp



plafoniera - ceiling lamp

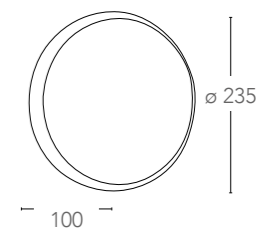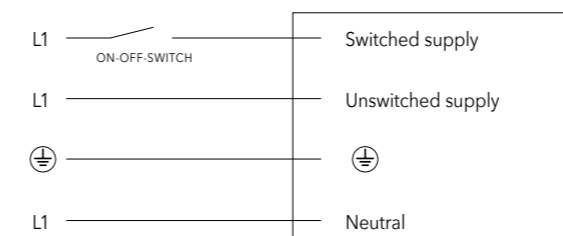

certificazioni - certification



ILLUMINAZIONE LED PROFESSIONALE ESTERNO
Professional outdoor LED lighting

RAYS



Proiettore LED RGB full color in alluminio
LED RGB full color lamp in aluminium

LED-RAYS-30P

8031440358071

informazioni tecniche - technical information

LED 30x1W 230V | IP65 | 40° | SMD | CLASSE A+ |

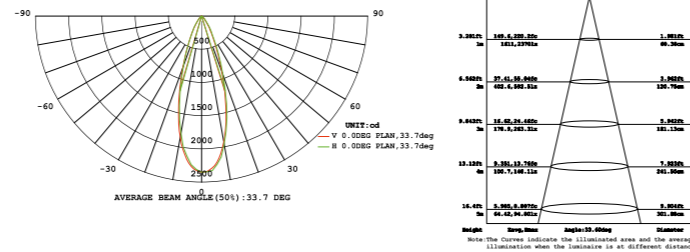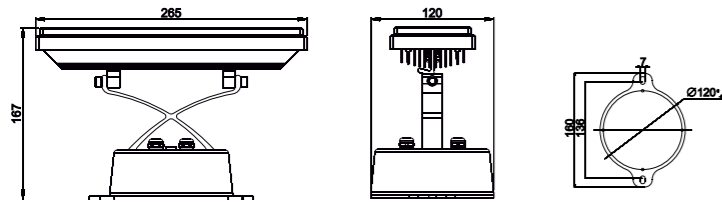



LED-IRIDE-3P

8031440358101

informazioni tecniche - *technical information*

LED 3x1W 12-24V DC IP65 40° SMD CLASSE A



LED-IRIDE-3P-BCO

8031440359719

informazioni tecniche - *technical information*

LED 3x1W 12-24V DC IP65 30° SMD CLASSE A

240 Lumen 6000K

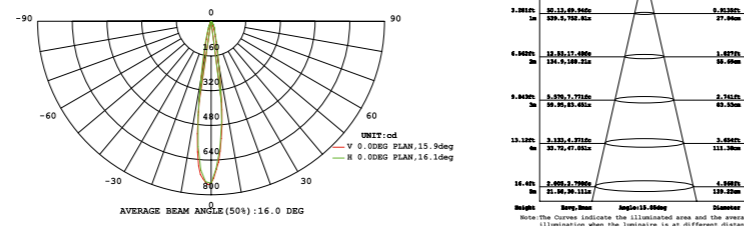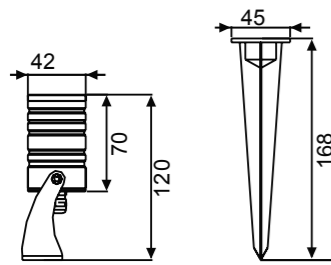

Proiettore LED RGB FULL COLOR in alluminio
LED RGB full color lamp in aluminium



LED-IRIDE-18P

8031440358088

informazioni tecniche - *technical information*

LED 18x1W 24V DC IP65 40° SMD CLASSE A



LED-IRIDE-18P-BCO

8031440359689

informazioni tecniche - *technical information*

LED 18x1W 24V DC IP65 30° SMD CLASSE A

1620 Lumen 6000K

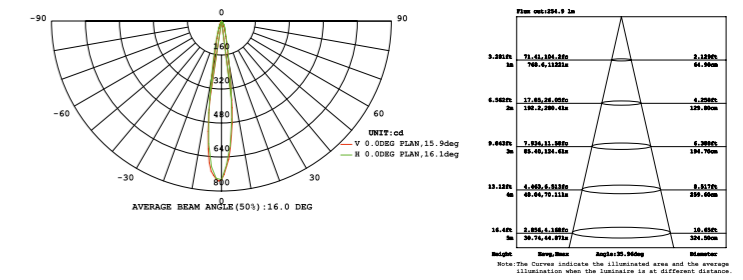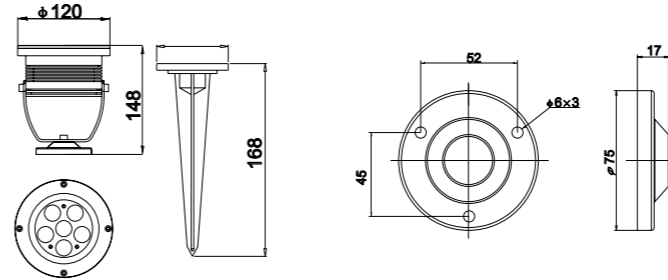

LED-IRIDE-9P

8031440358118

informazioni tecniche - *technical information*

LED 9x1W 12-24V DC IP65 40° SMD CLASSE A



LED-IRIDE-9P-BCO

8031440359702

informazioni tecniche - *technical information*

LED 9x1W 12-24V DC IP65 30° SMD CLASSE A

720 Lumen 6000K

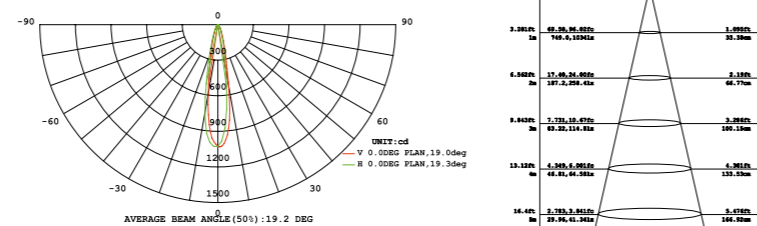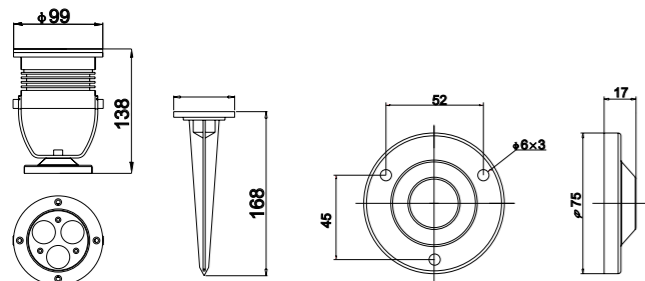

Neptune



Proiettore LED RGB full color in alluminio
LED RGB full color lamp in aluminium



LED-NEPTUNE-36P

8031440358057

informazioni tecniche - technical information

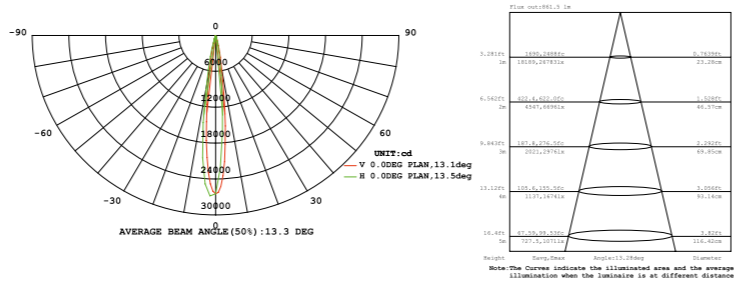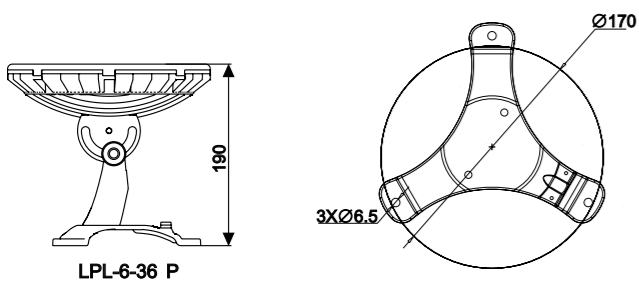

CONTROLLER




CONTROLLER-PRO-3

8031440358033

informazioni tecniche - technical information

CONTROLLER MASTER 3 CANALI PER USO PROIETTORI IN MODALITA EASY IN 230V OUT DMX/XLR-3 2 CANALI IP20


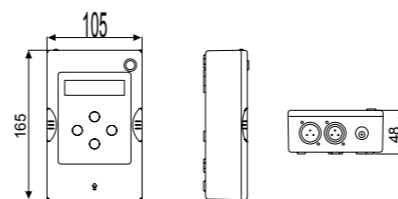


CONTROLLER-PRO-2

8031440358002

informazioni tecniche - technical information

CONTROLLER DMX LED 3 CANALI RGB SEGNALE OUTPUT DMX/XLR-3 (DUE USCITE) IP20 CON CAVO CARICATORE

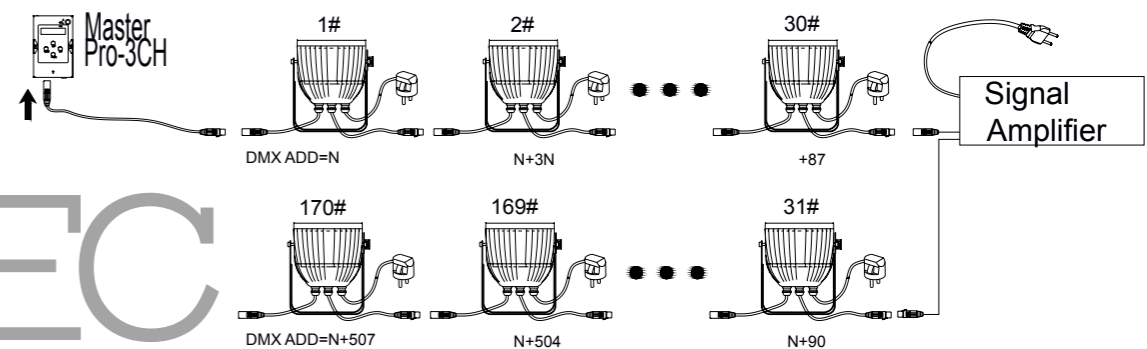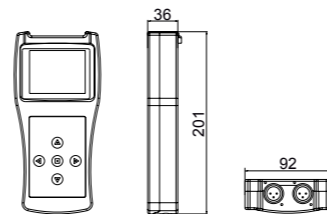

CONTROLLER



308
 Scatola comando fari proiettori LED 6 canali collegabili DMX 18 canali
 LED lamp control box 6 output ports, connectable with DMX 18-channel



309

CONTROLLER-CTR-RGB

8031440358026

informazioni tecniche - *technical information*

CONTROLLO C/PORTA DMX512 LED RGB INPUT 230V AC OUTPUT 12V/24V DC 300W 6 CANALI RGB (50W)

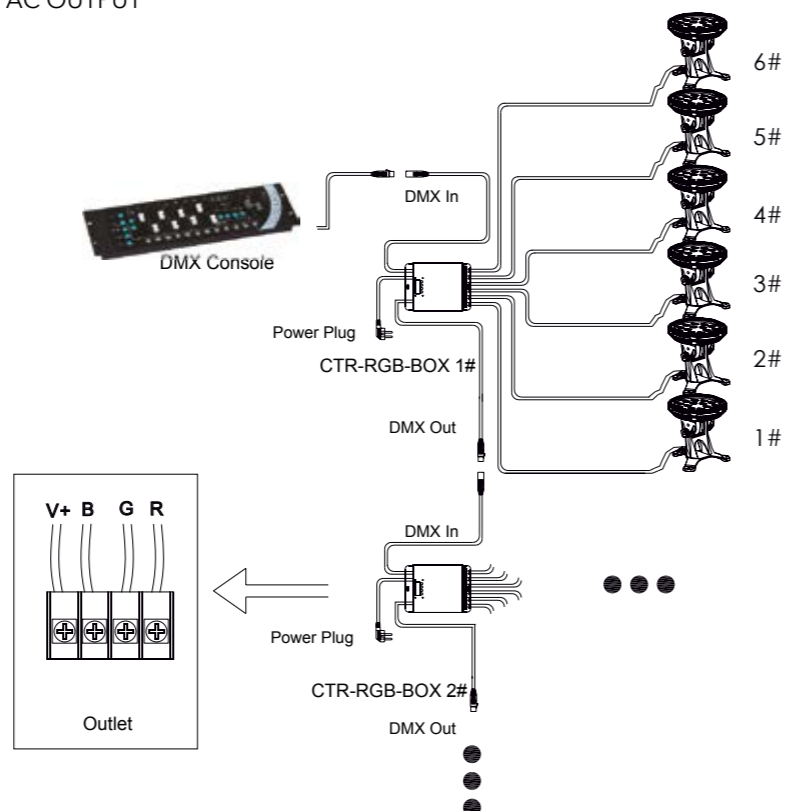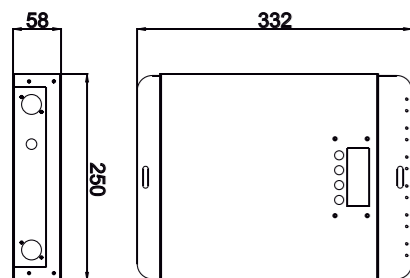

I-DRIVER-HLG-120-12

8031440358064

informazioni tecniche - *technical information*

ALIMENTATORE MW HLG 120W 12V IP67



I-DRIVER-HLG-120-24

8031440360241

informazioni tecniche - *technical information*

ALIMENTATORE MW HLG 120W 24V IP67



I-DRIVER-HLG-320-12

8031440360258


informazioni tecniche - *technical information*

ALIMENTATORE MW HLG 320W 12V IP67

I-DRIVER-HLG-320-24

8031440360227

ALIMENTATORE MW HLG 320W 24V IP67

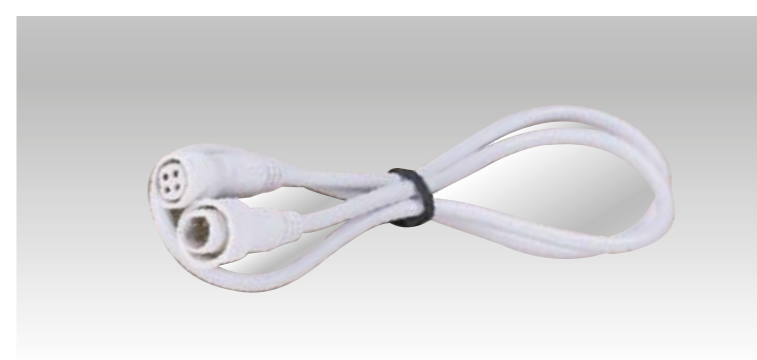


LED-IRIDE-CAVO-2M

8031440358095

informazioni tecniche - *technical information*

CAVO RGB 4 POLI X FARO IRIDE RGB ALLUMINIO IP65 BIANCO



KIT STRIP E FIBRE OTTICHE


Kit strip and optical fiber

FIBRA OTTICA

Kit fibra ottica
LED optical fiber kit

TAYLOR


Kit luci LED fuga piastrelle
LED set for tiles drain

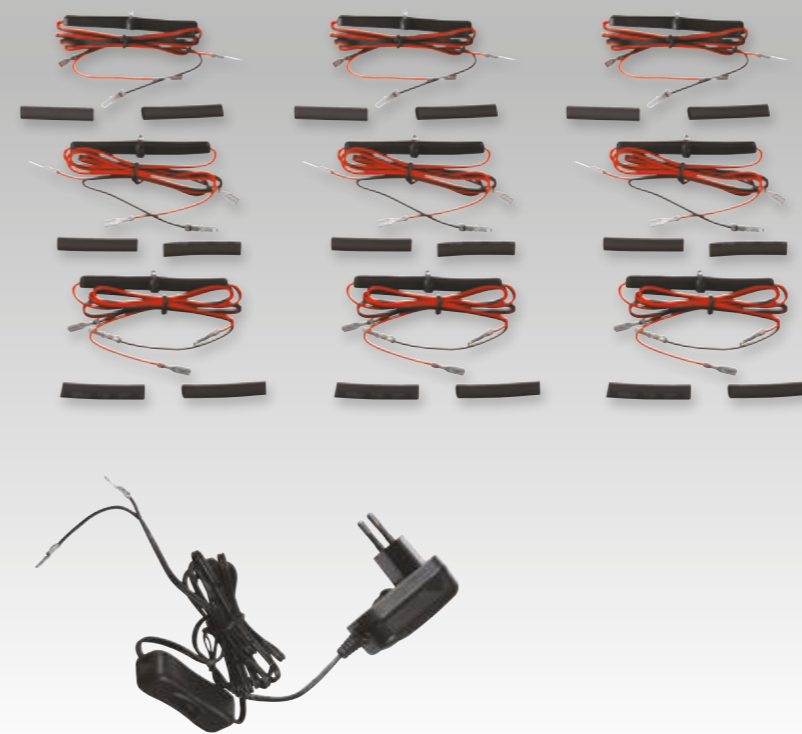

FIBRAOTTICA-LED-RGB

8031436691236





informazioni tecniche - technical information

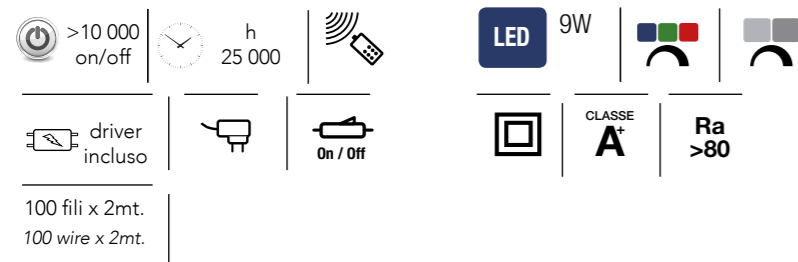

LED-TAYLOR-KIT-NERO

8031440061278

informazioni tecniche - technical information

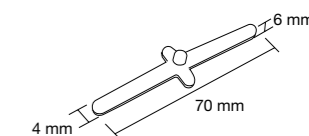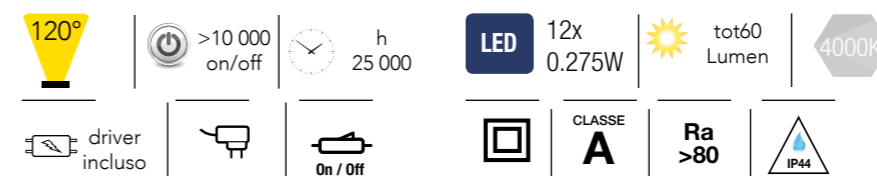

certificazioni - certification



INTEC
LIGHT



certificazioni - certification



STRIP

Kit strisce luci LED monocolora
LED strip light set single color


Kit strisce luci LED RGB
RGB LED strip set

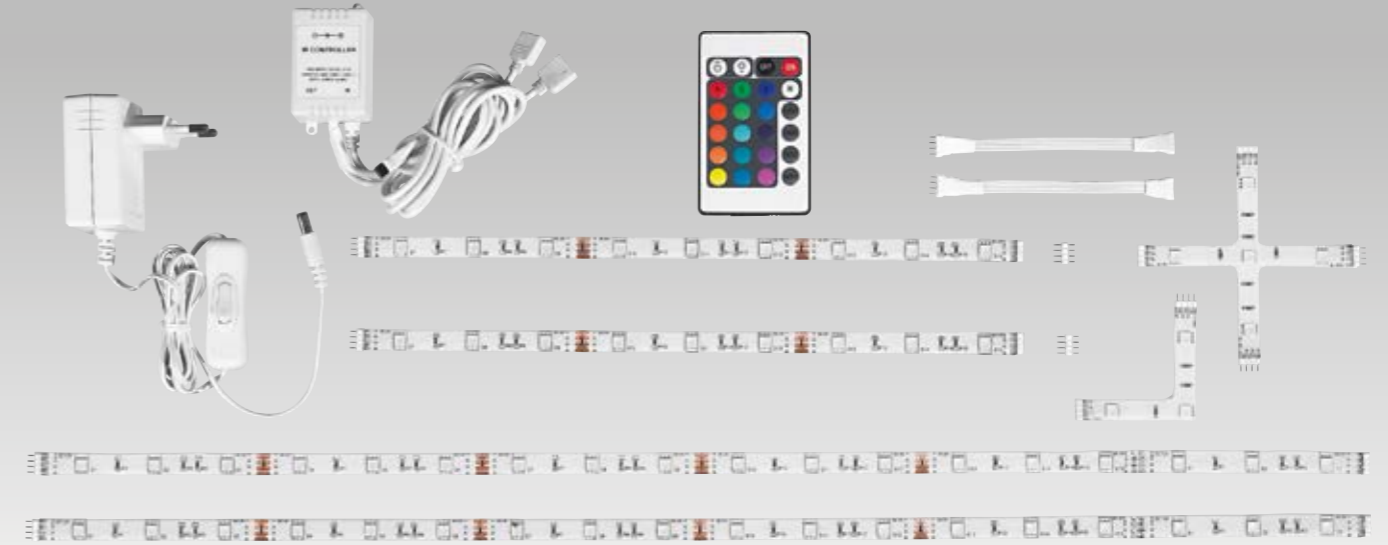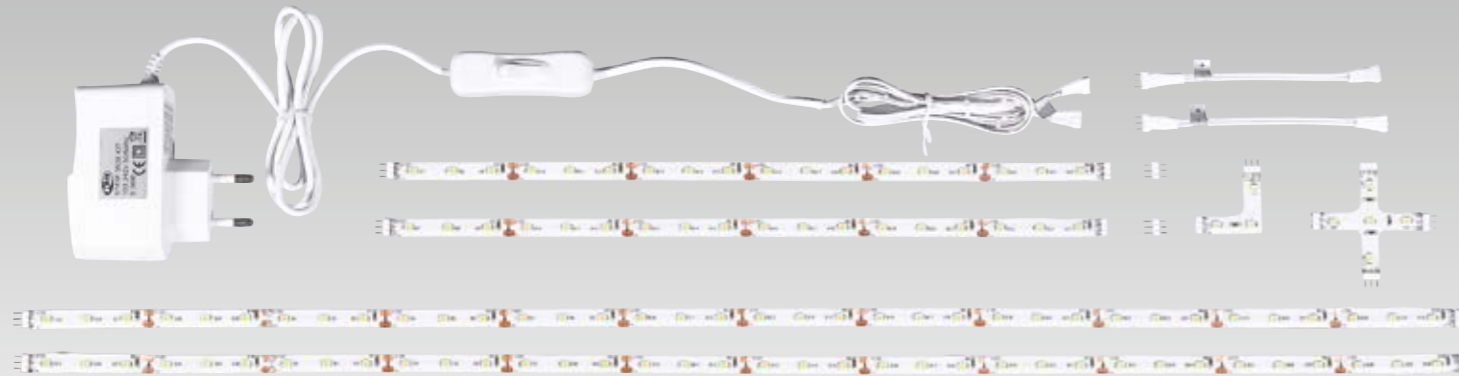

STRIP-3528-KIT

8031436561232



informazioni tecniche - technical information

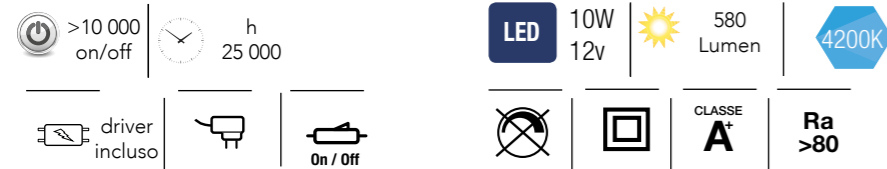


STRIP-5050-KIT-RGB

8031436571231

informazioni tecniche - technical information

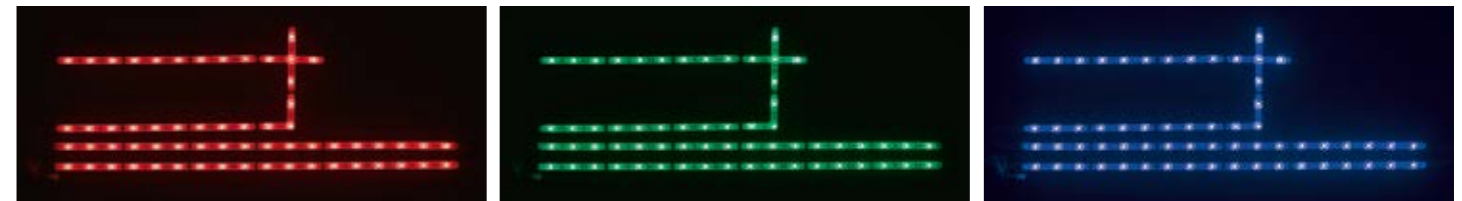

certificazioni - certification



certificazioni - certification



STRIP

Striscia luci LED rotoli da 5mt.
LED strip light 5m roll


Striscia luci LED rotoli da 5mt.
LED strip light 5m roll



STRIP-3528-60/C

8031433191203


informazioni tecniche - technical information

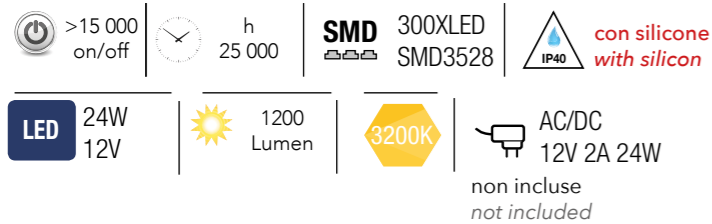

STRIPLED-3528-C

8031440359955


informazioni tecniche - technical information

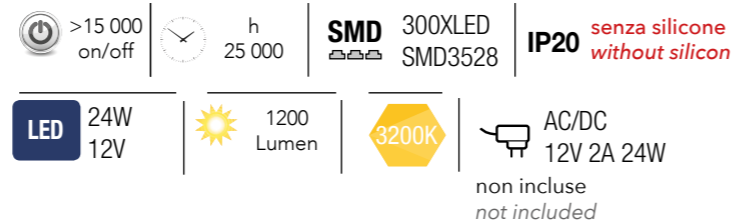

STRIP-5050-60/C

8031433231206


informazioni tecniche - technical information

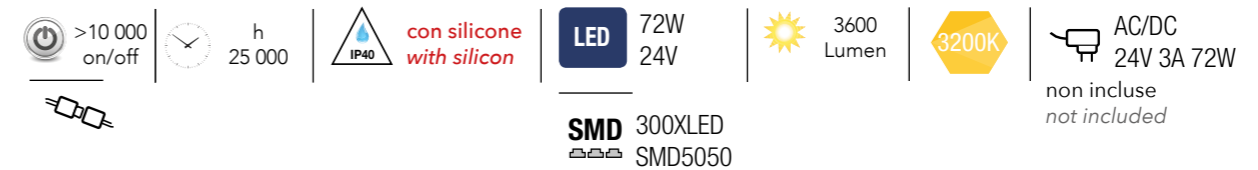

STRIP-3528-60/F

8031433201209


informazioni tecniche - technical information

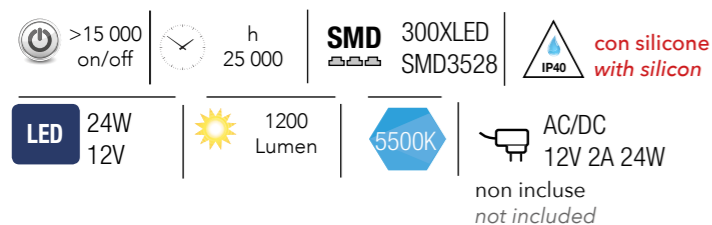

STRIPLED-3528-F

8031440359924



informazioni tecniche - technical information

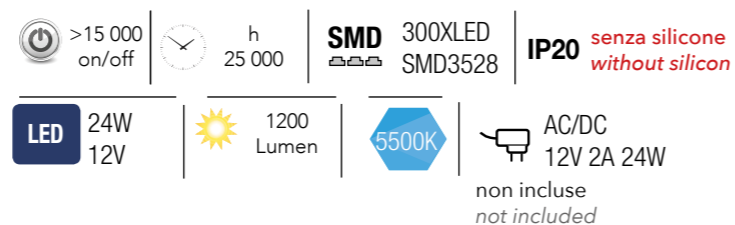

STRIP-5050-60/F

8031433241205

informazioni tecniche - technical information

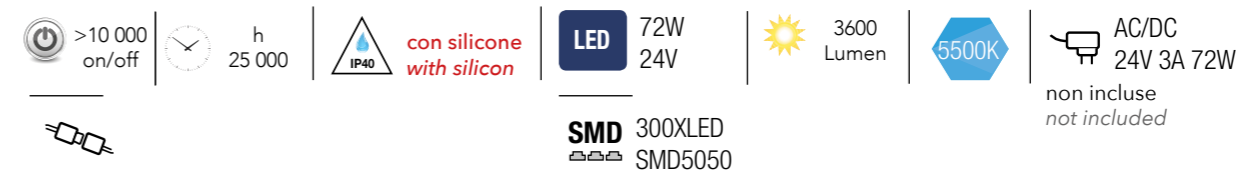


certificazioni - certification



certificazioni - certification




INTEC
LIGHT



STRIP

Striscia luci LED rotoli da 5mt.
LED strip light 5m roll

Striscia luci LED rotoli da 5mt.
LED strip light 5m roll

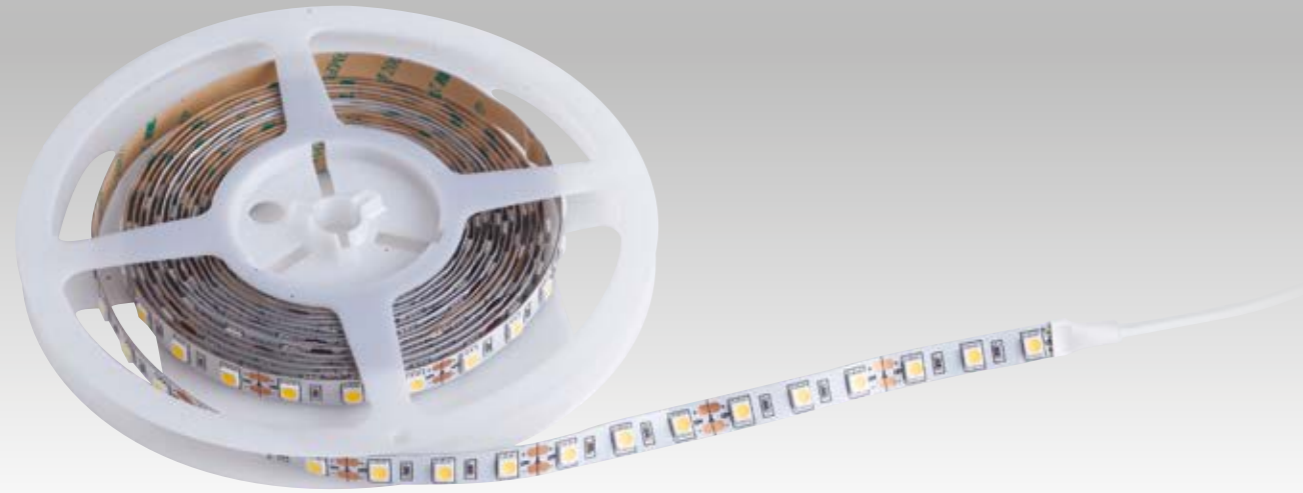

articoli e varianti - *article and finish*

STRIPLED-5050-C

8031440355902

informazioni tecniche - *technical information*

>15 000 on/off	h 25 000	LED 72W 12V	3600 Lumen	3200K	AC/DC 12V 6A 72W non include not included	IP20 senza silicone without silicon
SMD 300XLED SMD5050						

STRIPLED-5050-F

8031440355889

informazioni tecniche - *technical information*

>15 000 on/off	h 25 000	LED 72W 12V	3600 Lumen	5500K	AC/DC 12V 6A 72W non include not included	IP20 senza silicone without silicon
SMD 300XLED SMD5050						

STRIPLED-5050-M

8031440355919

informazioni tecniche - *technical information*



>15 000 on/off	h 25 000	LED 72W 12V	3600 Lumen	4000K	AC/DC 12V 6A 72W non include not included	IP20 senza silicone without silicon
SMD 300XLED SMD5050						

STRIPLED-5050-RGB

8031440355896

informazioni tecniche - *technical information*


>15 000 on/off	h 25 000	LED 72W 12V		SMD 300XLED SMD5050	AC/DC 12V 6A 72W non include not included	non include not included	IP20 senza silicone without silicon
----------------	----------	--------------------	--	----------------------------	---	-----------------------------	---

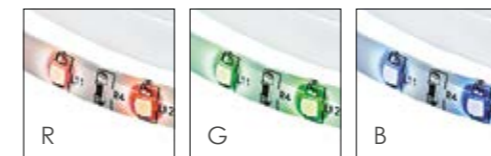

certificazioni - *certification*



INTEC
LIGHT



certificazioni - *certification*



STRIP

320

Striscia luci LED rotoli da 5mt.
LED strip light 5m roll

321



articoli e varianti - article and finish

STRIPLED-240-C

8031440359962

informazioni tecniche - technical information

>15 000 on/off	h 25 000	SMD 1200XLED SMD3528
LED 96W 24V	7200 Lumen	3200K

AC/DC 24V 4,5A 96W
non include
not included

IP20 senza silicone
without silicon

Per una corretta dissipazione applicare la strip su un supporto d'alluminio.

For correct dissipation fix the strip light on aluminium support.

STRIPLED-240-F

8031440359948

informazioni tecniche - technical information

>15 000 on/off	h 25 000	SMD 1200XLED SMD3528
LED 96W 24V	7200 Lumen	5500K

AC/DC 24V 4,5A 96W
non include
not included

IP20 senza silicone
without silicon

Per una corretta dissipazione applicare la strip su un supporto d'alluminio.

For correct dissipation fix the strip light on aluminium support.

STRIPLED-240-M

8031440359979

informazioni tecniche - technical information


>15 000 on/off	h 25 000	SMD 1200XLED SMD3528
LED 96W 24V	7200 Lumen	4200K

AC/DC 24V 4,5A 96W
non include
not included


IP20 senza silicone
without silicon

Per una corretta dissipazione applicare la strip su un supporto d'alluminio.

For correct dissipation fix the strip light on aluminium support.




certificazioni - certification

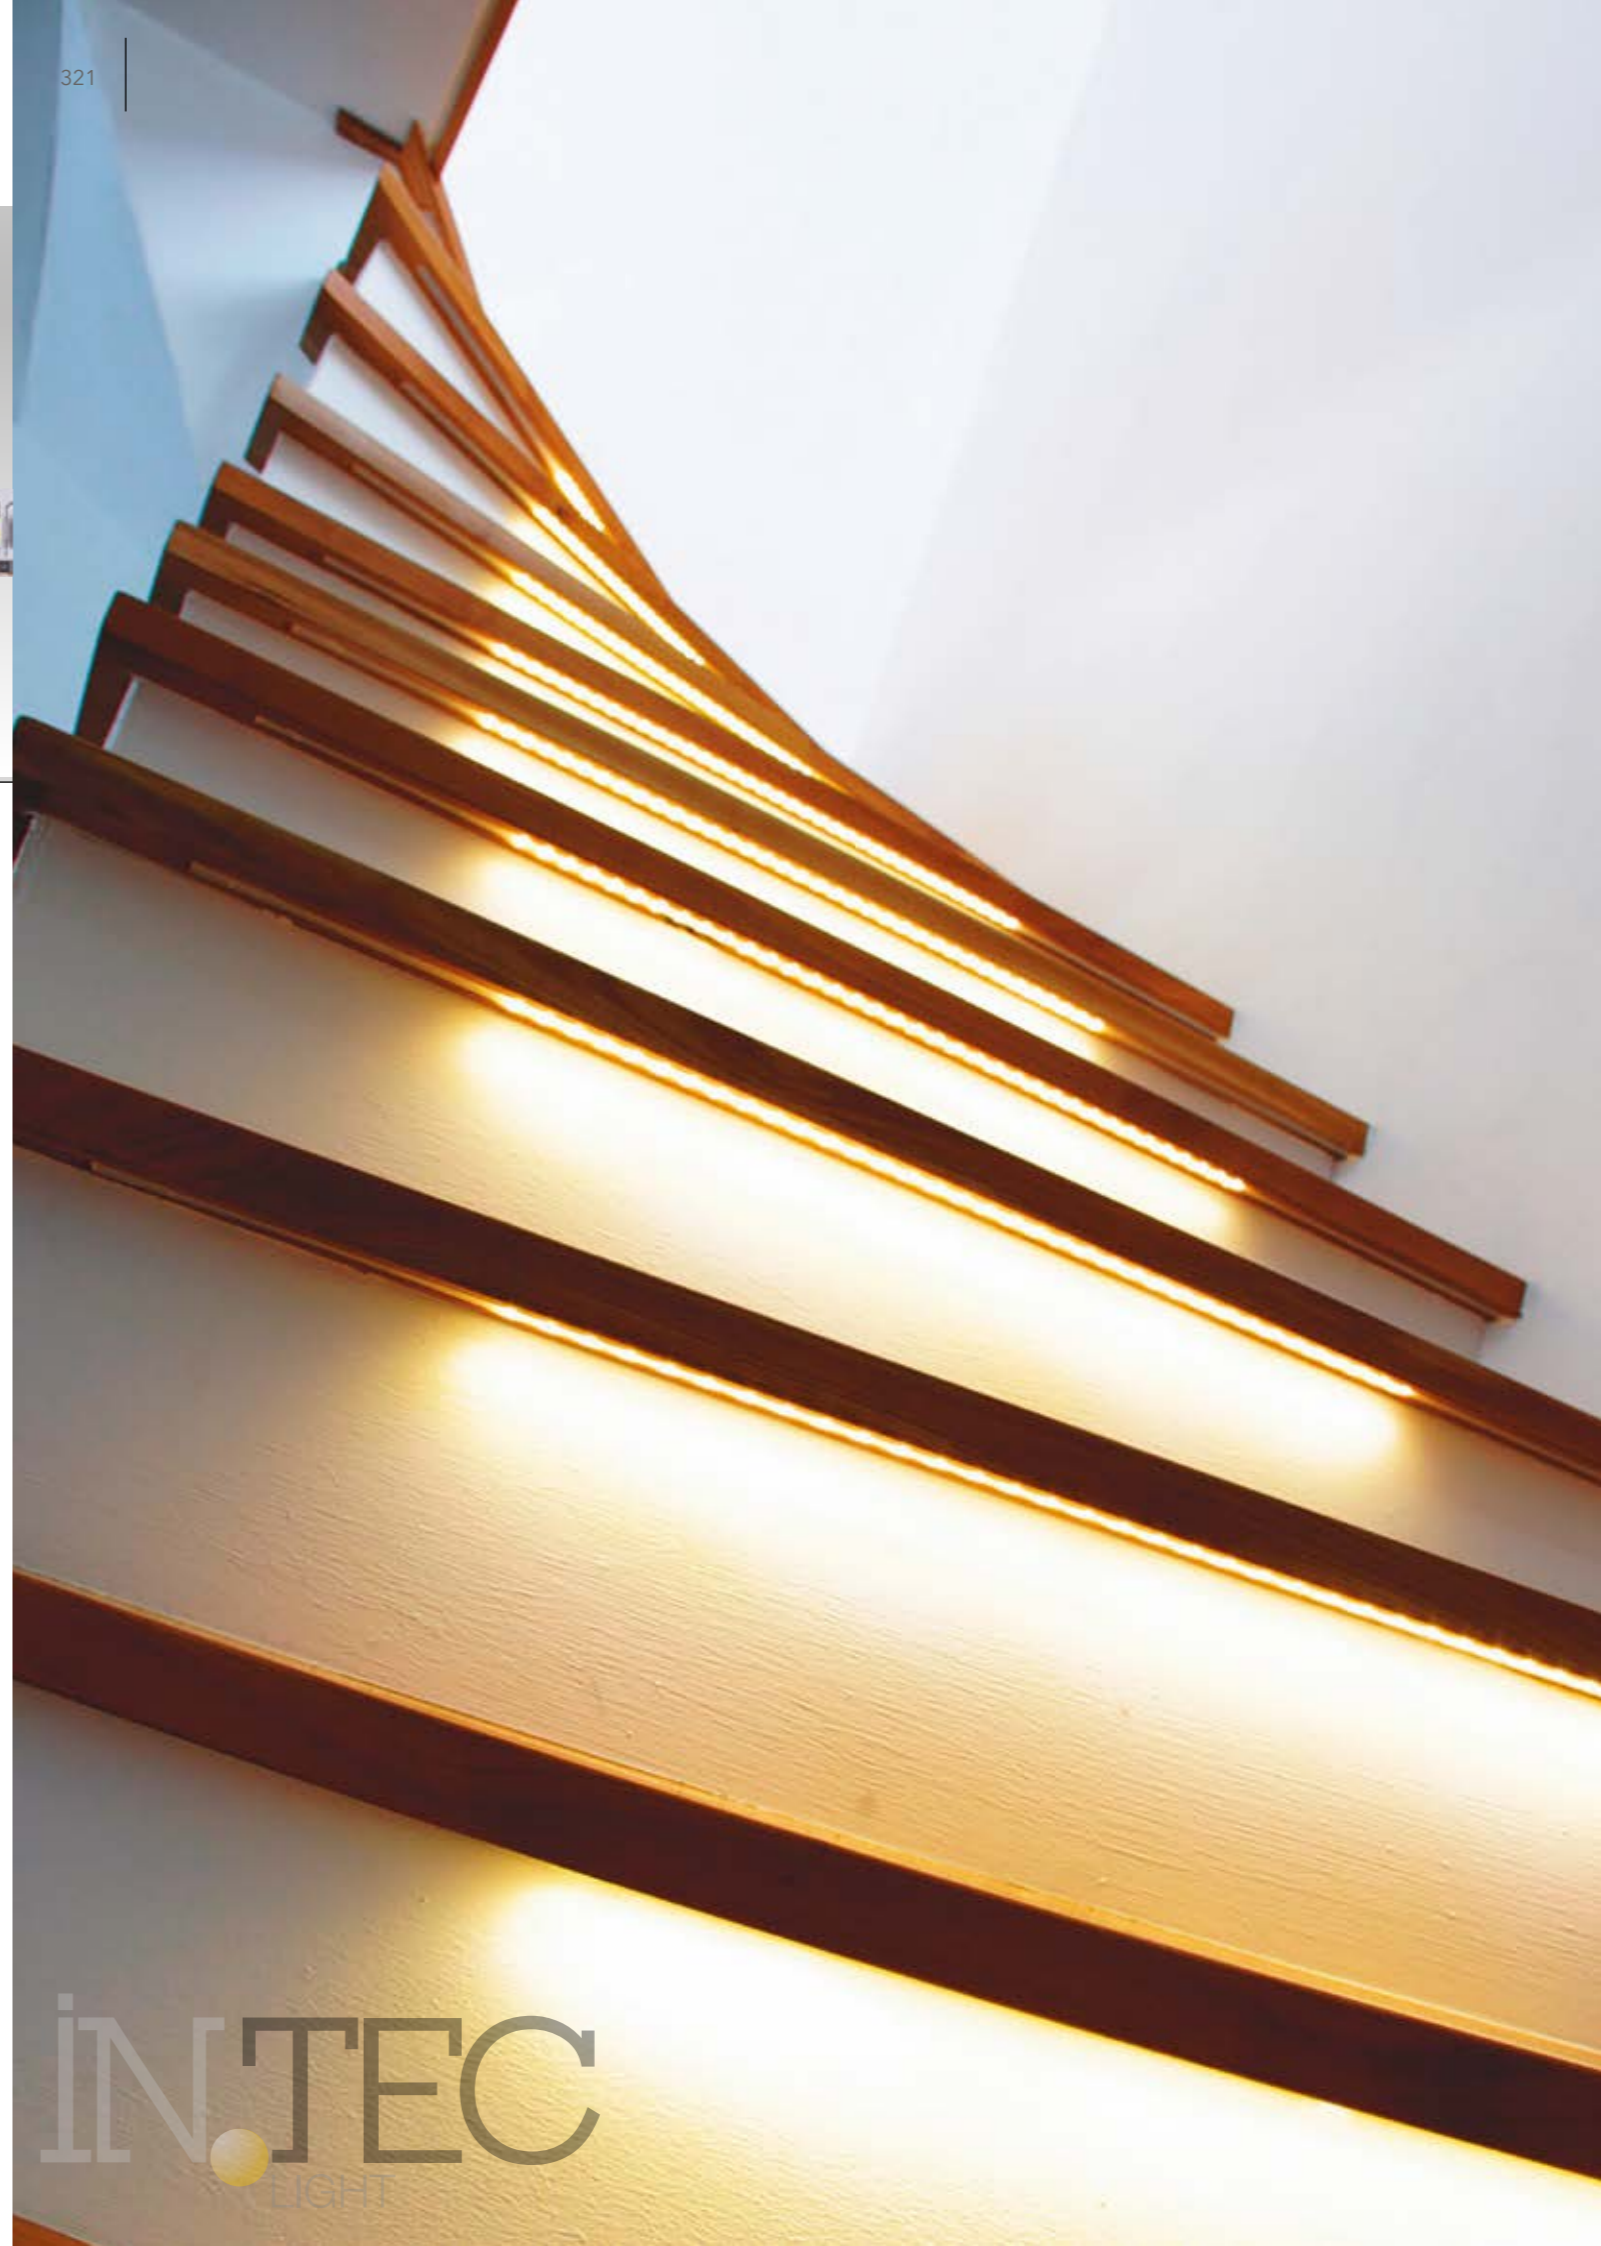

STRIP

Striscia luci LED rotoli da 5mt.
LED strip light 5m roll

Striscia luci LED rotoli da 5mt.
LED strip light 5m roll

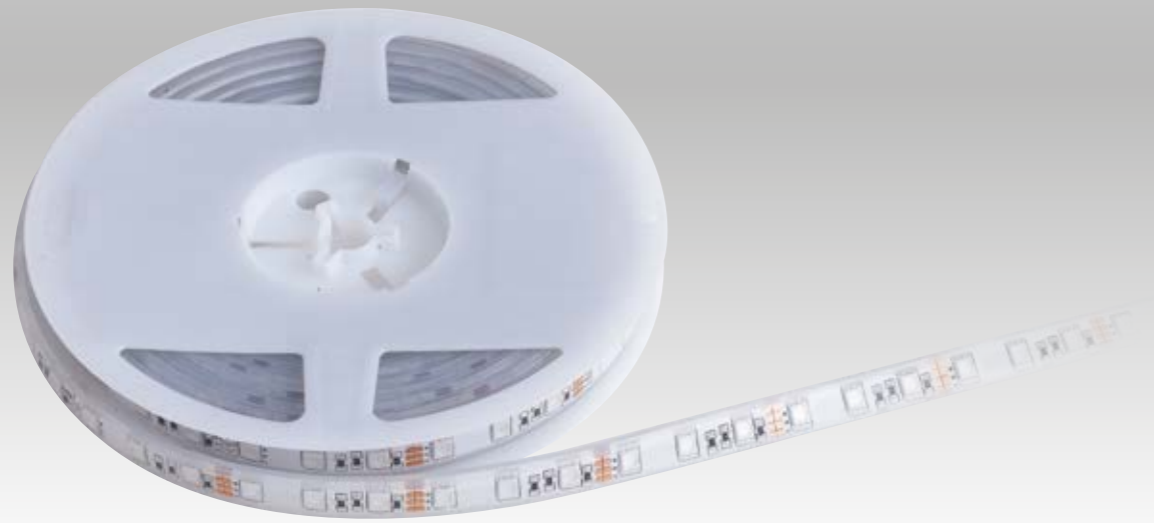


articoli e varianti - *article and finish*

STRIPLED-5050-IP67-C

8031440355865


informazioni tecniche - *technical information*

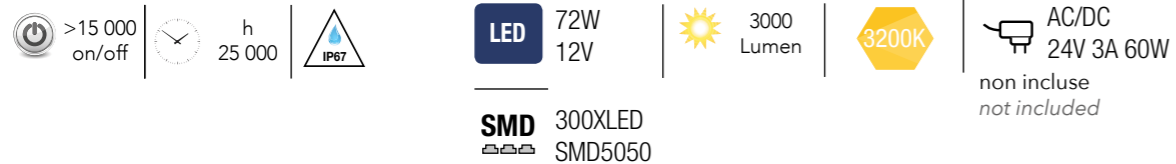

STRIPLED-5050-IP67-F

8031440355841


informazioni tecniche - *technical information*

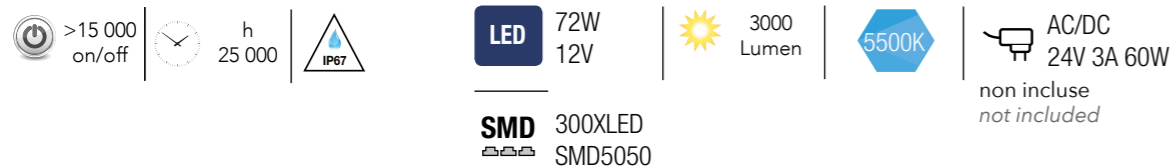

STRIPLED-5050-IP67-M

8031440355872


informazioni tecniche - *technical information*

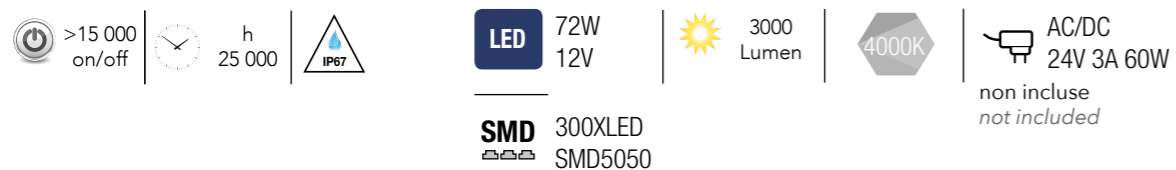

STRIPLED-5050-IP67-RGB


8031440355858

informazioni tecniche - *technical information*

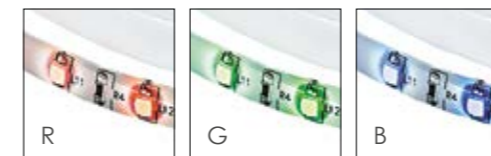

INTEC
LIGHT

certificazioni - *certification*



STRIP



STRIP-3528-240/M

8031433181204

informazioni tecniche - technical information

>10 000 on/off | h 25 000

LED 96W 24V | 7200 Lumen | 4000K

SMD 1200XLED SMD3528 | AC/DC 24V 4,5A 96W
non include
not included

Kit striscia luci LED
LED strip light step

STRIP-IP68-RGB-KIT

8031436811238




informazioni tecniche - technical information

>10 000 on/off | h 25 000 | **LED** 20W 12V

driver incluso | On / Off | **SMD**

SMD 150XLED SMD5050 | |

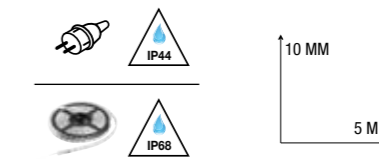

STRIP-3528-60/RGB

8031433211208

informazioni tecniche - technical information

>10 000 on/off | h 25 000 | include included | AC/DC 12V 2A 24W
non include
not included

LED 24W 12V | 1200 Lumen | **SMD** 300XLED SMD3528



STRIP-IP68-WW-KIT

8031436781234




informazioni tecniche - technical information

100° | >10 000 on/off | h 25 000

driver incluso | On / Off |

LED 24W 12V | **SMD** 300XLED SMD3528



certificazioni - certification



certificazioni - certification



STRIP


Striscia luci LED rotoli da 5mt.
LED strip light 5mt. roll



STRIP-RGBW-KIT

8031436831236

informazioni tecniche - technical information





STRIP-RGB-XL-KIT

8031436801239

informazioni tecniche - technical information



164 giochi di colore

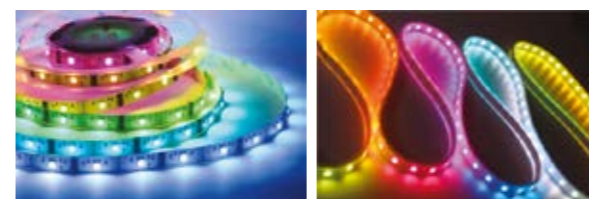

STRIP

Striscia luci LED rotoli da 3mt.
LED strip light 3mt. roll



STRIP-LINE-3M/C

8031440353281


informazioni tecniche - technical information



STRIP-LINE-3M/RGB

8031440353267


informazioni tecniche - technical information

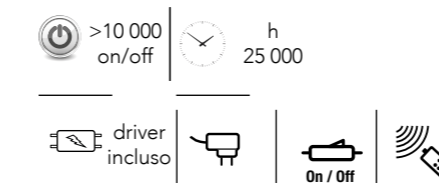


STRIP-LINE-3M/F

8031440353250

informazioni tecniche - technical information



certificazioni - certification



certificazioni - certification




STRIP

Strip LED comando touch con attacco USB
 LED strip light with switch touch control and USB connection

330


331

Accessori e connettori per strisce LED basso voltaggio
 LED strip light accessories and connectors low voltage

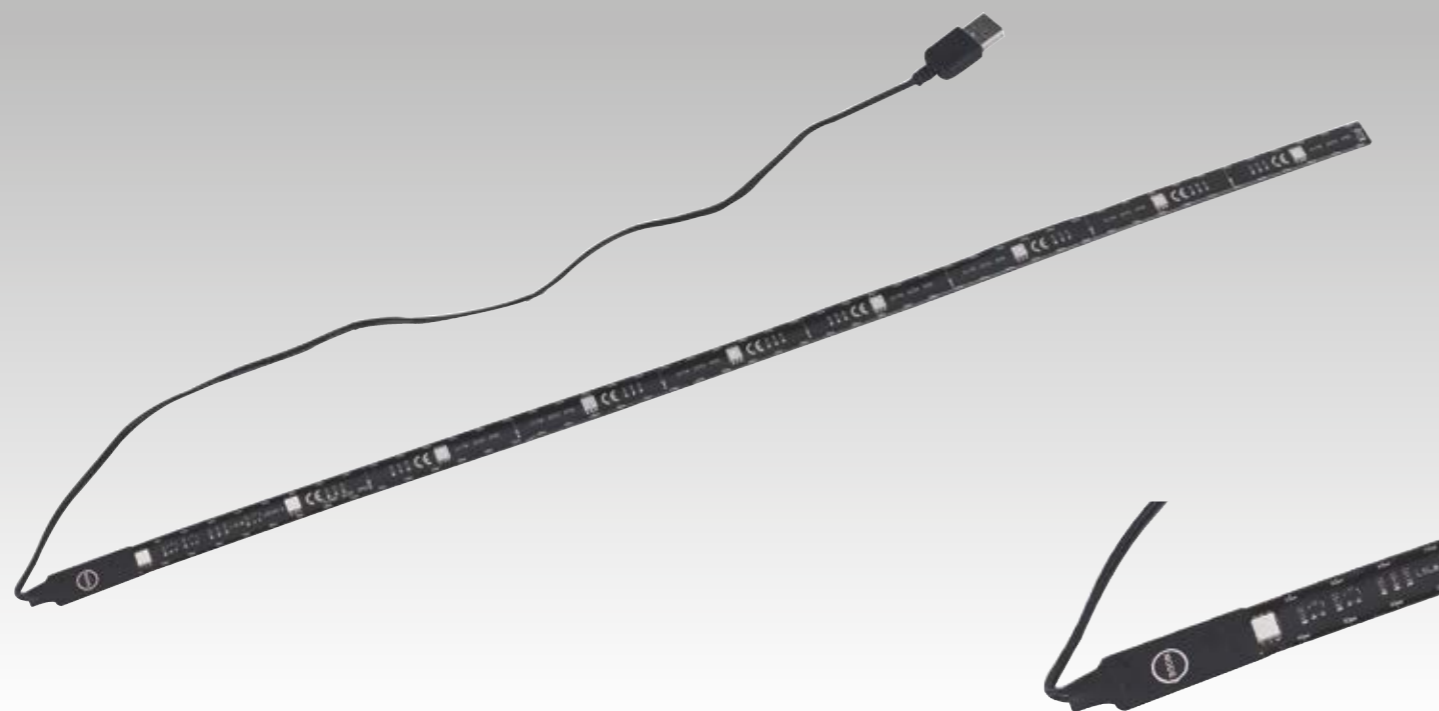

STRIP-NEX-JACK
8031434491210

Kit 2pz connettore clip per strip 3528 e 5050 12V+jack 5,5 (F)

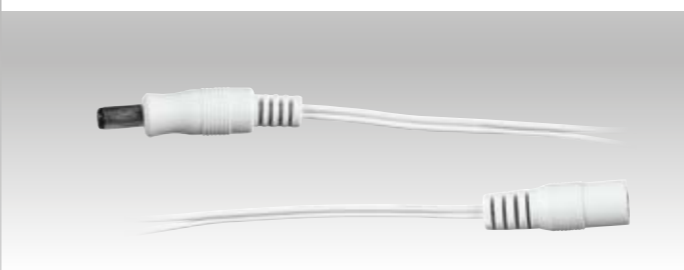

STRIP-JACK-MF
8031434471212

Kit 2pz jack 5,5 1xmaschio 1xfemmina x strip



STRIP-NEX+C-LV
8031434441215

Kit 2pz connettore 1clip + cavo x strip 3528 e 5050 12V




STRIP-NEX-LV
8031434511215

Kit 2pz connettore 2clip x strip 3528 e 5050 12V



STRIP-NEX+C-LVRGB
8031434451214

Kit 2pz connettore 1clip + cavo x strip RGB12V

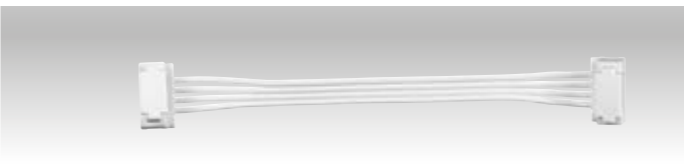

STRIP-NEX-LVRGB
8031434461213

Kit 2pz connettore 12xclip x strip RGB12V



STRIP-NEX-LVRGB-PIN
8031434481211

Kit 2pz connettore 1clip +1 pin x strip RGB 12V




STRIP-SEAL
8031434501216

20cm tubo silicone sigillante strip sigillante a caldo connessioni strip

STRIP-SURROUND

8031440354202

informazioni tecniche - technical information



certificazioni - certification



STRIP/230V

Kit striscia luci LED
LED strip light set



STRIP-5050-KITHV150

8031435371221

informazioni tecniche - technical information


LED 10,8W
230V | 540 Lumen | 4000K | **SMD** 45XLED
SMD5050

>10 000 on/off | h 25 000 | driver incluso

On / Off

IP44

IP65



STRIP-3528HV-60/M

8031433221207

informazioni tecniche - technical information


>10 000 on/off | h 25 000 | driver incluso

LED 24W
230V | 1500 Lumen | 3500K

SMD 300XLED
SMD3528

IP20

IP44



STRIP-5050-KITHV300

8031435361222

informazioni tecniche - technical information


>10 000 on/off | h 25 000 | 4000K

LED 21,6W
230V | 1080 Lumen

SMD 90XLED
SMD5050 | IP65



Optional: vedi pag. 336
non include - not included



certificazioni - certification



certificazioni - certification




STRIP/230V

Kit striscia luci LED
LED strip light set

334

335

Bobina striscia luci LED 50 mt.
LED strip light roll 50mt.

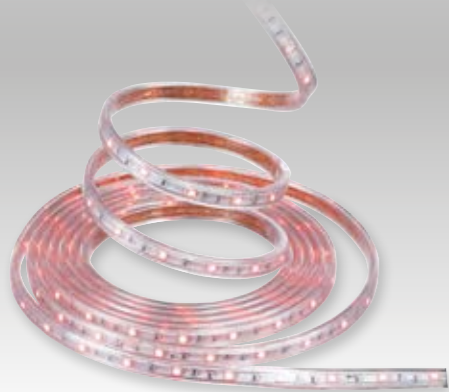

STRIP-5050HV-30-RSO


8031439061265

informazioni tecniche - technical information

>10 000 on/off | h 25 000

LED 36W 230V | 750 Lumen

SMD 150XLED SMD5050 |

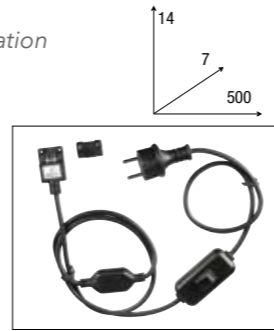

Optional: vedi pag. 336
non include - not included



STRIP-R-5050HV-30/C


8031435351223

informazioni tecniche - technical information

>10 000 on/off | h 25 000 |

LED 7.2W/M 230V | 330 Lm/M

SMD 1500XLED SMD5050 |

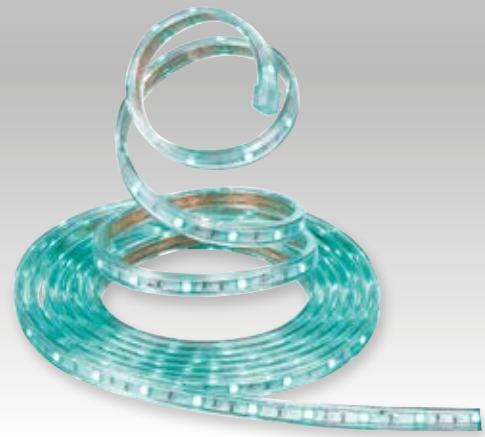

STRIP-5050HV-30-VDE


8031439071264

informazioni tecniche - technical information


>10 000 on/off | h 25 000

LED 36W 230V | 750 Lumen

SMD 150XLED SMD5050 |

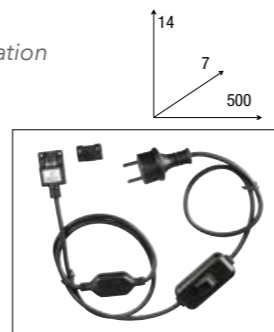

Optional: vedi pag. 336
non include - not included

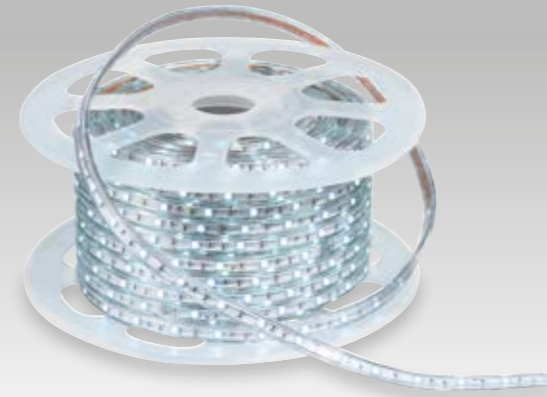

STRIP-R-5050HV-30/F


8031428901169

informazioni tecniche - technical information

>10 000 on/off | h 25 000 |

LED 7.2W/M 230V | 330 Lm/M

SMD 1500XLED SMD5050 |

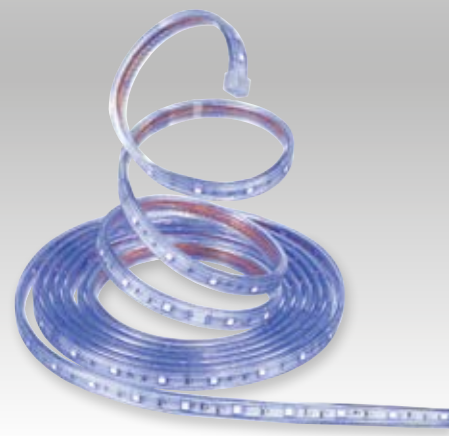

STRIP-5050HV-30-BLU


8031439051266

informazioni tecniche - technical information


>10 000 on/off | h 25 000

LED 36W 230V | 750 Lumen

SMD 150XLED SMD5050 |

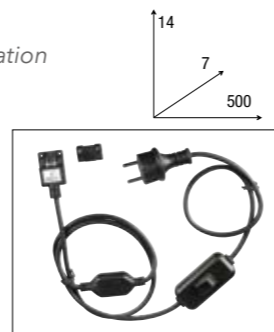

Optional: vedi pag. 336
non include - not included

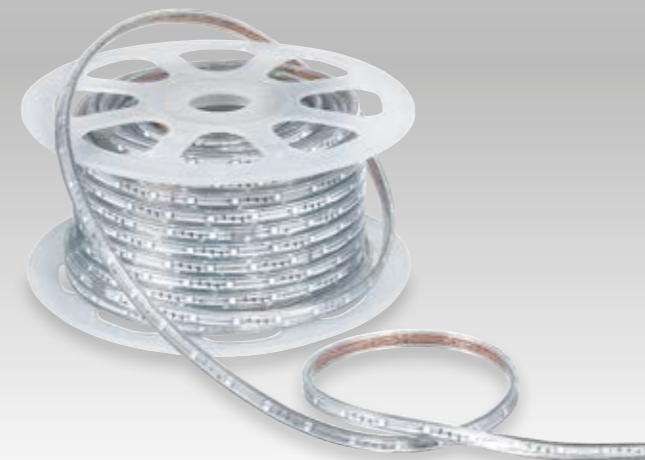

STRIP-R-5050HV-30RGB

8031435451220

informazioni tecniche - technical information

>10 000 on/off | h 25 000

LED 7.2W/M 230V | 330 Lm/M

SMD 1500XLED SMD5050 |






STRIP-ADAPT-HV

8031435381220



STRIP-ADAPT-HV-RGB

8031435391229



STRIP-ADAPT-HR-RGB

8031435401225



STRIP-NEX-IP65-60
8031435431222

Connettore per strip 220V 60cm con viti



STRIP-NEX-IP65-150
8031435421223

Connettore per strip 220V 150cm con viti



STRIP-NEX-IP65-300
8031439091262

Connettore per strip 220V 300cm con viti



STRIP-NEX-RGB-60
8031439121266

Connettore per strip 220V RGB 60cm con viti



STRIP-NEX-RGB-150
8031439101268

Connettore per strip 220V RGB 150cm con viti



STRIP-NEX-RGB-300
8031439111267

Connettore per strip 220V RGB 300cm con viti



STRIP-NEX-RGB-MINI
8031434501216

Mini connettore per strip 220V RGB IP65 con viti e tappo



STRIP-NEX-IP65-MINI
8031435441221

Mini connettore per strip 220V IP65 con viti e tappo



STRIP-CAP-IP65
8031435411224

Kit 3pz tappi in silicone per strip 220V 14x7mm



STRIP-FIXIT
8031433371209

Kit 10pz staffe fissa strip 220V 14x7mm

certificazioni - certification





Componenti

Components



Profili



I-PROFILO-BERLINO


8031434611212

mis. 1MT

I-PROFILO-BERLINO-2

8031440359405

mis. 2MT



I-PROFILO-ROMA


8031434601213

mis. 1MT

I-PROFILO-ROMA-2

8031440359399

mis. 2MT



I-PROFILO-NEWYORK


8031434581218

mis. 1MT

I-PROFILO-NEWYORK-2

8031440359382

mis. 2MT



I-PROFILO-MILANO


8031434611854

mis. 1MT

I-PROFILO-MILANO-2

8031440359412

mis. 2MT



Driver

342

Adattori e driver per prodotti LED
LED product power supply and drivers



I-DRIVER/18W

8031439571269

Driver 18W corrente costante
Output DC 350mA 48V
Misure 32X22X240mm



I-DRIVER/3W-IP67



8031440357357

DRIVER 3x1W LED OUTPUT
350mA 3-12V DC INPUT 100-
240V 0,08A IP67

343



STRIP-ADAT-72W

8031433261203

Adattatore tensione costante x strip LED 24V 72W - SPINA CEE 7/16
IP20 - OUTPUT 24V 3A INPUT 110-240V 1,5A
MISURE 37X115X50MM - CAVO 1500+1500mm - IP20 - CLASSE 2



STRIP-ADAT-36W

8031436601235

Adattatore tensione costante x strip LED 12V 36W - SPINA CEE 7/16
IP20 - OUTPUT 12V 3A INPUT 110-240V 0,6A
MISURE 35X100X50mm - CAVO 1500MM - IP20 - CLASSE 2



STRIP-ADAT-24W

8031433251204

Adattatore tensione costante x strip LED 12V 24W - SPINA CEE 7/16
IP20 - OUTPUT 12V 2A INPUT 110-240V 0,6A
MISURE 38X80X50MM - CAVO 1500mm - IP20 - CLASSE 2



STRIP-ADAT-12W

8031433141208

Adattatore tensione costante x strip LED 12V 12W - SPINA CEE 7/16
IP20 OUTPUT 12V 1A INPUT 110-240V 0,5A
MISURE 38X67X42mm - CAVO 1500MM - IP20 - CLASSE 2



I-DRIVER/5W

8031436761236

Driver corrente costante 5W - INPUT AC 100-240V 0,06A
OUTPUT DC 300mA 9-18V - MISURE 40X40X22mm



I-DRIVER/6W

8031436191231

Driver corrente costante 6W - INPUT AC 100-240V 0,09A
OUTPUT DC 350mA 9-18V - MISURE 40X40X22mm



STRIP-DRIVER12V-35W

8031440360265

Adattatore x strip led smd Output 12V 3A 35W
multipla entrata serracavo
Misure 99X82X30mm

STRIP-DRIVER12V-150W

8031439611262

Adattatore tensione costante
12V 150W
Multientrata output 12V 1.2A
INPUT 100-240V 2.0A
Misure 180X100X44mm
IP20 CLASSE 1

STRIP-DRIVER12V-75W

8031439581268

Adattatore tensione costante
12V 75W
Multientrata output 12V 6A
INPUT 100-240V 2.0A
Misure 125X100X37mm
IP20 CLASSE 1

STRIP-DRIVER-150W

8031433351201

Adattatore tensione costante
24V 150W
Multientrata Output 24V 6A
INPUT 100-240V
Misure 200X100X44mm
IP20 CLASSE 1

STRIP-DRIVER-240W

8031433361200

Adattatore tensione costante
24V 150W
Multientrata Output 24V 10A
INPUT 100-240V
Misure 200X100X44mm
IP20 CLASSE 1

STRIP-RGB-CONTROL-XL

8031434521214

Ricevitore multientrata + telecomando RGB 12V per strip
INPUT DC12V - 24V MISURE 120X51X27mm
INPUT 12V 15A MAX 180W - INPUT 24V 15A MAX 360W IP20



I-DRIVER/3W

8031436791233

Driver corrente costante 3W -
INPUT AC 100-240V 0,09A
OUTPUT DC 350mA 9-12V
MISURE 40X40X22mm



certificazioni - certification



certificazioni - certification



**I-DRIVER/9W**

8031434541212
 Driver corrente costante 9W - INPUT AC 100-240V 0,08A
 OUTPUT DC 350mA 18-23V
 MISURE 87X37X22mm

**I-DRIVER/10W**

8031434571219
 Driver corrente costante 10W - INPUT AC 100-240V 0,07A
 OUTPUT DC 350mA 9-18V
 MISURE 104X37X22mm

**I-DRIVER/10W550MA**

8031439511265
 Driver corrente costante 10W - INPUT AC 100-240V 0,07A -
 OUTPUT DC 350mA 9-18V
 MISURE 104X37X22mm

**I-DRIVER/12W**

8031436161234
 Driver corrente costante 12W
 INPUT AC 100-240V 0,1A OUTPUT DC 350mA 18-24V
 MISURE 104X37X22mm

**I-DRIVER/12W550MA**

8031439471262
 Driver corrente costante 12W
 INPUT AC 100-240V 0,1A OUTPUT DC 350mA 18-24V
 MISURE 104X37X22mm

**I-DRIVER/24W**

8031434561210
 Driver corrente costante 24W
 INPUT AC 100-240V 0,15A OUTPUT DC 550mA 24-49V
 MISURE 114X44X29mm

**I-DRIVER/36W**

8031436771235
 Driver corrente costante 36W
 INPUT AC 100-240V 0,23A - OUTPUT DC 850mA 24-49V
 MISURE 130X44X24mm

**STRIP-SOUND**

8031434531213

Ricevitore musicale + telecomando RGB 12V PER STRIP LED
 MISURE 50X70X20mm

**I-DRIVER-DIMM-LCM40**

8031439591267

Driver dimmerabile 40W corrente costante - OUTPUT DC 2-100V
 350mA; 2-80V 500mA; 2-67V 600mA; 2-57V 700mA; 2-45V 900mA;
 2-40V 1050mA
 MISURE 120X80X22mm - CLASSE 2

**I-DRIVER-DIMM-LCM60**

8031439561260

Adattatore tensione costante x strip LED 12V 24W - SPINA CEE 7/16
 IP20 - OUTPUT 12V 2A INPUT 110-240V 0,6A
 MISURE 38X80X50MM - CAVO 1500mm - IP20 - CLASSE 2

**I-DMX-ETL030DALI**

8031440311649

Dispositivo dimmer dali RGB 3 CANALI - USCITA PWM - INPUT
 8-28V DC 6A - trasmette con protocollo DMX-512.
 POTENZA A 12V DC 12W PER CANALE - POTENZA A 24V DC 144W
 PER CANALE.
 FREQUENZA DIMMER PWM 300~350HZ
 MISURE 90X70X58MM - PESO 33G


Sensori

Sensori ad infrarossi Infrared sensors

I-SENSORE-360

8031435901237



Sensore PIR 230V max 1600W 360°
distanza massima 5mt.
time 10 sec. - 4 min.
lux 2 - 2000 IP44



I-SENSORE-130

8031434401219


Sensore PIR 230V max 1000W 130°
distanza massima 12mt.
time 10 sec. - 4 min.
lux 2 - 2000 IP44
base accessoria angolare

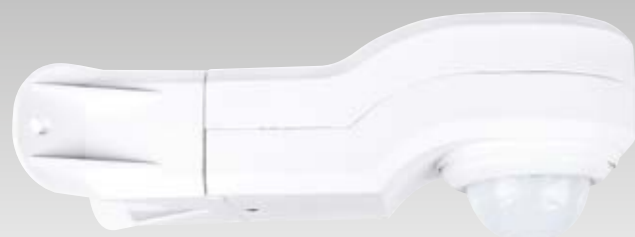

I-SENSORE-180

8031434411218

Sensore PIR 230V max 1000W 180°
distanza massima 12mt.
time 10 sec. - 4 min.
lux 2 - 2000 IP44



Adattatori

Adattori e portalampe Lamp holders and adaptors

ADATTATORE-E14-E27

8031439351267



ADATTATORE-E27-E14

8031439391263



ADATTATORE-E27-2E27

80314439371265



ADATTATORE-E27-GU10

8031436171233



ADATTATORE-E14-GU10

8031439361266



ADATTATORE-GU10-E14

8031439431266



ADATTATORE-GU10-E27

8031439421267



ADATTATORE-G9-E14

8031439401269



ADATTATORE-G9-E27

8031439411268



ADATTATORE-E27-E27

8031439451264



certificazioni - certification



INTEC

LIGHT

certificazioni - certification



Portalampada

Ghiere incasso

Strutture incasso per lampade MR16 o
GU10
MR16 or GU10 down light frame




I-PORTALAMPADE-E14-L
8031440354592




I-PORTALAMPADE-E14-S
8031440351904



INC-REFLEX-SF1 BCO
8031439321260

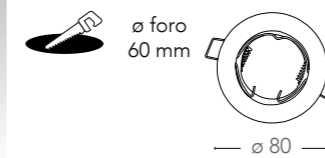


INC-REFLEX-SM1 BCO
8031439251260

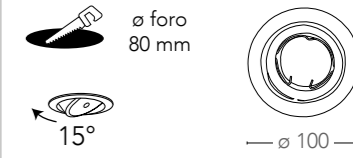

I-PORTALAMPADE-E14-T
8031440354585




I-PORTALAMPADE-E27-L
8031440354554



INC-REFLEX-SF1 NIK
8031439311261




INC-REFLEX-SM1 NIK
8031439261269

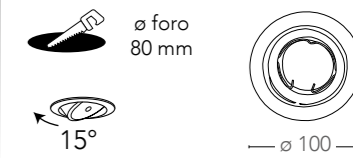



I-PORTALAMPADE-E27-P
8031440354561




I-PORTALAMPADE-E27-S
8031440354530

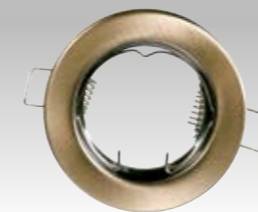

INC-REFLEX-SF1 BR
8031439331269

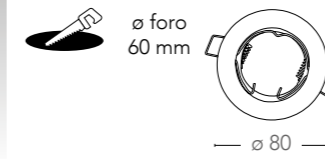


INC-REFLEX-SM1 BR
8031439291266

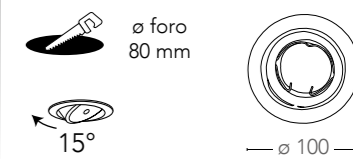


I-PORTALAMPADE-E27-T
8031439761264





I-PORTALAMPADE-GU10
8031435751221



INC-REFLEX-SF1 CR
8031439301262

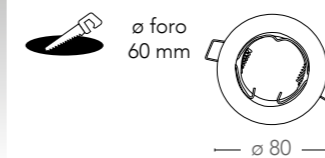

INC-REFLEX-SM1 CR
8031439281267

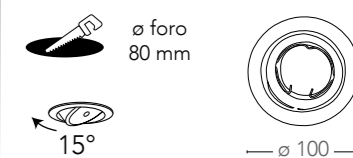

I-PORTALAMPADE-MR16
8031440351904




I-PORTALAMPADE-T8
8031439851262



INC-REFLEX-SF1 ORO
8031439341268



INC-REFLEX-SM1 ORO
8031439271268

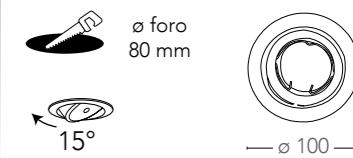

I-COPRICANDELA/CR
8031436541234



I-VFUSION
8031439721268



INC-MATRIX-KIT
8031436551233

Clay

Adattori e portalampane
Lamp holders and adaptors



I-CLAY-SCADER

8031440360173

SCATOLA DI DERIVAZIONE
ELETTRICA CLAY IN PORCEL-
LANA BIANCA

*white porcelain external jun-
ction box CLAY*



I-CLAY-PRESA-F

8031440359832

PRESA ELETTRICA SCHUKO
CLAY IN PORCELLANA
BIANCA AC230V 50Hz



I-CLAY-INTERRUTTORE

8031440360210

INTERRUTTORE ROTATIVO
CLAY IN PORCELLANA
BIANCA 10A AC230V 50Hz

*white porcelain rotating switch
CLAY 10A AC230V 50Hz*



I-CLAY-ISOLATORI

8031440360203

KIT 4PZ ISOLATORI CLAY IN
PORCELLANA BIANCA

*white porcelain pulleys CLAY
set 4pcs*



I-CLAY-PRESA

8031440360234

PRESA ELETTRICA CLAY PO-
LIVALENTE IN PORCELLANA
BIANCA 10/16A AC230V
50Hz

*white porcelain universal
socket CLAY 10/16A AC230V
50Hz*



I-CLAY-CAVO-BCO

8031440360166

CAVO ELETTRICO CLAY
TRECCIATO CON RIVESTI-
MENTO TESSILE IN BIANCO
5M 3X0,75

*twisted white fabric wire CLAY
5M 3X0,75*

I-CLAY-CAVO-ORO

8031440360197

CAVO ELETTRICO CLAY
TRECCIATO CON RIVESTI-
MENTO TESSILE IN ORO 5M
3X0,75

*twisted white fabric wire CLAY
5M 3X0,75*

Legenda simboli

	CLASSE A+	Classificazione di classe energetica come da normativa 874/2012 <i>Energy class according to ERP normative 874/2012</i>			Prodotto dimmerabile luce calda o fredda <i>Product color temperature changing and dimmable</i>			
	Indicazione colore luce in gradi kelvin <i>Color temperature indicator under Kelvin degrees</i>			> 15 000 on/off	Numero di accensioni garantite <i>number of ON/OFF guaranteed</i>			
	Indicatore di luminosità espresso in Lumen <i>Brightness indicator in meter of Lumen</i>				Prodotto con interruttore touch on/off <i>Product equipped with touch ON/OFF switch</i>			
	Apparecchio a led / integrato o provvisto di lampadina led <i>Led equipped product</i>			On / Off	Prodotto con interruttore manuale on/off <i>Product equipped with ON/OFF switch</i>			
	Apparecchio provvisto di lampadina alogena <i>Halogen equipped product</i>				Articolo alimentato da batterie <i>Product powered by battery</i>			
	Apparecchio provvisto di lampadine a risparmio energetico <i>Energy Saving bulb equipped product</i>			driver incluso	Prodotto provvisto di alimentatore driver <i>Product with driver included</i>			
	Indicatore di potenza espresso in Watt <i>Power indicator in Watt</i>				Prodotto provvisto di alimentatore drive su spina <i>Product with plug power supply</i>			
	Indice cromatico del led <i>Color Rendering Index</i>				Prodotto provvisto di spina per uso esterno <i>Product equipped with Schuko plug for outdoor</i>			
	Prodotto provvisto di led cob <i>Product equipped with COB led type.</i>				Prodotto con possibilita' di connessione <i>Product with connection</i>			
	Prodotto provvisto di led smd <i>Product equipped with SMD led type.</i>				Indicazione grado flusso luminoso <i>Beam angle degree</i>			
	Indicazione di garanzia di durata <i>Life time warranty</i>				Indicazione inclinazione <i>Adjustable inclination degree</i>			
	Apparecchio in doppio isolamento <i>Double insulation product, Class 2</i>			ø foro 27 mm	Indicazione foro per alloggiamento incasso <i>Cutout size for down light</i>			
	Apparecchio in classe 3 <i>Insulation needless product (low voltage), Class 3</i>				Prodotto calpestabile <i>Product to be fixed in ground and walkable</i>			
	Apparecchio in classe 1 <i>Product with earth connection Class 1</i>				Prodotto provvisto di rilevatore di presenza e timer regolabile <i>Product equipped with setting up sensor</i>			
	Indice di protezione dell'apparecchio <i>Ingress protection rate</i>				Prodotto provvisto di rilevatore di presenza <i>Product equipped with sensor</i>			
	Apparecchio conforme alle normative ce <i>Product conform with CE normative</i>			Prodotto dimmerabile <i>Dimmable product</i>				
	Prodotto non dimmerabile <i>Not dimmable product</i>				Product conform with EMC <i>(Electromagnetic Compatibility) normative</i>			
	Prodotto fornito di telecomando <i>Product equipped with remote control</i>				Product conform with ROHS (Restriction of Hazardous Substances Directive) normative			
	Prodotto dimmerabile rgb con le variabili colori <i>Product color changing RGB and dimmable</i>							