

Dura-Torch SBS



Dura-Torch is manufactured from bitumen that is modified by SBS (Styrene Butadiene Styrene) a thermoplastic rubber.

This modification gives the membrane elastomeric properties and is designed to allow the membrane to remain flexible when used in cooler weather extremes.

Combined with a high performance polyester base material, the membrane is intended for use in a built up torch applied flat roofing system, offering excellent application characteristics.

If laid to manufacturers specifications, Dura-Torch can achieve an 8 year guarantee.

Various colours available:



Technical performance data Capsheet

| | |
|-----------------------|-------------------------------|
| Carrier | Polyester 180g/m ² |
| Roll size | 8m x 1m |
| Roll weight | 32kg |
| m ² weight | 4kg |
| Rolls per pallet | 25 |

Technical performance data Glass Underlay

| | |
|-----------------------|----------------|
| Carrier | 100 gram glass |
| Roll size | 16m x 1m |
| Roll weight | 32kg |
| m ² weight | 2kg |
| Rolls per pallet | 30 |




ROSE ROOFING

MANUFACTURERS AND SUPPLIERS OF
BITUMINOUS WATERPROOFING PRODUCTS

High Performance Torch Applied Membranes

1 Flass Lane, Cutsyke, Castleford,
West Yorkshire, WF10 5JW
Tel: 01977 516044 • Fax: 01977 514149
Email: sales@rose-roofing.co.uk
www.rose-roofing.co.uk

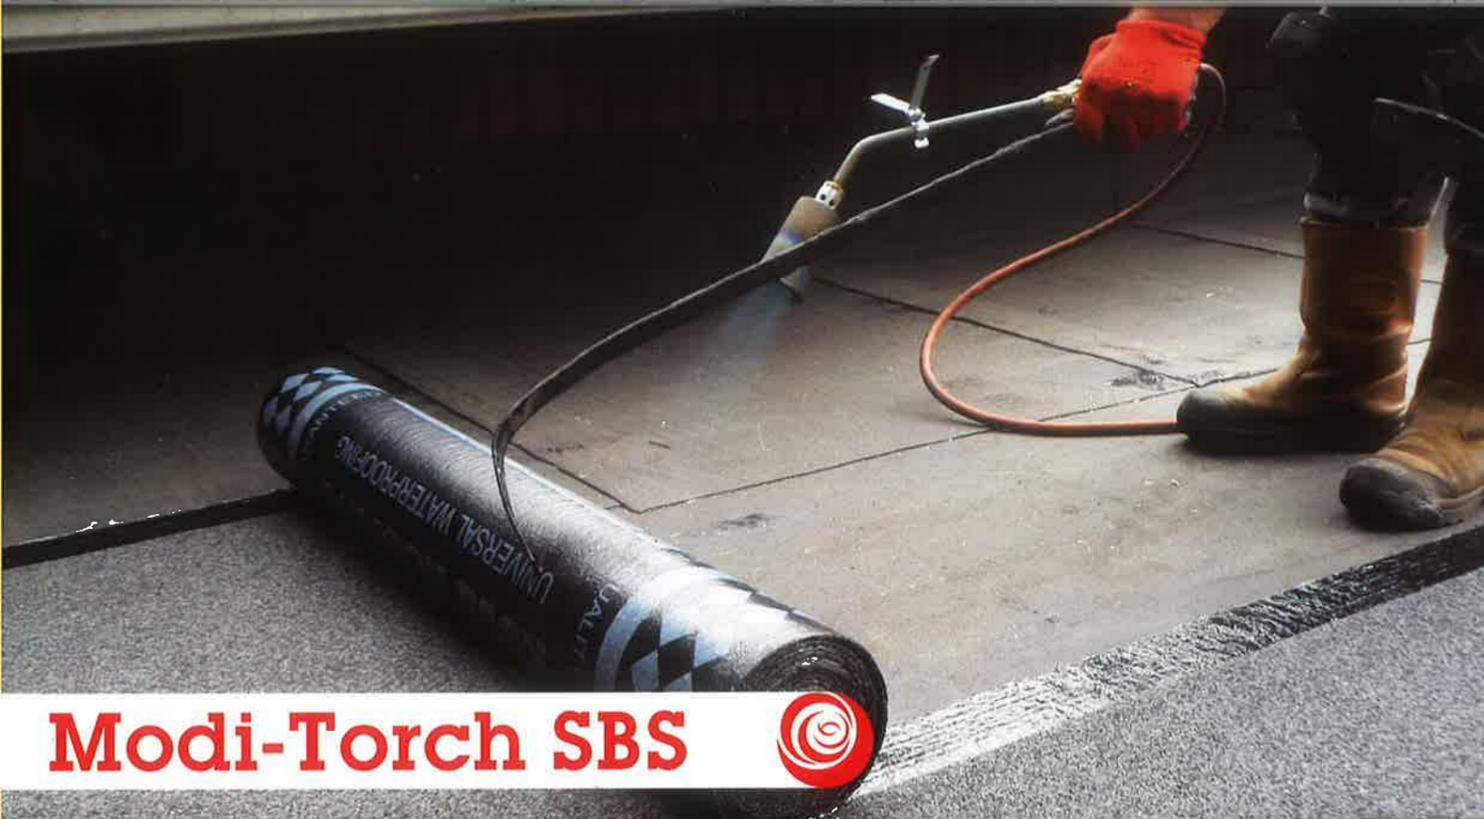

Modi-Torch SBS



Modi-Torch SBS felt has been developed for use in high performance built up, torch applied flat roofing systems. When used in an approved system, the life expectancy of Modi-Torch is 20 years.

Features of Modi-Torch SBS:

- Low temperature flexibility
- Easy to apply
- Quick bitumen flow at low temperature
- Reduced energy use
- Excellent for use in detail work
- Exceptional mineral adhesion
- Tested in accordance with BSEN13707

Various colours available:



ROSE ROOFING

&



TOTAL BITUMEN

Working in partnership to manufacture and distribute high quality modified torch on membranes

Guarantee specifications

Modi-Torch guarantee

Modi-Torch systems offer a range of material guarantees up to 20 years. All systems are based on a three layer built up system.

10 year guarantee systems are as follows:

- 1st Layer Application will consist of one of the following products; 36kg Glass Bonding 3B, 34kg Glass Perforated 3H, 36kg Glass Torch Perforated or 2mm Modi-Torch Glass Underlay
- 2nd Layer Application will consist of one of the following products; 2mm Modi-Torch Glass Underlay or 2mm Modi-Torch Polyester Underlay
- 3rd Layer Application will consist of a 4mm Modi-Torch Polyester Capsheet

15 year guarantee systems are as follows:

- 1st Layer Application will consist of one of the following products; 36kg Glass Bonding 3B, 34kg Glass Perforated 3H, 36kg Glass Torch Perforated or 2mm Modi-Torch Glass Underlay
- 2nd Layer Application will consist of a 3mm Modi-Torch Polyester Intermediate Underlay
- 3rd Layer Application will consist of a 4mm Modi-Torch Polyester Capsheet

20 year guarantee systems are as follows:

- 1st Layer Application will consist of one of the following products; 36kg Glass Bonding 3B, 34kg Glass Perforated 3H, 36kg Glass Torch Perforated or 2mm Modi-Torch Glass Underlay
- 2nd Layer Application will consist of a 4mm Modi-Torch Polyester Sand
- 3rd Layer Application will consist of a 4mm Modi-Torch Polyester Capsheet



MANUFACTURERS AND SUPPLIERS OF BITUMINOUS WATERPROOFING PRODUCTS