

**Terminals**

### Terminal Functions

- 1 through 4: Rapid Shutdown terminals.
  - Terminals 1 and 3 connect to normally-closed contacts on the RSI (Rapid Shutdown Initiator), which is part of the OutBack ICS Plus system.
  - NOTE:** A factory-installed jumper wire connects these terminals. It may need to be removed before installing a rapid shutdown. Otherwise it should be left in place. If the terminals are left open, the controller shuts down.
  - Terminals 2 and 4 are parallel connections. They can connect to additional FLEXmax 100 controllers to perform the same function with a single RSI.
- 5 and 6: Auxiliary (Aux) terminals.
  - Used for diversion control and other functions.
- 7 and 8: Battery Sense terminals.
  - See Wiring section.

### Environmental / Safety Specifications

Environmental Category	Outdoor
Enclosure Type	Type 3R
Suitable for wet locations	Yes
Pollution degree classification	PD3
IP rating	IP54
Ambient temperature range	-25°C to 60°C (-13°F to 140°F)
Relative humidity rating	4% to 100% Condensing
Maximum altitude rating	10,000 feet
Overvoltage category	PV: OV Cat II Batt: OV Cat II

**NOTES:**

- ❖ Unit output is derated above 25°C (77°F)

### LED Indicators and FLEXmax 100 Symbols

(See **A** in wiring section)

Symbol	Indicator	Pattern	Controller Status	Voltage
	Charging		Off = less than 10 W PV available Bulk, Equalize, or GT Mode	Battery rest
	Status		Absorption	Float
	Status		Float	≥ 1.91 Vpc
	Status		Bulk or Absorption	< 1.91 Vpc
	Status		Float	< 1.75 Vpc
	Status		GT Mode	≤ EQ
	Auxiliary		Battery Discharge	
	Auxiliary		Critical Battery Discharge	
	Auxiliary		Equalize	
	Auxiliary		AUX Active	
	Fault		Ground Fault Shutdown or other fault	
	Fault		Arc Fault Shutdown	

All flash twice, then turn off (with PV power available) = Rapid Shutdown



**IMPORTANT:**  
Not intended for use with life support equipment.

### Date and Revision

June 2019, Revision A

# FLEXmax 100

### Included in Package

- FLEXmax 100 Charge Controller
- 2 x Mounting Bracket
- Silicone Grease Package
- Cooling Fan (outdoor-rated)
- MicroSD Card (already installed)


### Mounting

- The FLEXmax 100 must be mounted upright at least 36" (91.4 cm) above the ground or floor. Shade is recommended when installing outdoors.
- Conduit hubs must be connected to the conduit before connecting to the FLEXmax 100.
- Conduit should be 1" size (1 3/8" actual diameter).
- Clearance requirements are a minimum of 6" (15.2 cm) above and below the controller.
- The unit can be mounted using either brackets (see steps 1 through 4 in **A**) or keyhole slots (see steps 1 and 2 in **B**) on a secure mounting surface. Follow the numbered steps.

This guide is intended for use by anyone required to install and operate this equipment. Be sure to review this guide carefully to identify any potential safety risks before proceeding. Failure to install or use this equipment as instructed can result in damage to the equipment that may not be covered under the limited warranty. This product is only serviceable by qualified personnel. Additional information on programming and advanced functions is available in the FLEXmax 100 Owner's Manual.

### Dimensions

Height: 23.0" (58.4 cm)  
Width: 8.8" (22.4 cm)  
Depth to Wall: 6.0" (15.2 cm)

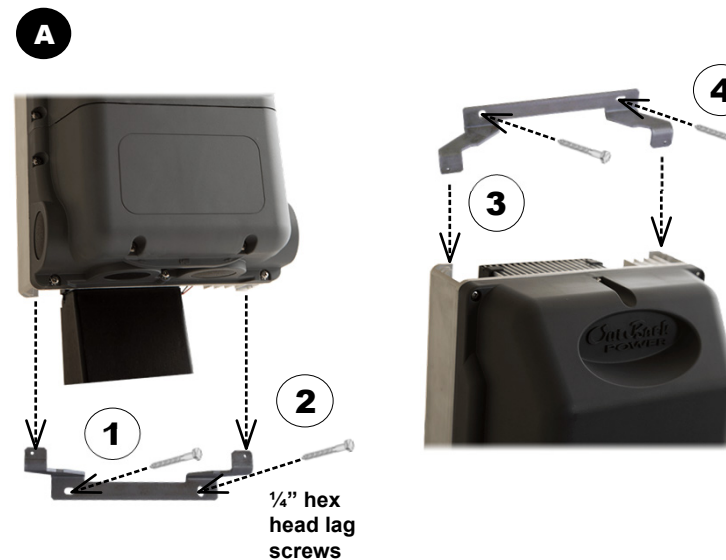


Bracket hole spacing: 5.13" (13.0 mm)  
Vertical space between upper and lower bracket holes:  
Approximately 20" when mounted



Keyhole Slots  
(#14 slotted wood screws,  
7.9" or 20.1 cm spacing)

**WARNING: Shock Hazard**  
When the PV array is exposed to light, it supplies a DC voltage to the charge controller.

**5 minutes**  
**WARNING: Shock Hazard (Timed Discharge)**  
This product is equipped with capacitors which store energy until completely discharged.

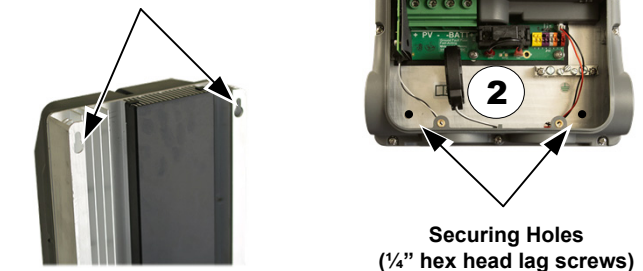

Securing Holes  
(1/4" hex head lag screws)

DC LEGEND	
Negative	
Positive	
Ground	

**IMPORTANT:** Before powering up the controller  
The rapid shutdown terminals (1 and 3 in **C**) are connected with a factory-installed jumper. See the back page to determine if this should be left in place or removed.

- Tighten all wire lugs and ground terminals to 4 Nm (35 in-lb) torque.
- Use copper wiring only (rated 90°C or higher). Refer to the NEC and other electrical codes for PV array cable sizing, length, and ampacity.
- Use #4 AWG (25 mm<sup>2</sup>) wire (**minimum**) for the controller output terminals to the batteries. They can accept up to #2 AWG (35 mm<sup>2</sup>).
- Use #6 AWG (16 mm<sup>2</sup>) wire (**maximum**) for the ground terminals.
- Ensure the arc fault coil and PV wires are connected as in **E**.
- A single controller with negative-ground installation is depicted here. (The bond is shown in **D**.) For multiple units or positive grounding, special arrangements are required.
- External disconnect and overcurrent protective devices must be sized and provided by the installer. For input circuit breakers, OutBack offers 40 Adc to 80 Adc devices. For the output, OutBack offers either 100 Adc or 125 Adc devices.
- This product supports the following nominal battery systems:
  - 24 volts
  - 36 volts
  - 48 volts

**IMPORTANT: Example only**  
Actual wiring may vary from the system depicted here. All configurations must comply with local and national electric codes. Consult the local electric authority to ensure compliance.

**IMPORTANT:**  
Wire sizes must comply with local and national codes. To comply with the NEC, input conductors and circuit breakers must be rated at 1.56 times the short-circuit current of the PV array.

**CAUTION: Equipment Damage**  
When installing multiple controllers or the OutBack GFDI, follow all instructions shown in the *Owner's Manual*.

**CAUTION: Equipment Damage**  
Do not use a power driver or other power tools to tighten wire terminals. This can damage them.

**WARNING: Burn Hazard**  
The heat sink can become hot when the charge controller is operating. Use caution when touching it during operation.

**NOTE:** See the *FLEXmax 100 Owner's Manual* for more notes on all topics above. This also includes installation of rapid shutdown devices, multiple controllers, and ground fault operation (GFDI).

